




GROUND FLOOR PLAN - MECHANICAL - DEMOLITION

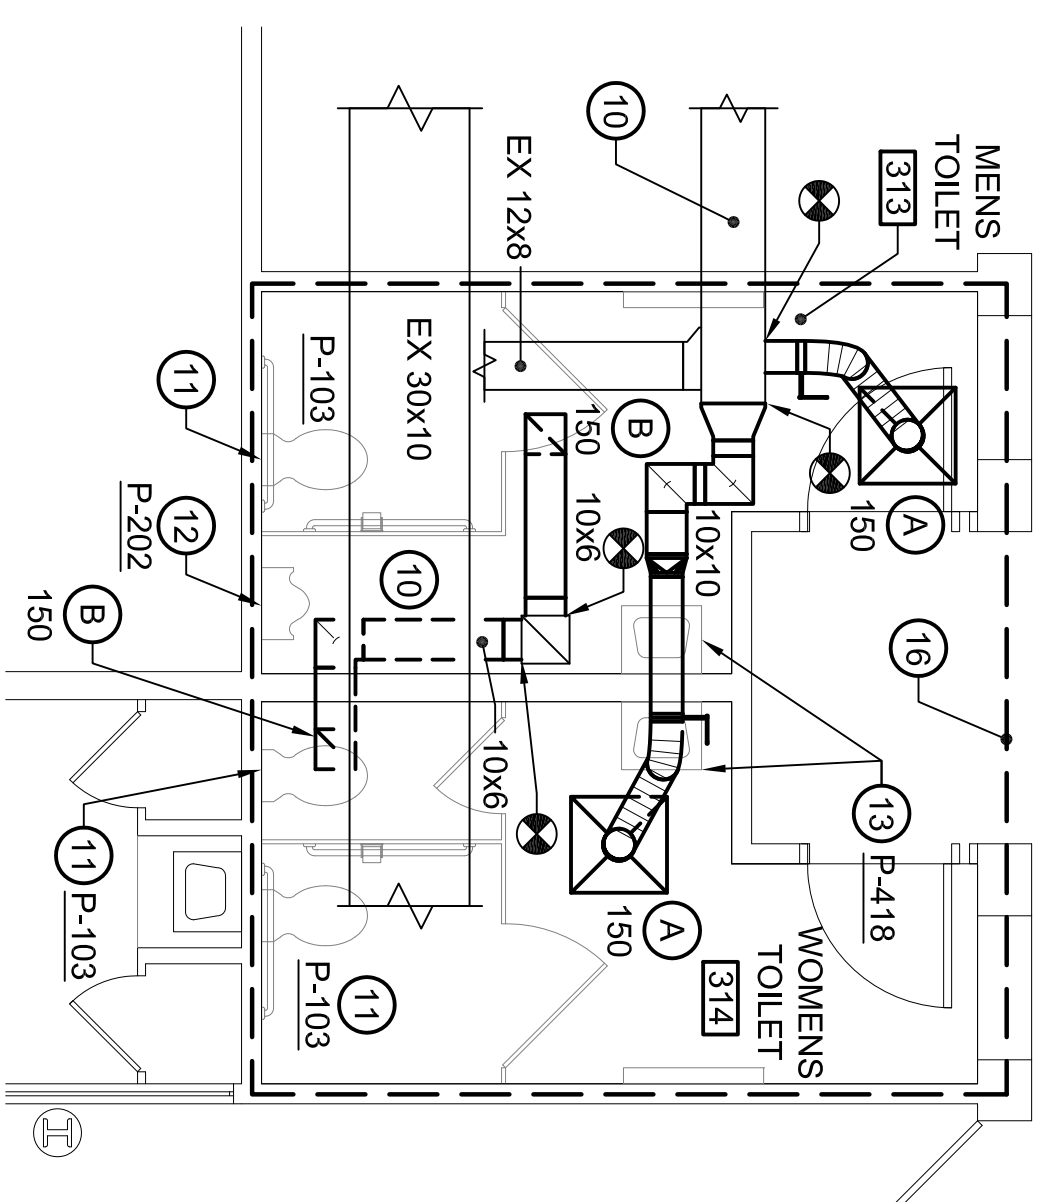


2 GROUND FLOOR PLAN - MECHANICAL - NEW WORK
SCALE: 1/4" = 1'-0"

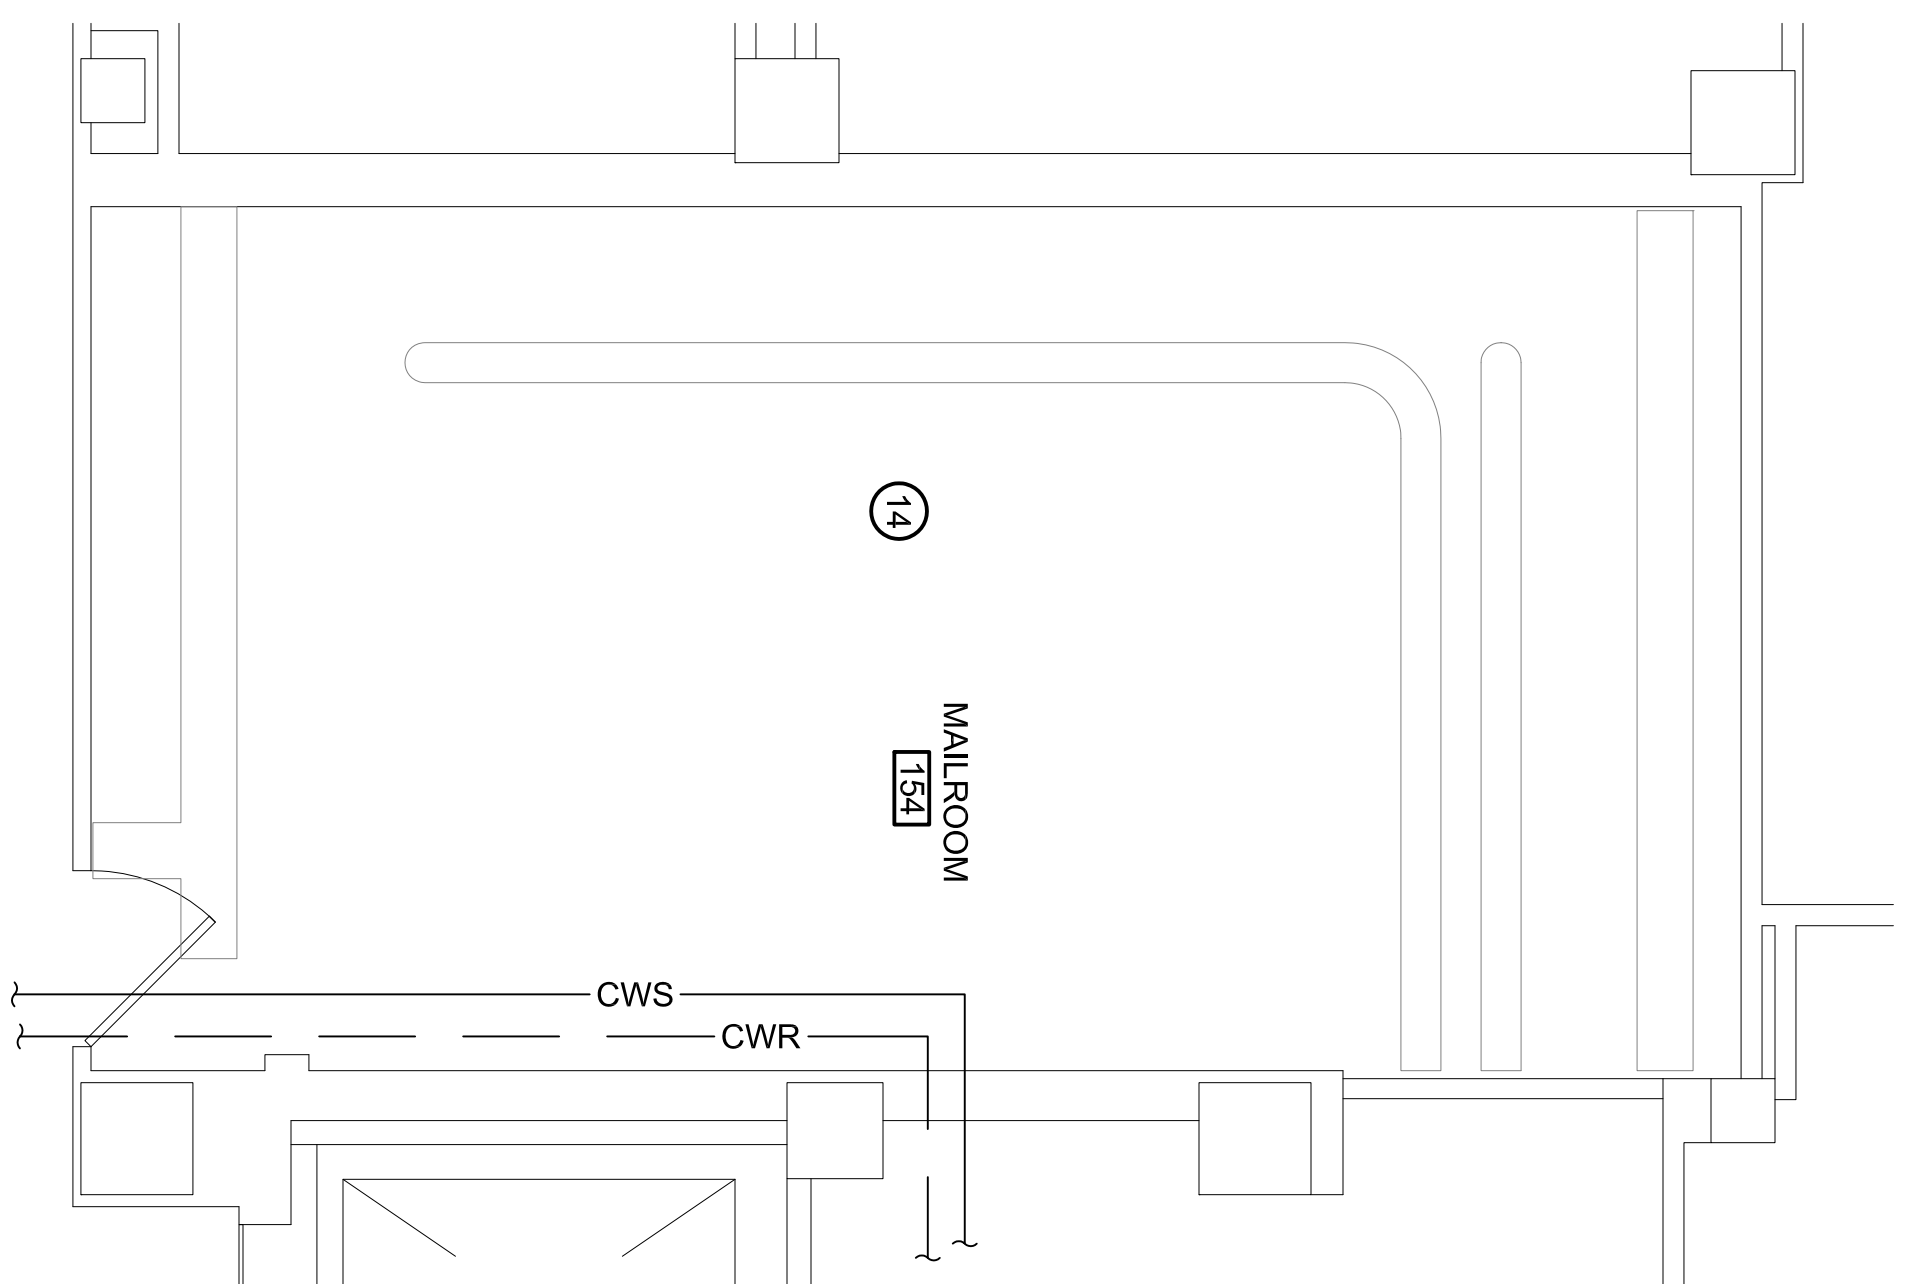

3 GROUND FLOOR PLAN - MECHANICAL - DEMOLITION
SCALE: 1/4" = 1'-0"

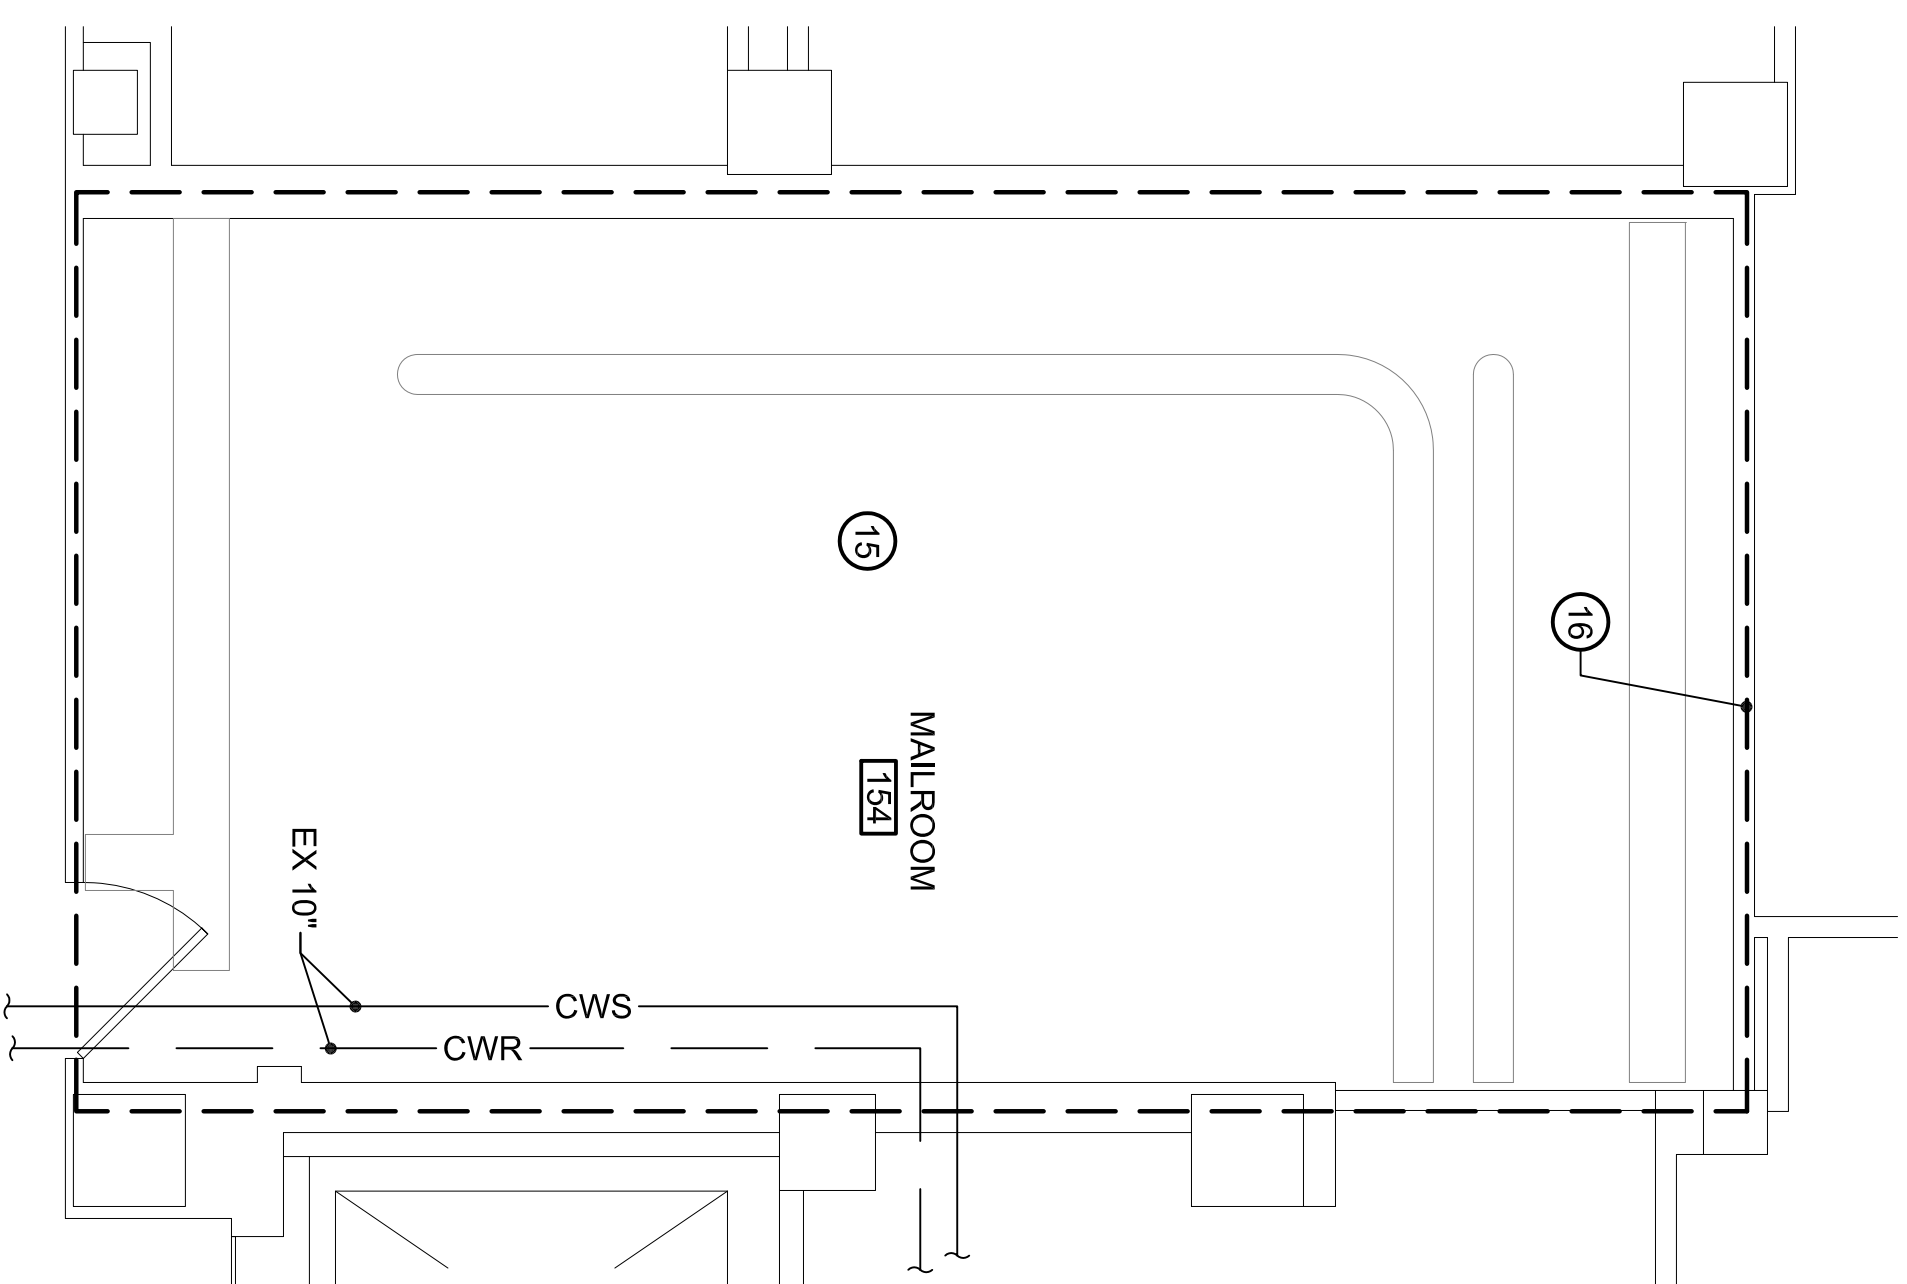

4 GROUND FLOOR PLAN - MECHANICAL - NEW WORK
SCALE: 1/4" = 1'-0"

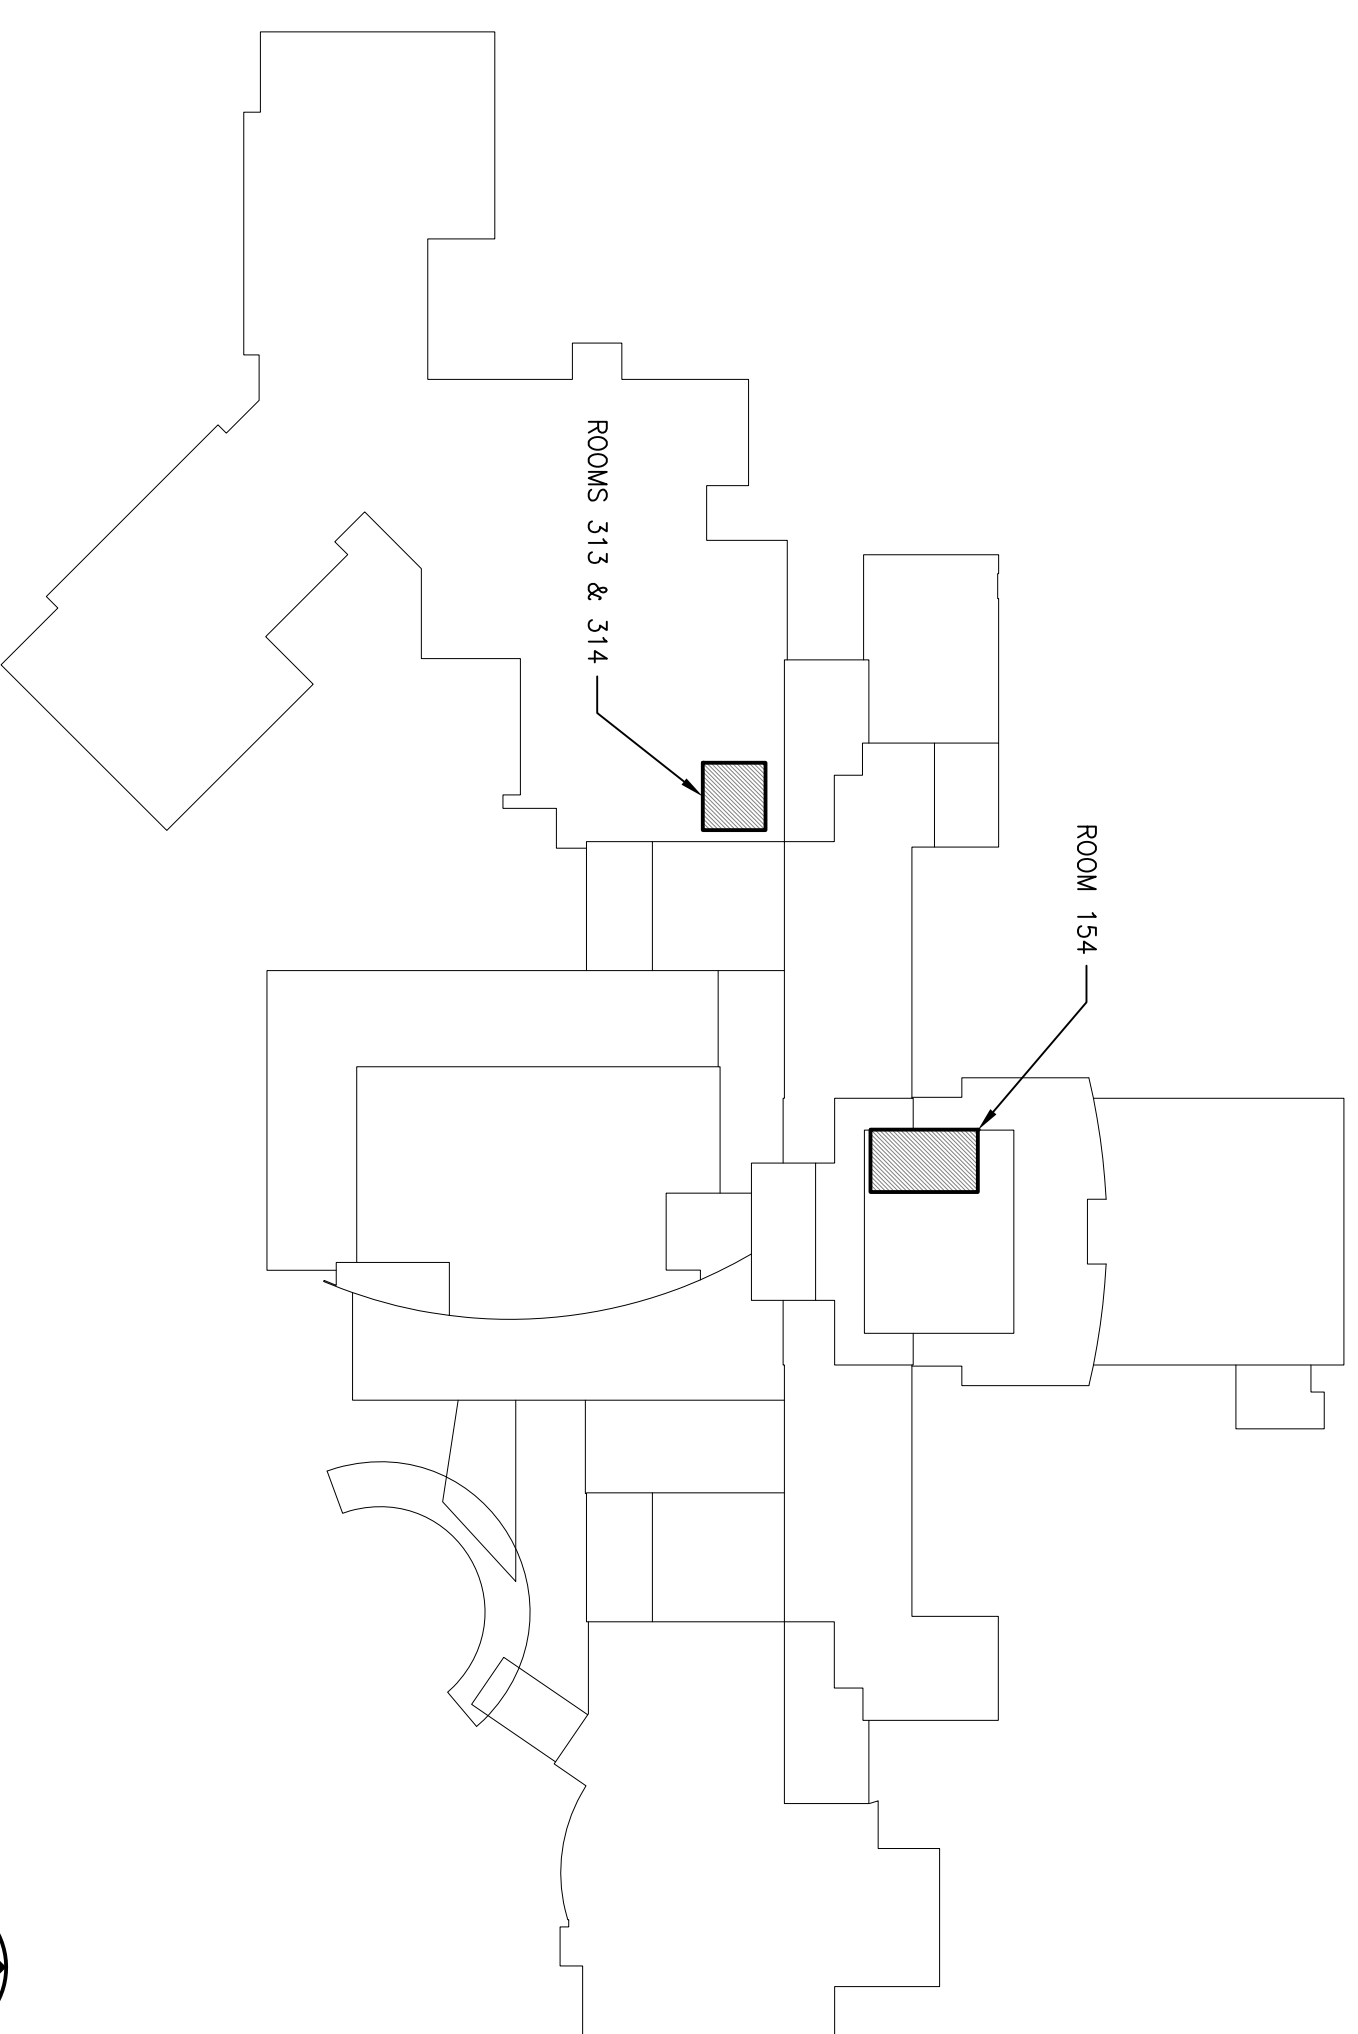

D

C

B

A

E

D |

C

B

A

E

FINAL CONTRACT DOCUMENT SUBMISSION

[illegible]

GENERAL NOTES:

1. REFER TO M-0 FOR MECHANICAL LEGEND, ABBREVIATIONS AND GENERAL NOTES.
2. SPRINKLER SYSTEM SHALL BE MODIFIED TO ACCOMMODATE NEW LAYOUT. REFER TO SPRINKLER GENERAL NOTES ON M-0 FOR FURTHER INFORMATION.

DRAWING NOTES:

- ① REMOVE/EXISTING WATER CLOSET AND ALL ASSOCIATED APURTENANCES. CAP PIPING IN WALL FOR RECONNECTION.
 - ② REMOVE EXISTING URINAL AND ALL ASSOCIATED APURTENANCES. CAP PIPING IN WALL FOR RECONNECTION.
 - ③ REMOVE EXISTING LAVATORY AND ALL ASSOCIATED APURTENANCES. CAP PIPING IN WALL FOR RECONNECTION.
 - ④ REMOVE EXISTING LAVATORY AND ALL ASSOCIATED APURTENANCES. REMOVE EXISTING PIPING IN WALL AND CAP AT MAN TO ALLOW FOR DEMOLITION OF WALL.
 - ⑤ REMOVE EXISTING SUPPLY AIR DIFFUSER AND ALL ASSOCIATED APURTENANCES.
 - ⑥ REMOVE EXISTING EXHAUST AIR GRILLE AND ALL ASSOCIATED APURTENANCES.
 - ⑦ REMOVE EXISTING SUPPLY DUCT AND ALL ASSOCIATED APURTENANCES. CAP DUCT AT MAN AND LEAVE CLEAN AND READY FOR RECONNECTION.
 - ⑧ REMOVE EXISTING EXHAUST DUCT AND ALL ASSOCIATED APURTENANCES. CAP DUCT AT MAN AND LEAVE CLEAN AND READY FOR RECONNECTION.
 - ⑨ EXISTING 12X12 EXHAUST DUCT UP TO REMAIN.
 - ⑩ EXISTING SUPPLY DUCT TO REMAIN.
 - ⑪ PROVIDE WATER CLOSET (P-103) WITH BARIATRIC JACK BY BAR INDUSTRIES SK-1000 SERIES OR APPROVED EQUAL. CONNECT TO EXISTING PIPING IN WALL. PROVIDE ADDITIONAL PIPING AS REQUIRED FOR INSTALLATION.
 - ⑫ PROVIDE URINAL (P-202) AND CONNECT TO EXISTING PIPING IN WALL. PROVIDE ADDITIONAL PIPING AS REQUIRED FOR INSTALLATION.
 - ⑬ PROVIDE LAVATORY (P-418) AND CONNECT TO EXISTING PIPING IN WALL. PROVIDE ADDITIONAL PIPING AS REQUIRED FOR INSTALLATION.
 - ⑭ REMOVE ALL FIBERGLASS INSULATION ON ALL HVAC AND PLUMBING PIPING ABOVE EXISTING CEILING. THIS PIPING SHALL INCLUDE BUT IS NOT LIMITED TO ALL CHILLED WATER PIPING AND ALL DOMESTIC WATER PIPING NOT SHOWN ON THE DRAWINGS.
 - ⑮ REINSULATE ALL HVAC AND PLUMBING PIPING ABOVE CEILING IN ACCORDANCE WITH THE SPECIFICATIONS. THIS PIPING SHALL INCLUDE BUT IS NOT LIMITED TO ALL CHILLED WATER PIPING AND ALL DOMESTIC WATER PIPING NOT SHOWN ON THE DRAWINGS.
- LIMIT OF WORK FOR SPRINKLER MODIFICATION. REFER TO GENERAL NOTE 2 AND SPRINKLER GENERAL NOTES ON DRAWING M-0.