



**1 GROUND FLOOR PLAN - ELEC - DEMOLITION**  
SCALE: 1/4" = 1'-0"

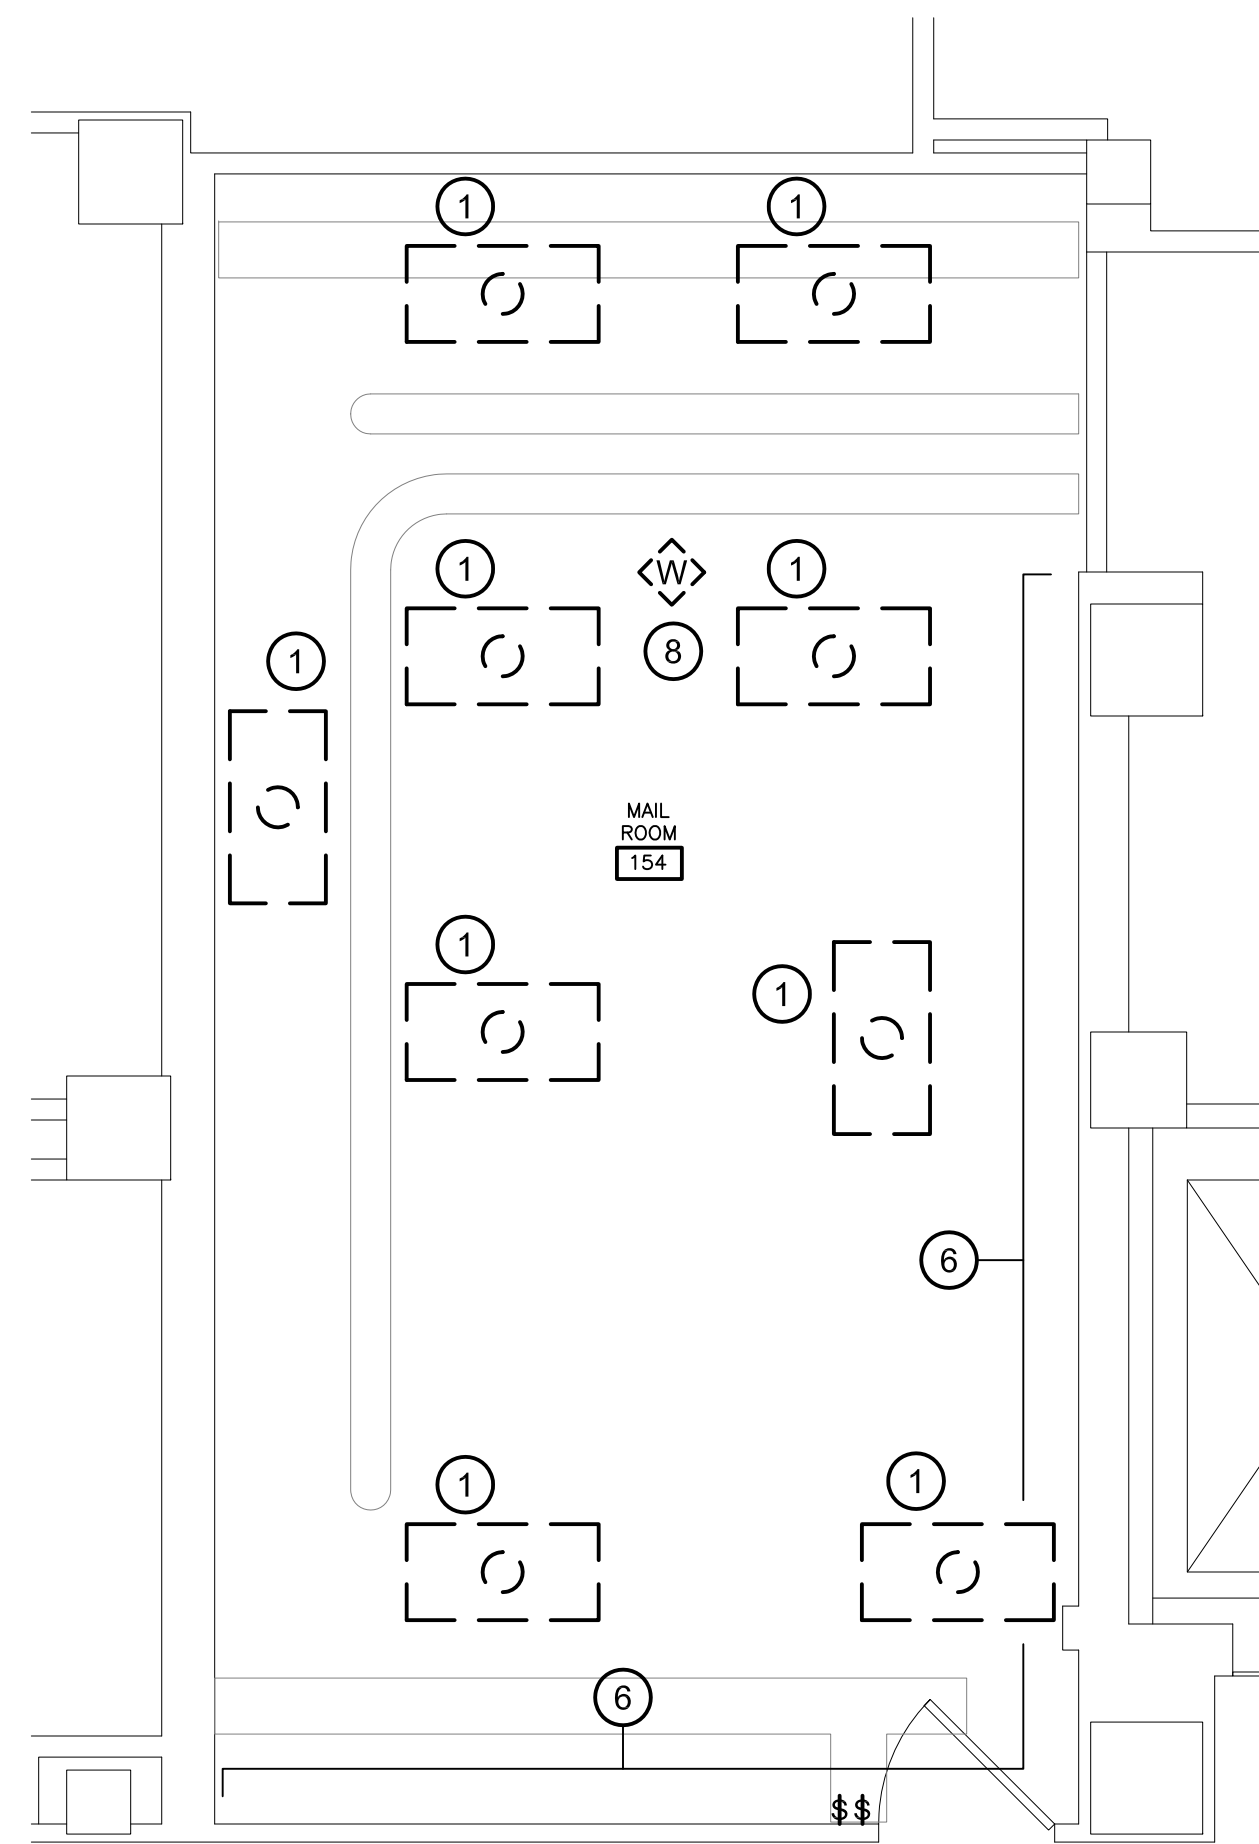

**3 GROUND FLOOR PLAN - ELEC - DEMOLITION**  
SCALE: 1/4" = 1'-0"

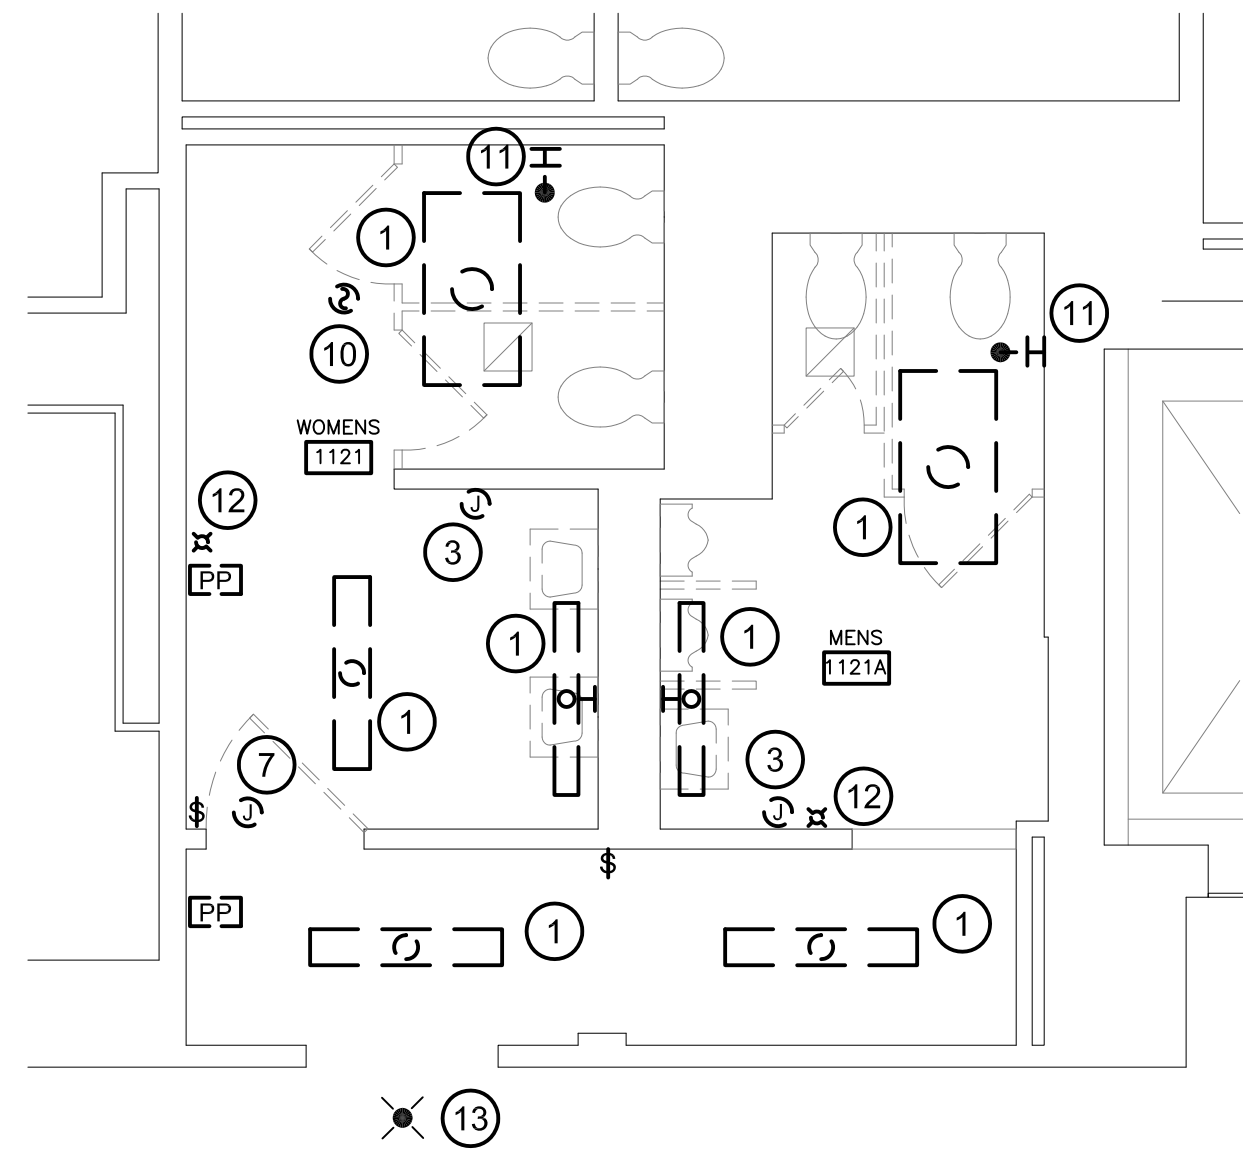


**2 FIRST FLOOR PLAN - ELEC - DEMOLITION**  
SCALE: 1/4" = 1'-0"

- GENERAL NOTES:**

1. REFER TO SHEET E-0 FOR ELECTRICAL LEGEND, ABBREVIATIONS, AND GENERAL NOTES.
2. UNLESS OTHERWISE NOTED, ALL DEVICES SHOWN IN THIS DRAWING SHALL BE REMOVED IN THEIR ENTIRETY INCLUSIVE OF ALL ASSOCIATED CONDUIT & WIRING BACK TO PANEL, SOURCE OR POINT OF ORIGIN.
3. ALL EQUIPMENT SHOWN IN THIS DEMOLITION PLAN IS EXISTING. ELECTRICAL EQUIPMENT SHOWN SOLID AND LIGHT SHALL REMAIN ALONG WITH ASSOCIATED WORK UNLESS OTHERWISE NOTED. ELECTRICAL EQUIPMENT SHOWN DASHED AND DARK SHALL BE REMOVED AND TURNED OVER TO THE OWNER. DISPOSE OF ALL ITEMS REFUSED BY THE OWNER.
4. ALL WIRING PASSING THROUGH AREA OF DEMOLITION WHICH IS NOT PART OF DEMOLITION SHALL REMAIN SUPPORTED FROM STRUCTURE ABOVE CEILING. CONTRACTOR SHALL RE-SUPPORT WIRING & LIGHTING IF NECESSARY AFTER DEMOLITION HAS FINISHED. MAINTAIN THE LIGHTING CIRCUITS AND FIRE ALARM SYSTEM SERVING AREA BEYOND SCOPE OF WORK.
5. CONTRACTOR SHALL RING OUT EXISTING CIRCUITS TO DETERMINE WHICH BRANCH CIRCUITS ARE NO LONGER IN USE. CONTRACTOR SHALL REMOVE BRANCH CIRCUIT WIRING DETERMINED NO LONGER IN USE BACK TO SOURCE IN ITS ENTIRETY. REMOVE EXISTING ABANDONED WIRING.

**DRAWING NOTES:**

- ① REMOVE LIGHTING FIXTURE, REMOVE WIRING AND CONDUIT BACK TO JUNCTION BOX AND PROTECT FOR RE-USE.
- ② AUTOMATIC FLUSH VALVE TO BE REMOVED.
- ③ AUTOMATIC PAPER TOWEL DISPENSER TO BE REMOVED.
- ④ REMOVE CEILING MOUNTED RECEPTACLE SERVING EXISTING DOOR OPERATOR. REMOVE WIRING AND CONDUIT BACK TO JUNCTION BOX AND PROTECT FOR CONNECTION TO NEW OPERATOR.
- ⑤ REMOVE ELECTRICAL DEVICE. REMOVE WIRING AND CONDUIT BACK TO JUNCTION BOX AND PROTECT FOR RE-USE.
- ⑥ REMOVE SURFACE MOUNTED ELECTRICAL RACEWAY AND DEVICES FROM PANELING TO BE REMOVED ON THIS WALL. PROTECT WIRING AND DEVICES FOR RE-INSTALLATION.
- ⑦ DISCONNECT POWER TO DOOR OPERATOR AS REQUIRED FOR REPLACEMENT OF DOOR. PROTECT ELECTRICAL CONNECTIONS AND RE-CONNECT TO MATCH EXISTING.
- ⑧ DISCONNECT AND REMOVE EXISTING CEILING MOUNTED WIFI DEVICE AND PROTECT FOR RE-INSTALLATION IN NEW CEILING. PROTECT WIRING AND CONNECTIONS FOR RE-USE.
- ⑨ REMOVE NURSE CALL DOME LIGHT AND RELOCATE AS INDICATED ON SHEET E-2.
- ⑩ REMOVE EXISTING SMOKE DETECTOR AND PROTECT FOR RE-INSTALLATION IN NEW CEILING. PROTECT WIRING AND CONNECTIONS FOR RE-USE.
- ⑪ REMOVE NURSE CALL DEVICE. PROTECT WIRING AND CONDUIT FOR RE-USE.
- ⑫ REMOVE FIRE ALARM DEVICE. PROTECT WIRING AND CONDUIT FOR RE-USE.
- ⑬ EXISTING NURSE CALL DOME LIGHT TO REMAIN.

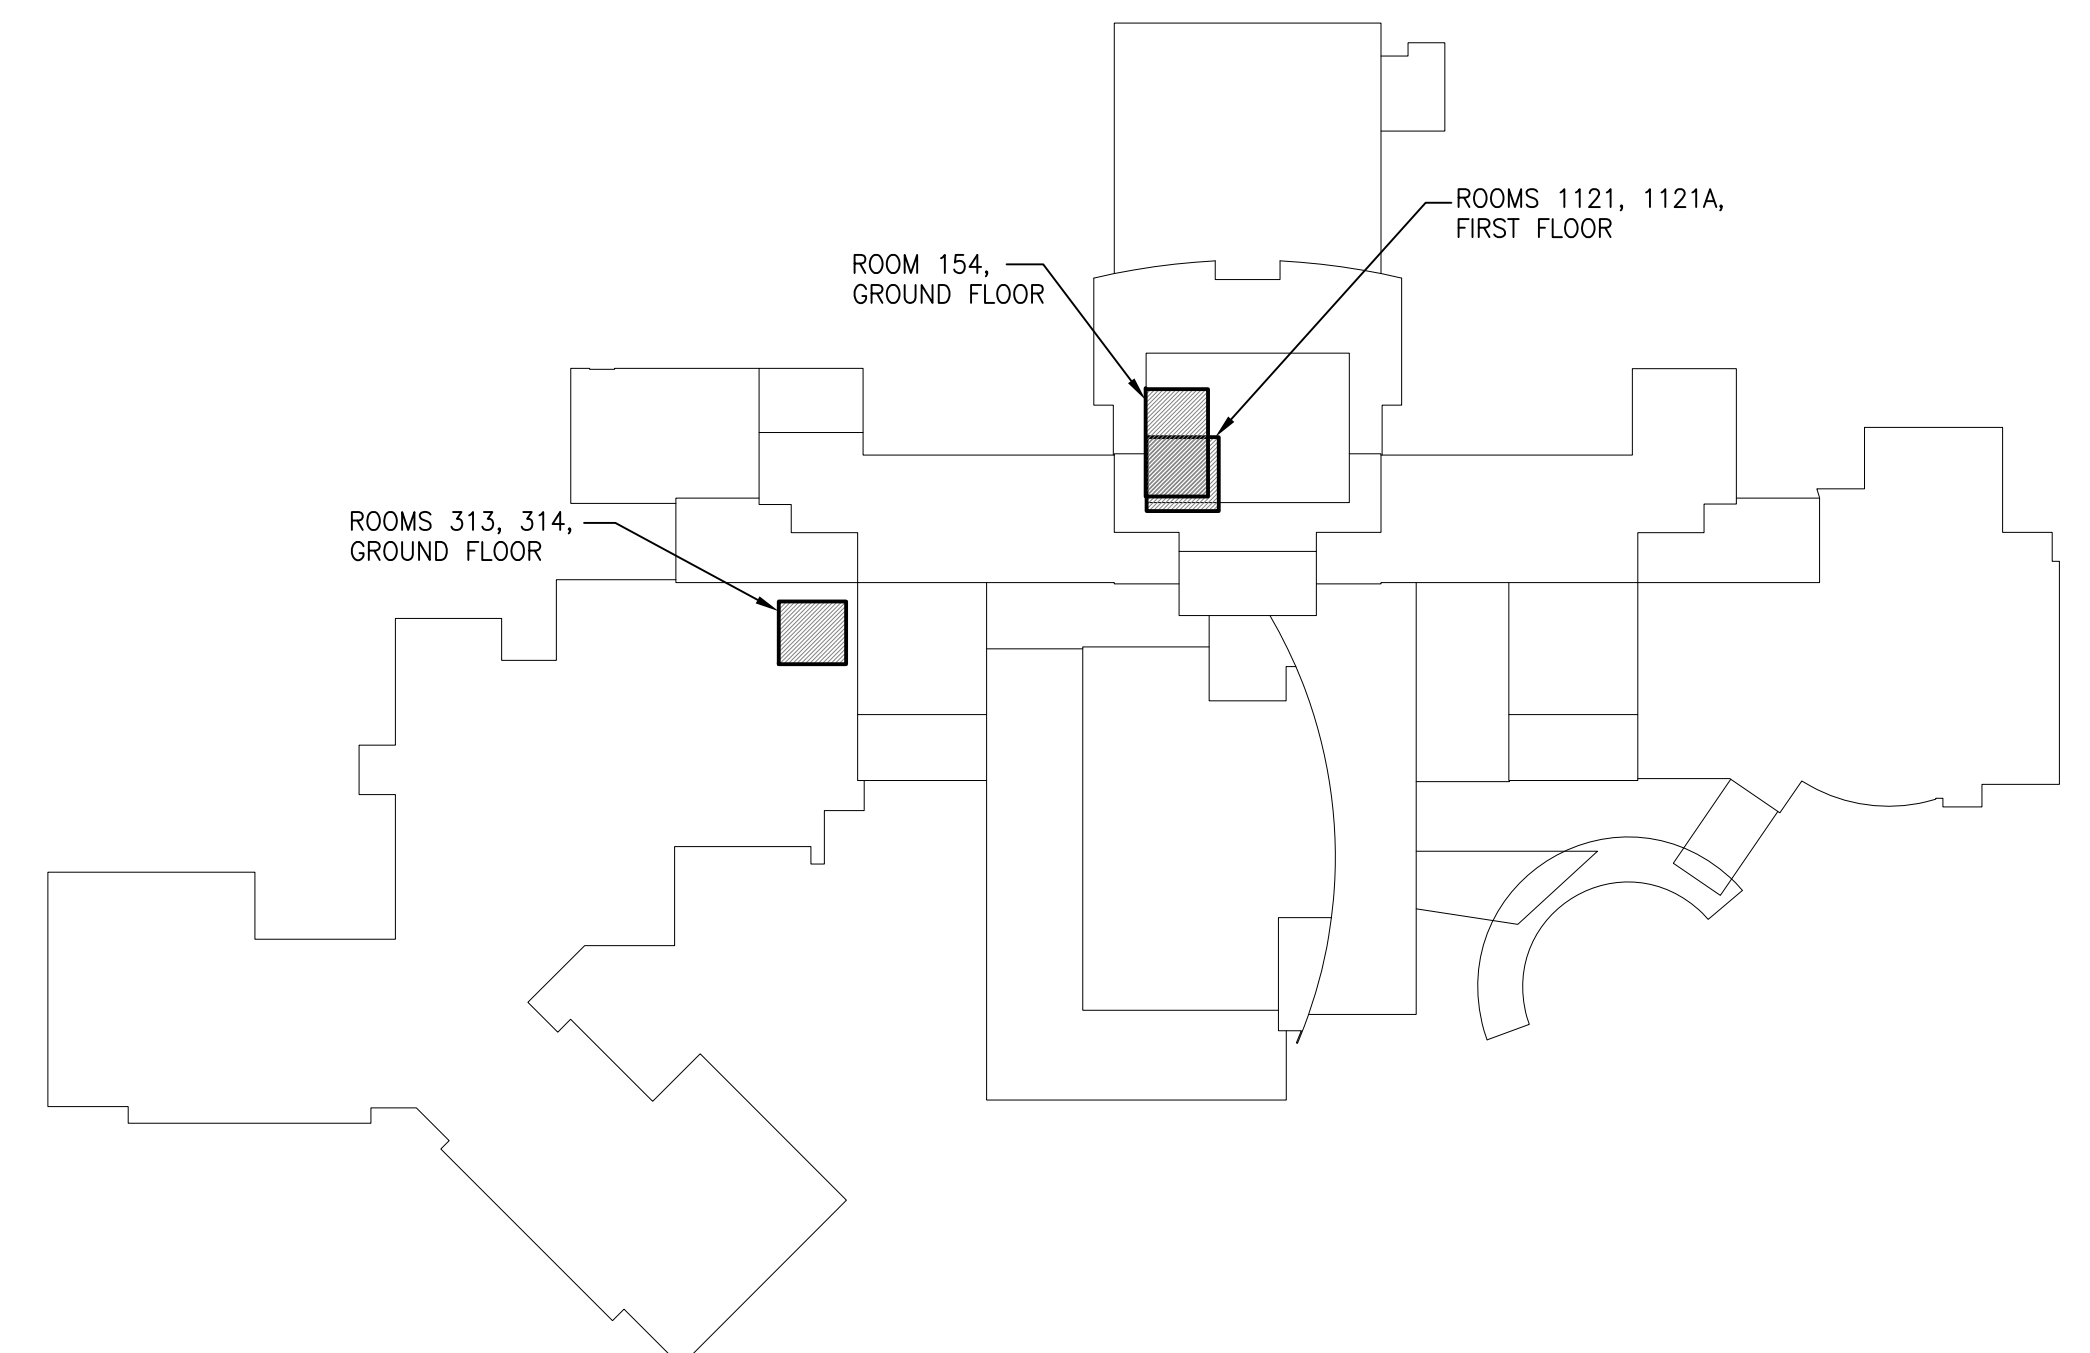[illegible]