


PLUMBING DEMOLITION GENERAL NOTES

- DEMOLITION WORK SHALL INCLUDE BUT IS NOT LIMITED TO REMOVAL OF PLUMBING ITEMS SHOWN DASHED OR AS INDICATED BY CODED NOTES. EXISTING PIPING AS SHOWN ON THESE PLANS MAY NOT ACCURATELY REPRESENT EXACT LOCATIONS. CONTRACTOR SHALL PROPERLY LOCATE AND IDENTIFY ALL PIPING WITHIN WORK AREA AND CONSIDER THIS IN DETERMINING THE SCOPE OF DEMOLITION.
- COORDINATE DEMOLITION WORK WITH OTHER CONTRACTORS.
- LOCATE ALL EXISTING ACTIVE MEDICAL GAS LINES, DOMESTIC WATER LINES, UTILITIES, AND PROTECT AS REQUIRED TO KEEP IN SERVICE.
- PROVIDE TWO(2) WEEKS (MINIMUM) ADVANCED NOTICE TO THE MEDICAL CENTER FOR ANY REQUIRED OUTAGES. UNAVOIDABLE INTERRUPTIONS ARE TO BE MINIMIZED AND ARE TO OCCUR DURING OFF PEAK PERIODS (NIGHTS AND WEEKENDS). SCHEDULE ALL WORK WITH FULL CONSIDERATION FOR BUILDING OCCUPANTS AVOIDING INTERFERENCE WITH THE USE OF, AND PASSAGE TO AND FROM ADJACENT AREAS AND FACILITIES DESIGNATED TO REMAIN IN USE DURING DEMOLITION. PROVIDE PROTECTION FOR OCCUPANTS AS REQUIRED.
- DEMOLISH AND REMOVE PIPING, ABANDONED LINES, SUPPORTS AND OTHER EXISTING ITEMS DESIGNATED FOR REMOVAL AND AS REQUIRED.
- ALL PLUMBING FIXTURES/EQUIPMENT WHICH IS TO BE REMOVED SHALL BE DISCARDED.
- REMOVE AND RELOCATE ANY ITEMS NECESSARY WHICH MUST REMAIN ACTIVE TO PERMIT INSTALLATION OF NEW WORK.
- IN THE REMOVAL OF ANY PART OF A DRAINAGE SYSTEM, DEAD ENDS SHALL BE PROHIBITED. ALL ABANDONED DRAINAGE PIPING IS NOT REMAIN CONNECTED TO THE ACTIVE PIPING OR IF CONNECTED, PROVIDE WITH CLEANOUT EXTENSIONS AND MAKE AVAILABLE FOR FUTURE USE.
- DEMOLISHED PIPING IS TO BE REMOVED BACK TO THE ACTIVE PIPING UNLESS PORTIONS ARE AGAIN CONNECTED TO NEW PLUMBING FIXTURES.
- NEW OR EXISTING POTABLE WATER SYSTEMS IN REWORKED AREAS TO REMAIN SHALL BE PURGED, THOROUGHLY FLUSHED, AND DISINFECTED PRIOR TO BEING PLACED IN SERVICE.
- REFER TO THE UNDER FLOOR PLAN FOR WORK TO OCCUR ON THE 7TH FLOOR. THE 7TH FLOOR IS AN OCCUPIED INPATIENT WARD, AND WILL REQUIRE SCHEDULING OF ALL WORK A MINIMUM OF 2 WEEKS PRIOR TO WORK ACTIVITIES.

CODED NOTES

- REMOVE LAVATORY. REMOVE DOW AND DHW BACK TO THE MAINS AND CAP. REMOVE VENT LINE BACK TO THE MAIN AND CAP. REMOVE 2" SAN TO THE SOIL STACK AND PLUG.
- REMOVE FLOOR DRAIN AND PIPING. CAP AT MAIN. REPAIR FLOOR TO MATCH SURROUNDING FLOOR SURFACE.
- REMOVE SINK. REMOVE DOW AND DHW BACK TO THE MAINS AND CAP. REMOVE VENT LINE BACK TO MAIN AND PLUG. REMOVE 2" SANITARY BACK TO MAIN AND PLUG.
- CAP AT THIS APPROXIMATE LOCATION.
- REMOVE PLUMBING FIXTURES AND PIPING WITHIN THIS ROOM. RELOCATE EXISTING RISERS WITH NEW PIPING.
- EXISTING SANITARY STACK TO BE RELOCATED.
- REMOVE AND RELOCATE THE EXISTING DOMESTIC WATER RISERS AS NOTED WITH NEW PIPING.
- REMOVE EXISTING BATHROOM FIXTURES. REMOVE DOW AND DHW BACK TO THE MAINS AND CAP. REMOVE VENT LINE BACK TO MAIN AND PLUG. REMOVE SANITARY BACK TO MAIN AND PLUG.
- REMOVE CLOGGED DRAINLINE. STEAM, BEDPAN HOPPER, AND DRAINLINE FOR SINK W/ FIXTURE.

KEYPLAN

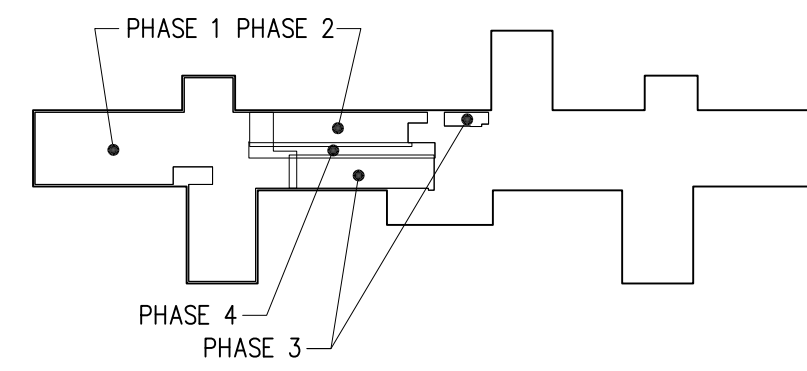


CONSTRUCTION DOCUMENTS

Project Number 636A8-12-005	Office of Construction and Facilities Management
Building Number 1	
Drawing Number 1-PD1	19 of 42
Date 07/27/2012	

NO.	REVISIONS/SUBMISSIONS	DATE
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		

Consultant

Seal

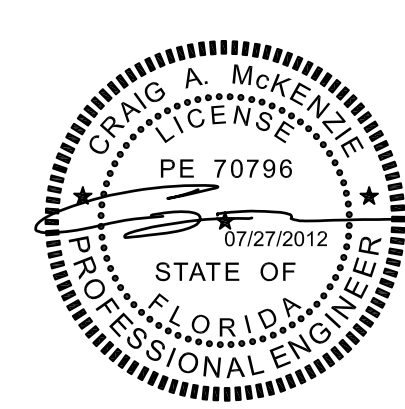

FED/Matrix
A Joint Venture



255 COUNTY ROAD 555 SOUTH, BARTOW, FLORIDA 33830
Telephone: (863) 665-6363 Fax: (863) 667-1773

Drawing Title
EIGHT EAST
PLUMBING
DEMOLITION PLAN

Approved: Project Director

Project Title
RENOVATE EIGHT EAST FOR
ENDOSCOPY & CARDIOLOGY
IC VAHCS

Location
IOWA CITY, IOWA

Date
07/27/2012

Checked
CAM

Drawn
JMS

Office of
Construction
and Facilities
Management

De art ei t
Vetera s Affairs