



2 PARTIAL CORRIDOR REMOVALS PLAN
ER100 SCALE: 1/16" = 1'-0"

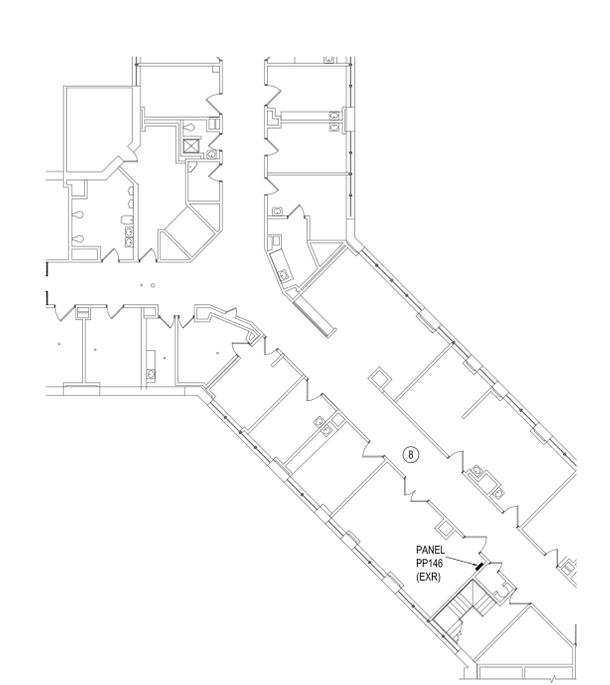

1 ELECTRICAL REMOVALS PLAN
ER100 SCALE: 1/4" = 1'-0"

- GENERAL NOTES:**
- REMOVE ALL ELECTRICAL DEVICES, LIGHT FIXTURES, AND EQUIPMENT SHOWN, UNLESS OTHERWISE NOTED.
 - MAINTAIN EXISTING ROOM LIGHTING CIRCUITS FOR REUSE.
 - MAINTAIN EXISTING CORRIDOR LIFE SAFETY LIGHTING CIRCUIT FOR REUSE.
 - WHERE LIGHT SWITCHES ARE LOCATED ON WALLS NOT BEING DEMOLISHED, MAINTAIN EXISTING BOX AND CONDUITS FOR REUSE.

- KEYED NOTES:**
- RELOCATE CODE BLUE STATION AS SHOWN ON DRAWING E100. REROUTE AND EXTEND WIRING AS NEEDED. COORDINATE REQUIREMENTS WITH THE VA COTR.
 - EXISTING SERVICE COLUMN TO BE REMOVED. COLUMN HAS NORMAL AND EMERGENCY RECEPTACLES. REMOVE ASSOCIATED 4 FOOT LONG WALL MOUNTED LIGHT FIXTURE.
 - COORDINATE REMOVAL OF DURESS BUTTON WITH THE VA. ASSOCIATED WIRING IS TO BE DISCONNECTED FROM ALARM PANEL PRIOR TO BUTTON REMOVAL. MAINTAIN WIRING FOR REUSE. RELOCATE DURESS BUTTONS TO LOCATIONS (TO BE DETERMINED BY THE VA)?
 - REMOVE SPEAKER TO ALLOW FOR CEILING REMOVAL. PROTECT SPEAKER AND ASSOCIATED WIRING FOR REINSTALLATION, AS SHOWN ON DRAWING E100.
 - EXISTING CABLE TRAY ABOVE CORRIDOR CEILING TO REMAIN. UTILIZED FOR "TIPS" (TELEPHONE/DATA) CABLING.
 - 6" X 4" ALUMINUM LADDER-TYPE CABLE TRAY, HUNG FROM STRUCTURE ABOVE CEILING. SEPARATE WHERE SHOWN, AND REMOVE HATCHED PORTION OF TRAY. CABLE TRAY CONTAINS CODE BLUE AND DURESS BUTTON CABLING "TO BE VERIFIED". REMOVE THESE CABLES FROM TRAY AND RUN THEM IN 1" CONDUIT ROUTED ABOVE CEILING.
 - SUSPENDED LAY-IN CEILINGS ARE BEING REPLACED IN THESE ROOMS. TEMPORARILY REMOVE OR SUPPORT LIGHT FIXTURES AS NEEDED TO ALLOW FOR CEILING REMOVAL AND MECHANICAL WORK. REINSTALL LIGHT FIXTURES IN NEW CEILING GRID.
 - PORTIONS OF CEILING GRID WILL BE REMOVED IN THIS CORRIDOR FOR MECHANICAL WORK. TEMPORARILY REMOVE OR SUPPORT EXISTING LIGHT FIXTURES (APPROXIMATELY TWELVE (12) 2x4 RECESSED LENSED TROFFERS) AS NEEDED IN THE WORK AREA. SEE ARCHITECTURAL DRAWINGS FOR EXTENT OF CEILING GRID. REINSTALL FIXTURES IN SAME LOCATIONS IN CEILING GRID.
 - REMOVE EXISTING CEILING MOUNTED FIRE ALARM SPEAKER/STROBE OR STROBE TO ALLOW FOR CEILING REMOVALS. REINSTALL IN NEW CEILING. ADJUST EXACT LOCATIONS TO COORDINATE WITH GRID AND OTHER CEILING MOUNTED DEVICES.

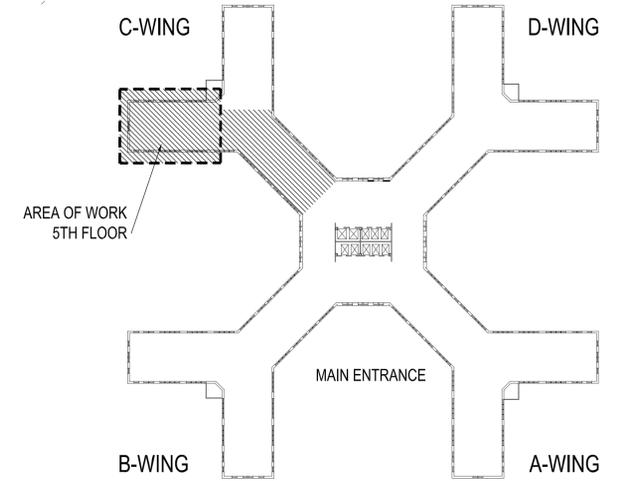

2 WORK KEY PLAN
ER100 SCALE: N.T.S.

100% DESIGN SUBMISSION

CONSULTANTS: 100% SUBMISSION 05/13/11 95% SUBMISSION - REISSUED 06/04/10 95% SUBMISSION 02/12/10 60% SUBMISSION 07/17/09 Revisions: Date		ARCHITECT/ENGINEERS: SAGE ENGINEERING ASSOCIATES, LLP 1211 WESTERN AVENUE ALBANY, NY 12203 (518)453-6091 FAX(518)453-6092  SEA PROJECT NO. 2217		Drawing Title ELECTRICAL REMOVALS PLAN Approved: Project Director		Project Title VISION CLINIC RENOVATIONS Location ALBANY, NEW YORK Date MAY 13, 2011		Project Number 528A8-08-830 Building Number 1 Drawing Number ER100 Checked SCY Drawn DLB		STRATTON VA MEDICAL CENTER 	
--	--	---	--	--	--	--	--	--	--	--	--