




WATER CLOSET  
SIDE VIEW

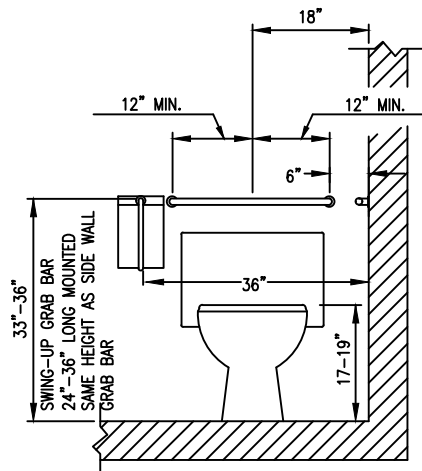

\*WHERE SPACE PERMITS,  
EXTEND GRAB BAR ON TRANSFER SIDE  
WATER CLOSET  
FRONT VIEW

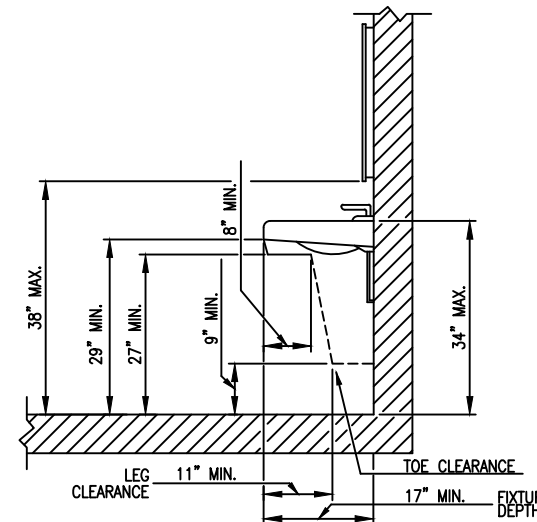

NOTE: DASHED LINE INDICATES DIMENSIONAL  
CLEARANCE OF OPTIONAL UNDER FIXTURE ENCLOSURE.

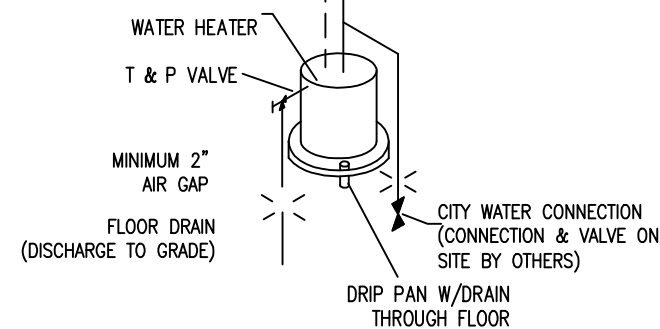

WATER HEATER DETAIL

#### SUPPLY NOTES:

1. WATER SUPPLY LINES TO BE CPVC, SUPPORTED 4' O.C. MAX.
2. WATER TEMPERATURE FACTORY SET AT A MAXIMUM OF 110°F.
3. SHUT OFF VALVES ARE TO BE PROVIDED AT EACH FIXTURE IN ACCORDANCE WITH SCHEMATICS ABOVE.
4. WATER HAMMER ARRESTORS PROVIDED, OR IF AIR CHAMBERS, TO BE MINIMUM 15" LONG AND NOT LESS THAN THE DIAMETER OF PIPE SERVED.
5. DIELECTRIC UNIONS TO BE USED AT CONNECTIONS OF WATER LINES TO WATER HEATER.
6. COLD WATER INLET TO BE PROVIDED WITH A SHUT OFF VALVE ABOVE FLOOR AT THE COLD WATER SUPPLY PER SCHEMATIC.
7. FULL SIZED SHUT OFF VALVE TO BE PROVIDED BETWEEN BUILDING AND WATER MAIN/METER BY OTHERS ON SITE.

#### WASTE NOTES:

1. DMV MATERIAL TO BE CONCEALED SCHEDULE 40 PVC.
2. ALL PIPES TO BE SECURED MAXIMUM 4' O.C.
3. ALL CLEAN OUTS SHALL BE ACCESSIBLE, PROVIDED AT THE BASE OF ALL WASTE/SOIL STACKS, AND SO THAT ALL HORIZONTAL PIPING MAY BE REACHED WITHOUT PASSING THROUGH MORE THAN 45° OF TURNS.
4. 1/4" PER. FT SLOPE PROVIDED ON ALL HORIZONTAL BRANCHES.
5. VENT PIPE SHALL END 12" ABOVE FINISHED ROOF AND NOT BE LOCATED WITHIN 10' OF OTHER VENT OPENINGS.
6. ALL VERTICAL TO HORIZONTAL OR HORIZONTAL TO HORIZONTAL CHANGES IN DIRECTION SHALL BE THROUGH LONG TURN T.Y. OR COMBINATION WYE FITTINGS WITH 1/8" BEND.
7. ALL HORIZONTAL TO VERTICAL CHANGES IN DIRECTION SHALL BE THROUGH SANITARY TEE, OR IF AT THE SAME LEVEL ON THE STACK THEN THROUGH AN APPROVED DOUBLE FIXTURE FITTING.


WHOLE BUILDING  
TEMPORING VALVE

6 GAL.  
WATER  
HEATER


SUPPLY THROUGH  
FLOOR

SERVICE  
SINK

SUPPLY SCHEMATICS  
MATERIAL: CPVC PIPE & FITTINGS

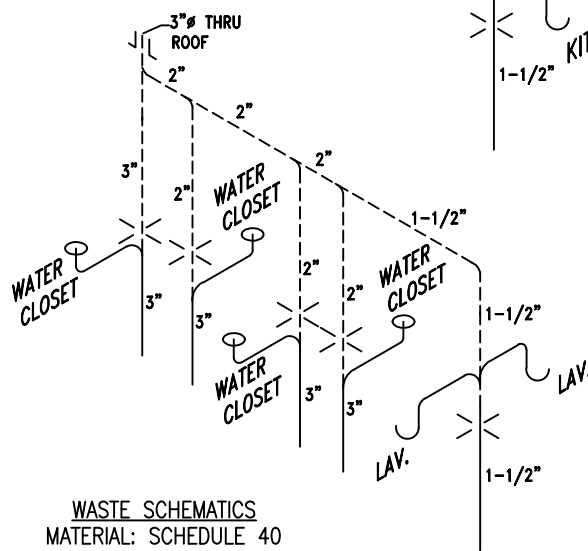

WASTE SCHEMATICS  
MATERIAL: SCHEDULE 40  
PVC PIPE & FITTINGS

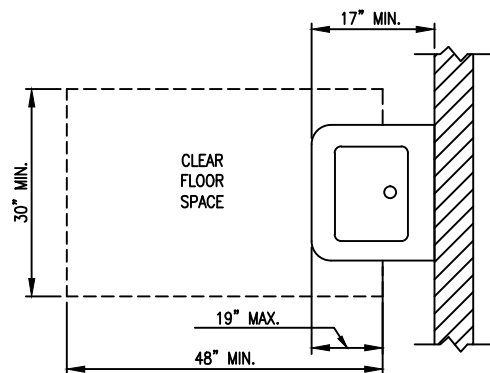

CLEAR SPACE AT  
LAVATORIES AND SINKS

MOBILE MODULAR  
**EXPRESS** INC.  
P.O. BOX 1099  
EDGEWOOD, MD 21040  
1-410-676-3700  
WWW.MOBILEMODULAR.COM

Mobile/Modular  
**EXPRESS** LLC.  
64 HESS ROAD  
LEOLA, PA 17450  
PHONE: (717) 656-2081  
FAX: (717) 656-4349

BUSINESS OFFICE  
MODULAR UNIT  
FO6064

PLUMBING  
SCHEMATICS

DWG. NO.:	P1		DATE	2-1-10				
DESIGNED:	12/15/09		REVISIONS	SERVICE SINK ADD				
PRINTED:	6/18/12 11:12AM							
SERIAL NO.:	50055A10 1-5							
SCALE:	NTS							