


#

KEYED NOTES

A - ACCESSORIES & MISCELLANEOUS DEMOLITION		F - FLOOR DEMOLITION		R - ROOF DEMOLITION	
A1	REMOVE ALL WALL MOUNTED ITEMS INCLUDING (BUT NOT LIMITED TO) TACKBOARDS, SHELVES, SOAP DISPENSERS, PAPER TOWEL DISPENSERS, TV BRACKETS, DOOR STOPS, WALL PROTECTION, MISCELLANEOUS EQUIPMENT MOUNTING BACKBOARDS AND HARDWARE, LEAVING ONLY THE BARE WALL FINISH, PATCH WALL SURFACES AS REQUIRED FOR NEW FINISHES AS SCHEDULED. PROPERLY DISPOSE OF ALL ITEMS NOT BEING REINSTALLED.	F.1	REMOVE VINYL TILE, BASE, AND MASTIC. REMOVE REMAINING MASTIC AS ACCEPTABLE TO MANUFACTURER OF NEW FLOORING MATERIAL. FLASH PATCH AND PREPARE SLAB FOR NEW FINISH IN MANNER REQUIRED BY NEW FINISH MANUFACTURER.	R.1	APPROXIMATE LOCATION OF NEW ROOF PENETRATION FOR NEW EXHAUST. CUT AND PATCH EXISTING EPDM ROOF TO MATCH EXG. AND MAKE WATERTIGHT. GC TO INSTALL CURB FURNISHED BY HVAC CONTRACTOR.
A.2	REMOVE ALL WALL MOUNTED TOILET ACCESSORIES INCLUDING (BUT NOT LIMITED TO) PAPER TOWEL AND SOAP DISPENSERS, TOILET PAPER DISPENSERS, MIRRORS, SHELVES, HAND DRYERS, AND SANITARY NAPKIN DISPENSERS/ DISPOSALS. PATCH WALL SURFACES AS REQUIRED FOR NEW FINISHES.	F.2	REMOVE CARPET AND BASE INCLUDING ANY TRANSITION STRIPS OR OTHER EDGING MATERIALS. REMOVE REMAINING CARPET ADHESIVE AS ACCEPTABLE TO MANUFACTURER OF NEW FLOORING MATERIAL. FLASH PATCH AND PREPARE SLAB FOR NEW FINISH IN MANNER REQUIRED BY NEW FINISH MANUFACTURER.	T.1	REMOVE TOILET PARTITIONS AND SCREENS COMPLETE. PATCH WALLS AND FLOORS TO MATCH ADJACENT SURFACES.
A.3	REMOVE DRINKING FOUNTAIN AND WALL TILE COMPLETE, COORDINATE WITH PLUMBING DRAWINGS.	F.3	PREPARE SLOPED FLOOR FOR NEW CONCRETE RAISED FLOOR AND RAMP. SCRAPE OFF THE EXG. FLOORING DOWN TO CLEAN CONCRETE, APPLY BONDING AGENT, PLACE WIRE MESH AND THEN PLACE A NEW LIGHTWEIGHT CONCRETE SLAB TO MATCH THE ELEVATIONS OF THE ADJACENT STAIR LANDING. COORDINATE WITH CONSTRUCTION PLAN AND DETAILS.	W - WALLS (INTERIOR PARTITION & FINISH WALL CONSTRUCTION)	
A.4	REMOVE VINYL WALL COVERING AND ADHESIVE COMPLETE ON EXG. WALLS TO REMAIN. PATCH WALLS AS REQUIRED FOR INSTALLATION OF NEW FINISHES.	F.4	REMOVE PLANK FLOORING AND VINYL BASE INCLUDING ANY TRANSITION STRIPS OR OTHER EDGING MATERIALS. FLASH PATCH AND PREPARE SLAB FOR NEW FINISH IN MANNER REQUIRED BY NEW FINISH MANUFACTURER.	W.1	REMOVE ENTIRE STUD PARTITION FULL HEIGHT. INCLUDING ALL WALL MOUNTED ITEMS, CASEWORK, DOORS AND FRAMES COMPLETE. PATCH EXG. ADJACENT WALLS SCHEDULED TO REMAIN AS REQUIRED. FLASH PATCH FLOOR AT REMOVED WALLS TO MATCH EXG. SURFACE AND PREPARE FOR NEW FINISH AS SCHEDULED. COORDINATE WITH CONSTRUCTION PLAN FOR MORE INFORMATION.
A.5	REMOVE WINDOW TREATMENTS AND ALL ATTACHMENTS COMPLETE.	F.5	REMOVE CERAMIC MOSAIC TILE FLOORING, BASE, AND BOND COAT DOWN TO SURFACE OF MORTAR BED. PATCH MORTAR BED WHERE DAMAGED BY TILE REMOVAL. FILL AND FLASH PATCH AS REQUIRED TO BRING LEVEL WITH ADJACENT SLAB SURFACES.	W.2	REMOVE ENTIRE CONCRETE BLOCK WALL FULL HEIGHT. INCLUDING ALL WALL MOUNTED ITEMS, CASEWORK, DOORS AND FRAMES COMPLETE. PATCH EXG. ADJACENT WALLS SCHEDULED TO REMAIN AS REQUIRED. FLASH PATCH FLOOR AT REMOVED WALLS TO MATCH EXG. SURFACE AND PREPARE FOR NEW FINISH AS SCHEDULED. COORDINATE WITH CONSTRUCTION PLAN FOR MORE INFORMATION.
A.6	REMOVE EXG. METAL CABINET AND ALL ATTACHMENTS COMPLETE. COORDINATE DISPOSAL WITH OWNER, PATCH WALLS AND FLOOR TO REMAIN TO MATCH ADJACENT SURFACES.	F.6	REMOVE EXPANSION JOINT COVER COMPLETE.	W.3	CUT OPENING IN EXG. CONCRETE BLOCK WALL AS INDICATED, INSTALL LINTEL AS REQUIRED AND PREPARE OPENING TO RECEIVE NEW DOOR, FRAME, AND HARDWARE AS SCHEDULED.
C - CEILING DEMOLITION		F.7	REMOVE TERRAZZO WALL BASE COMPLETE. FLASH PATCH AND PREPARE SLAB FOR NEW FINISH IN MANNER REQUIRED BY NEW FINISH MANUFACTURER.	W.4	CUT OPENINGS IN EXG. CONCRETE BLOCK WALL AS NEEDED FOR HVAC DUCTWORK AND INSTALL STEEL ANGLE AS REQUIRED. COORD. EXACT LOCATIONS WITH HVAC DRAWINGS.
C1	REMOVE LAY-IN CEILING, SUSPENSION SYSTEM, SOFFITS, AND ALL ATTACHMENTS COMPLETE. PATCH WALLS TO MATCH ADJACENT FINISHED SURFACES AND PREPARE FOR INSTALLATION OF NEW CEILING AS SCHEDULED. COORDINATE WITH REFLECTED CEILING PLAN FOR MORE INFORMATION.	F.8	REMOVE ASBESTOS TILE AND COORD. W/ DRAWING HA-100 FOR ASBESTOS MATERIAL REMOVAL DRAWINGS AND NOTES. PROVIDE FLOWABLE FLOOR FILL (GYPCRETE OR EQUAL) AT ABATED FLOOR AREAS.		
		F.9	PATCH AND PREPARE SLAB FOR NEW FINISH IN MANNER REQUIRED BY NEW FINISH MANUFACTURER.		
		O - OPENINGS (DOORS & WINDOWS)			
		O.1	REMOVE WOOD DOOR, HOLLOW METAL FRAME, HARDWARE AND ALL ATTACHMENTS COMPLETE.		
		O.2	REMOVE DOOR HARDWARE AND PREPARE FOR NEW CARD READER SECURITY HARDWARE. PREP AND SAND EXG. DOOR AND FRAME FOR NEW PAINT AS SCHEDULED.		

GENERAL NOTES
1. ALL ELECTRICAL OUTLETS, WIRING, BOXES, CONDUIT, FIXTURES, ETC. LOCATED IN WALLS OR CEILINGS SHOWN TO BE REMOVED BY THIS PROJECT SHALL BE REMOVED TO THE POINT OF CONNECTION AT THE ELECTRICAL SERVICE PANEL.
2. ALL PLUMBING SUPPLY AND SANITARY COMPONENTS AND PIPING SHOWN TO BE REMOVED BY THIS PROJECT SHALL BE REMOVED TO THE POINT OF SERVICE ENTRY OR EXIT IN EXISTING BUILDING. PENETRATIONS THROUGH EXISTING ROOF SHALL BE CUT AND TERMINATED AT A POINT BELOW THE ROOF LINE TO BE REUSED, PENETRATIONS NOT SCHEDULED FOR REUSE SHALL BE CUT BELOW ROOF LINE AND CAPPED.
3. ALL HEATING EQUIPMENT, CONNECTIONS, CEILING UNITS, REGISTERS, BASEBOARD UNITS, DUCTWORK, ROOF TOP UNITS, ETC. SHOWN TO BE REMOVED BY THIS PROJECT SHALL BE REMOVED IN THEIR ENTIRETY. PATCH AND REPAIR ANY EXISTING CONDITIONS AFFECTED THAT ARE TO REMAIN. PATCH AND REPAIR OPENINGS IN FLOOR TO RECEIVE NEW FLOORING AS AFFECTED BY REMOVALS.
4. INDICATES AREA OF ASBESTOS TILE REMOVAL.
5. REFER TO DRAWINGS AS-103 AND P-102 FOR AREAS OF REMOVAL & REPLACEMENT OF EXISTING METAL PAN CEILINGS ON 8TH FLOOR, PHASING OF WORK TO BE COORDINATED W/ OWNER.

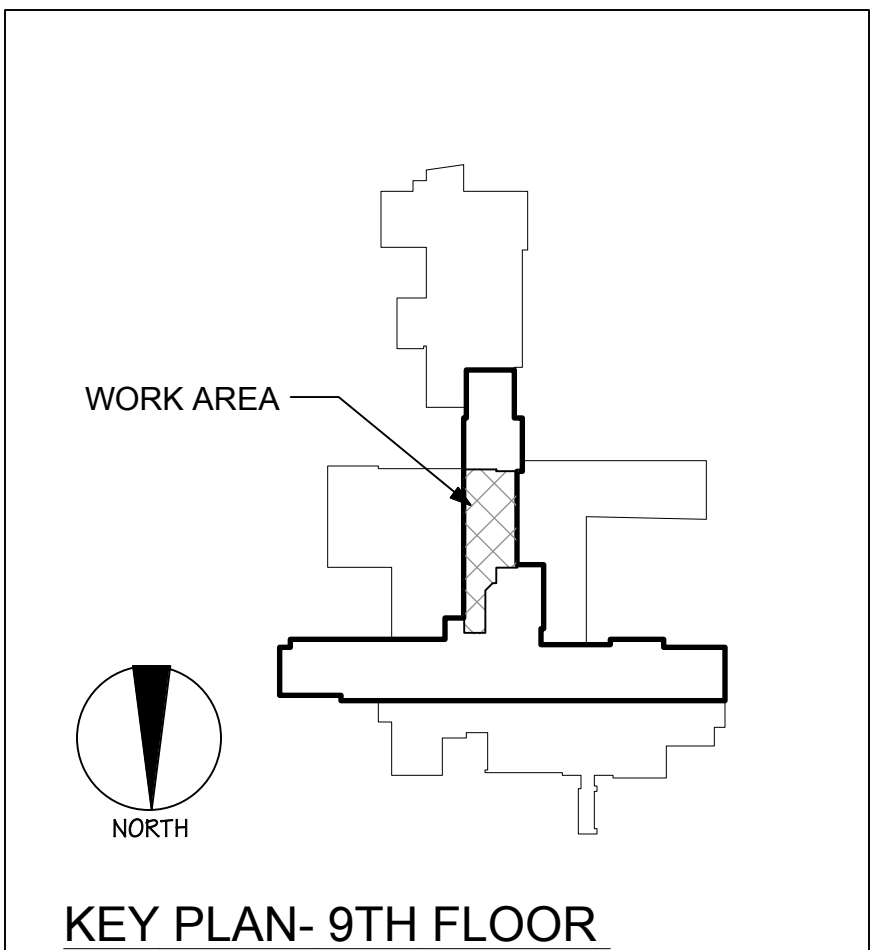

CONSULTANTS:		ARCHITECT/ENGINEERS:		Drawing Title DEMOLITION PLAN & NOTES		Project Title RENOVATE FOR WOMEN'S CLINIC		Project Number VA# 528A7-13-701 DA# 12-001 Building Number 1	
				Approved: Project Director		Location 800 IRVING AVENUE, SYRACUSE NY 13210		Drawing Number AD-101	
						Date 12.18.2012	Checked KAD	Drawn LMB	Dwg. 9 of 41