


1. CONTRACTOR SHALL VISIT SITE TO VERIFY EXISTING CONDITIONING LIGHT FIXTURES, CIRCUITS, SWITCHES, ETC. AND REMOVE ALL FIXTURES NOT TO REMAIN.
2. EXISTING CIRCUITS SHALL BE SAVED FOR NEW LIGHT FIXTURES.

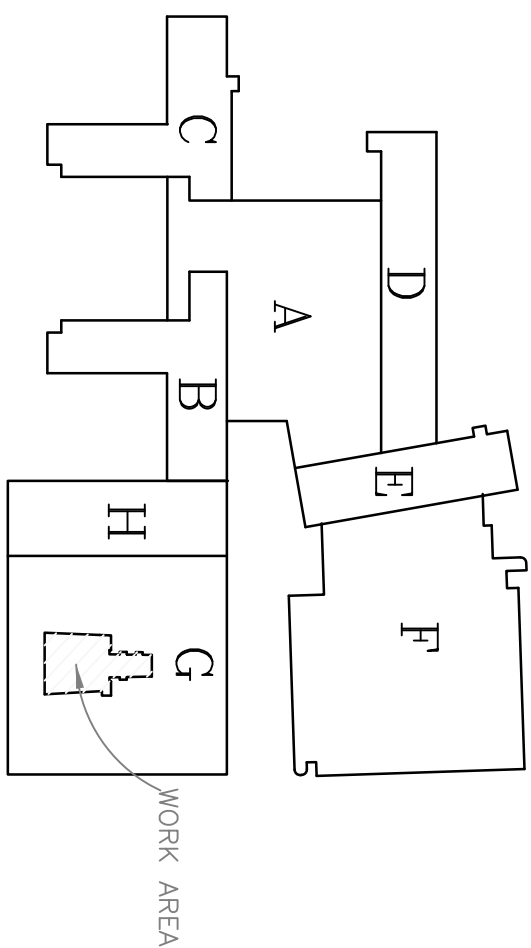

- ☐ REMOVE 24X LIGHT FIXTURE AND RELATED BRANCH CIRCUITS. SAVE CIRCUIT FOR NEW FIXTURE.
- ⊗ RECESSED LIGHT FIXTURES TO BE REMOVED
- EXIT LIGHT TO BR REPLACED
- ⊗ A/C DIFFUSER TO BE REMOVED
- ▢ RETURN AIR GRILLE TO BE REMOVED
- SPRINKLER TO BE MODIFIED
- ⑤ REMOVE AND REINSTALL SMOKE DETECTOR
- ⑤ REMOVE AND REINSTALL SPEAKER
- ① REMOVE LIGHT FIXTURES
- ② LIGHT FIXTURE TO REMAIN. REWIRCUIT
- ③ SAVE LIGHT FIXTURE CIRCUIT FOR NEW FIXTURE
- ④ REPLACE EXIST LIGHT

ME-1 SCALE: $\frac{1}{4}" = 1'-0"$

			M-K ENGINEERING, INC. CONSULTING ENGINEERS HVAC-PLUMBING-FIRE PROTECTION-ELECTRICAL 4323 Division Street, Suite 211 Metairie, LA 70002 Tel:(504) 887-2376, Fax(504) 887-2302 M-K Project No.: 0980			
REVISIONS	Date					
© 2009						
Drawing Title DEMOLITION FLOOR PLAN LIGHTING GENERAL & KEY NOTES			Project Title RENOVATE LOBBY OF IG PARKING GARAGE			
Approved Division Chief			Building Number	Directed	Drawn	Date 6/19/09
Approved Service Director			Location 1601 PERDIDO STREET NEW ORLEANS, LOUISIANA		Project No. 629-09-101 NRM	
			Sheet No. ME-1 1 OF 6		SOUTHEAST LOUISIANA VETERANS HEALTH CARE SYSTEM	