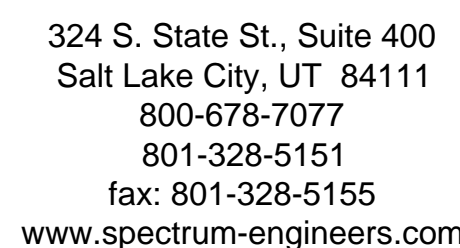
[illegible]

---

 Department of  
Veterans Affairs

1. REMOVE EXISTING LIGHT FIXTURE AND EXISTING LIGHT SWITCH. CONDUIT, CONDUCTORS AND JUNCTION BOXES SHALL REMAIN IN PLACE AND REPAIRABLE FOR RE-USE. LIGHT FIXTURE AND SWITCH SHALL BE REPLACED AND ALL INTERCONNECTING CIRCUITS SHALL REMAIN OPERABLE AS ILLUSTRATED ON NEW WORK DRAWINGS.
2. REMOVE EXISTING UPS UNIT. RETURN ALL FUNCTIONAL UPS UNITS TO THE VA DISPOSITION ALL OTHERS TO BE DISPOSED USING PROPER METHODS.
3. EXISTING EMERGENCY OUTLET SHALL REMAIN.
4. PROVIDE NEW LIGHT FIXTURE PER LIGHT FIXTURE SCHEDULE AS DETAILED. RECONNECT EXISTING CIRCUIT TO POWER EXISTING LIGHT FIXTURE AND INSTALL A 20 AMPERE DUAL TECHNOLOGY OCCUPANCY SENSOR/LIGHT SWITCH COMBO TO CONTROL THE LIGHTING.
5. PROVIDE LIGHT FIXTURE PER LIGHT FIXTURE SCHEDULE. EXTEND NEW CRITICAL POWER CIRCUIT BEING PULLED IN TO POWER NEW LIGHTING. PROVIDE A 20 AMPERE DUAL TECHNOLOGY OCCUPANCY SENSOR/LIGHT SWITCH COMBO TO CONTROL THE LIGHTING.
6. PROVIDE UPS UNIT, APC-SMT2200RM2U (RACK MOUNTED) OR APC-SMT2200. PROVIDE WALL MOUNTED SHELF FOR UPS UNIT THAT IS A MINIMUM OF 10" BY 24" IN SIZE AND CAN HOLD A MINIMUM OF TWO SUBMIT. PROVIDE A SIGNATURE OF ENGINEER FOR APPROVAL. INSTALL UPS ON SHELVING UNIT AND SECURE UPS TO SHELVING AND WALL. RECONNECT EXISTING IT EQUIPMENT REMOVED/DISCONNECTED IT ITEM KEYNOTE 2.
7. PROVIDE A FOUR-PELLED RED RECEPTACLE(S), HOSPITAL GRADE WITH A STAINLESS STEEL ENGRAVED PLATE. PROVIDE A FOUR-PELLED RED NUMBER AND PANEL DESIGNATION ENGRAVED ON THE NAME PLATE. PATCH EXISTING WALL AS REQUIRED TO ACCOMMODATE NEW INSTALLATION.