

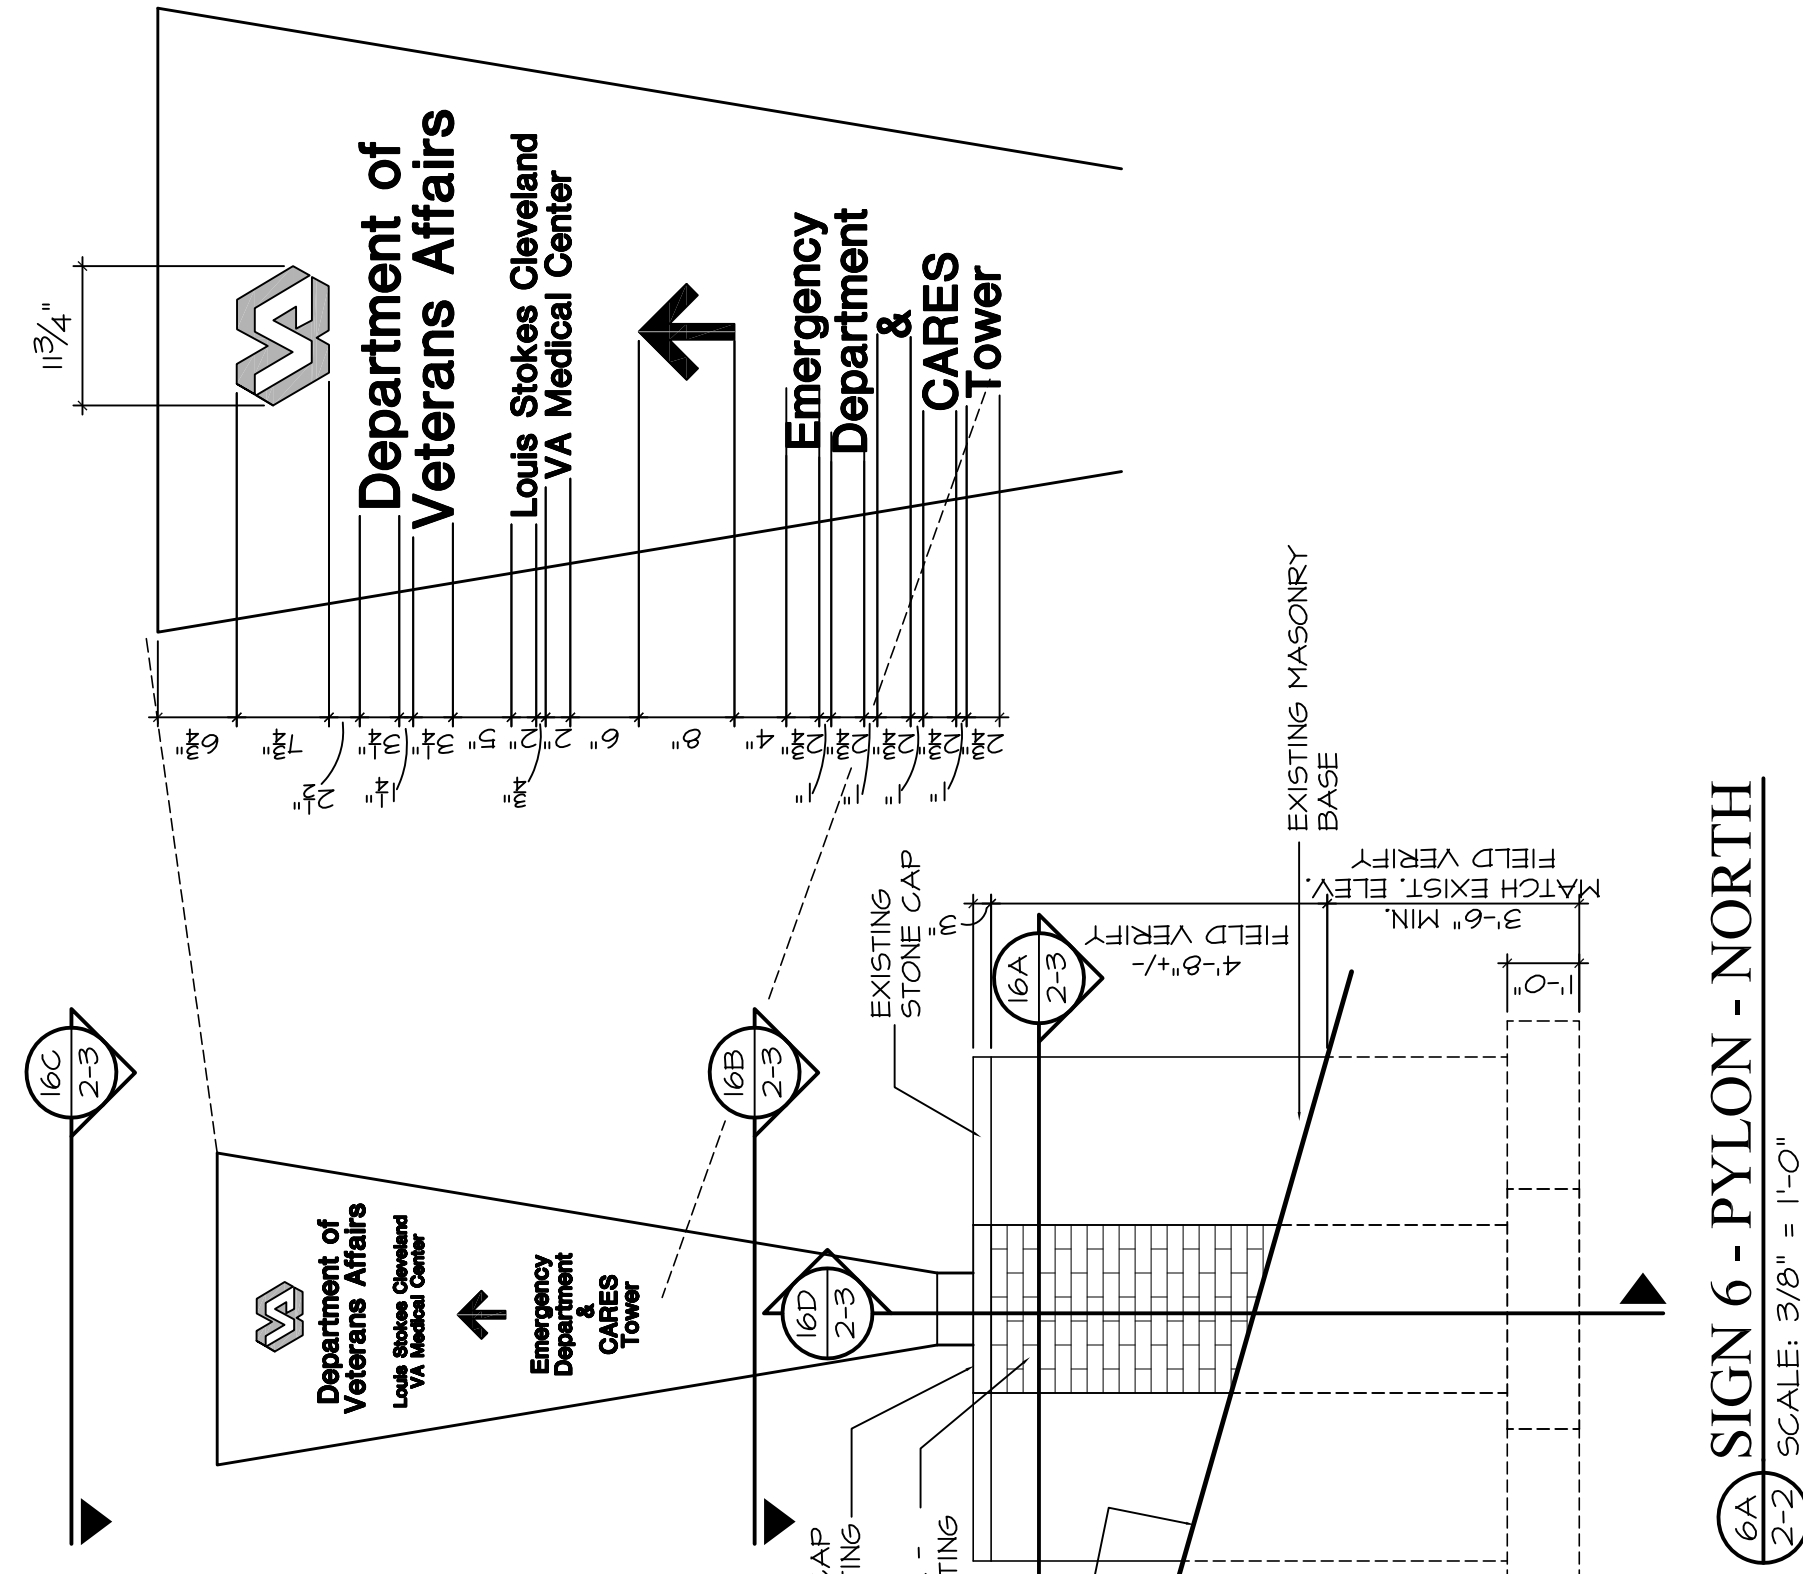
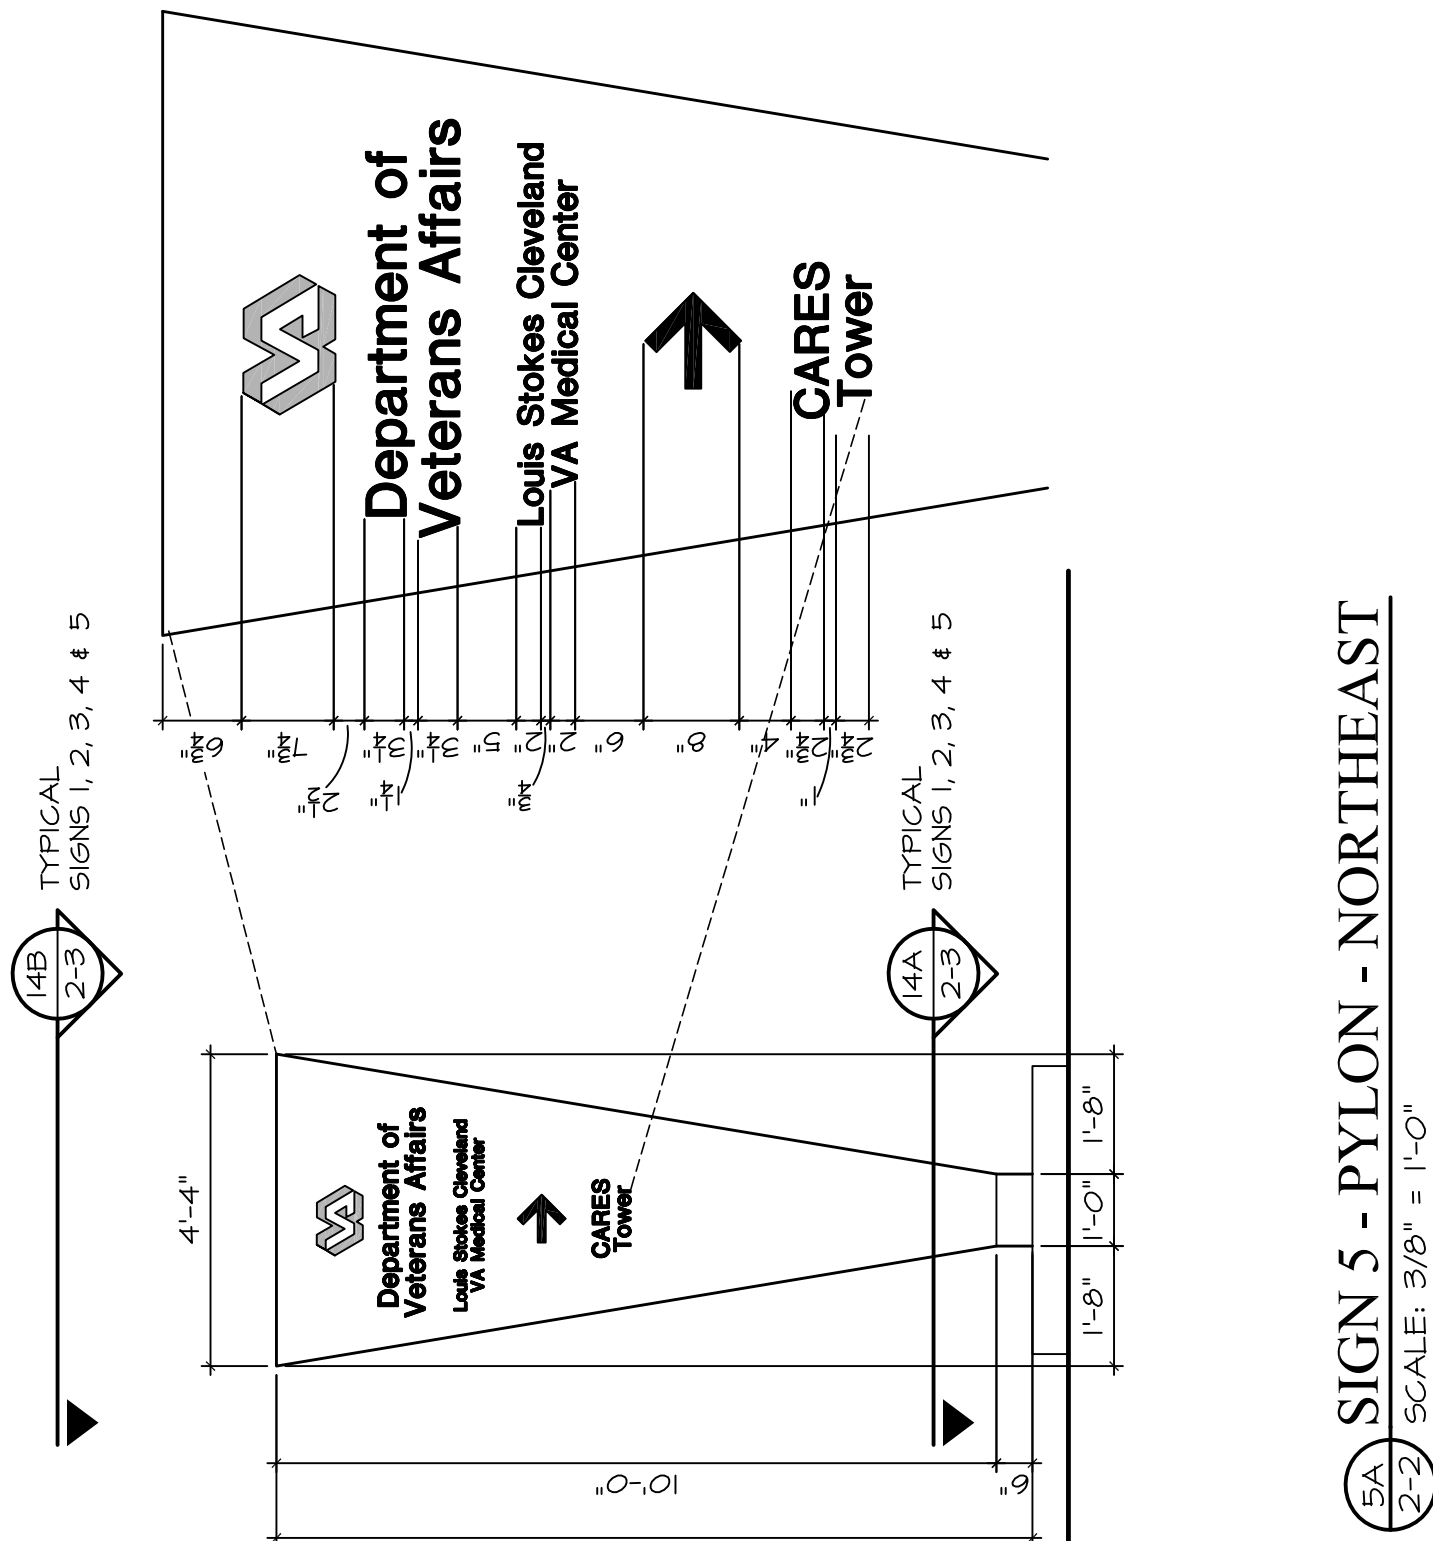
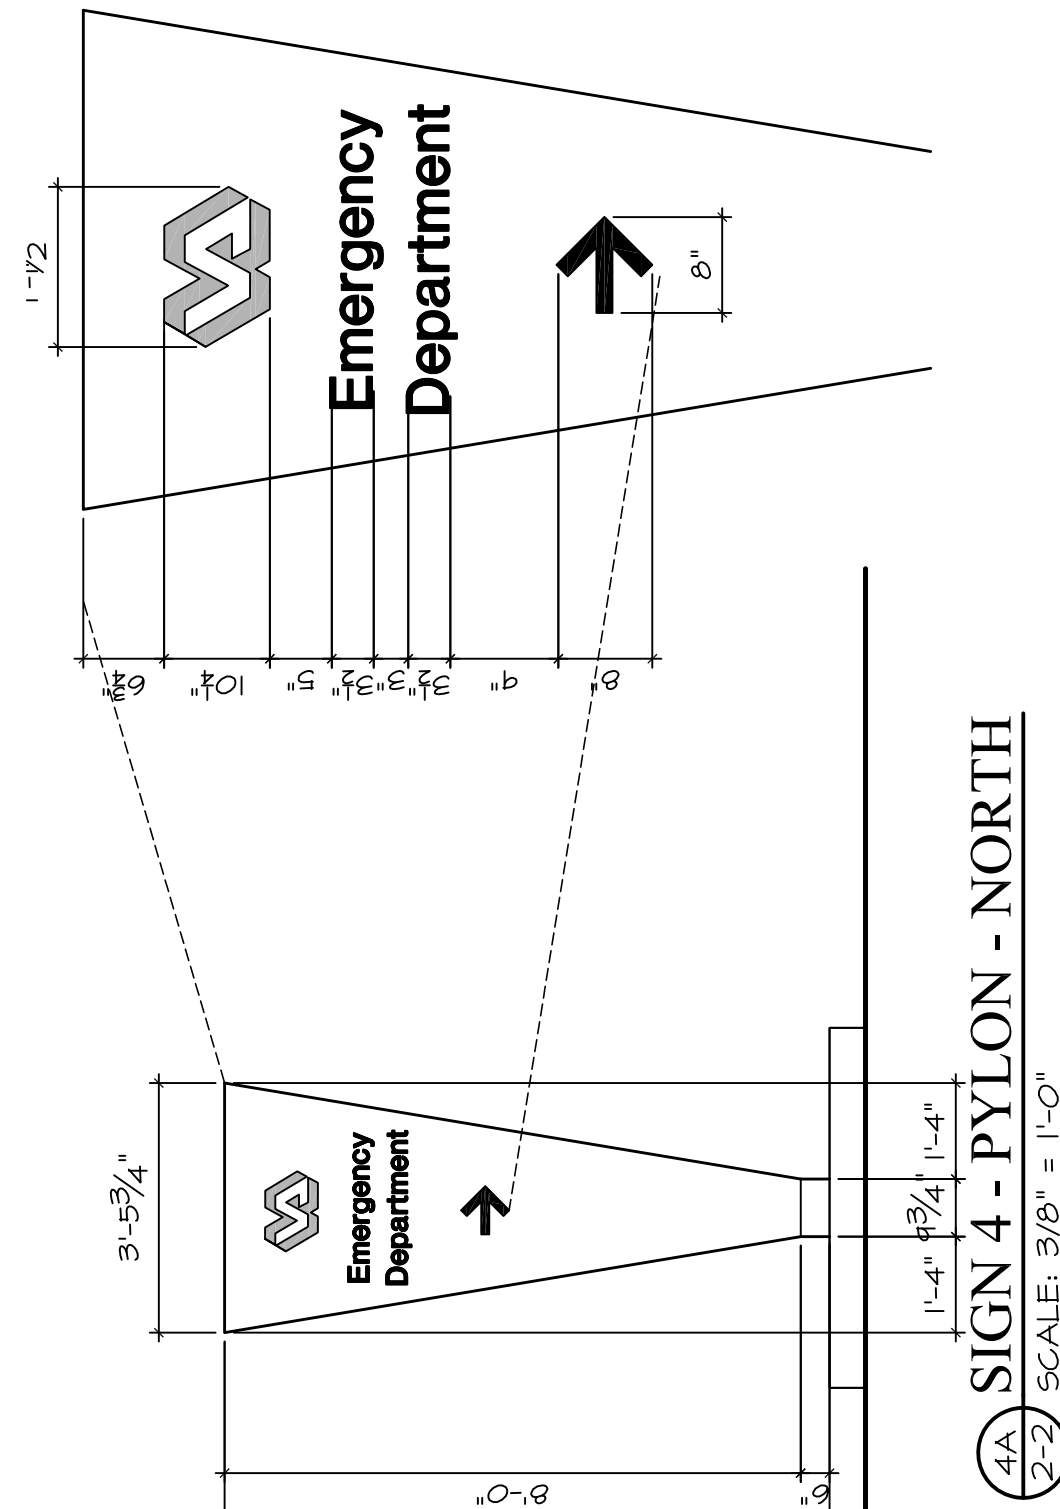
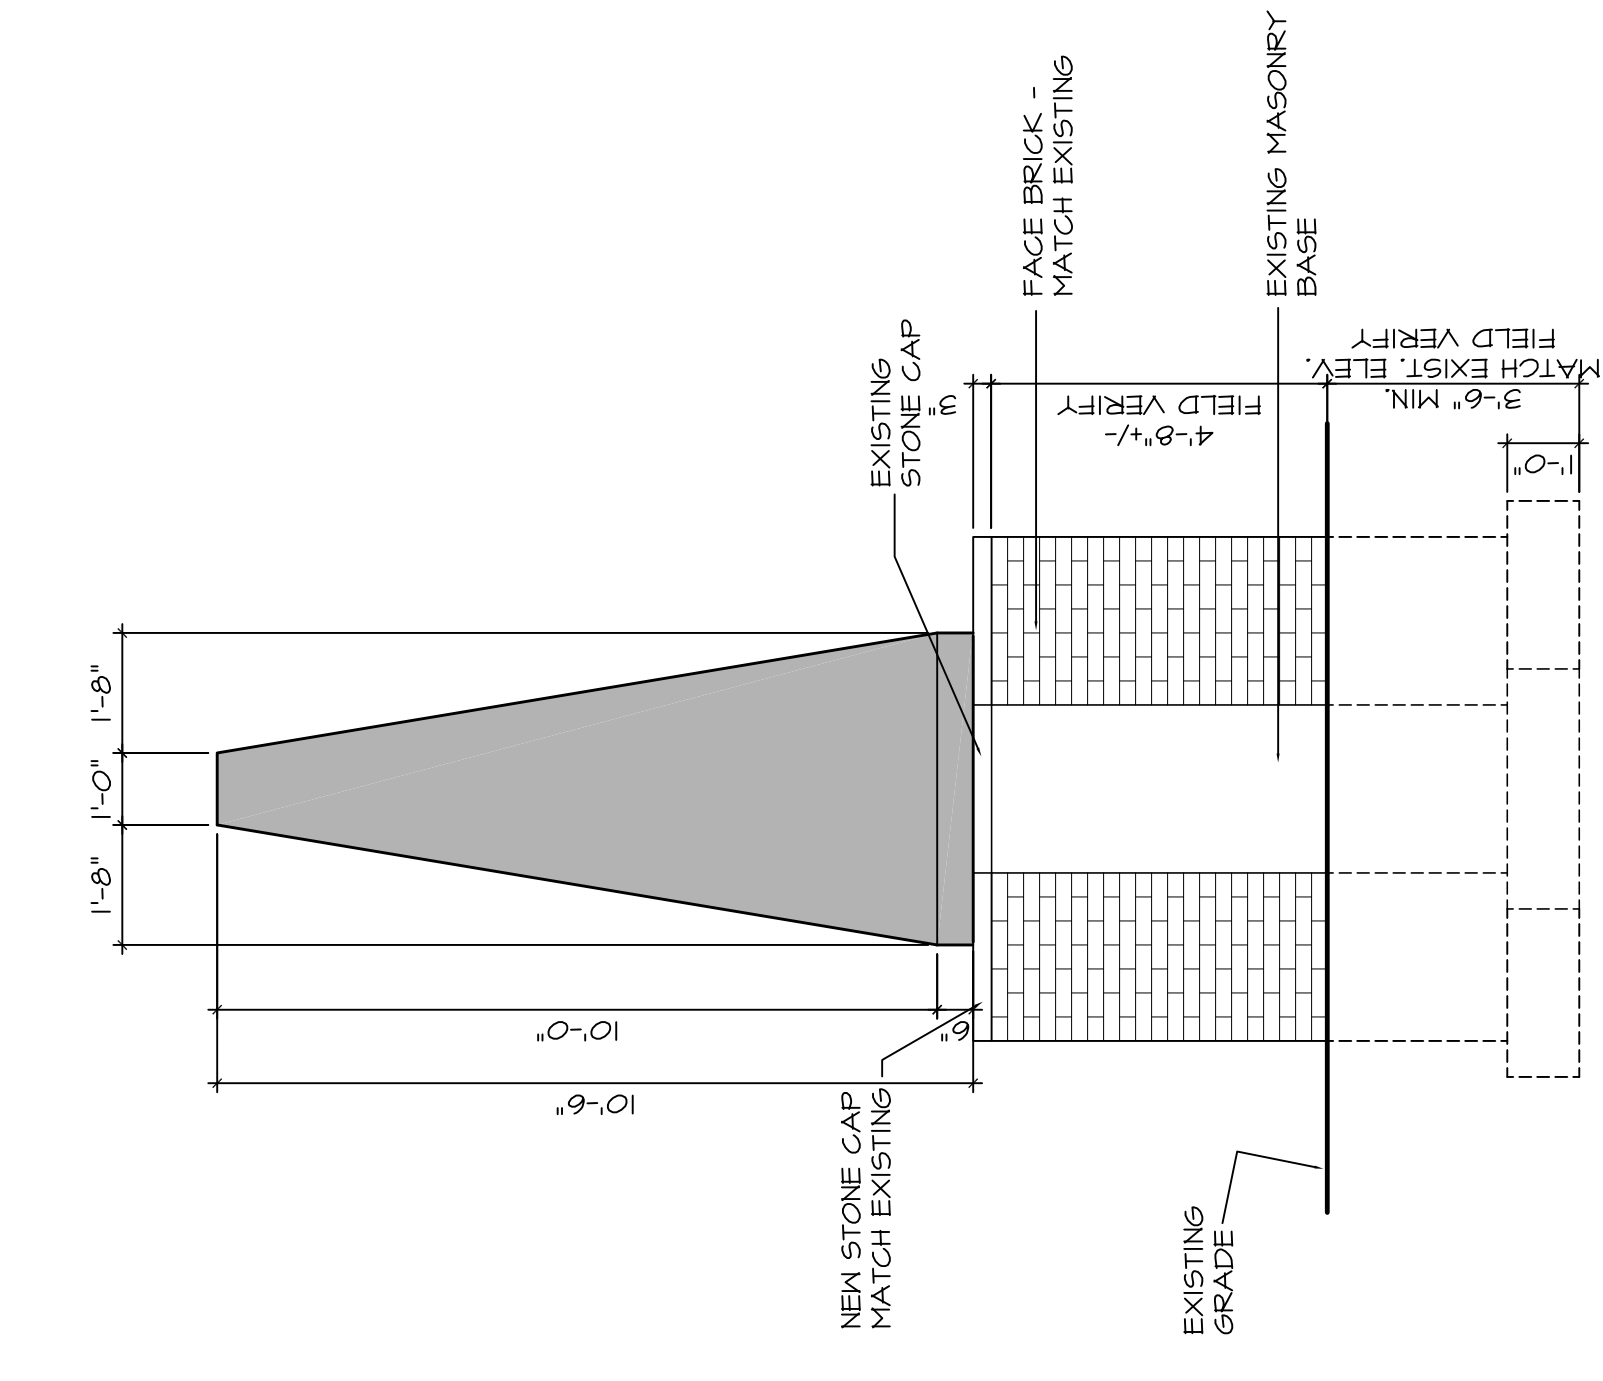
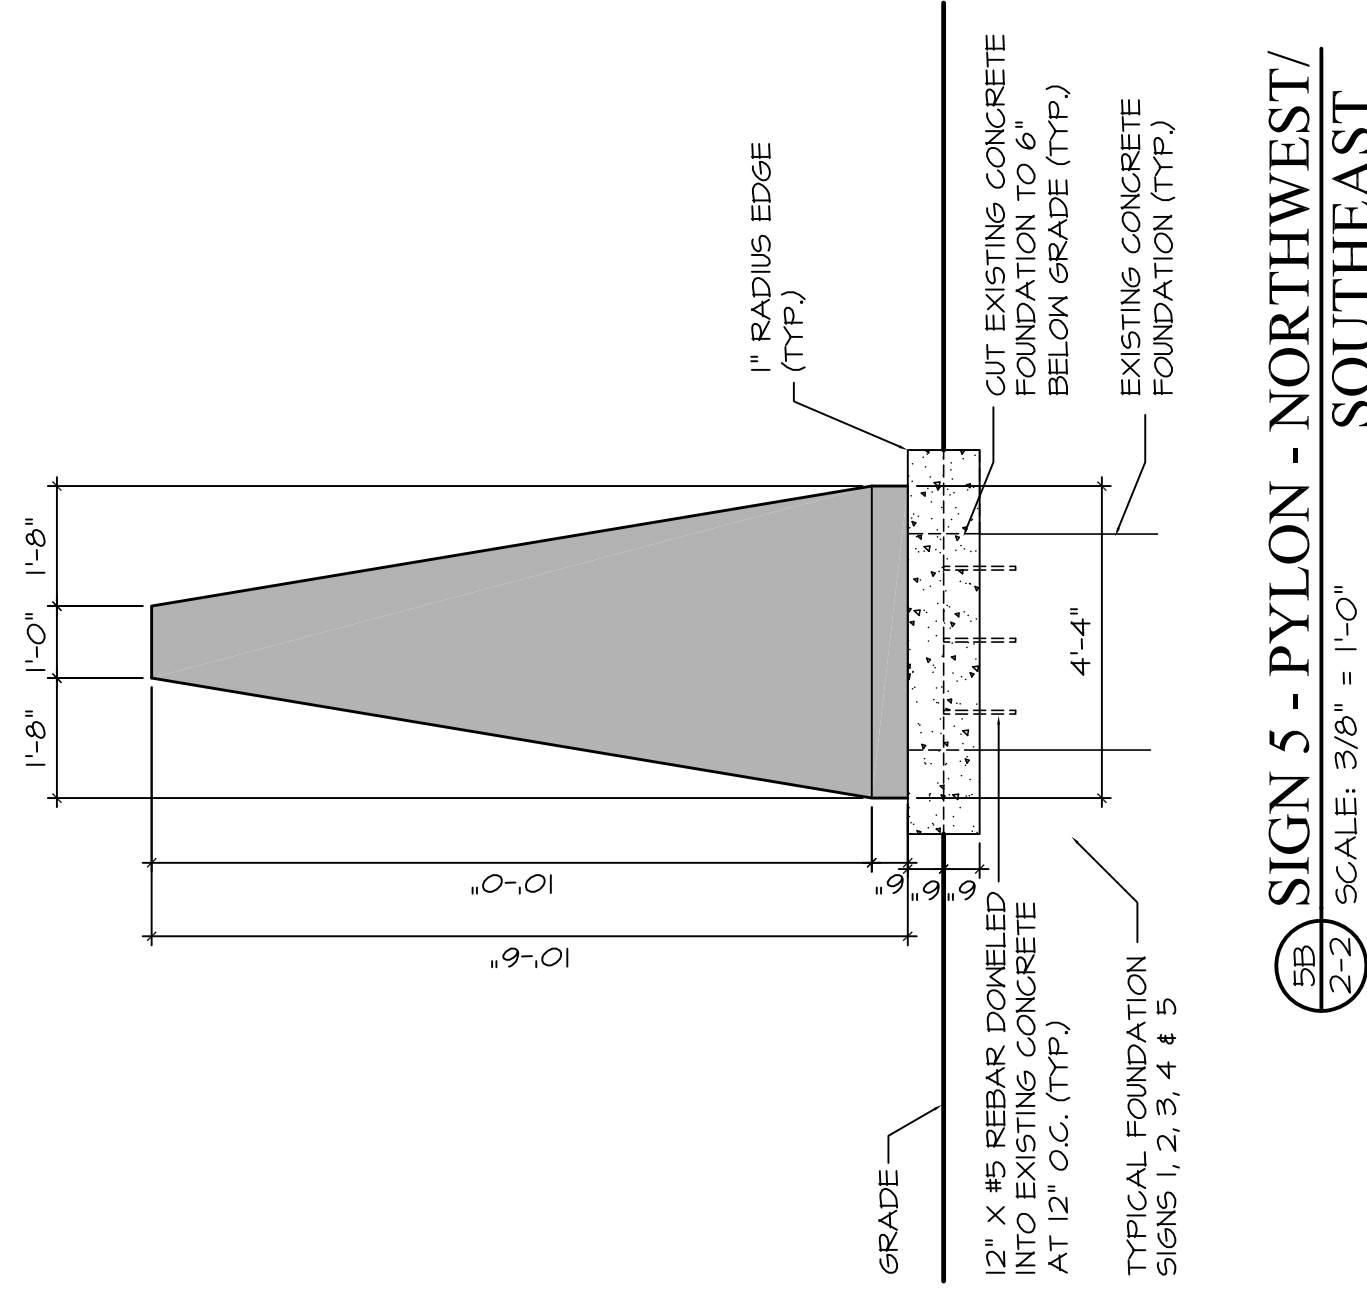
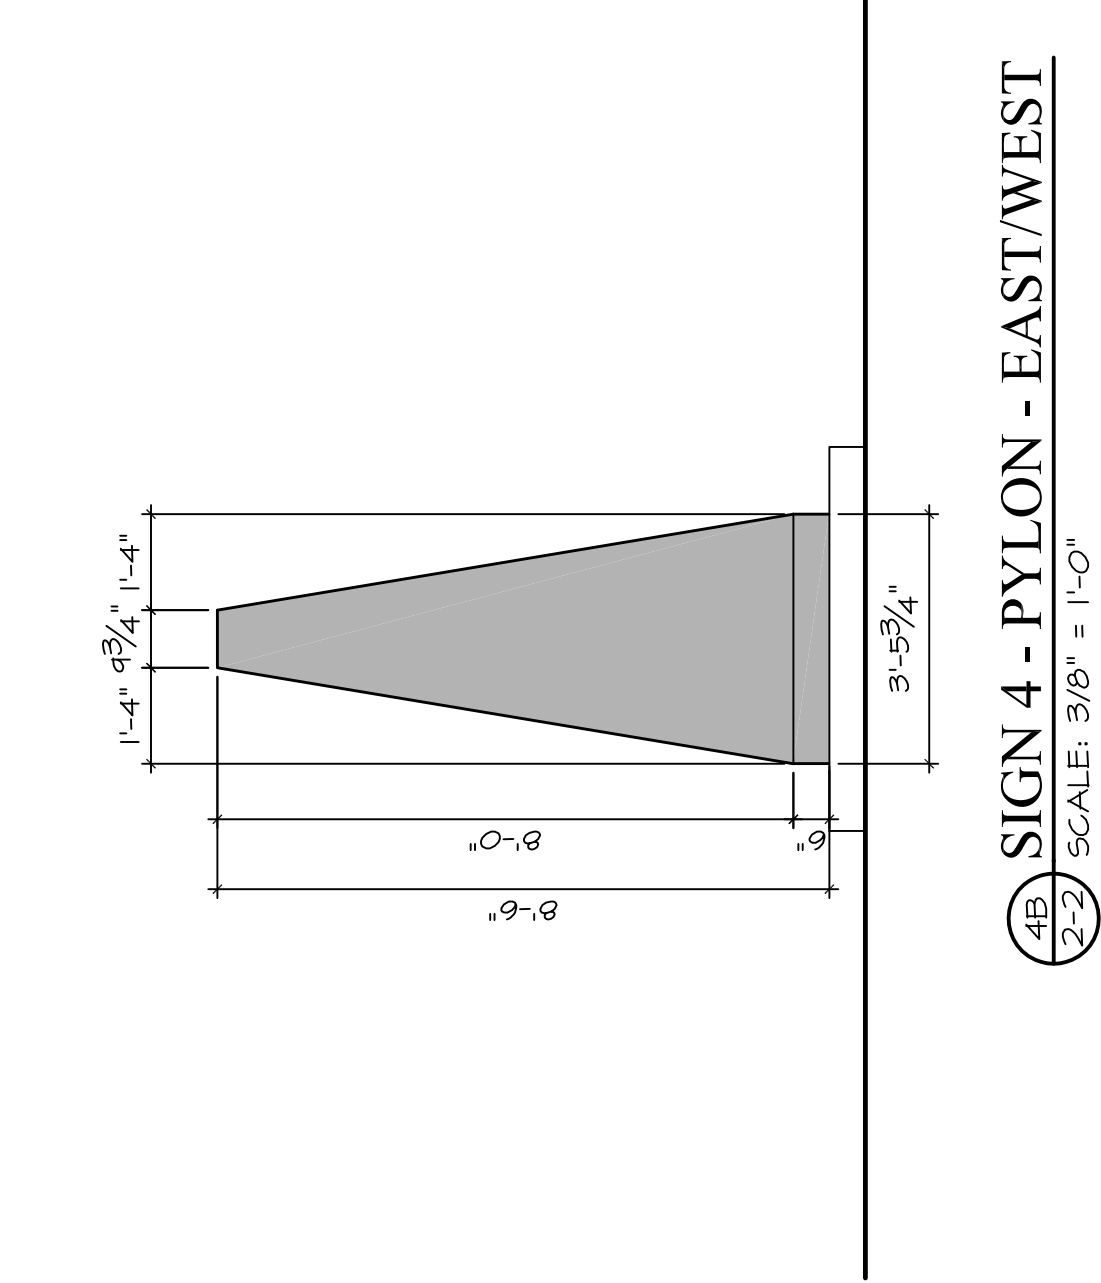
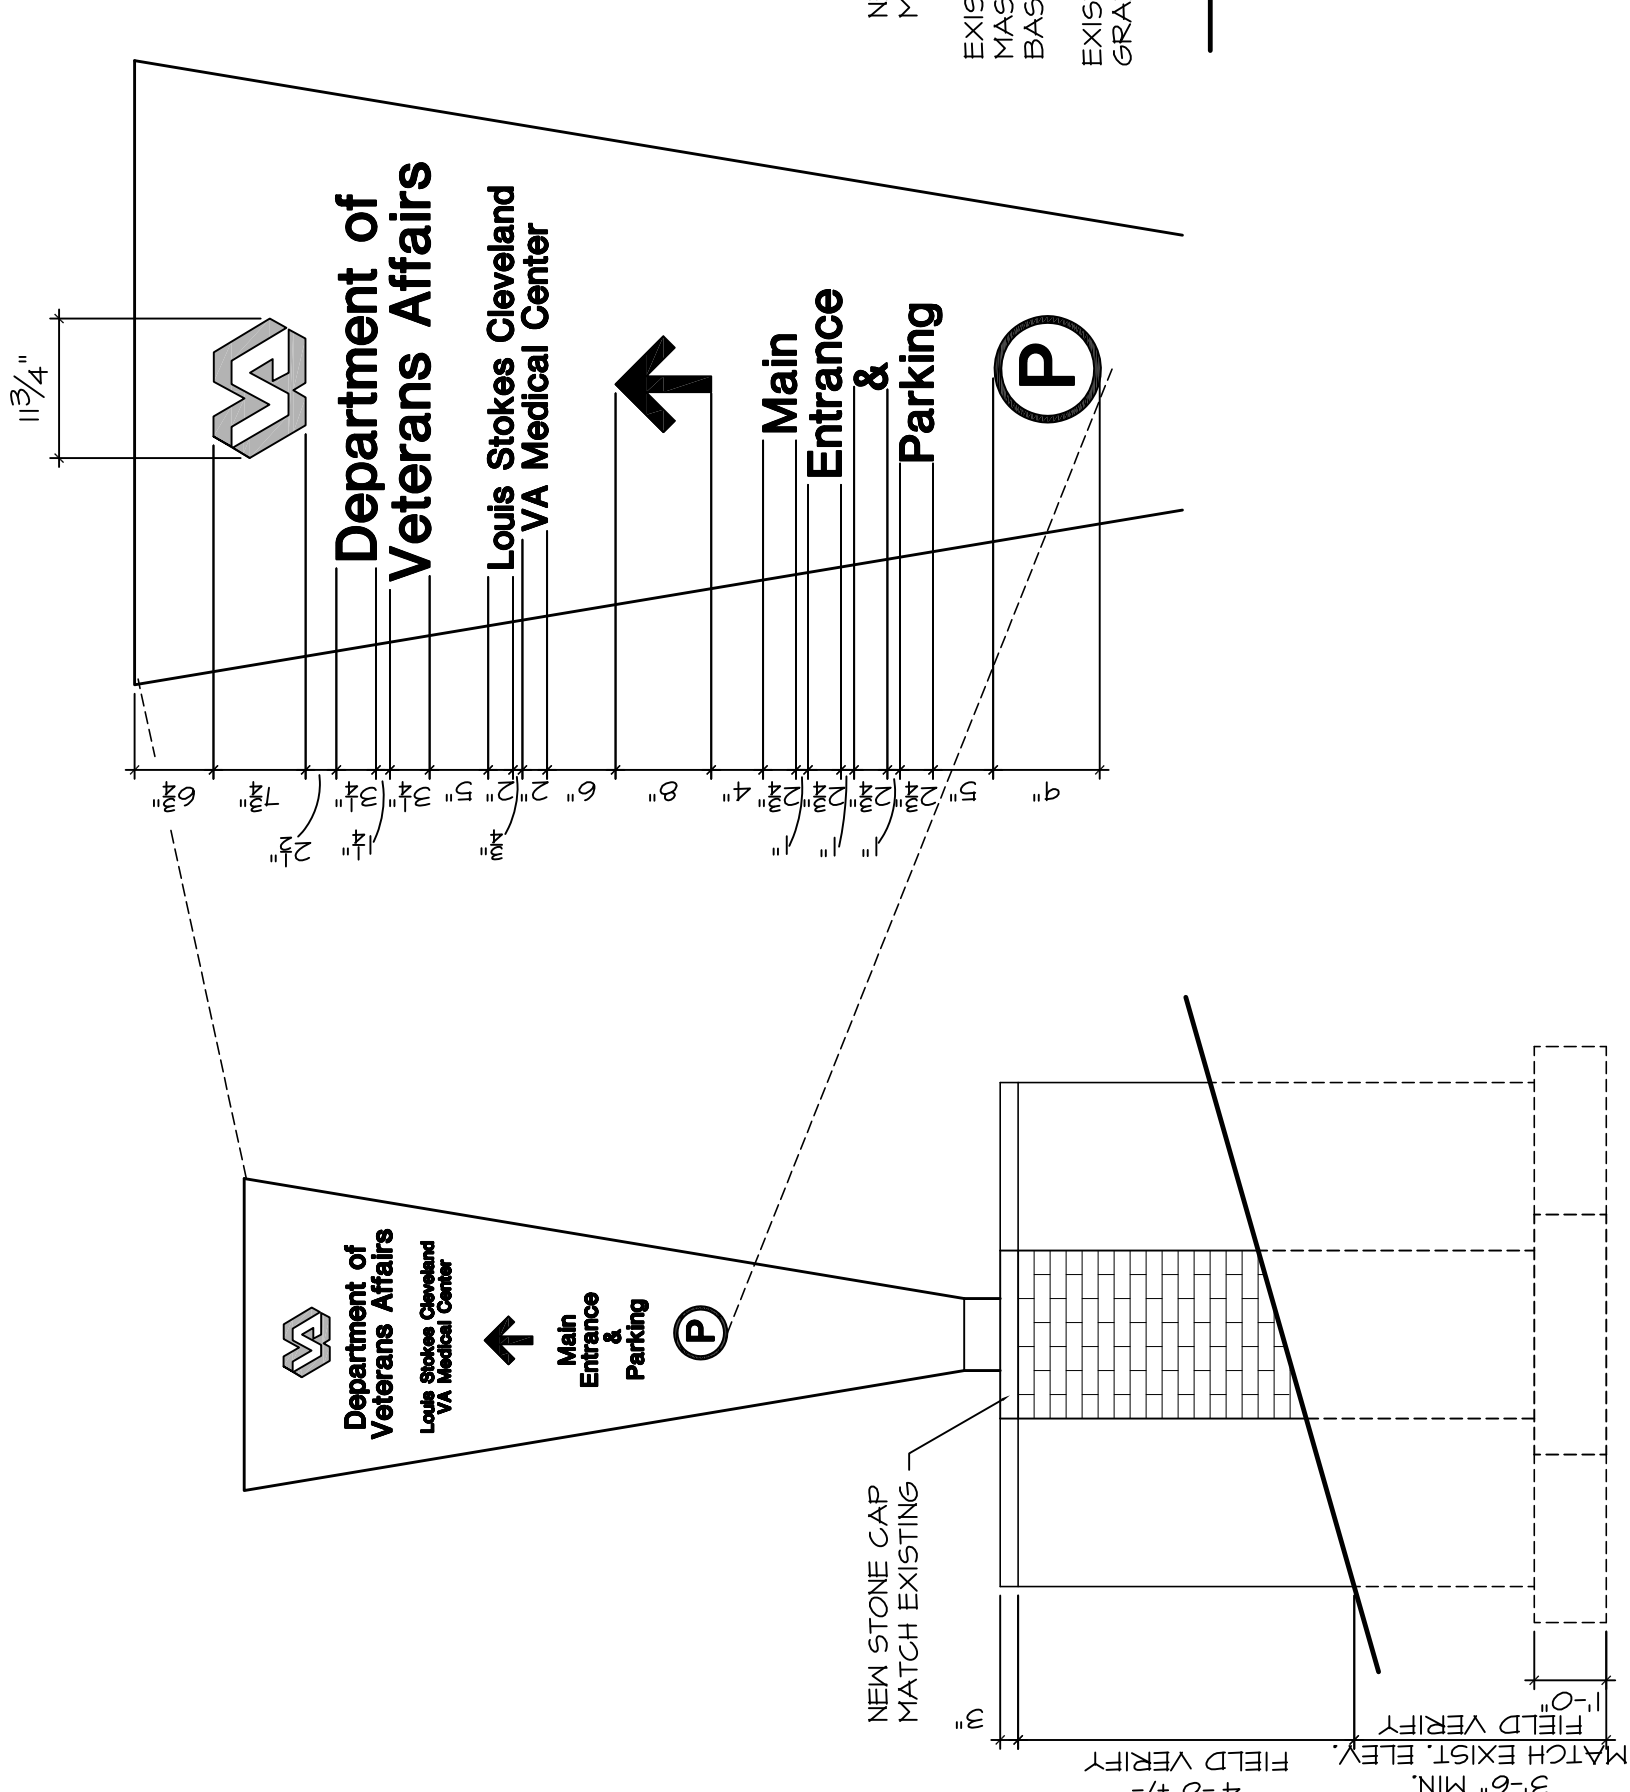


VA FORM 08-6231

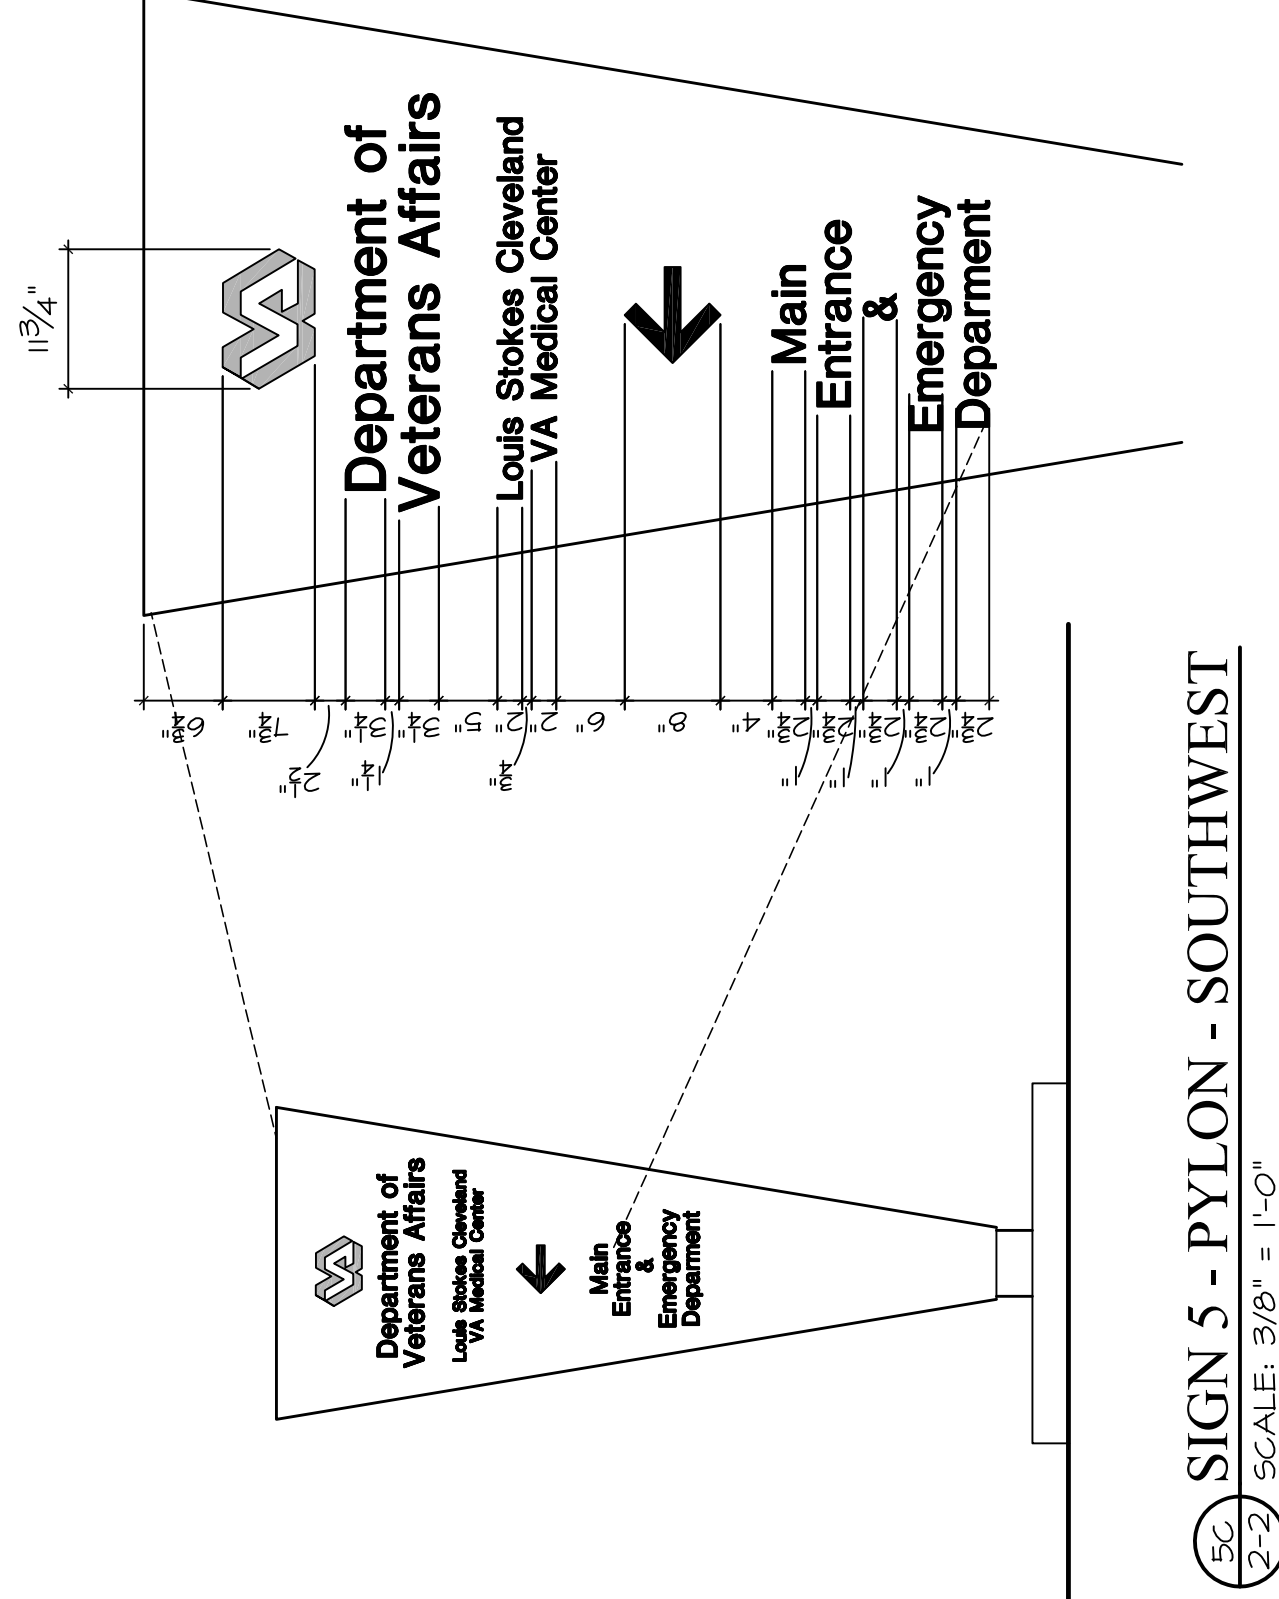

GENERAL NOTES

1. SIGNS THROUGH 4. EXISTING PYLON SIGNS SHALL BE REMOVED AND REPLACED WITH NEW EXISTING CONCRETE FOUNDATIONS WILL REMAIN AND BE REUSED.
2. SIGN 1, NEW PYLON SIGN ON NEW CONCRETE FOUNDATION
3. SIGNS 4. EXISTING PANEL SIGNS SHALL BE REMOVED AND REPLACED WITH NEW PREP AND PAINT EXISTING POSTS TO REMAIN AND PAINTED.
4. SIGNS 1 AND 12, NEW SOLID SHEET SIGN ON NEW POST.
5. SIGNS 10 AND 11, EXISTING POST SIGN WITH SOLID SHEET SIGN TO BE REPLACED, PREP AND PAINT EXISTING POSTS TO REMAIN.
6. SIGN 13, NEW SOLID SHEET SIGN ON NEW POST IN PRECAST MOVABLE CONCRETE BASE.
7. PYLON SIGNS:
 1. LED BACKLIT ALUMINUM PANELS
 2. FRAME, ALUMINUM
 3. FINISH, BAKED ENAMEL
 4. GRAPHICS, TRANSLUCENT ACRYLIC, CHARACTERS, ROOTTED ALUMINUM PANEL.
 5. FINISH, BAKED ENAMEL, COLOR MATCH AS1 HX15 SATIN
 6. SIDE PANEL COLOR, MATCH AS1 HX16 DUSTED STEEL
8. PANEL SIGNS:
 1. NON-ILLUMINATED ALUMINUM PANELS
 2. FRAME, ALUMINUM
 3. FINISH, BAKED ENAMEL
 4. GRAPHICS, BAKED ENAMEL
9. POST SIGNS:
 1. SOLID SHEET 1/8" THICK ALUMINUM
 2. FINISH, BAKED ENAMEL
 3. GRAPHICS, BAKED ENAMEL
10. FONT STYLE SHALL BE HELVETICA BOLD UNLESS OTHERWISE NOTED.

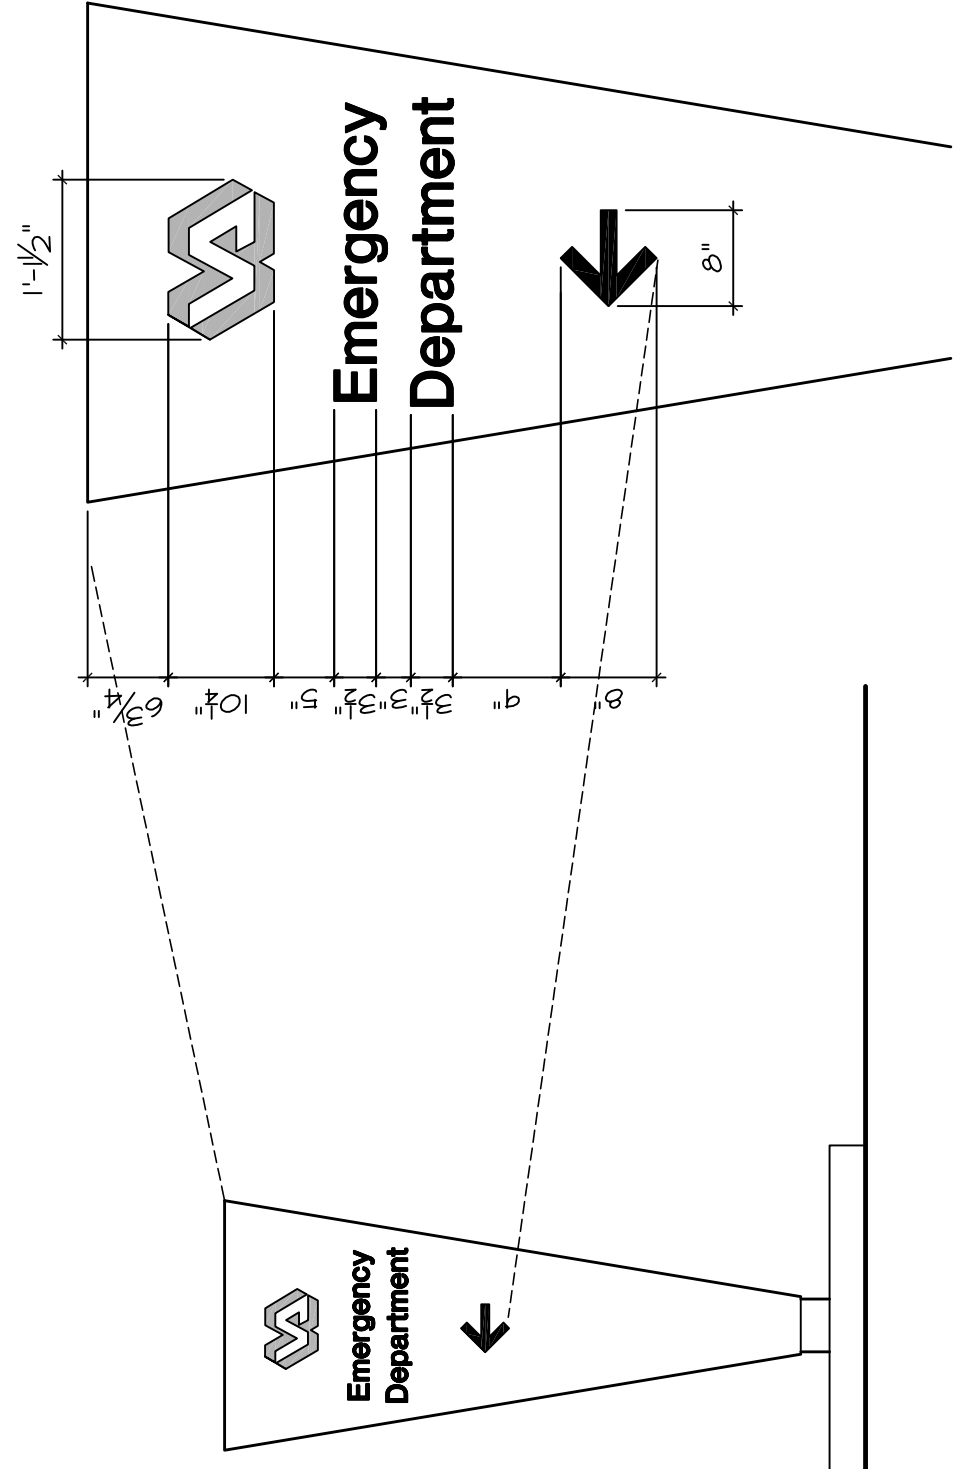

FOR CONSTRUCTION

FULLY SPRINKLERED

		CONSULTANTS:		ARCHITECT/ENGINEERS:		Drawing Title PYLON SIGN ELEVATIONS		Project Title VAMC WADE PARK CLEVELAND COMPREHENSIVE EXTERIOR SITE SIGNAGE DESIGN		Project Number 541-12-120		Office of Construction and Facilities Management	
								Location 10701 EAST BLVD, CLEVELAND, OHIO 44106		Building Number 1			
								Approved: Project Director		Drawing Number 2-2			
				DAVID J. RUSTI REGISTERED PROFESSIONAL ENGINEER STATE OF OHIO				Date		Checked By MJM		Drawn By	
				MAKOVICH & RUSTI ARCHITECTS, INC. 1411 RIVERSIDE DRIVE, CLEVELAND, OHIO 44115 / TEL: (216) 525-8877 FAX: (216) 525-8877								Department of Veterans Affairs	
FINAL CD SUBMISSION													
Revisions:													