


- NOTES:
- 1. Supply 200 cfm to storage room.
  - 2. Supply 100 cfm to N side of DAV office.
  - 3. Supply 100 cfm to S side of DAV office.
  - 4. Supply 100 cfm to garage.
  - 5. Take existing supply for the DAV office and run it up to the 1st floor in room 107.
  - 6. Transition from a 16" by 8" rectangular duct to a 12" by 8" rectangular duct.
  - 7. Keep the return duct size at 16" by 8".

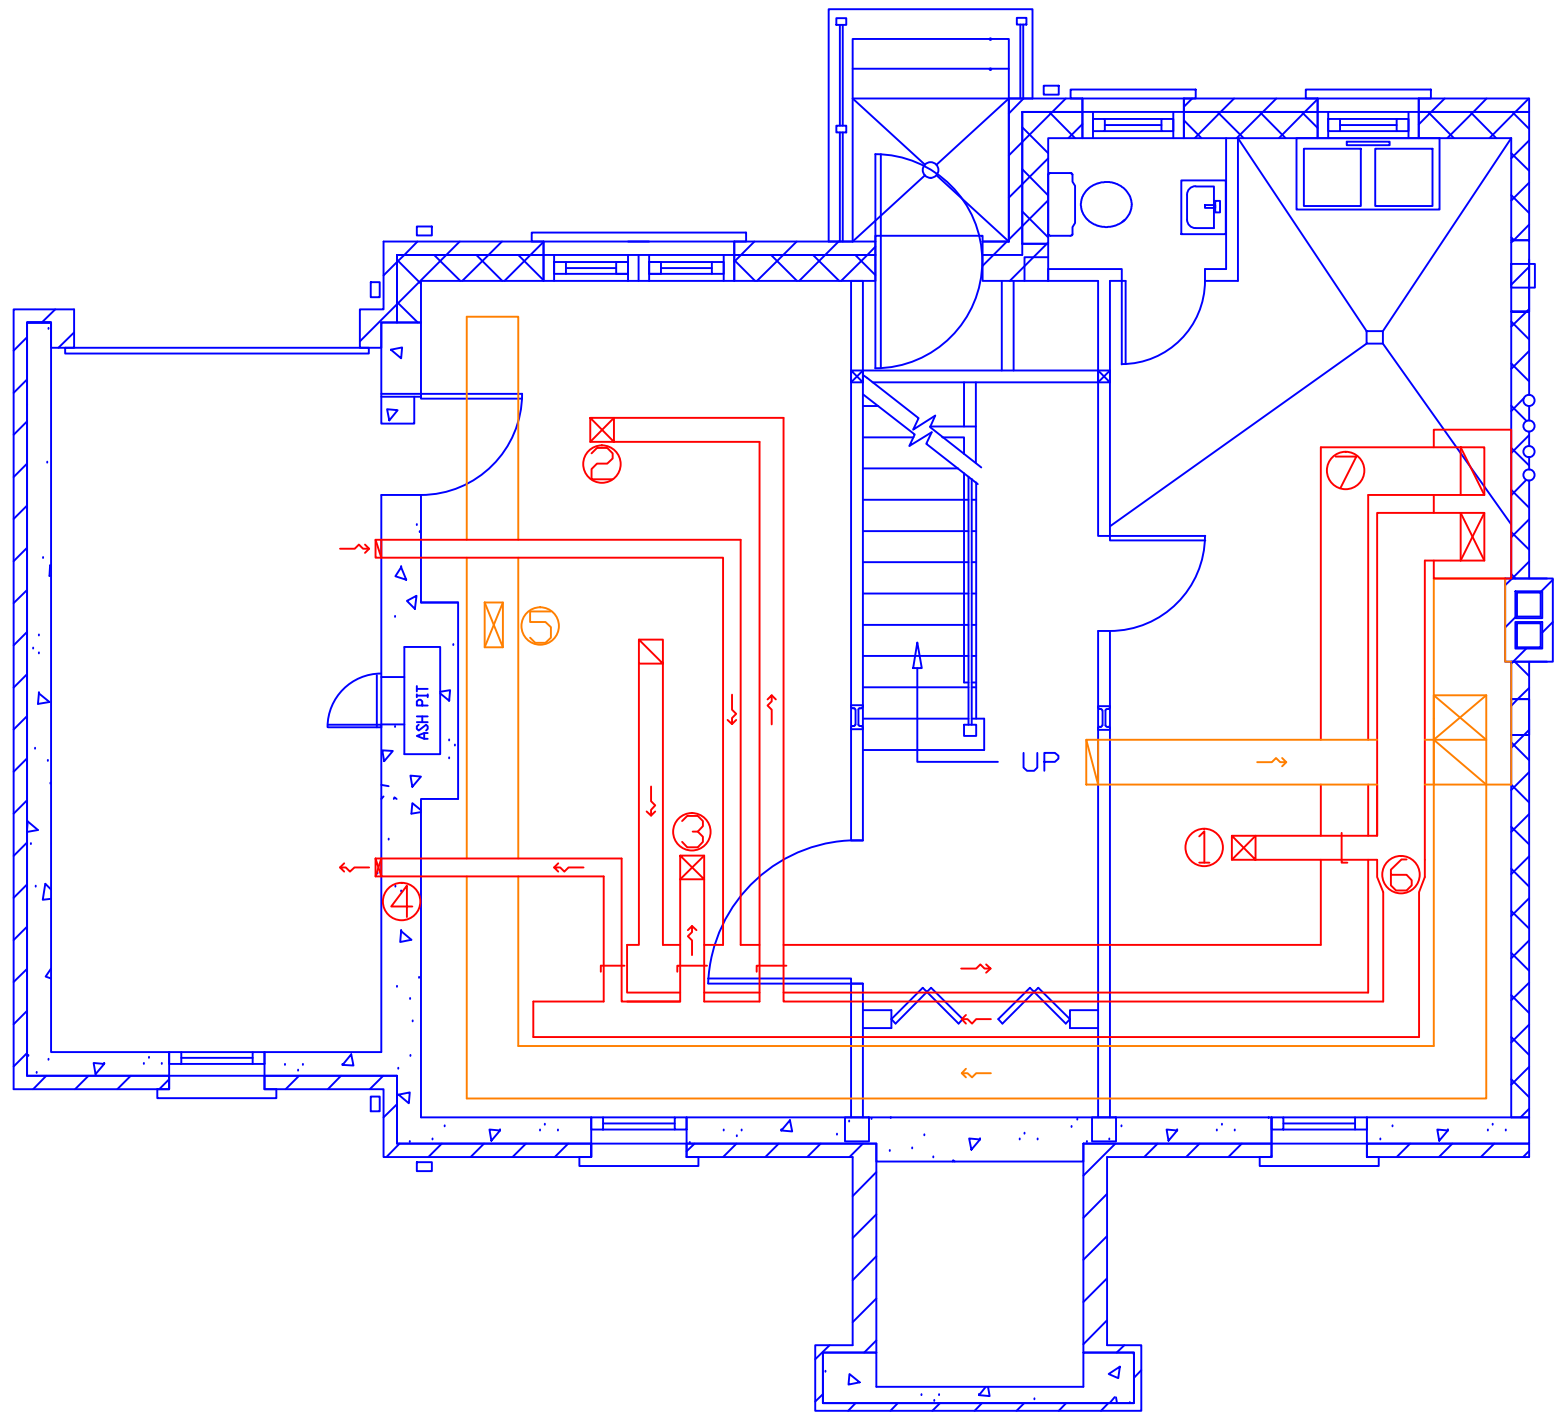

Notes and/or Revisions:	Date

CUSTOM VA FORM 08-6231B, MAY 2012


Approved: VHSO Associate Director
Approved: Engineering Service Chief

Project Title	13-107D Renovate 7B DAV
One inch or not to scale!	Scale: 1/4" = 1'

Drawing Title		Drawing #
Location Healthcare System of the Ozarks		
Checked	Drawn	Date

Project Number
Building Number
Drawing Number
Sheet 1 of 1

Engineering Service

  
VETERANS HEALTH CARE SYSTEM  
OF THE OZARKS