


three inches = one foot  
one and one half inches = one foot  
one inch = one foot  
three quarters inch = one foot  
one half inch = one foot  
three eighths inch = one foot  
one quarter inch = one foot  
one eighth inch = one foot

### ADDITIONAL NOTES FOR FIXTURE REMOVAL/DEMOLITION


1. REMOVE ALL PIPES BACK TO THE REMAINING ACTIVE MAINS OR RISERS. CAP AS CLOSE AS POSSIBLE TO THE ACTIVE PIPING SYSTEMS, BUT NO REMAINING DEAD END SHALL EXCEED 12".
2. SOME OF THE SOIL AND WASTE PIPE REMOVAL AND SOME OF THE NEW PIPES REQUIRED FOR THE NEW FIXTURES WILL OCCUR IN THE 6TH FLOOR CEILING SPACE BELOW. THE DISTURBANCE TIMES REQUIRED FOR REMOVAL AND INSTALLATIONS OF NEW PIPES SHALL BE COORDINATED WITH THE PROJECT MANAGER, WITH CONCURRENCE BY THE VAMC.

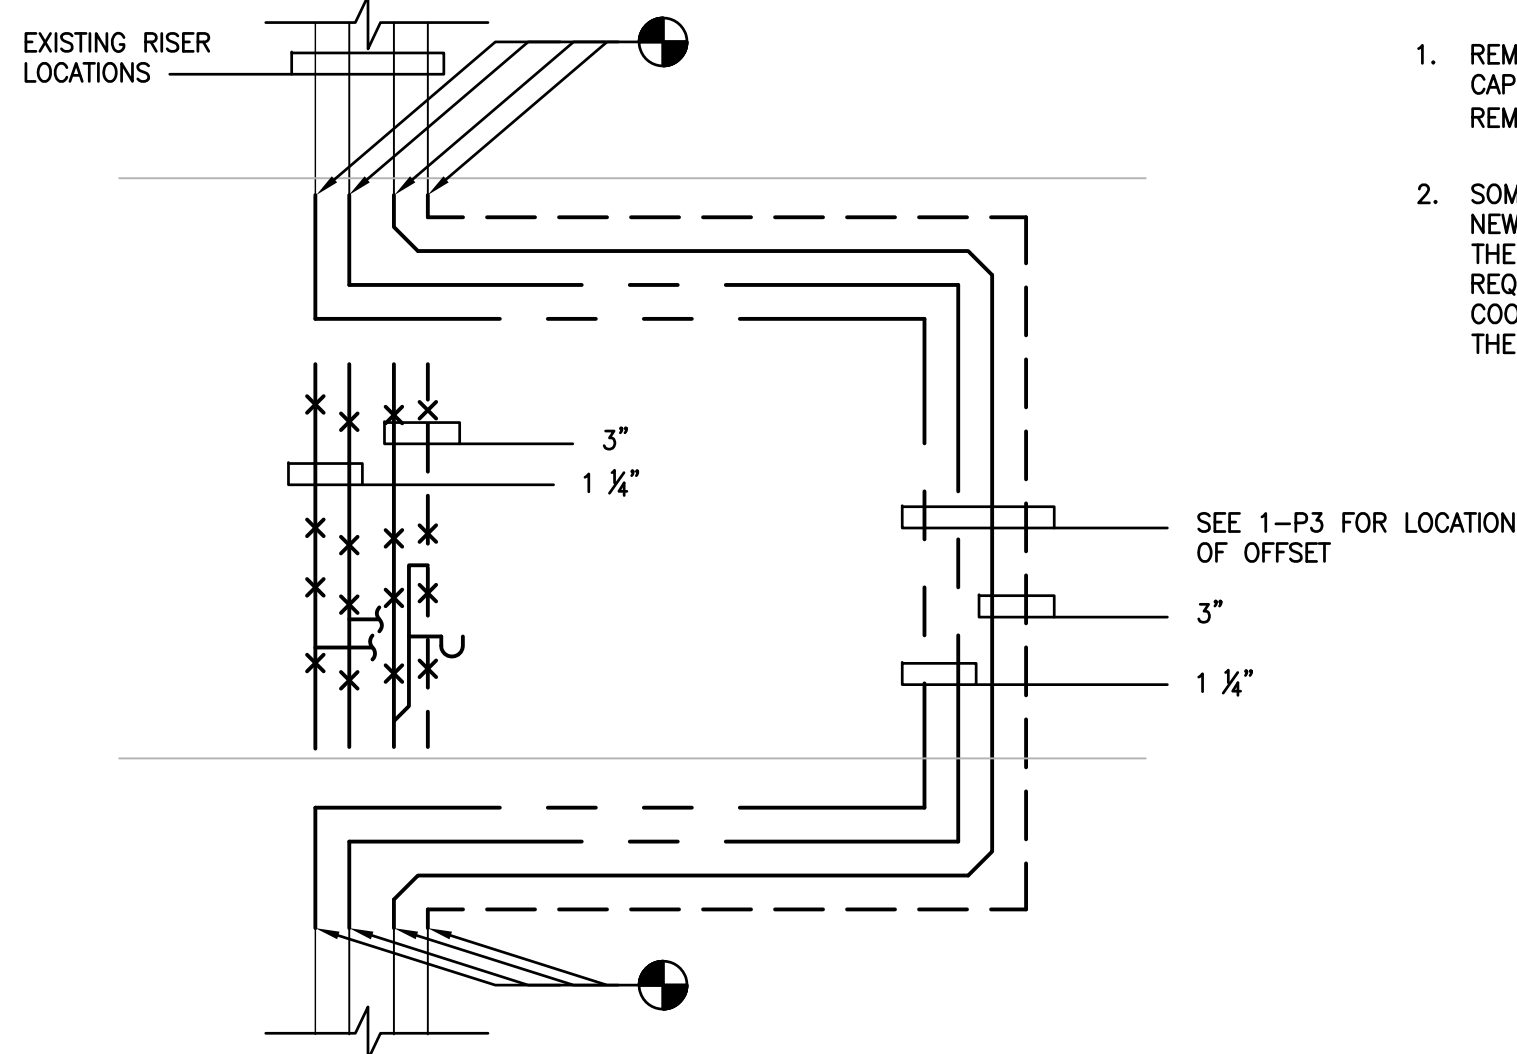


**DETAIL 'A' - RISER OFFSET**  
NO SCALE

### DRAWING DEMOLITION NOTES

1. REMOVE FLOOR MOUNTED WATER CLOSET, AND ACCESSORIES. REMOVE ALL FIXTURE WATER, WASTE & VENT PIPING INTO THE CEILING SPACES ABOVE AND BELOW.
2. REMOVE WALL HUNG LAVATORY, CARRIER AND ACCESSORIES. REMOVE ALL FIXTURE WATER, WASTE & VENT PIPING INTO THE CEILING SPACES ABOVE AND BELOW.
3. REMOVE SHOWER AND ACCESSORIES. REMOVE ALL FIXTURE WATER, WASTE & VENT PIPING INTO THE CEILING SPACES ABOVE AND BELOW.
4. REMOVE THERAPY TUB AND ACCESSORIES. REMOVE ALL FIXTURE WATER, WASTE & VENT PIPING INTO THE CEILING SPACES ABOVE AND BELOW.
5. REMOVE ALL WALL MOUNTED URINAL, CHAIR CARRIER AND ACCESSORIES, REMOVE ALL FIXTURE WATER, WASTE & VENT PIPING INTO THE CEILING SPACES ABOVE AND BELOW.
6. REMOVE FLOOR DRAINS. REMOVE ALL WASTE & VENT PIPING INTO THE CEILING SPACES ABOVE AND BELOW.
7. REMOVE THE O-MA-MV WALL OUTLETS. REMOVE ALL THE OXYGEN, MEDICAL AIR AND VACUUM PIPES AS INDICATED ON THE FLOOR PLAN.
8. EXISTING SOIL STACK AND WASTE STACK TO REMAIN.
9. EXISTING HOT AND COLD WATER RISERS.
10. REMOVE THREE VALVES MEDICAL GAS ZONE VALVE CABINET AND ACCESSORIES. REMOVE THE OXYGEN, MEDICAL AIR AND VACUUM PIPES BACK TO THE MAIN BUILDING RISERS AND CAP WITH NEW VALVES FOR NEW WORK.
11. REMOVE AREA MEDICAL GAS ALARM PANEL AND ACCESSORIES.
12. REMOVE EXISTING LAV & W.C. & REPLACE WITH NEW. MODIFY EXISTING UTILITIES AS REQUIRED.
13. EXISTING TO REMAIN
14. REMOVE EX CLINICAL SERVICE SINK AND ALL ACCESSORIES.
15. REMOVE SINK AND ACCESSORIES. REMOVE ALL FIXTURE WATER, WASTE & VENT PIPING INTO THE CEILING SPACES ABOVE AND BELOW.
16. REMOVE ICE MACHINE AND ACCESSORIES. REMOVE ALL FIXTURE WATER, WASTE & VENT PIPING INTO THE CEILING SPACES ABOVE AND BELOW.

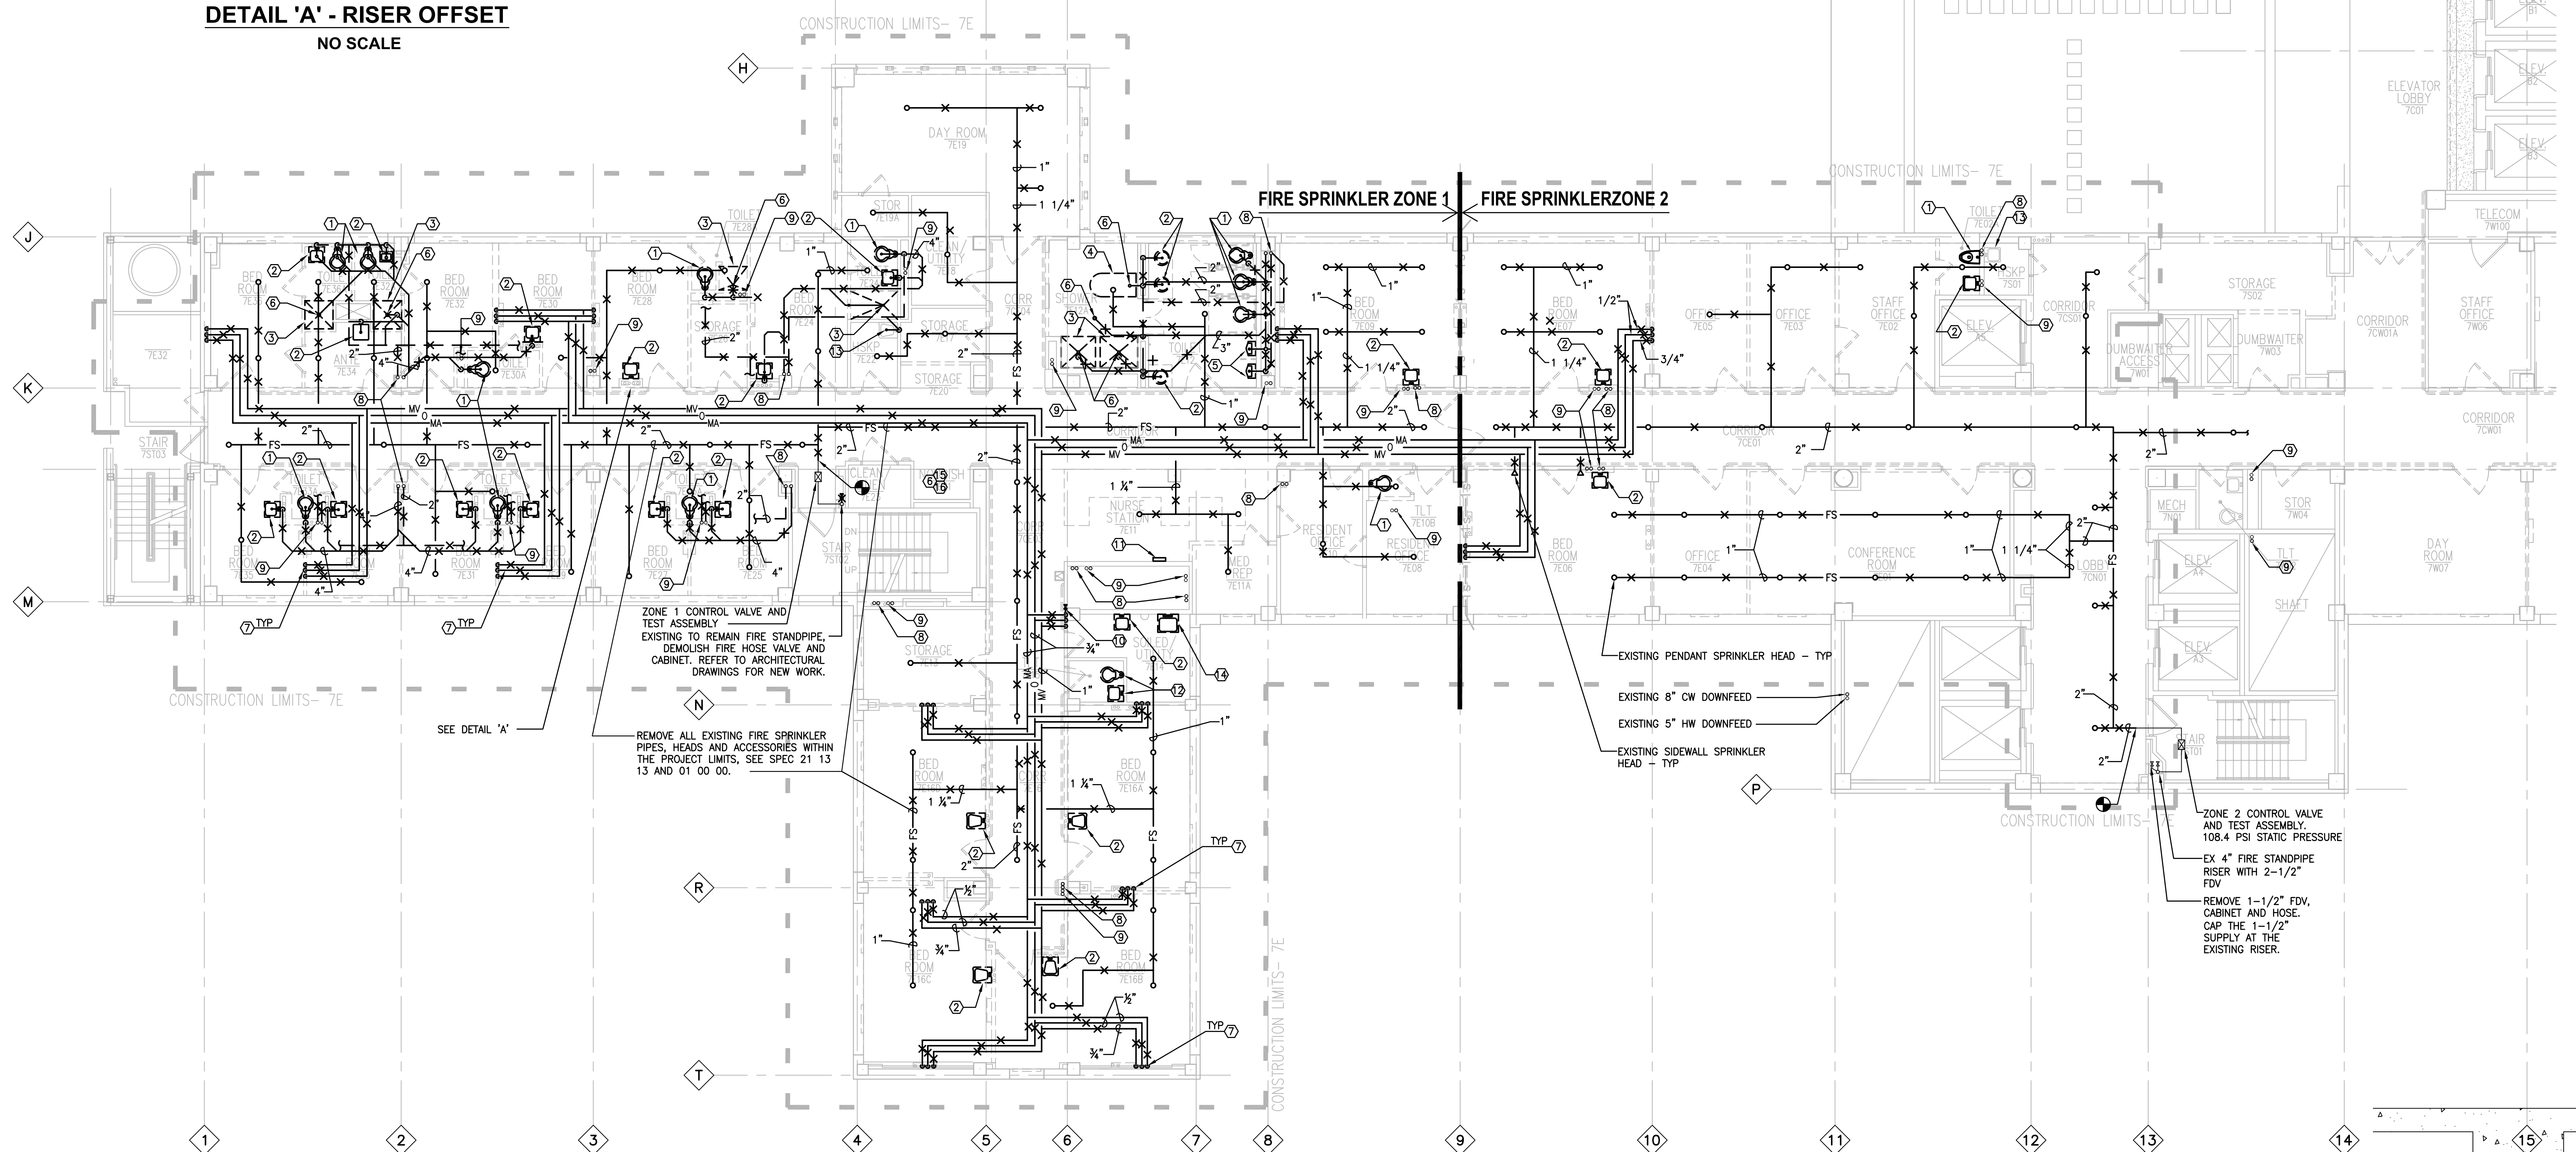

**1 PLUMBING AND FIRE PROTECTION DEMOLITION PLAN - 7E**  
SCALE: 1/8"=1'-0"

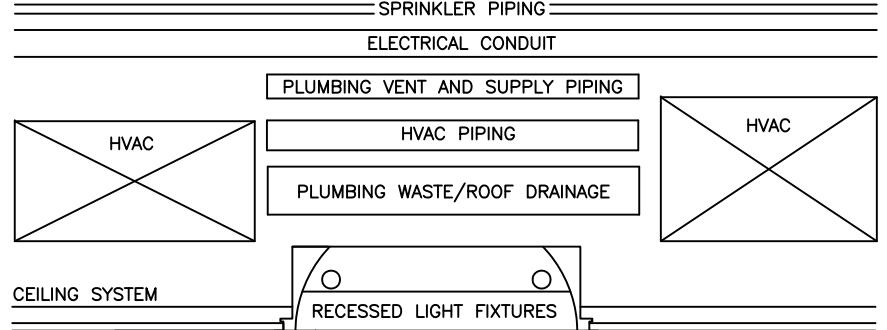

**FULLY SPRINKLERED  
FOR CONSTRUCTION**

Revisions:	Date	KEY PLAN:	STAMP:	CONSULTANTS:	ARCHITECT/ENGINEERS:	Drawing Title	Project Title	Project Number	Office of
						PLUMBING AND FIRE PROTECTION 7TH FLOOR 7E - DEMOLITION PLAN	RENOVATE INPATIENT MEDICAL/SURGICAL WARD 7E	R636A8-10-001	Construction
						Approved: Project Director	Location	Building Number	and Facilities
							Iowa City VA Medical Center	1	Management
							Date	Drawing Number	
							07/07/2009	1-P2	
							Checked	Dwg. 35 of 44	
							JN		
							Drawn		
							GO		