



1 SECTION— MECHANICAL ROOM  
SCALE: 1/4" = 1'-0"

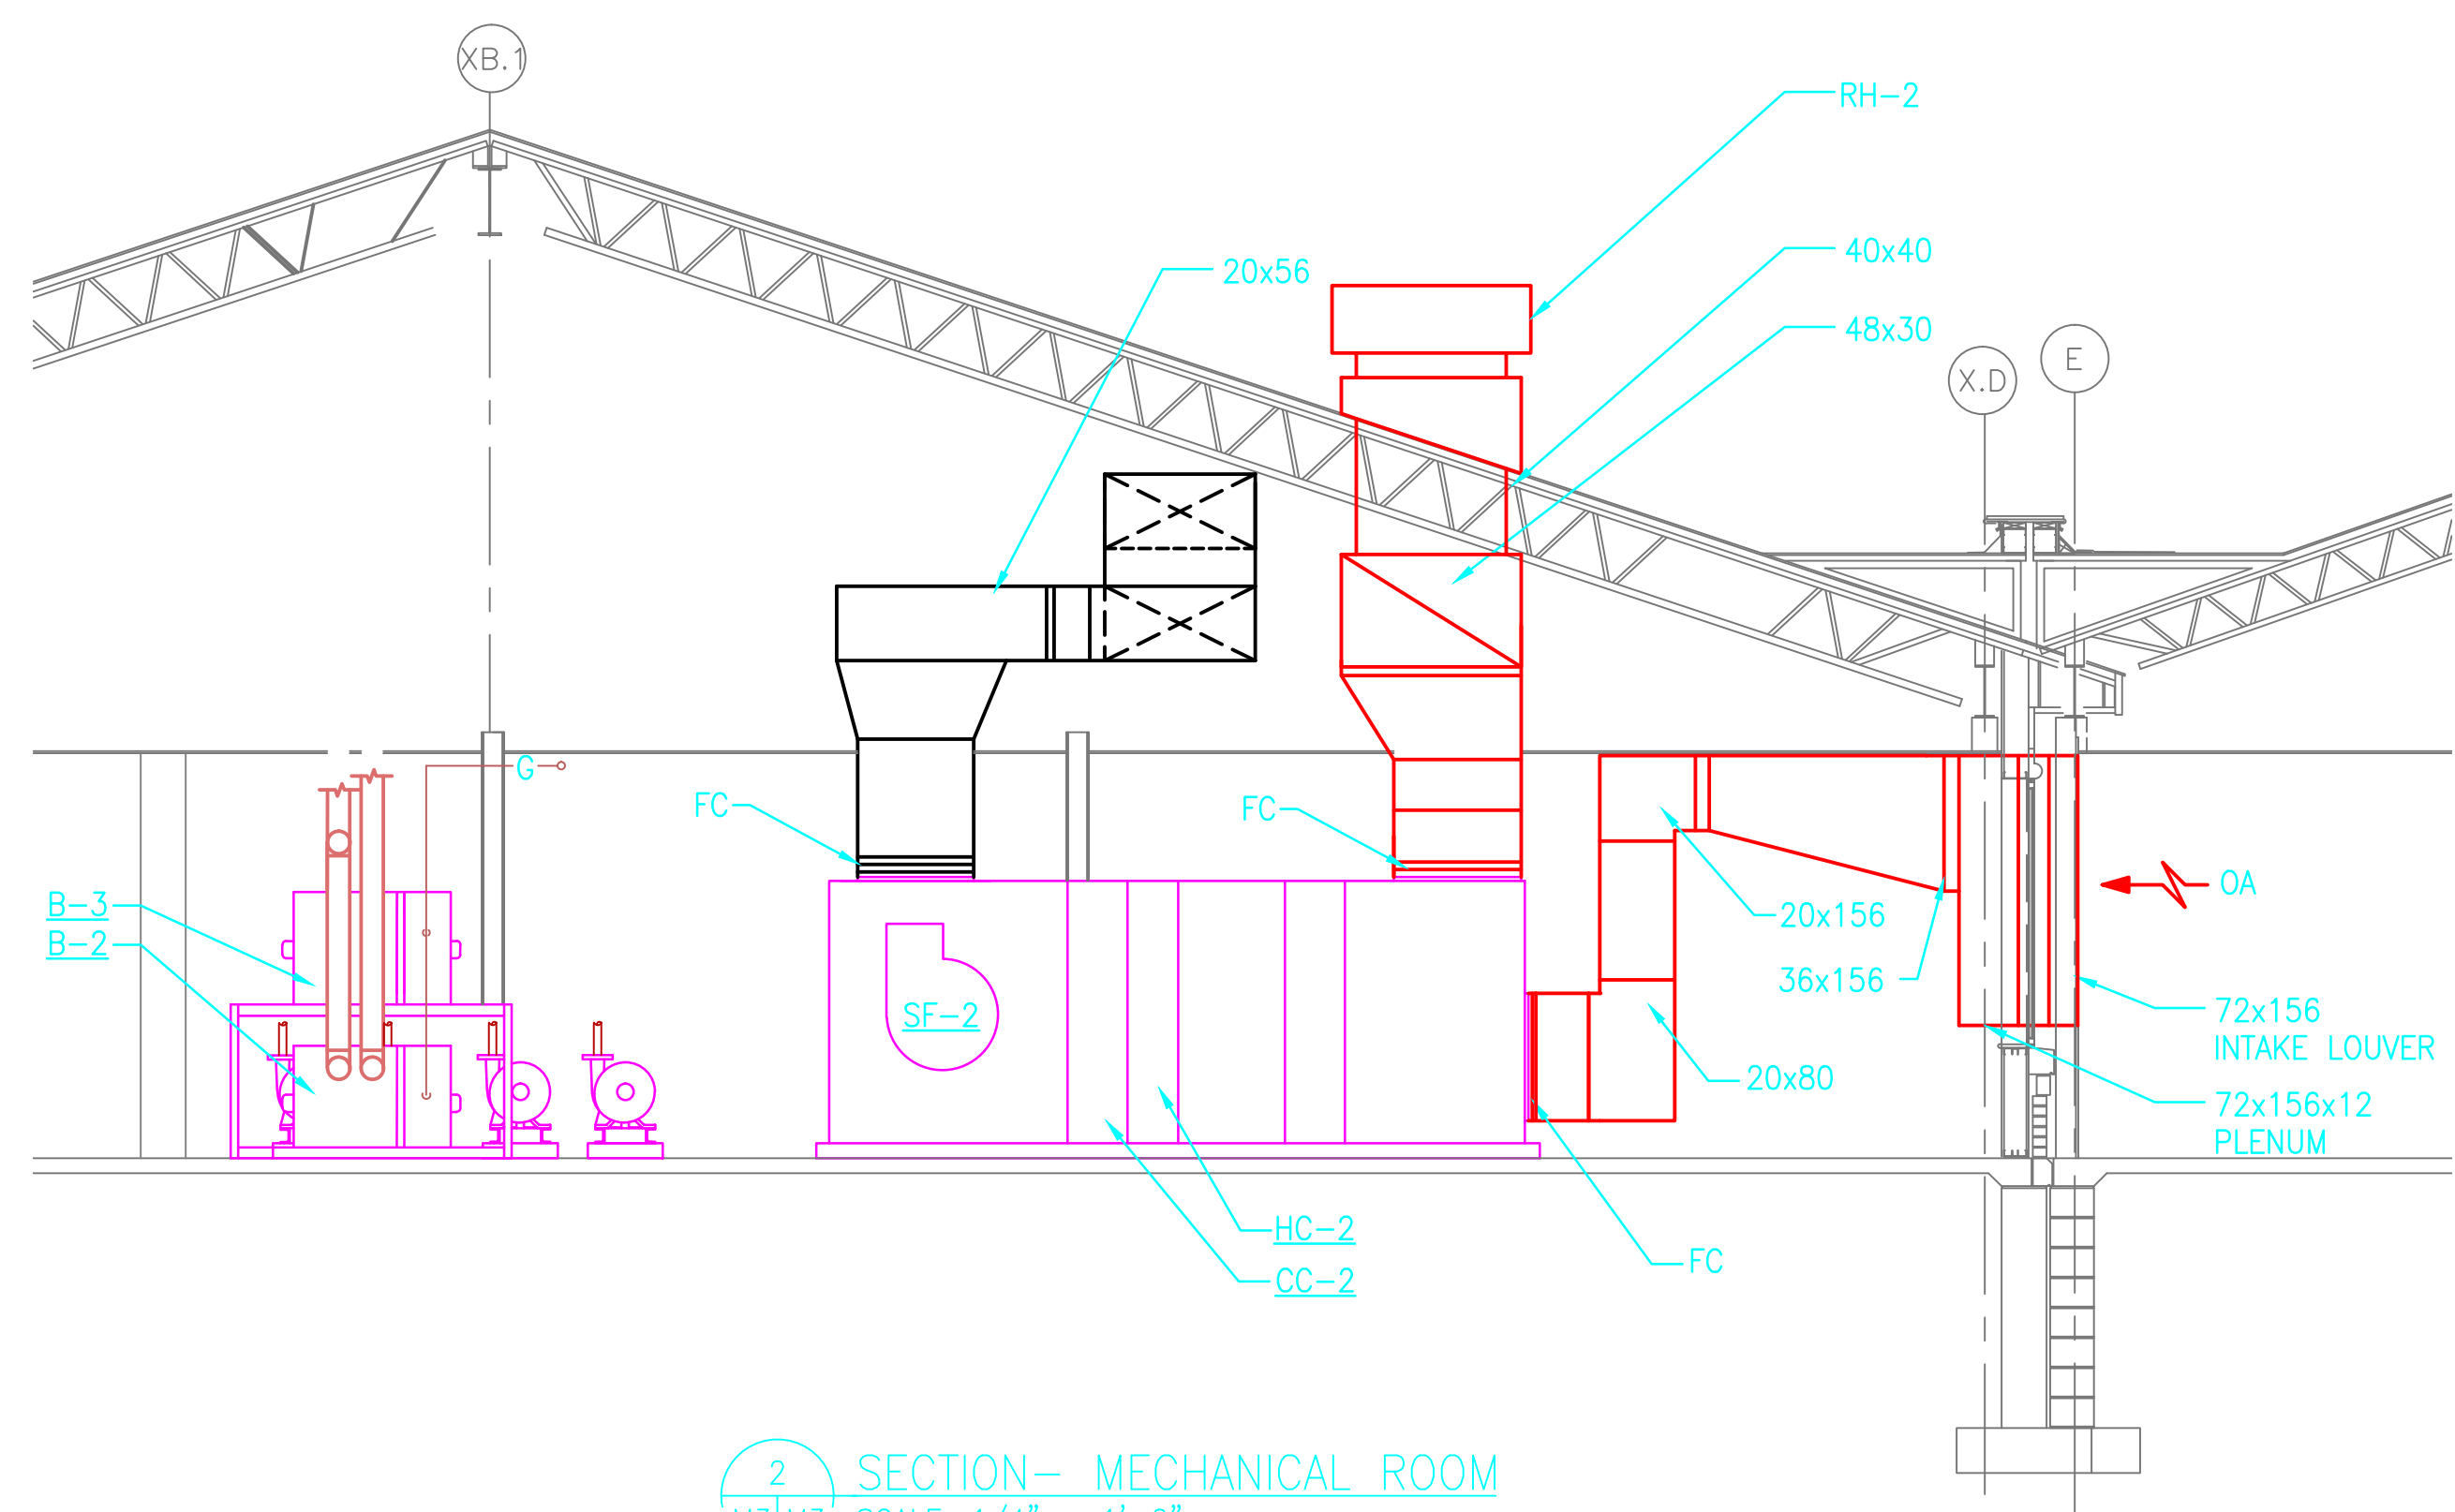


2 SECTION— MECHANICAL ROOM  
SCALE: 1/4" = 1'-0"

NOTES:

- 1 PROVIDE TWO 6"Ø INTAKE FLUES FOR B-2 AND B-3. INSTALL AS PER MANUFACTURERS RECOMMENDATION.
- 2 B-2 SHALL BE A 6"Ø SIDE DISCHARGE AND B-3 SHALL BE A 6"Ø TOP DISCHARGE FOR EXHAUST. INSTALL FLUE AS PER MANUFACTURERS RECOMMENDATION UP TO AND ABOVE ROOF.
- 3 B-2 AND B-3 SHALL BE INSTALLED WITH A STACK-RACK ASSEMBLY.
- 4 EXTEND EXISTING FLUE TO ABOVE NEW ROOF.
- 5 CHANGE MOTOR FROM 208/3 TO 460/3, 1750 RPM.
- 6 PROVIDE WALL SLEEVE.
- 7 PROVIDE ROOF THIMBLE AND FLASHING.
- 8 NEW FLUE FOR EXISTING BOILER AND HOT WATER HEATER.

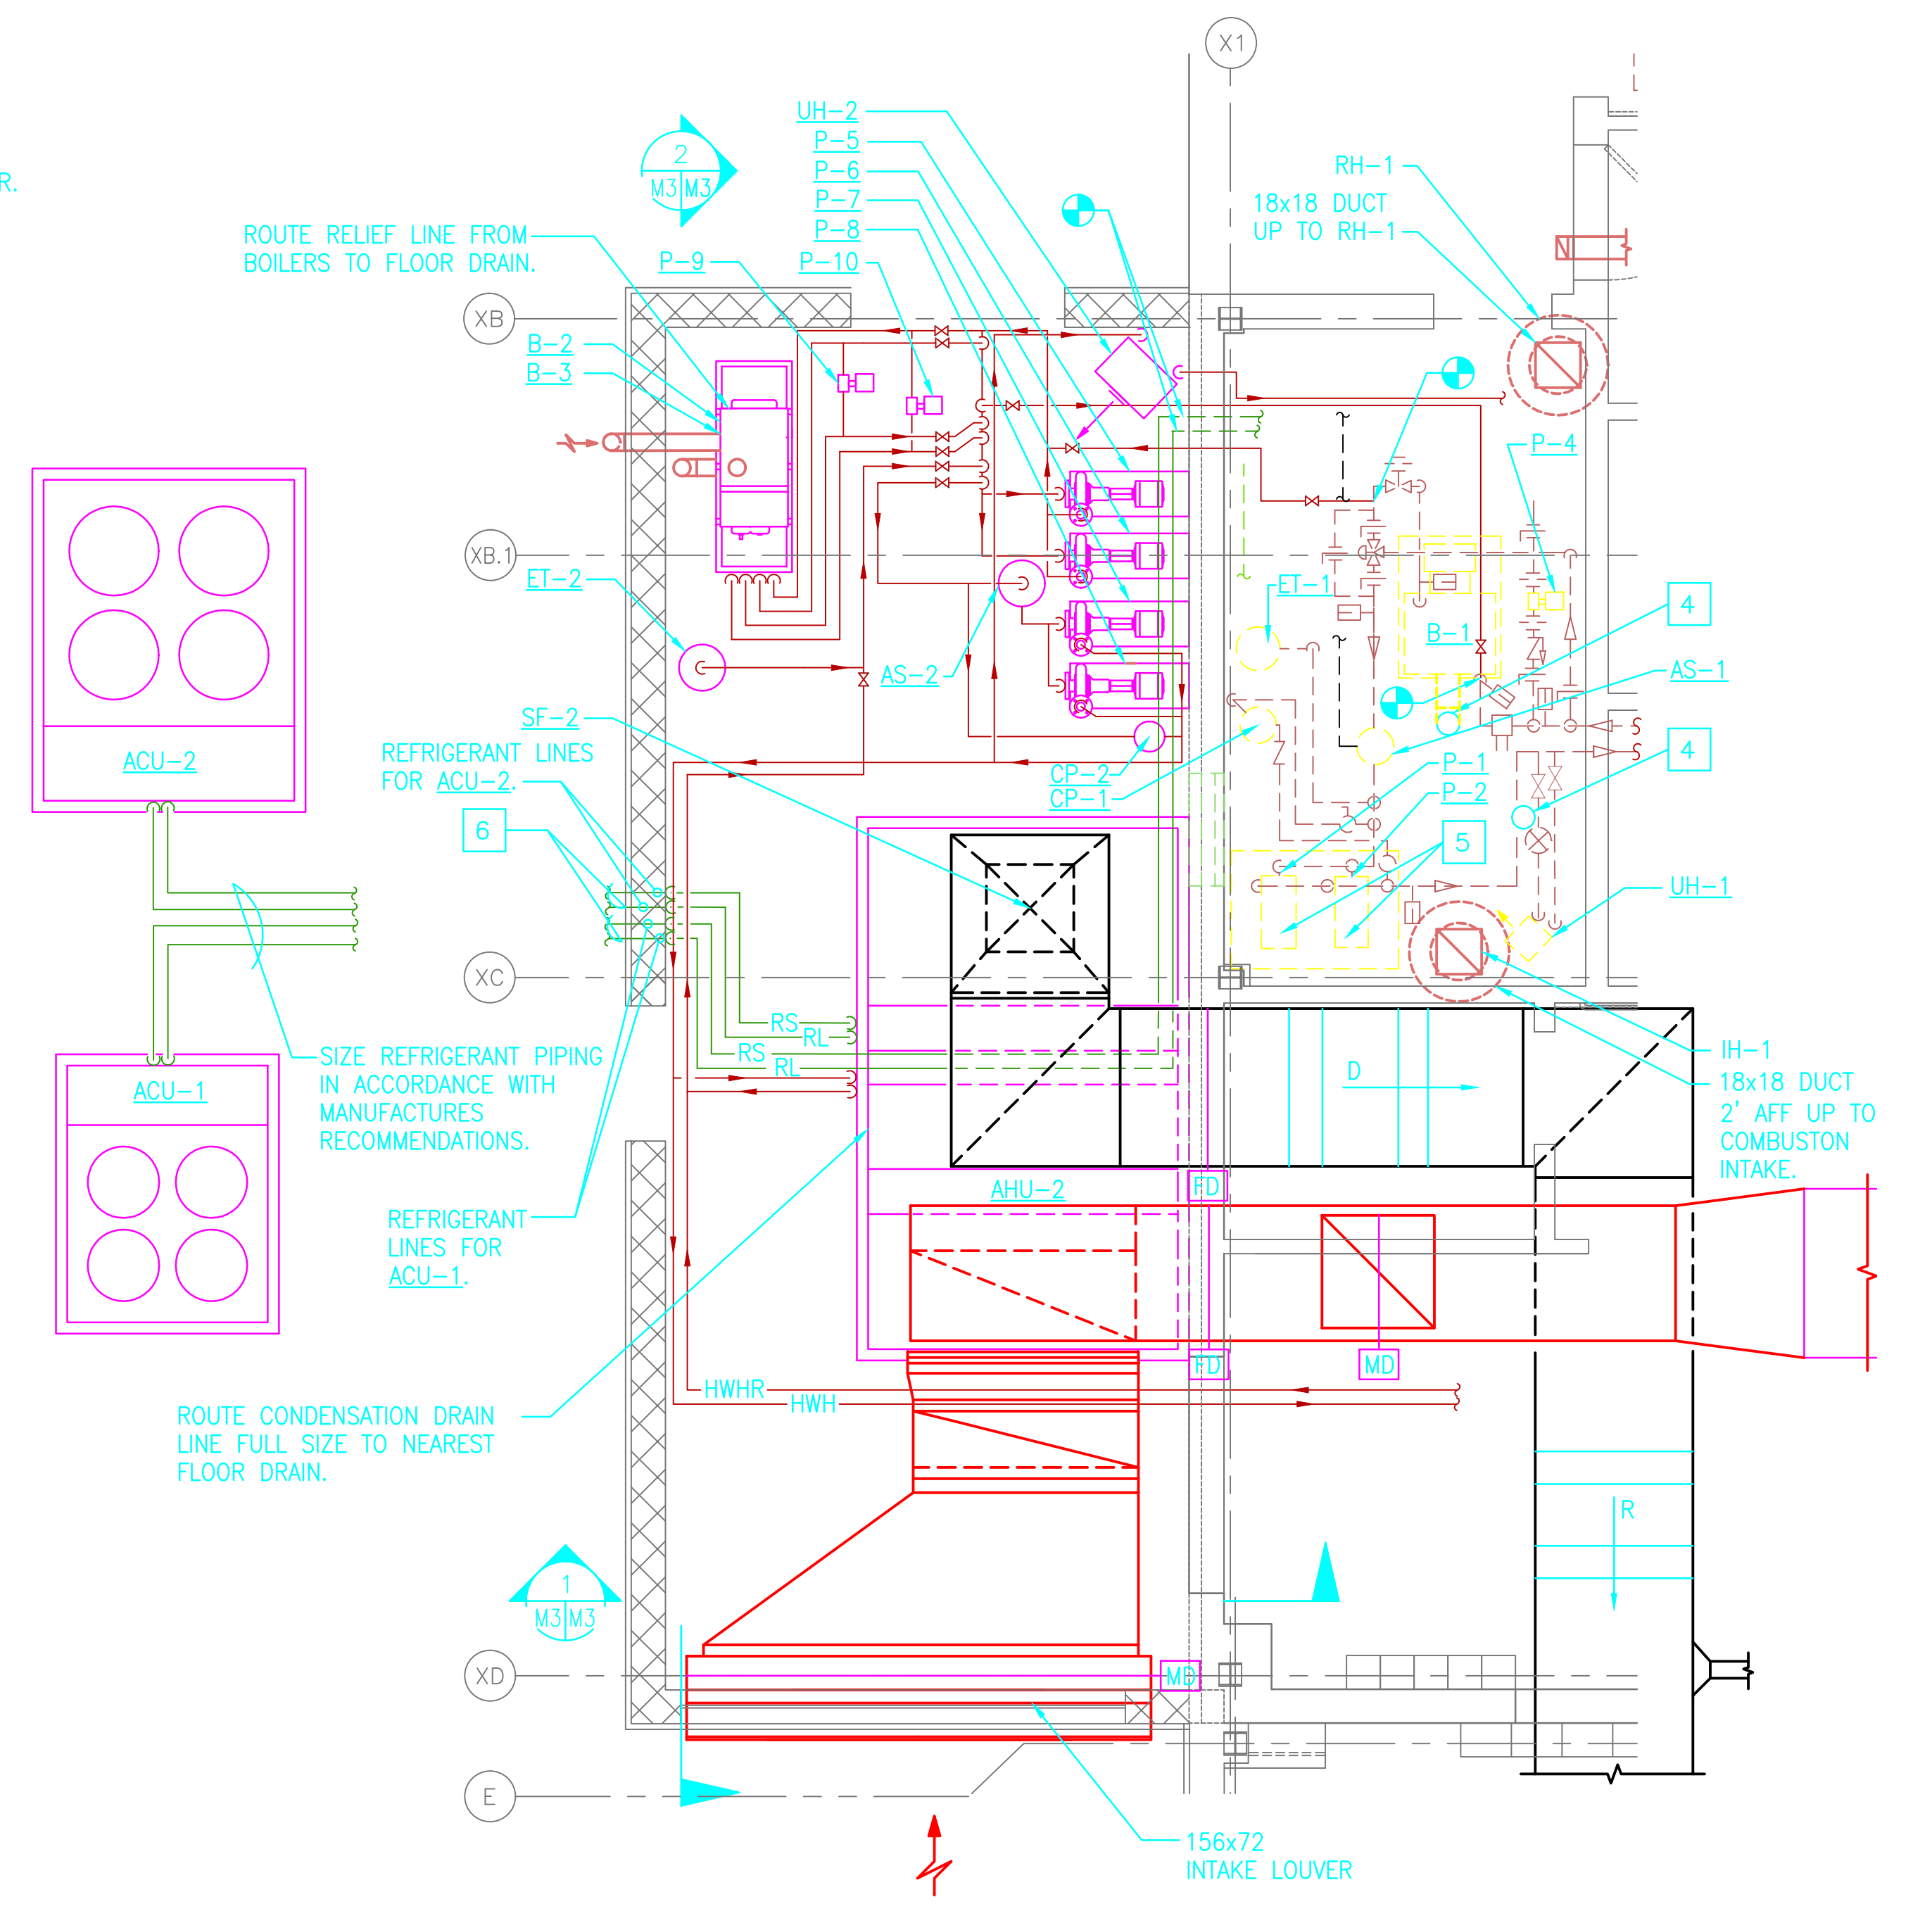

1 ENLARGED PART PLAN — MECHANICAL ROOM  
SCALE: 1/4" = 1'-0"



IF THIS DRAWING IS A REDUCTION,  
GRAPHIC SCALE MUST BE USED.

5' 0 5'

SCALE: 1/4" = 1'-0"

85% SUBMITTAL	03.24.05
100% SUBMITTAL	05.03.05
FINAL SUBMITTAL	06.10.05
Revisions:	Date

**CONSULTANTS:**

**ARCHITECT/ENGINEERS:**



PEOPLE ARCHITECTURE  
CSD

Cochran, Stephenson & Donkervoet, Inc.  
The Warehouse at Camden Yards  
323 West Camden Street  
Baltimore, MD 21201  
WWW.CSDARCH.COM  
CSD Project Number: 04103.00

**Wiley & Wilson**  
Employee-Owned  
2550 Huntington Avenue  
Alexandria, VA 22303  
WWW.WileyWilson.com

Drawing Title  
**Mechanical 1/4 Scale Plans & Sections**

Approved: Project Director

Project Title  
**Expand Community Based Outpatient Clinic**

Location  
**V.A.M.C. LOCH RAVEN**

Building Number  
6

Checked  
**LJS**


Drawn  
**JEJ**

Date  
**05.03.05**

Project Number  
**512.514**

Drawing Number  
**M-3**  
Dwg. 46 of 74

**Loch Raven Outpatient Clinic**

 Department of Veterans Affairs