


# EXTERIOR MASONRY TUCK POINTING

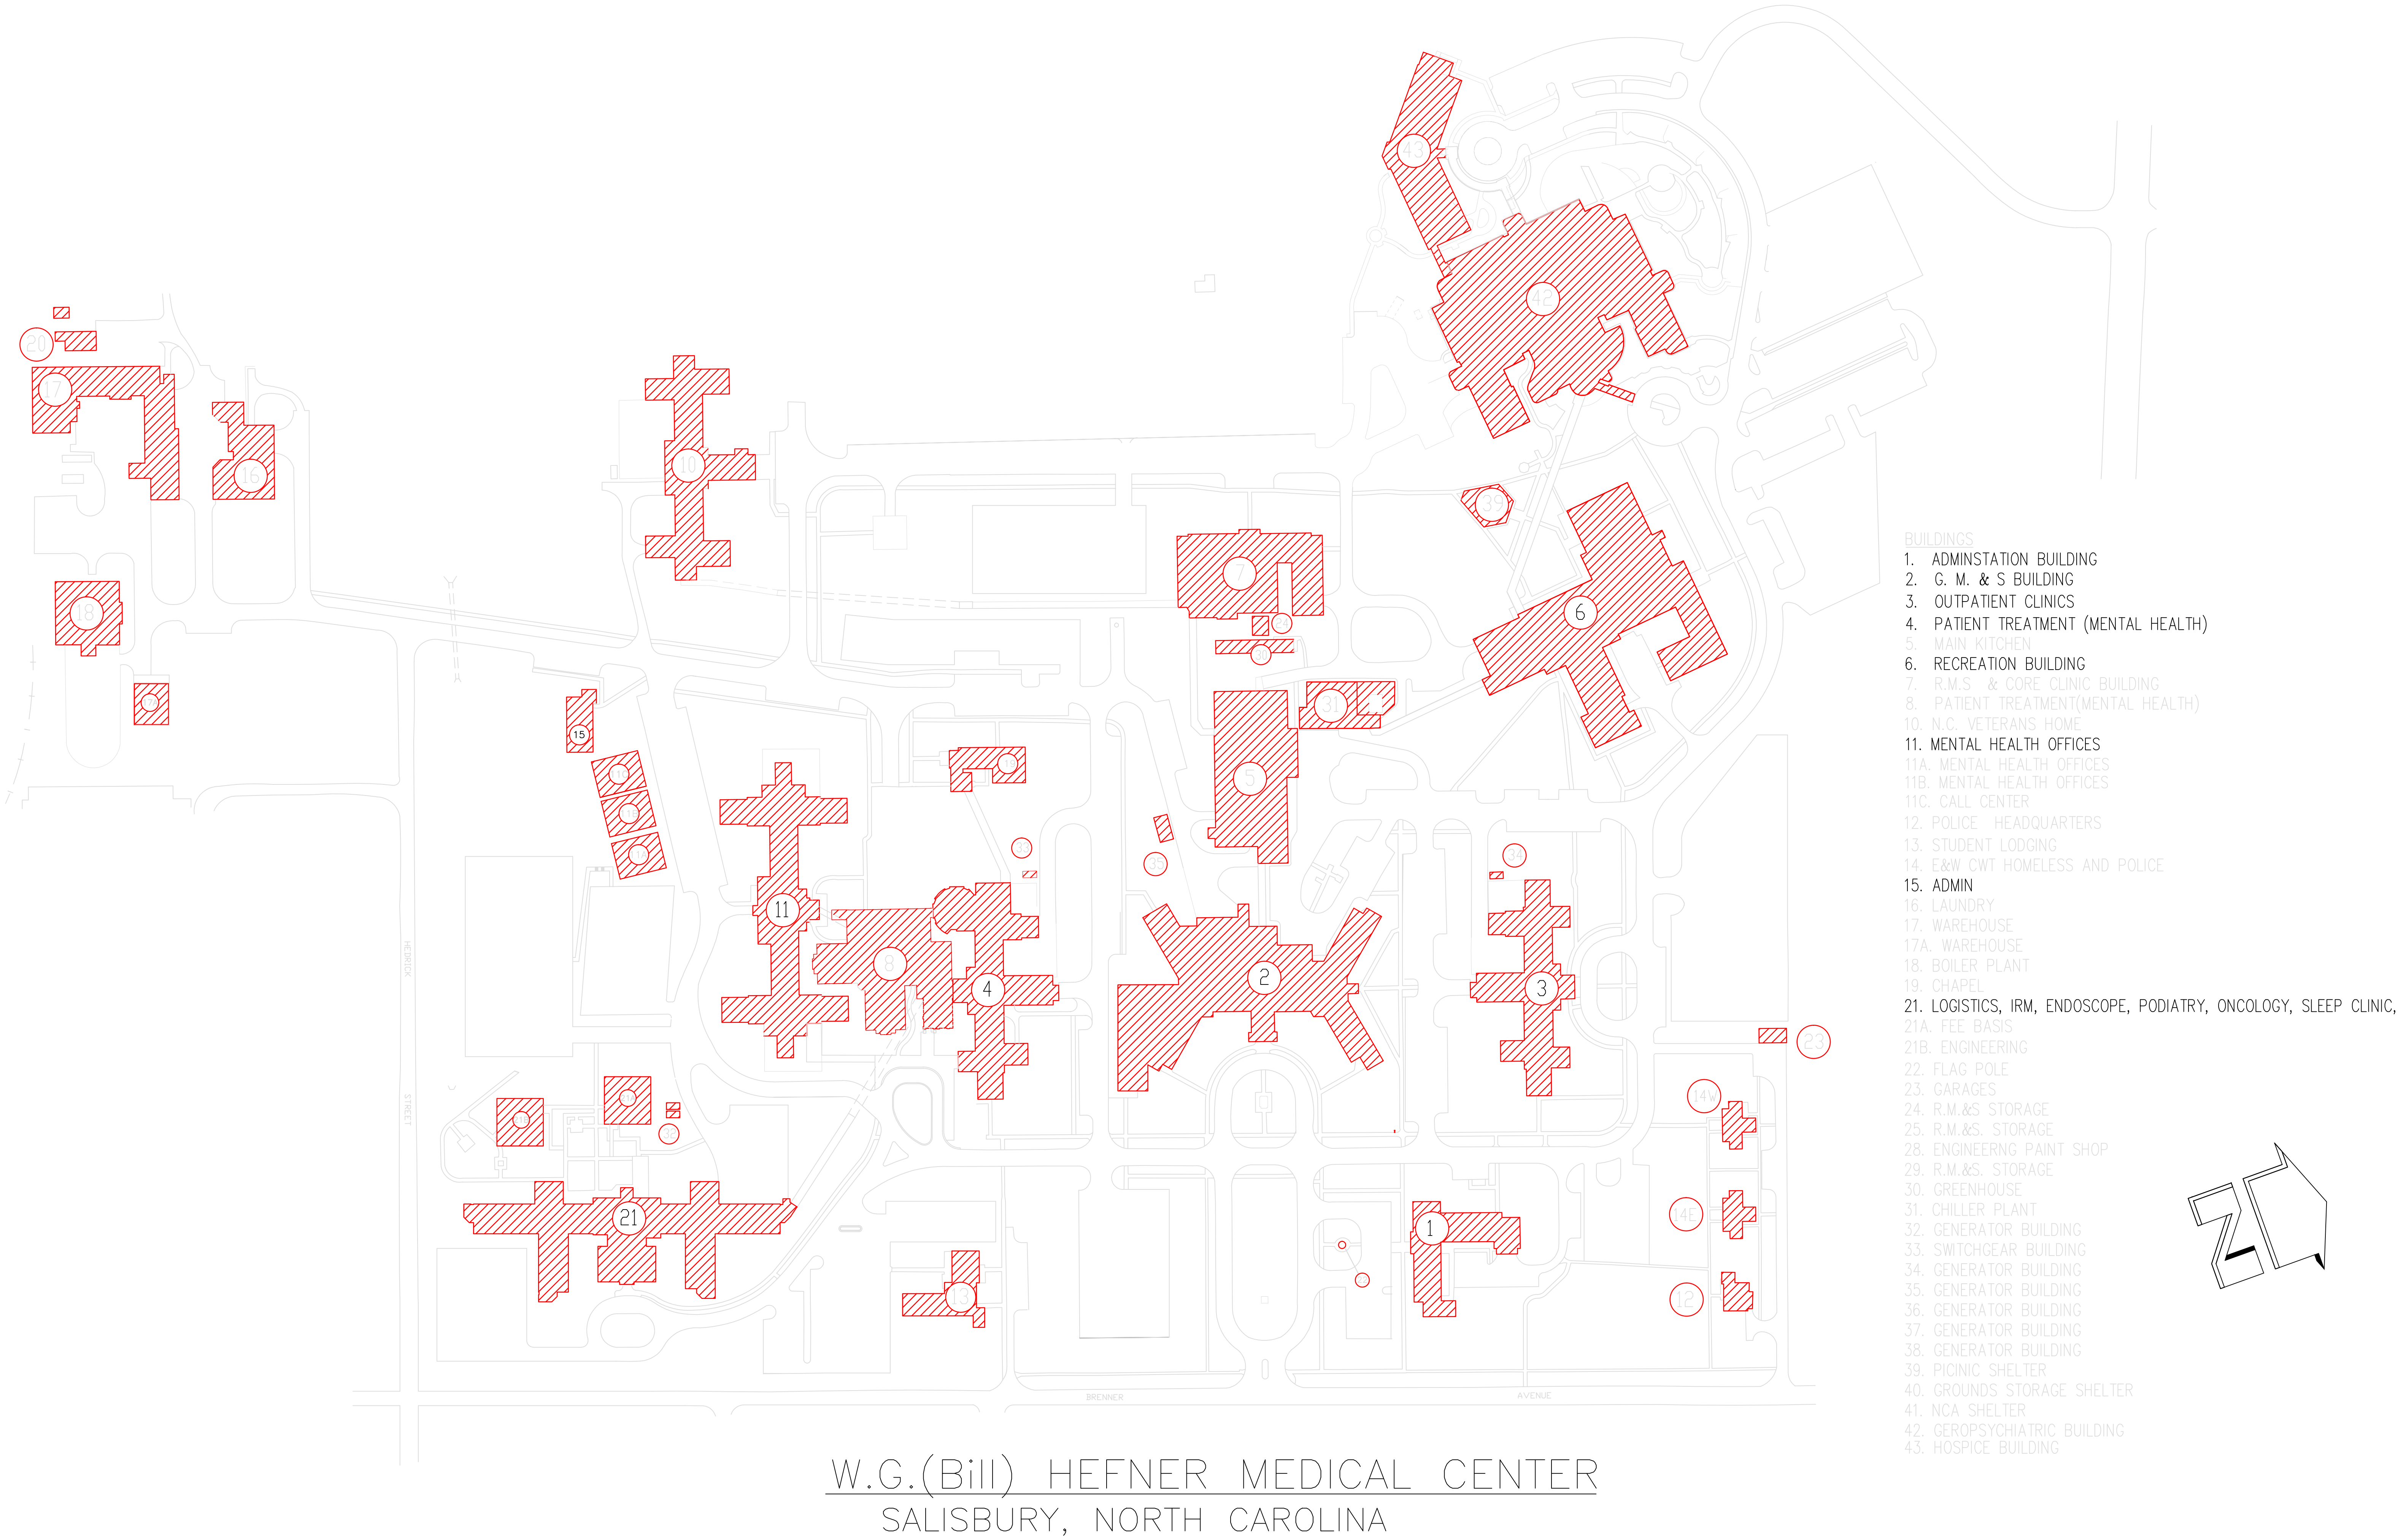

## PROJECT DESCRIPTION

PROJECT CONSISTS OF EXTERIOR MASONRY TUCK POINTING OF BUILDINGS 1, 2, 3, 4, 6, 11, 15, AND 21 ON THE HEFNER VA MEDICAL CENTER CAMPUS IN SALISBURY NC.

## GENERAL NOTES

1. ALL LEVELS (FLOORS) ARE IDENTIFIED FROM THE EXTERIOR GROUND UNLESS NOTED OTHERWISE.
2. THE LEVELS REFERENCED MAY INCLUDE UPTO AN ADDITIONAL 6 FT TO THE ROOF.
3. MORTAR AND BRICK SHALL MATCH THE EXISTING.
4. BORAL BRICK MOD 32 RED RANGE WIRECUT SHOULD BE USED TO MATCH THE EXISTING FACE BRICK.
5. DAMAGED BRICK AND MORTAR SHALL BE REMOVED AND REPLACED.
6. REPAIR ALL CAP STONE JOINTS THROUGHOUT BUILDING 15.
7. WATERPROOF AND SEAL ALL OF BUILDING 15.

		RECOMMEND APPROVAL				Drawing Title		Project Title			Date			Department of Veterans Affairs	
		REQUESTER	Date	CHIEF OF STAFF	Date	COVER SHEET		EXTERIOR MASONRY TUCK POINTING			2/25/2013				
		CHIEF OF SERVICE	Date	CHIEF OF STAFF	Date						Project No.				
		ASSOC. DIR. PATIENT CARE SVC.	Date	ASSOC. DIR. for OPERATIONS	Date	Approved: Safety Manager/M&O Supervisor		Building Number		Checked	Drawn	659-13-211			
		APPROVAL BY:				Date	Approved:Chief of Facilities Management Svr.		Location		W.G.(Bill) Hefner Medical Center 1601 Brenner Ave Salisbury NC 28144		DRAWING NO.		
Revision		Date										G-000			
												DWG. 1 OF 4			