


8M CLEAR

SAFETY & SECURITY WINDOW FILM

BENEFITS

- > Designed for safety and security applications.
- > Crystal clear appearance.
- > Advanced adhesion formulation.
- > Superior optical clarity.
- > Blocks over 99% of the sun's damaging ultraviolet rays, keeping upholstery, carpet and window treatments looking like new.
- > Exclusive Manufacturer's Warranty.

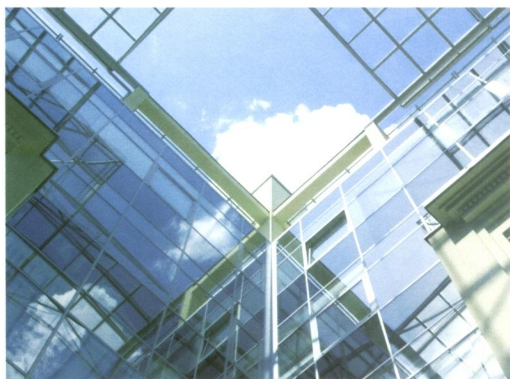


PRODUCT SPECIFICATIONS

Visible Light Transmittance	83%
Total Solar Transmittance	77%
Total Solar Reflectance	8%
Total Solar Absorbance	15%
Visible Light Reflectance	10%
Winter U-Value	1.05
UV Rejected	99%
Shading Coefficient	0.92
Total Solar Energy Rejected	19%

PHYSICAL PROPERTIES

Film Thickness	0.008"
Single or Multi-Ply	Multi
Tensile Strength	32,500 psi
Break Strength	269 lbs/inch
Elongation at Break	>100%
Peel Strength	2700g/inch
Puncture Strength	173 lbs

Note: All data values above are representative and are provided for comparison purposes only.

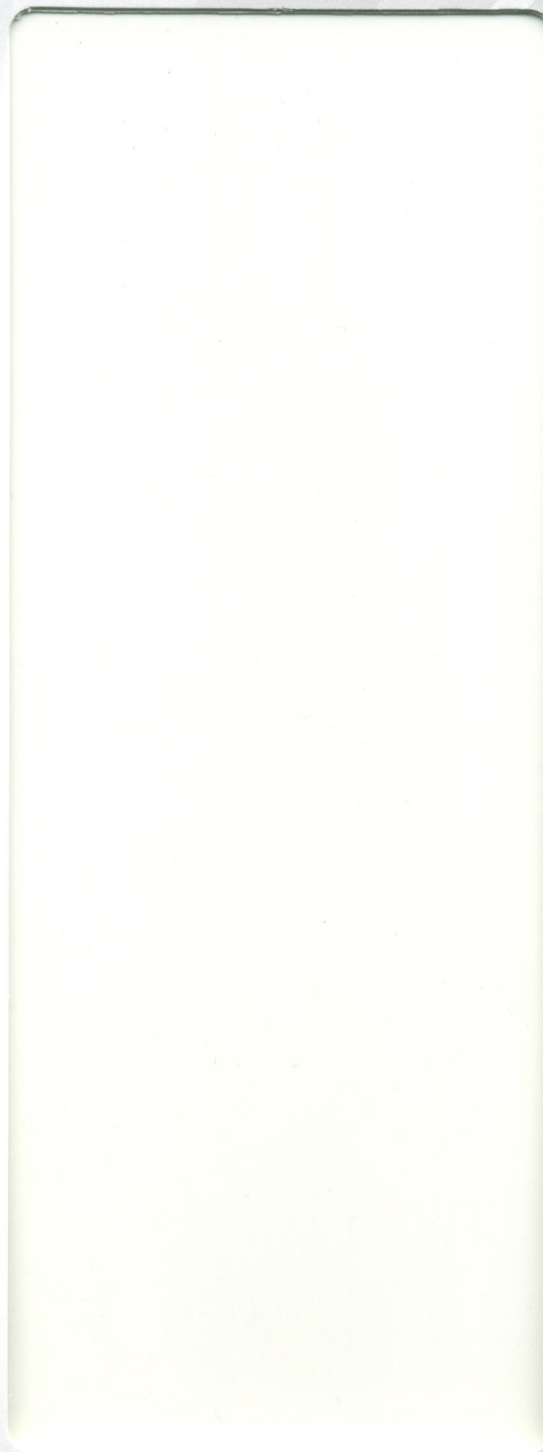

INTERIOR