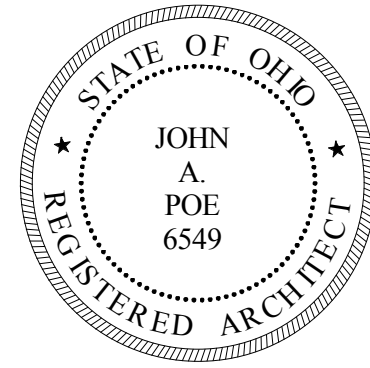


2	Addendum Two	03/14/2013
Revisions		Date

[illegible]

ARCHITECT/ENGINEERS:

JOHN POE ARCHITECTS

116 EAST THIRD STREET
DAYTON, OHIO 45402-2130

937 461 3290 PHONE
937 461 0260 FAX
eap@johnpoe.com

Drawing Title

DEMOLITION PLAN


2

Approved: Project Director

Project Title		
Renovate Occupational Therapy Building 3		
2		
Location		
Chillicothe, Ohio		
Date	Checked	Drawn
	MS	ES

Project No.	VA Project No. 538-13-101 JPA Project No. 11013.00
Building Number	3
Drawing Number	AD101

Office of
Construction
and Facilities
Management

 Department of
Veterans Affairs

GENERAL DEMOLITION NOTES

- L. New construction shall be phased in the following sequence. Phase 1: Area limited to the south west wing. Phase 2: Area limited to the north west wing. Phase 3: Area limited to the south east wing. Upon completion of each phase coordinate access and start-up of the following phase with the COTR.
- M. Painted wood doors and trim are known to contain lead based paint (greater than 0.5%). It is the intent of the VA that the work which may disturb these materials be conducted by a contractor with experience and training to perform work in accordance with OSHA CFR 1926.62. Lead in Construction.

DEMOLITION NOTES

- 2 Remove portion of wall and door for installation of new door. See S3 A302 for additional information.
- 3 Remove concrete loading dock and stair. See Civil and Structural Drawings for additional information.
- 4 Remove existing concrete floor and associated plumbing and plumbing cut for installation of new wall. Flooring to remain. Owner to provide removal and installation of new flooring at an undetermined future date. Patch and repair any voids or uneven surfaces as required with high-strength flowable self-leveling cement. All substrates shall be maintained or repaired to facilitate installation of new casework and walls.
- 5 Patch and repair end of wall to match existing conditions.
- 6 Remove existing window blinds and store. The blinds will be replaced once construction is complete.
- 7 The VA will be removing the existing equipment in the Southwest wall.
- 8 Remove existing window, prepare opening for installation of new louver.