


# EXTERIOR MASONRY TUCK POINTING

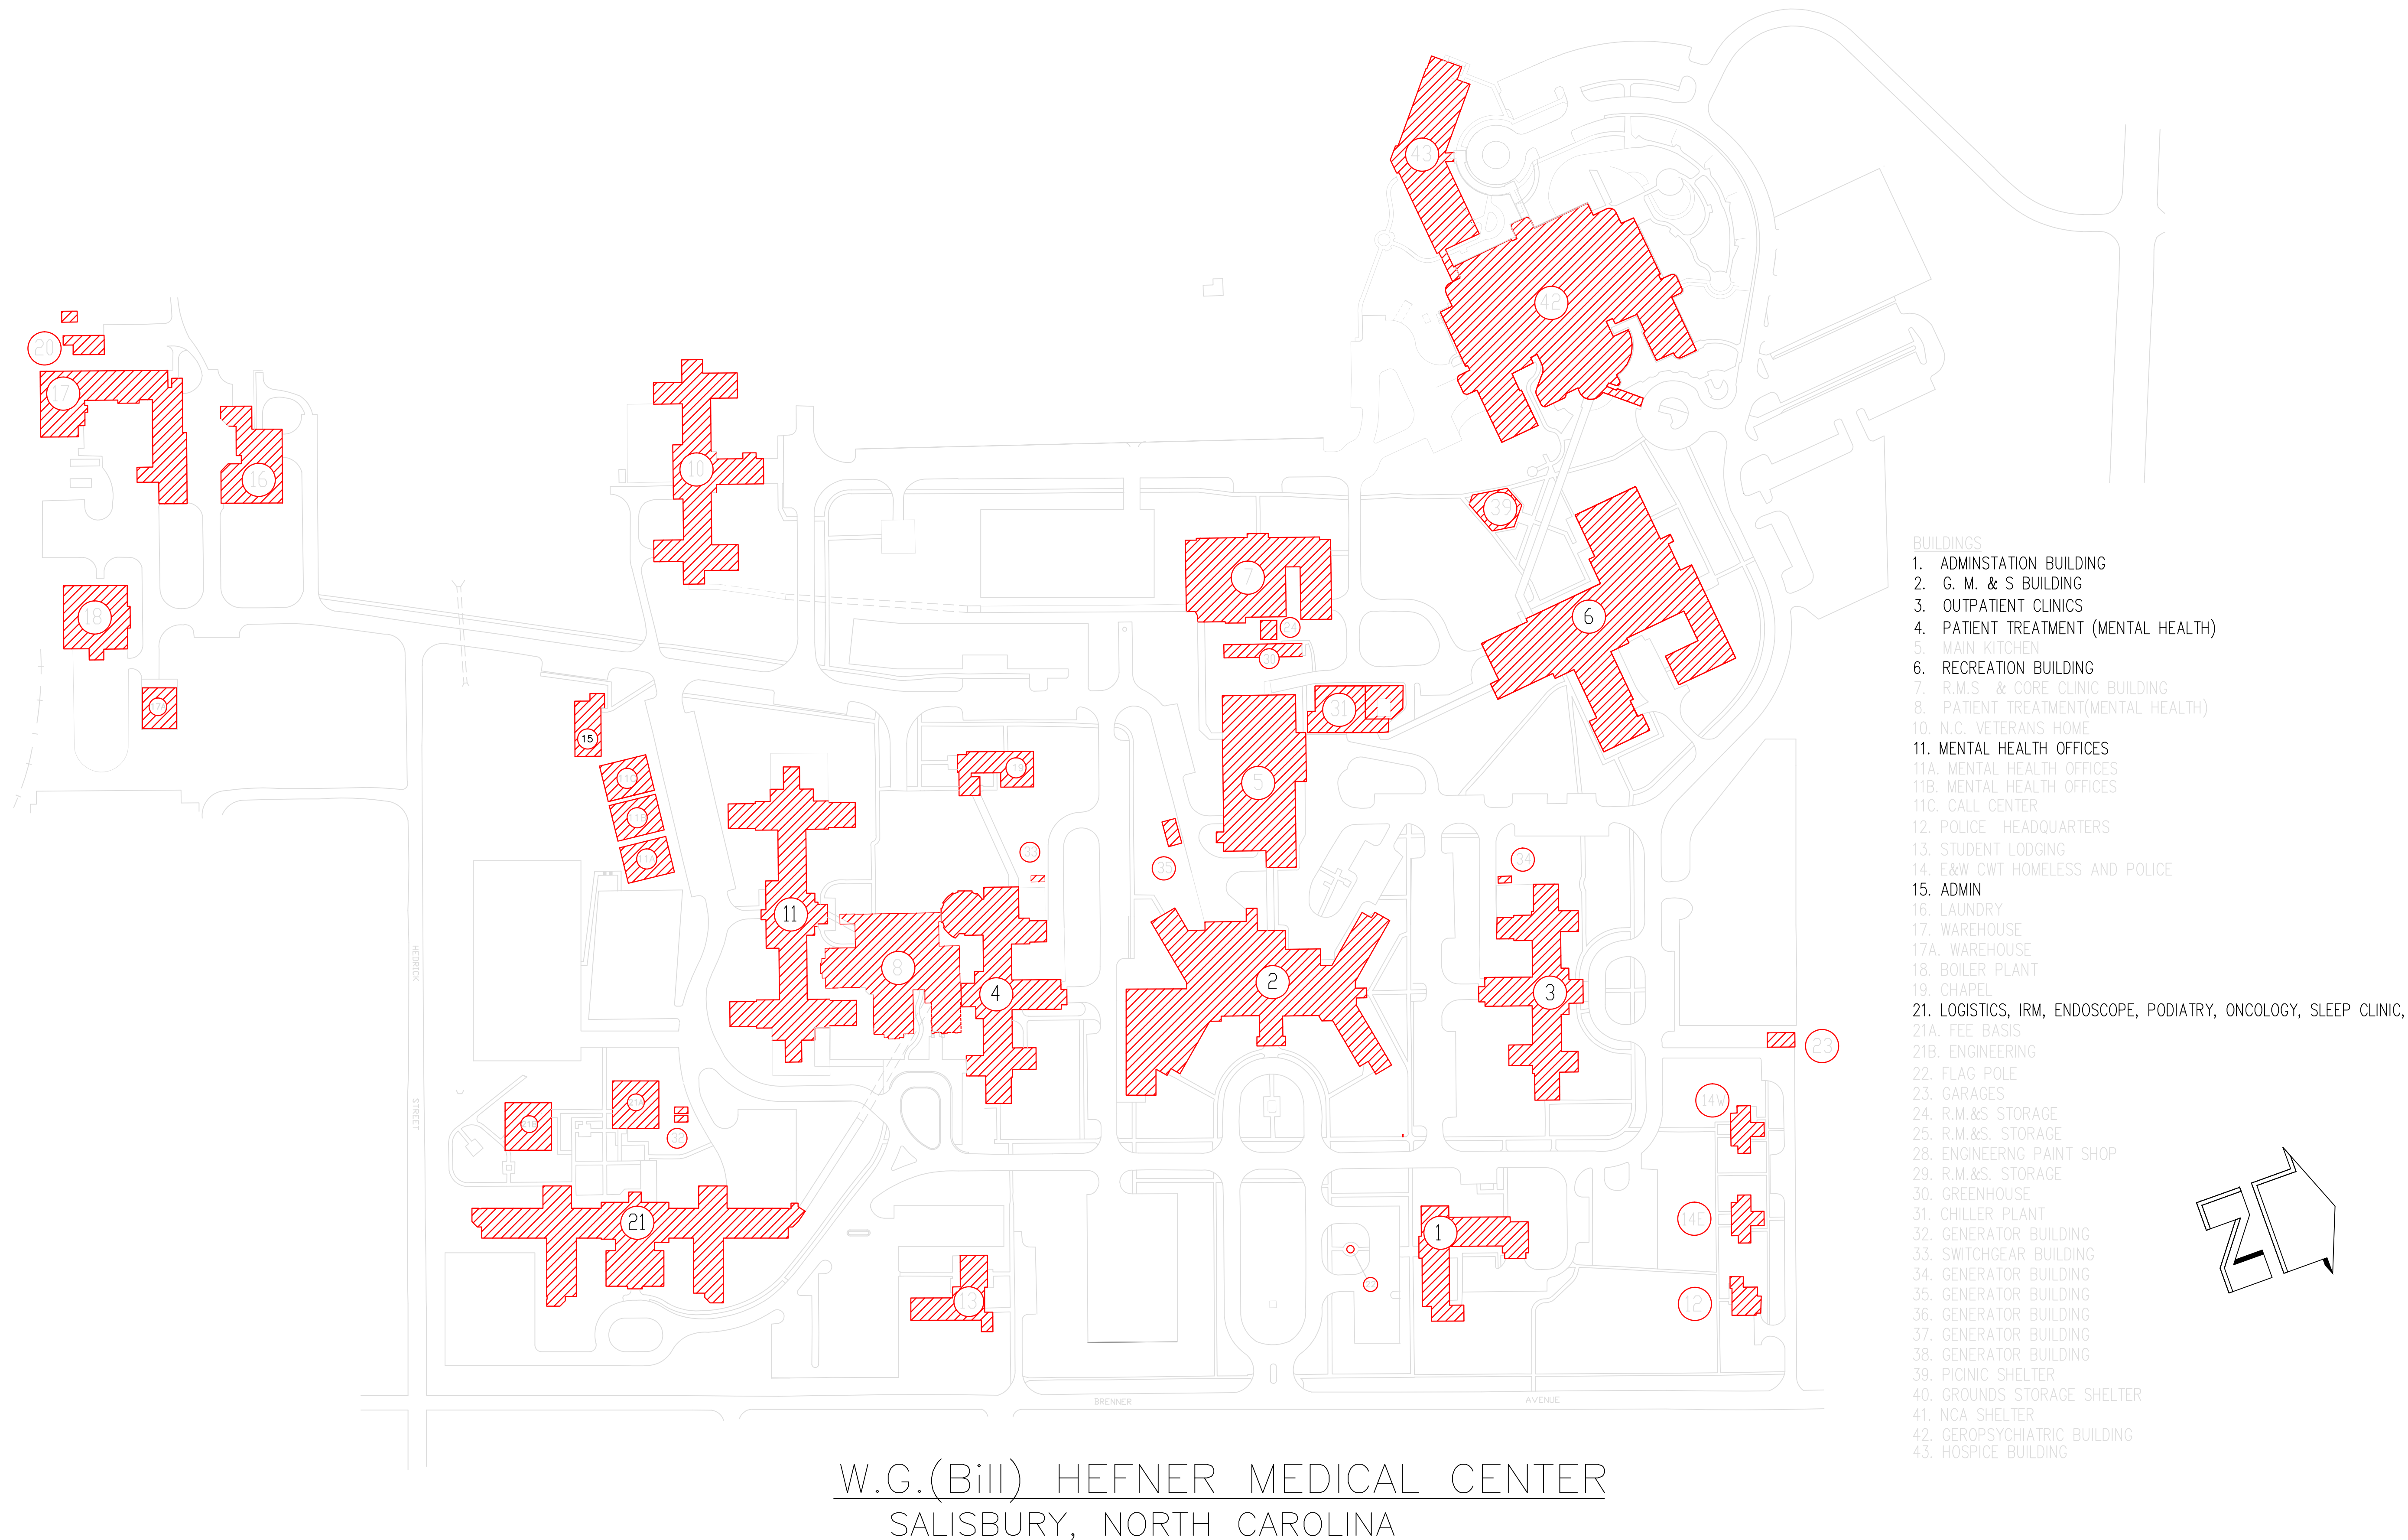


# PROJECT DESCRIPTION

PROJECT CONSISTS OF EXTERIOR MASONRY TUCK POINTING OF BUILDINGS 1, 2, 3, 4, 6, 11, 15, AND 21 ON THE HEFNER VA MEDICAL CENTER CAMPUS IN SALISBURY NC.

# GENERAL NOTES

1. ALL LEVELS (FLOORS) ARE IDENTIFIED FROM THE EXTERIOR GROUND UNLESS NOTED OTHERWISE.
2. THE LEVELS REFERENCED MAY INCLUDE UPTO AN ADDITIONAL 6 FT TO THE ROOF.
3. MORTAR AND BRICK SHALL MATCH THE EXISTING.
4. BORAL BRICK MOD 32 RED RANGE WIRECUT SHOULD BE USED TO MATCH THE EXISTING FACE BRICK.
5. DAMAGED BRICK AND MORTAR SHALL BE REMOVED AND REPLACED.
6. REPAIR ALL CAP STONE JOINTS THROUGHOUT BUILDING 15.
7. WATERPROOF AND SEAL ALL OF BUILDING 15.

REVISION: DEFINED SCOPE	24 APR 2013					RECOMMEND APPROVAL				Drawing Title		Project Title		Date	 <div>Department of Veterans Affairs</div>
		REQUESTER		Date					COVER SHEET		EXTERIOR MASONRY TUCK POINTING		Project No.		
		CHIEF OF SERVICE		Date	CHIEF OF STAFF		Date	659-13-211							
		ASSOC. DIR. PATIENT CARE SVC.		Date	ASSOC. DIR. for OPERATIONS		Date	Approved: Safety Manager/M&O Supervisor		Building Number	Checked	Drawn	DRAWING NO. <b>G-000</b> DWG. 1 OF 9		
		APPROVAL BY:						Date	Approved:Chief of Facilities Management Svr.		Location	W.G.(Bill) Hefner Medical Center 1601 Brenner Ave. Salisbury NC 28144			
		MEDICAL CENTER DIRECTOR													
Revision	Date														