


NORTH

NOTES

- 1) THE ROOFING PLAN SHOWS THE EDGES, RIDGES, AND VALLEYS. THE PLAN WAS DRAWN PREPARED USING THE ORIGINAL BUILDING PLANS AND GOOGLEMAP IMAGES. SOME ASSUMPTIONS WERE MADE. THE PLAN NEEDS TO BE FIELD CHECKED FOR ACCURACY.
- 2) THE ROOFING AREA AS DRAWN IS 9,909 SF FOR 3/12 PITCH. FOR BIDDING PURPOSES ASSUME 10,000 SQUARE FEET. THE OUTER PERIMETER OF THE BLDG IS APPROX 800 LF. FIELD MEASURE ALL AREAS PRIOR TO ORDERING MATERIALS.
- 3) THE EXISTING ROOF HAS MANY UNUSUAL FEATURES AND ROOFING PENETRATIONS.
- 4) BASE BID SHALL BE FOR ROOFING USING ASPHALT SHINGLES AS SPECIFIED. USE 380 LB CLASS A SHINGLES AND 30LB FELT
- 5) ALTERNATE BID SHALL BE FOR ROOFING USING STANDING SEAM METAL ROOFING AS SPECIFIED.
- 6) THE INTERIOR BUILDING MUST BE PROTECTED FROM THE WEATHER AT ALL TIMES.
- 7) THE WORK INCLUDES THE COMPLETE REPLACEMENT OF ALL FLASHING, GUTTERING, DOWNSPOUTS, AND ANY EXISTING ROOF DRAINAGE STRUCTURES THAT MAY BE FOUND. ALL WORK SHALL BE IN ACCORDANCE WITH BUILDING CODE REQUIREMENTS. THE WORK INCLUDES REPLACING ALL EXISTING VENTS AND STACKS BOOTS.

EXISTING ROOF PLAN

SCALE 1/16" = 1'-0"

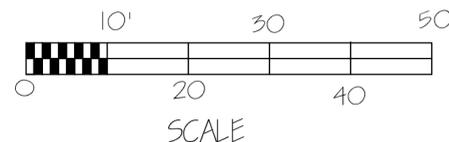

WOOD NATIONAL CEMETERY
REPLACE ROOF ADMIN/ MAINT BLDG

DETAILED SITE PLAN A TO STAIRS