


three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
three eighths inch = one foot
one quarter inch = one foot
one eighth inch = one foot
one sixteenth inch = one foot

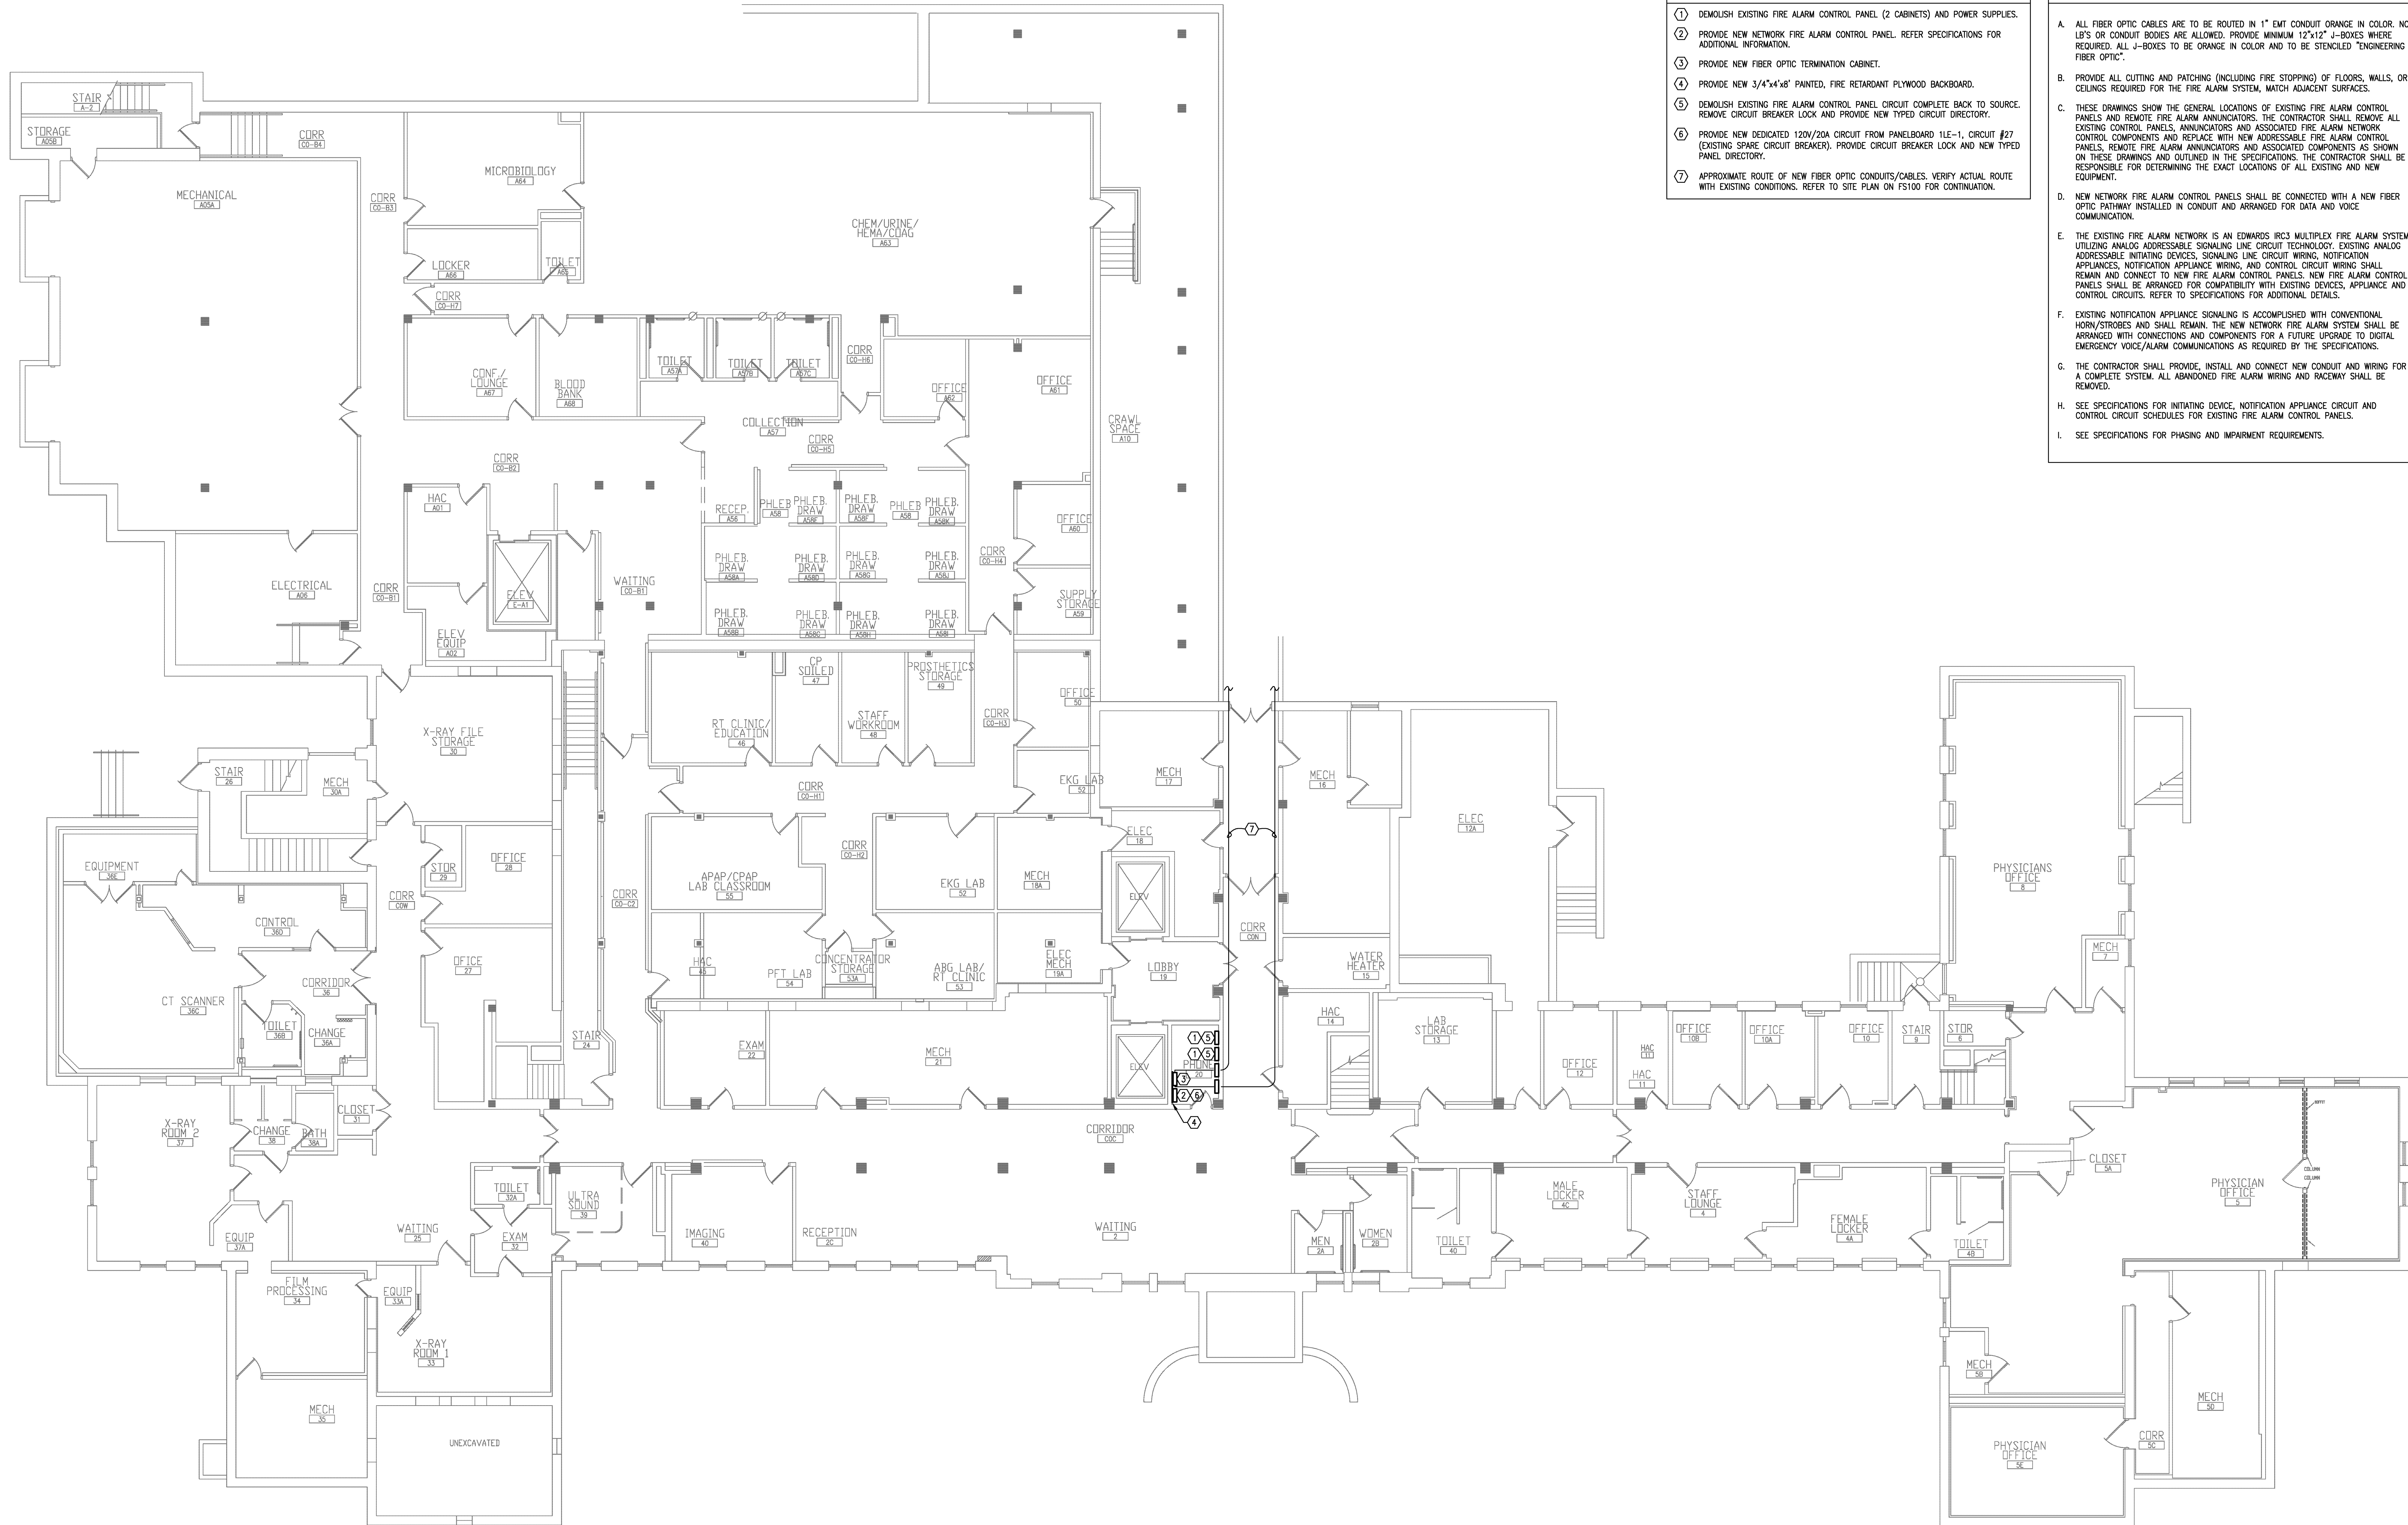

- ### PLAN NOTES
- DEMOLISH EXISTING FIRE ALARM CONTROL PANEL (2 CABINETS) AND POWER SUPPLIES.
 - PROVIDE NEW NETWORK FIRE ALARM CONTROL PANEL. REFER SPECIFICATIONS FOR ADDITIONAL INFORMATION.
 - PROVIDE NEW FIBER OPTIC TERMINATION CABINET.
 - PROVIDE NEW 3/4"x4"x8" PAINTED, FIRE RETARDANT PLYWOOD BACKBOARD.
 - DEMOLISH EXISTING FIRE ALARM CONTROL PANEL CIRCUIT COMPLETE BACK TO SOURCE. REMOVE CIRCUIT BREAKER LOCK AND PROVIDE NEW TYPED CIRCUIT DIRECTORY.
 - PROVIDE NEW DEDICATED 120V/20A CIRCUIT FROM PANELBOARD 1LE-1, CIRCUIT #27 (EXISTING SPARE CIRCUIT BREAKER). PROVIDE CIRCUIT BREAKER LOCK AND NEW TYPED PANEL DIRECTORY.
 - APPROXIMATE ROUTE OF NEW FIBER OPTIC CONDUITS/CABLES. VERIFY ACTUAL ROUTE WITH EXISTING CONDITIONS. REFER TO SITE PLAN ON FS100 FOR CONTINUATION.

- ### GENERAL NOTES
- ALL FIBER OPTIC CABLES ARE TO BE ROUTED IN 1" EMT CONDUIT ORANGE IN COLOR. NO LP'S OR CONDUIT BODIES ARE ALLOWED. PROVIDE MINIMUM 12"x12" J-BOXES WHERE REQUIRED. ALL J-BOXES TO BE ORANGE IN COLOR AND TO BE STENCILED "ENGINEERING FIBER OPTIC".
 - PROVIDE ALL CUTTING AND PATCHING (INCLUDING FIRE STOPPING) OF FLOORS, WALLS, OR CEILINGS REQUIRED FOR THE FIRE ALARM SYSTEM. MATCH ADJACENT SURFACES.
 - THESE DRAWINGS SHOW THE GENERAL LOCATIONS OF EXISTING FIRE ALARM CONTROL PANELS AND REMOTE FIRE ALARM ANNUNCIATORS. THE CONTRACTOR SHALL REMOVE ALL EXISTING CONTROL PANELS, ANNUNCIATORS AND ASSOCIATED FIRE ALARM NETWORK CONTROL COMPONENTS AND REPLACE WITH NEW ADDRESSABLE FIRE ALARM CONTROL PANELS. REMOTE FIRE ALARM ANNUNCIATORS AND ASSOCIATED COMPONENTS AS SHOWN ON THESE DRAWINGS AND OUTLINED IN THE SPECIFICATIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING THE EXACT LOCATIONS OF ALL EXISTING AND NEW EQUIPMENT.
 - NEW NETWORK FIRE ALARM CONTROL PANELS SHALL BE CONNECTED WITH A NEW FIBER OPTIC PATHWAY INSTALLED IN CONDUIT AND ARRANGED FOR DATA AND VOICE COMMUNICATION.
 - THE EXISTING FIRE ALARM NETWORK IS AN EDWARDS IRCD MULTIPLEX FIRE ALARM SYSTEM UTILIZING ANALOG ADDRESSABLE SIGNALING LINE CIRCUIT TECHNOLOGY. EXISTING ANALOG ADDRESSABLE INITIATING DEVICES, SIGNALING LINE CIRCUIT WIRING, NOTIFICATION APPLIANCES, NOTIFICATION APPLIANCE WIRING, AND CONTROL CIRCUIT WIRING SHALL REMAIN AND CONNECT TO NEW FIRE ALARM CONTROL PANELS. NEW FIRE ALARM CONTROL PANELS SHALL BE ARRANGED FOR COMPATIBILITY WITH EXISTING DEVICES, APPLIANCE AND CONTROL CIRCUITS. REFER TO SPECIFICATIONS FOR ADDITIONAL DETAILS.
 - EXISTING NOTIFICATION APPLIANCE SIGNALING IS ACCOMPLISHED WITH CONVENTIONAL HORN/STROBES AND SHALL REMAIN. THE NEW NETWORK FIRE ALARM SYSTEM SHALL BE ARRANGED WITH CONNECTIONS AND COMPONENTS FOR A FUTURE UPGRADE TO DIGITAL EMERGENCY VOICE/ALARM COMMUNICATIONS AS REQUIRED BY THE SPECIFICATIONS.
 - THE CONTRACTOR SHALL PROVIDE, INSTALL AND CONNECT NEW CONDUIT AND WIRING FOR A COMPLETE SYSTEM. ALL ABANDONED FIRE ALARM WIRING AND RACEWAY SHALL BE REMOVED.
 - SEE SPECIFICATIONS FOR INITIATING DEVICE, NOTIFICATION APPLIANCE CIRCUIT AND CONTROL CIRCUIT SCHEDULES FOR EXISTING FIRE ALARM CONTROL PANELS.
 - SEE SPECIFICATIONS FOR PHASING AND IMPAIRMENT REQUIREMENTS.

BUILDING 1 FIRE ALARM PLAN - BASEMENT
SCALE = 1/8"=1'-0"

100% Construction Documents - For Construction

FP&C Consultants, Inc.
3770 Broadway
Kansas City, MO 64111
816.931.3377
www.fpc-consultants.com

Design Tree
ENGINEERING AND
LAND SURVEYING
Alexandria Office
1201 17th Avenue SE
Alexandria, MN 56308
(520) 762-1290
St. Cloud Office
3339 West St. Germain, Suite 250
St. Cloud, MN 56301
(320) 217-5557

JLG architects
Alexandria
525 Broadway Street
Alexandria, MN 56308
phone 320.759.9030
facsimile 320.759.9062
www.jlgarchitects.com
copyright © 2013

PROFESSIONAL ENGINEER
JAMES E. SOYAK
12174
02/12/13
KANSAS

BUILDING 1 FIRE ALARM PLAN - BASEMENT
DATE: _____
APPROVED: PROJECT DIRECTOR

FIRE ALARM REPLACEMENT
DATE: 08.12.2013
AS NOTED
02213001
DATE: 02/12/13
OFFICE: XXX
PROJECT: ST. CLOUD VA MEDICAL CENTER
ST. CLOUD, MN 56303
FA100-1

St. Cloud VA Health Care System
Brainerd | Montevideo | Alexandria