


three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
one quarter inch = one foot
three eighths inch = one foot
one eighth inch = one foot
one eighth inch = one foot

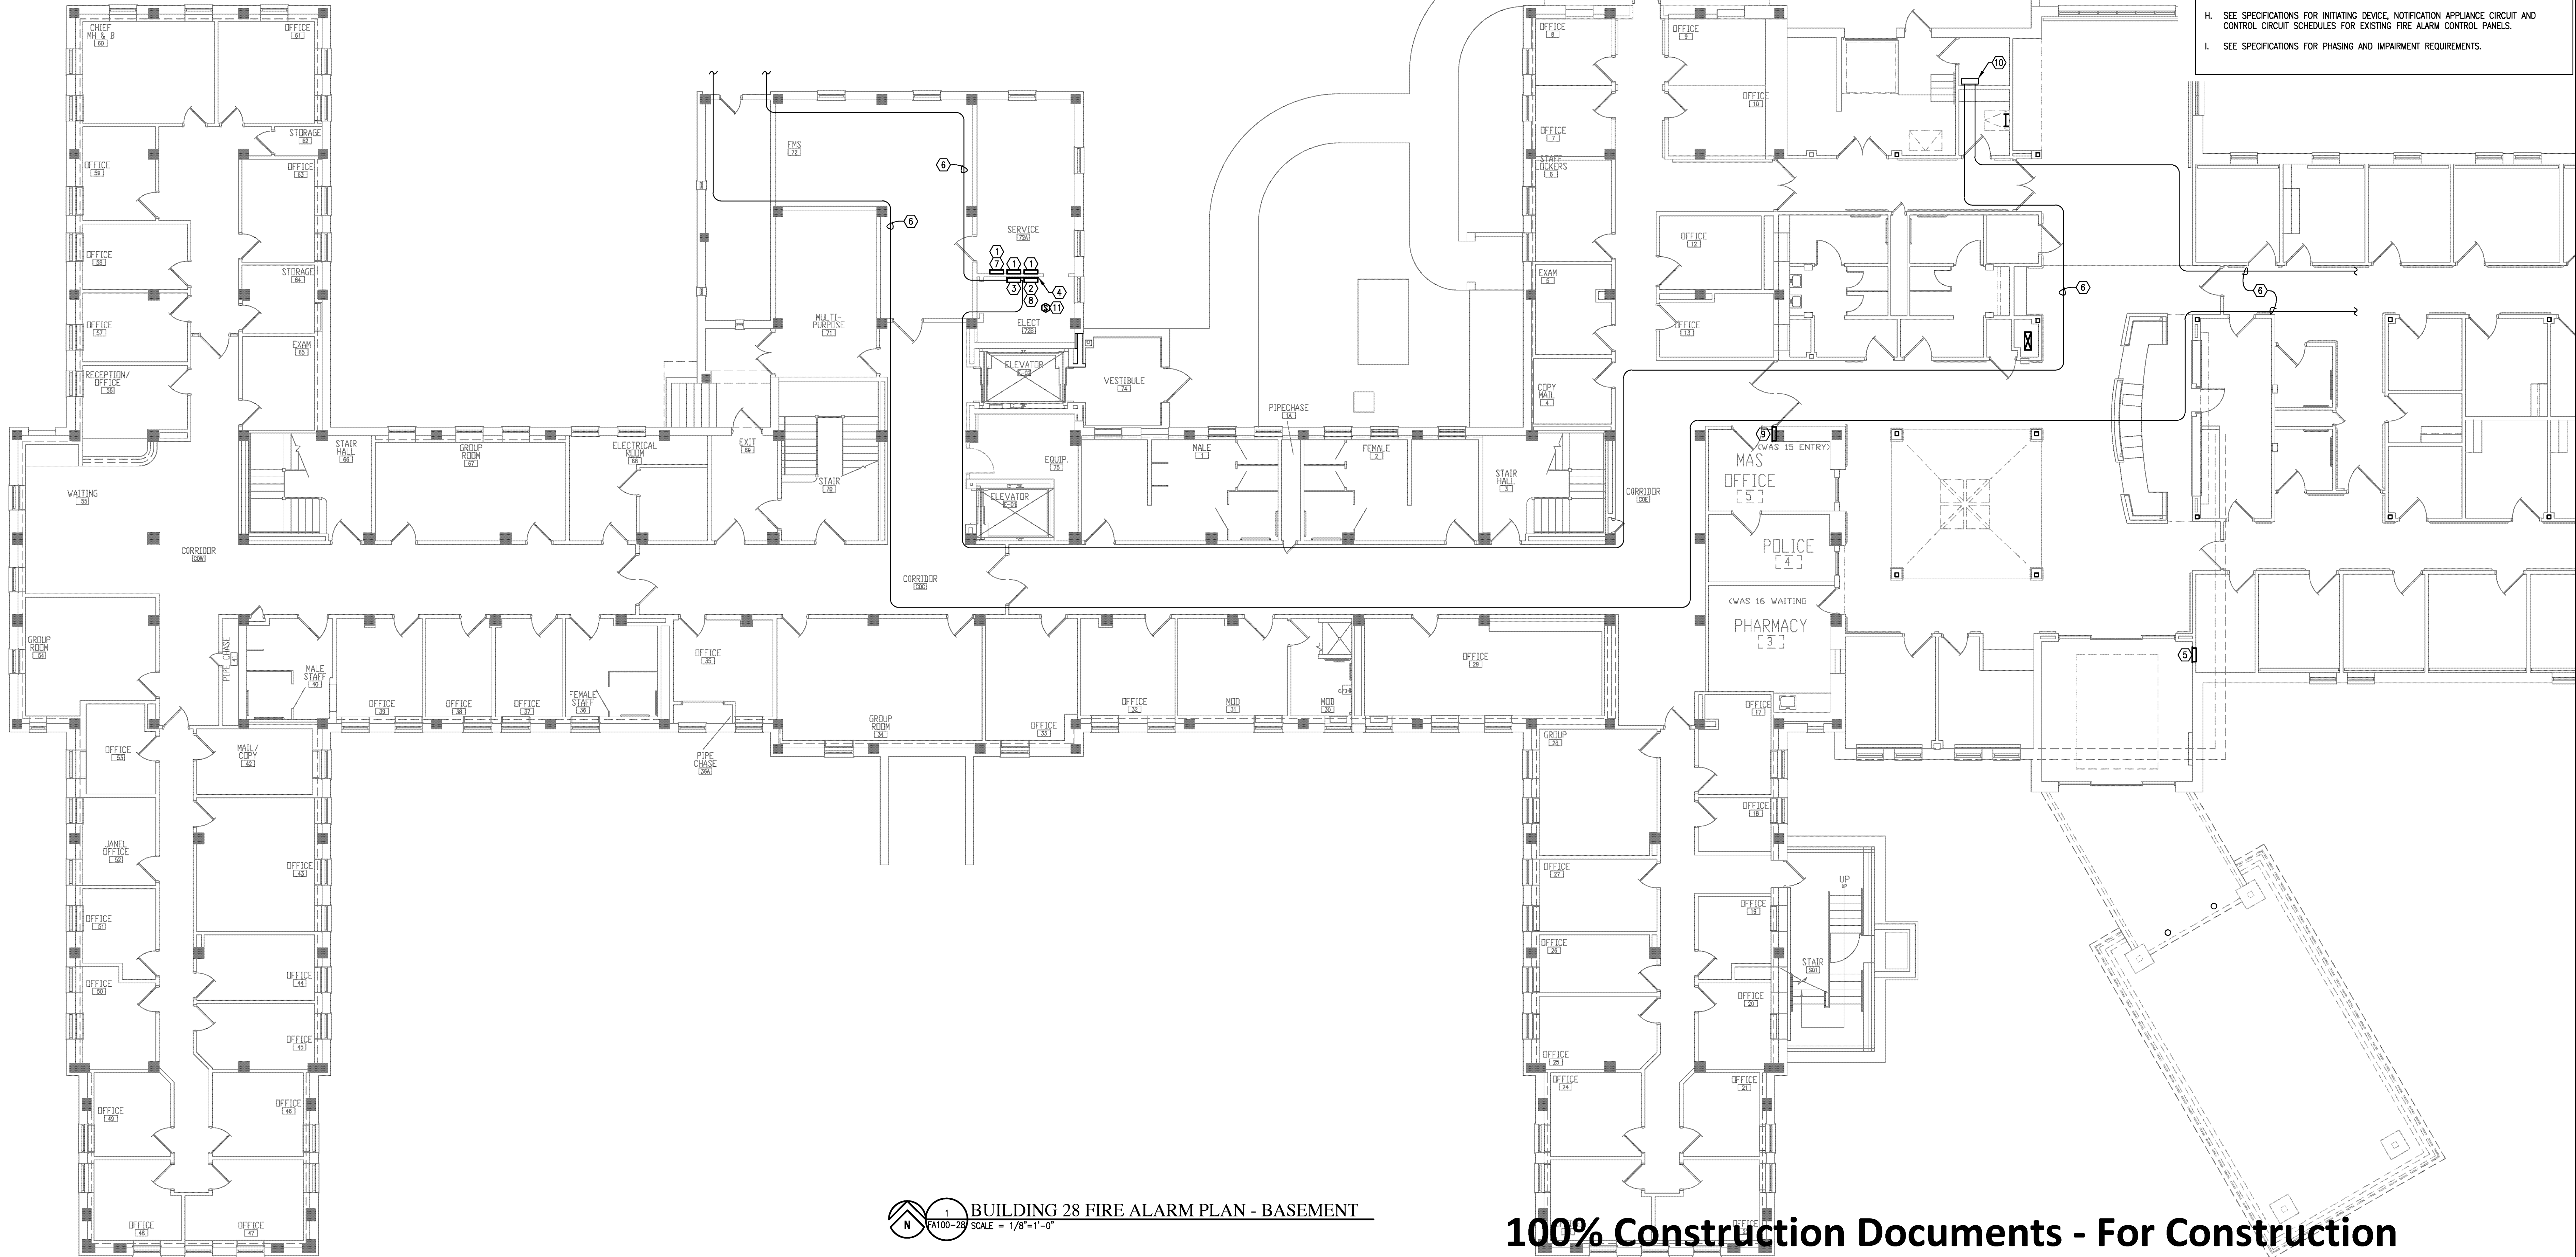

- PLAN NOTES**
- 1 DEMOLISH EXISTING FIRE ALARM CONTROL PANEL AND POWER SUPPLIES.
 - 2 PROVIDE NEW NETWORK FIRE ALARM CONTROL PANEL. REFER TO SPECIFICATIONS FOR ADDITIONAL INFORMATION.
 - 3 PROVIDE NEW FIBER OPTIC TERMINATION CABINET.
 - 4 PROVIDE NEW 3/4"x4"x8" PAINTED, FIRE RETARDANT PLYWOOD BACKBOARD.
 - 5 DEMOLISH EXISTING FIRE ALARM ANNUNCIATOR. PROVIDE NEW FLUSH MOUNT ANNUNCIATOR AT SAME LOCATION. PROVIDE NEW CONDUIT AND WIRE FROM FIRE ALARM CONTROL PANEL. REFER TO SPECIFICATIONS FOR ADDITIONAL INFORMATION.
 - 6 APPROXIMATE ROUTE OF NEW FIBER OPTIC CONDUITS/CABLES. VERIFY ACTUAL ROUTE WITH EXISTING CONDITIONS. REFER TO SITE PLAN ON FS100 FOR CONTINUATION.
 - 7 DEMOLISH EXISTING FIRE ALARM CONTROL PANEL CIRCUIT COMPLETE BACK TO SOURCE. REMOVE CIRCUIT BREAKER LOCK AND PROVIDE NEW TYPED PANEL DIRECTORY.
 - 8 PROVIDE NEW DEDICATED 120V/20A CIRCUIT FROM PANEL 28ES-1, CIRCUIT #24 (EXISTING SPARE CIRCUIT BREAKER). PROVIDE CIRCUIT BREAKER LOCK AND NEW TYPED PANEL DIRECTORY.
 - 9 PROVIDE NEW REMOTE VOICE PANEL WITH MICROPHONE FOR FUTURE EMERGENCY VOICE/ALARM COMMUNICATION. REFER TO SPECIFICATIONS FOR ADDITIONAL INFORMATION.
 - 10 PROVIDE FIBER OPTIC TERMINATION CABINET FOR FUTURE EXTENSION TO NEW PSYCH BUILDING.
 - 11 PROVIDE SMOKE DETECTOR AT NEW FIRE ALARM CONTROL PANEL LOCATION.

- GENERAL NOTES**
- A. ALL FIBER OPTIC CABLES ARE TO BE ROUTED IN 1" EMT CONDUIT ORANGE IN COLOR. NO LP'S OR CONDUIT BODIES ARE ALLOWED. PROVIDE MINIMUM 12"x12" J-BOXES WHERE REQUIRED. ALL J-BOXES TO BE ORANGE IN COLOR AND TO BE STENCILED "ENGINEERING FIBER OPTIC".
 - B. PROVIDE ALL CUTTING AND PATCHING (INCLUDING FIRE STOPPING) OF FLOORS, WALLS, OR CEILINGS REQUIRED FOR THE FIRE ALARM SYSTEM. MATCH ADJACENT SURFACES.
 - C. THESE DRAWINGS SHOW THE GENERAL LOCATIONS OF EXISTING FIRE ALARM CONTROL PANELS AND REMOTE FIRE ALARM ANNUNCIATORS. THE CONTRACTOR SHALL REMOVE ALL EXISTING CONTROL PANELS, ANNUNCIATORS AND ASSOCIATED FIRE ALARM NETWORK CONTROL COMPONENTS AND REPLACE WITH NEW ADDRESSABLE FIRE ALARM CONTROL PANELS. REMOTE FIRE ALARM ANNUNCIATORS AND ASSOCIATED COMPONENTS AS SHOWN ON THESE DRAWINGS AND OUTLINED IN THE SPECIFICATIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING THE EXACT LOCATIONS OF ALL EXISTING AND NEW EQUIPMENT.
 - D. NEW NETWORK FIRE ALARM CONTROL PANELS SHALL BE CONNECTED WITH A NEW FIBER OPTIC PATHWAY INSTALLED IN CONDUIT AND ARRANGED FOR DATA AND VOICE COMMUNICATION.
 - E. THE EXISTING FIRE ALARM NETWORK IS AN EDWARDS IRC3 MULTIPLEX FIRE ALARM SYSTEM UTILIZING ANALOG ADDRESSABLE SIGNALING LINE CIRCUIT TECHNOLOGY. EXISTING ANALOG ADDRESSABLE INITIATING DEVICES, SIGNALING LINE CIRCUIT WIRING, NOTIFICATION APPLIANCES, NOTIFICATION APPLIANCE WIRING, AND CONTROL CIRCUIT WIRING SHALL REMAIN AND CONNECT TO NEW FIRE ALARM CONTROL PANELS. NEW FIRE ALARM CONTROL PANELS SHALL BE ARRANGED FOR COMPATIBILITY WITH EXISTING DEVICES, APPLIANCE AND CONTROL CIRCUITS. REFER TO SPECIFICATIONS FOR ADDITIONAL DETAILS.
 - F. EXISTING NOTIFICATION APPLIANCE SIGNALING IS ACCOMPLISHED WITH CONVENTIONAL HORN/STROBES AND SHALL REMAIN. THE NEW NETWORK FIRE ALARM SYSTEM SHALL BE ARRANGED WITH CONNECTIONS AND COMPONENTS FOR A FUTURE UPGRADE TO DIGITAL EMERGENCY VOICE/ALARM COMMUNICATIONS AS REQUIRED BY THE SPECIFICATIONS.
 - G. THE CONTRACTOR SHALL PROVIDE, INSTALL AND CONNECT NEW CONDUIT AND WIRING FOR A COMPLETE SYSTEM. ALL ABANDONED FIRE ALARM WIRING AND RACEWAY SHALL BE REMOVED.
 - H. SEE SPECIFICATIONS FOR INITIATING DEVICE, NOTIFICATION APPLIANCE CIRCUIT AND CONTROL CIRCUIT SCHEDULES FOR EXISTING FIRE ALARM CONTROL PANELS.
 - I. SEE SPECIFICATIONS FOR PHASING AND IMPAIRMENT REQUIREMENTS.

BUILDING 28 FIRE ALARM PLAN - BASEMENT
SCALE = 1/8"=1'-0"

100% Construction Documents - For Construction

No	REVISION	DATE

FP&C Consultants, Inc. 3770 Broadway Kansas City, MO 64111 816.931.3377 www.fpc-consultants.com	Design Tree ENGINEERING AND LAND SURVEYING Alexandria Office 1201 17th Avenue SE Alexandria, MN 56308 (320) 762-1290 St. Cloud Office 3339 West St. Germain, Suite 250 St. Cloud, MN 56301 (320) 217-5557	JLG architects Alexandria 525 Broadway Street Alexandria, MN 56308 phone 320.759.9030 facsimile 320.759.9062 www.jlgarchitects.com copyright © 2013	JEFFREY SCOTT 12174 03/13/13 MINNESOTA PROFESSIONAL ENGINEER	DRAWING TITLE BUILDING 28 FIRE ALARM PLAN - BASEMENT APPROVED: PROJECT DIRECTOR DATE:	PROJECT TITLE FIRE ALARM REPLACEMENT DESIGNER: AS NOTED CHECKER: HHB DRAWN: CAB DATE: 12.2013 AS NOTED 02213001 ST. CLOUD VA MEDICAL CENTER ST. CLOUD, MN 56303 FA100-28	St. Cloud VA Health Care System Brainerd Montevideo Alexandria
--	--	---	---	--	--	--