


three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
three eighths inch = one foot
one quarter inch = one foot
one eighth inch = one foot

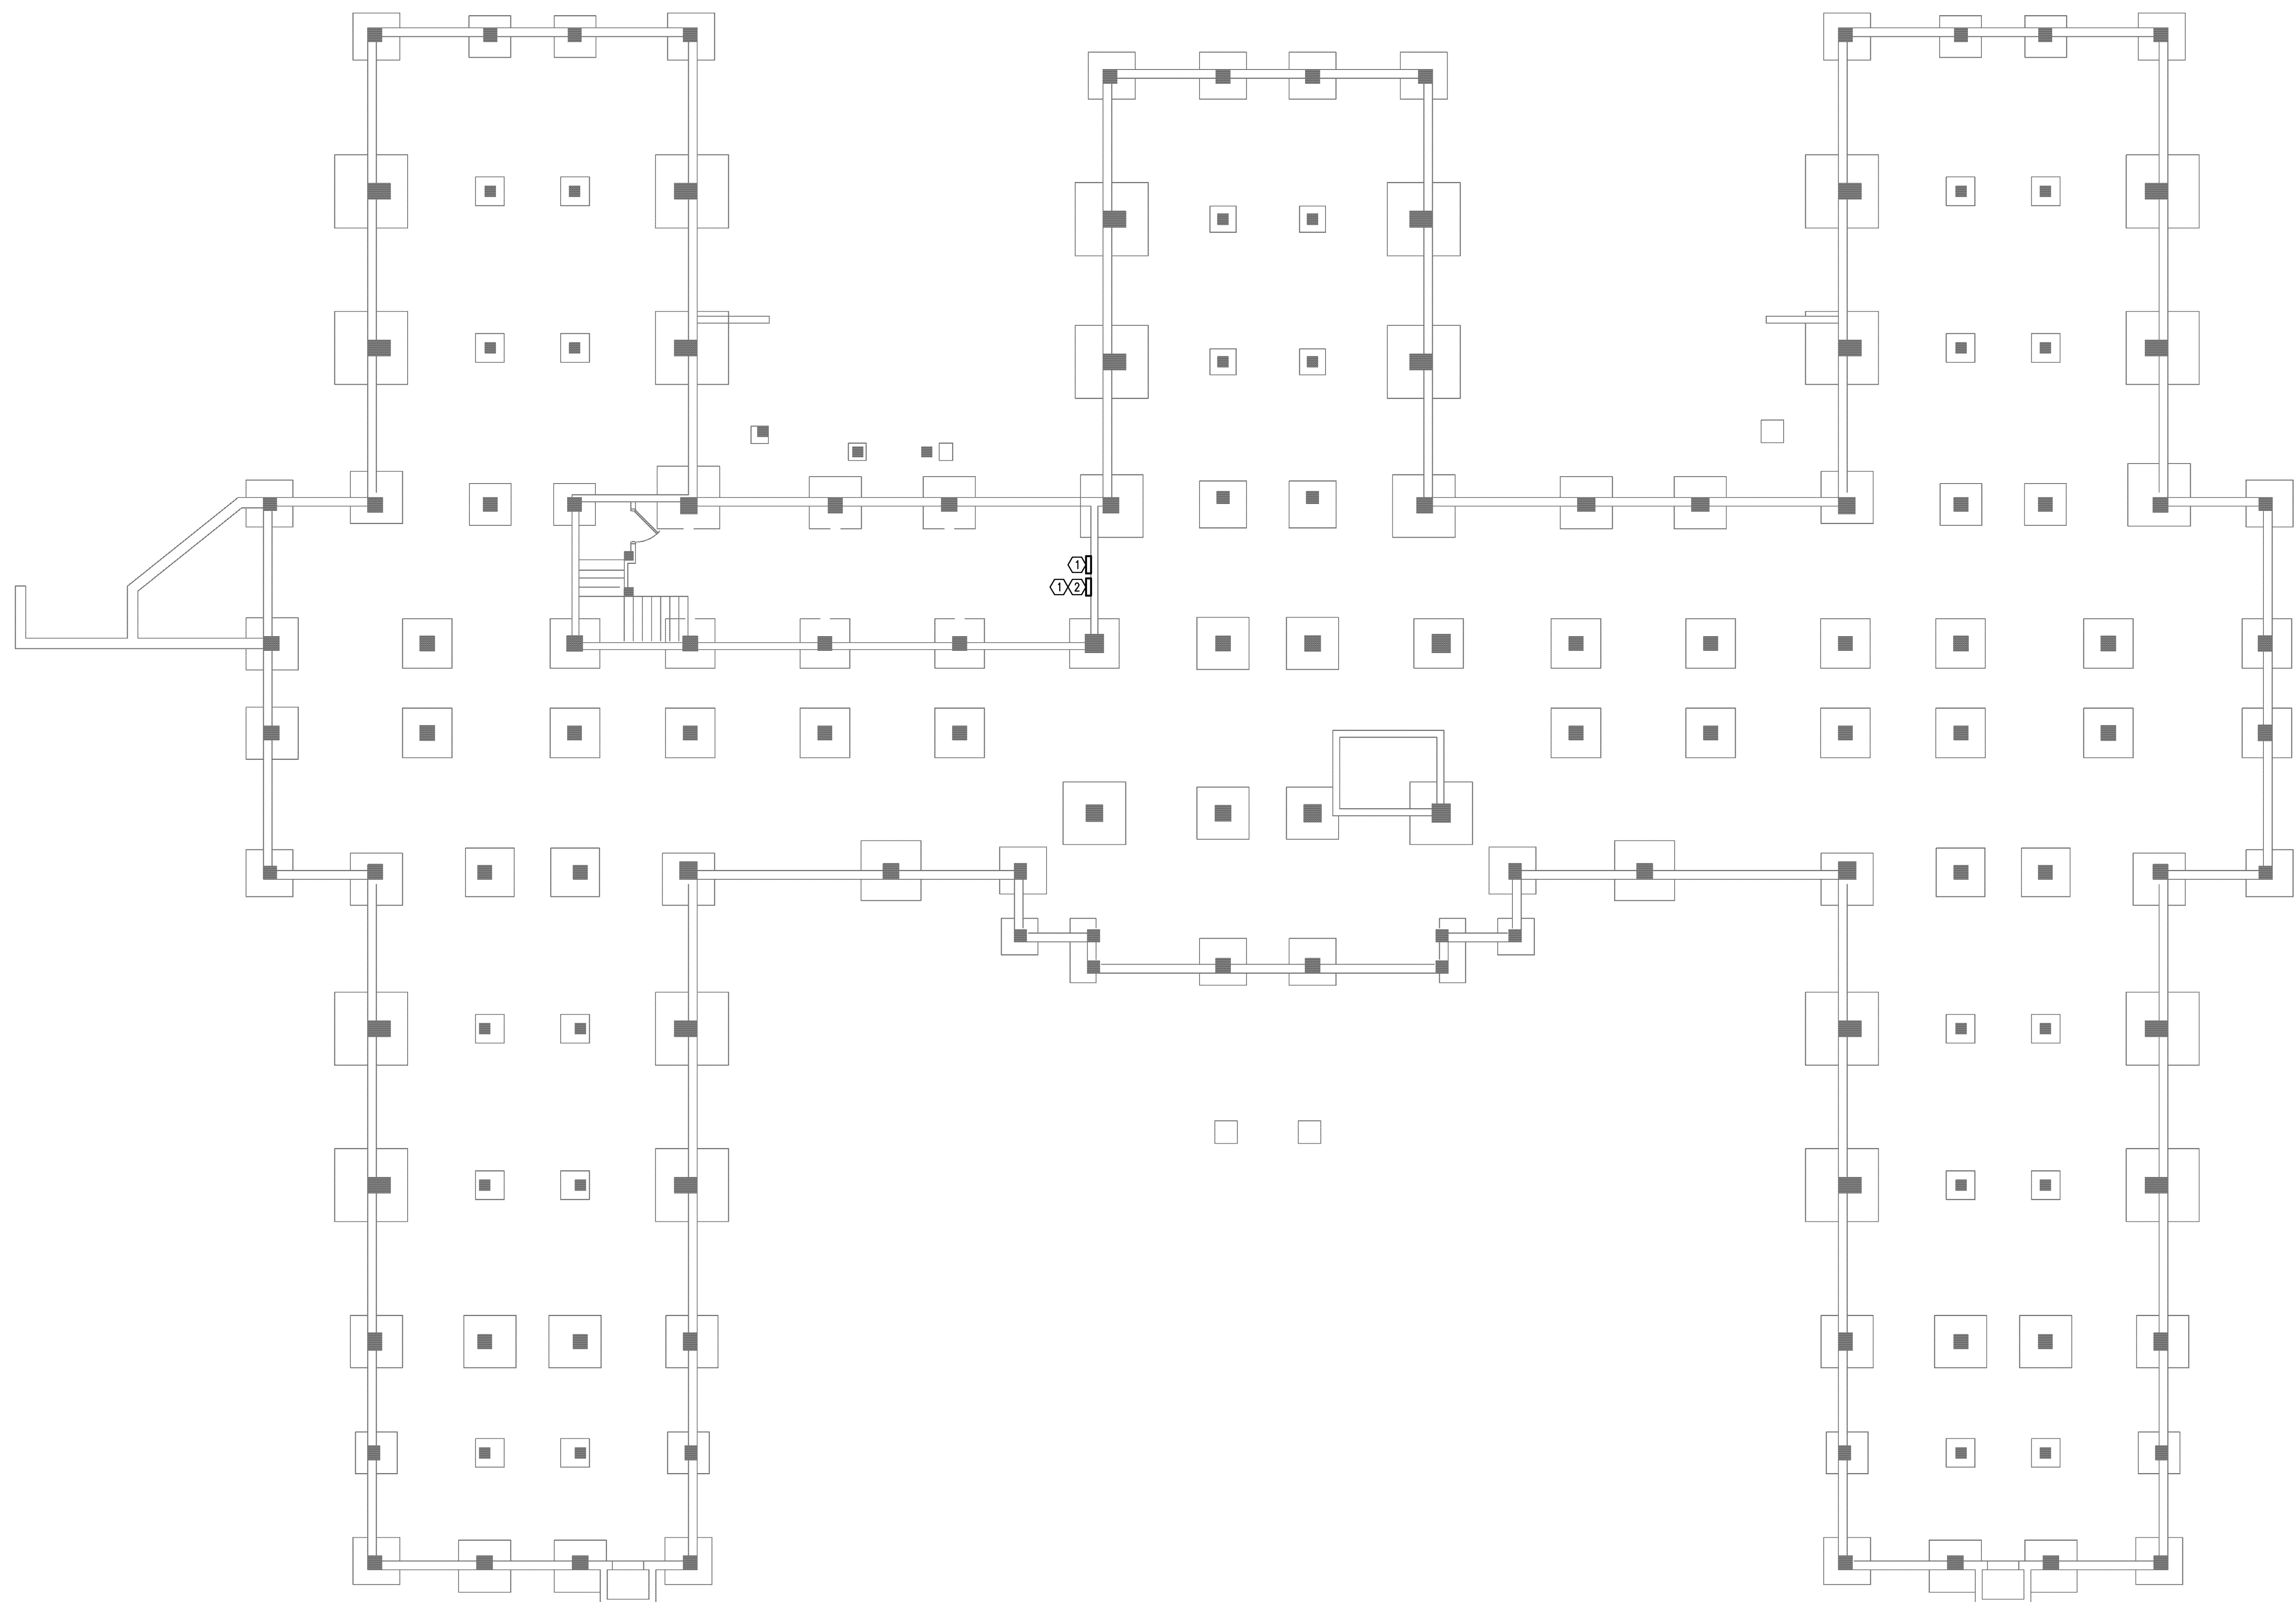

- ### GENERAL NOTES
- ALL FIBER OPTIC CABLES ARE TO BE ROUTED IN 1" EMT CONDUIT ORANGE IN COLOR, NO LP'S OR CONDUIT BODIES ARE ALLOWED. PROVIDE MINIMUM 12"x12" J-BOXES WHERE REQUIRED. ALL J-BOXES TO BE ORANGE IN COLOR AND TO BE STENCILED "ENGINEERING FIBER OPTIC".
 - PROVIDE ALL CUTTING AND PATCHING (INCLUDING FIRE STOPPING) OF FLOORS, WALLS, OR CEILING REQUIRED FOR THE FIRE ALARM SYSTEM, MATCH ADJACENT SURFACES.
 - THESE DRAWINGS SHOW THE GENERAL LOCATIONS OF EXISTING FIRE ALARM CONTROL PANELS AND REMOTE FIRE ALARM ANNUNCIATORS. THE CONTRACTOR SHALL REMOVE ALL EXISTING CONTROL PANELS, ANNUNCIATORS AND ASSOCIATED FIRE ALARM NETWORK CONTROL COMPONENTS AND REPLACE WITH NEW ADDRESSABLE FIRE ALARM CONTROL PANELS. REMOTE FIRE ALARM ANNUNCIATORS AND ASSOCIATED COMPONENTS AS SHOWN ON THESE DRAWINGS AND OUTLINED IN THE SPECIFICATIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING THE EXACT LOCATIONS OF ALL EXISTING AND NEW EQUIPMENT.
 - NEW NETWORK FIRE ALARM CONTROL PANELS SHALL BE CONNECTED WITH A NEW FIBER OPTIC PATHWAY INSTALLED IN CONDUIT AND ARRANGED FOR DATA AND VOICE COMMUNICATION.
 - THE EXISTING FIRE ALARM NETWORK IS AN EDWARDS IRCD MULTIPLEX FIRE ALARM SYSTEM UTILIZING ANALOG ADDRESSABLE SIGNALING LINE CIRCUIT TECHNOLOGY. EXISTING ANALOG ADDRESSABLE INITIATING DEVICES, SIGNALING LINE CIRCUIT WIRING, NOTIFICATION APPLIANCES, NOTIFICATION APPLIANCE WIRING, AND CONTROL CIRCUIT WIRING SHALL REMAIN AND CONNECT TO NEW FIRE ALARM CONTROL PANELS. NEW FIRE ALARM CONTROL PANELS SHALL BE ARRANGED FOR COMPATIBILITY WITH EXISTING DEVICES, APPLIANCE AND CONTROL CIRCUITS. REFER TO SPECIFICATIONS FOR ADDITIONAL DETAILS.
 - EXISTING NOTIFICATION APPLIANCE SIGNALING IS ACCOMPLISHED WITH CONVENTIONAL HORN/STROBES AND SHALL REMAIN. THE NEW NETWORK FIRE ALARM SYSTEM SHALL BE ARRANGED WITH CONNECTIONS AND COMPONENTS FOR A FUTURE UPGRADE TO DIGITAL EMERGENCY VOICE/ALARM COMMUNICATIONS AS REQUIRED BY THE SPECIFICATIONS.
 - THE CONTRACTOR SHALL PROVIDE, INSTALL AND CONNECT NEW CONDUIT AND WIRING FOR A COMPLETE SYSTEM. ALL ABANDONED FIRE ALARM WIRING AND RACEWAY SHALL BE REMOVED.
 - SEE SPECIFICATIONS FOR INITIATING DEVICE, NOTIFICATION APPLIANCE CIRCUIT AND CONTROL CIRCUIT SCHEDULES FOR EXISTING FIRE ALARM CONTROL PANELS.
 - SEE SPECIFICATIONS FOR PHASING AND IMPAIRMENT REQUIREMENTS.

- ### PLAN NOTES
- DEMOLISH EXISTING FIRE ALARM CONTROL PANEL AND POWER SUPPLIES.
 - DEMOLISH EXISTING FIRE ALARM CONTROL PANEL CIRCUIT COMPLETE BACK TO SOURCE. REMOVE CIRCUIT BREAKER LOCK AND PROVIDE NEW TYPED PANEL DIRECTORY.

 BUILDING 49 FIRE ALARM PLAN - SUB BASEMENT
SCALE = 1/8"=1'-0"

100% Construction Documents - For Construction

FP&C Consultants, Inc.
3770 Broadway
Kansas City, MO 64111
816.931.3377
www.fpc-consultants.com

Design Tree
ENGINEERING AND
LAND SURVEYING
Alexandria Office
1201 17th Avenue SE
Alexandria, MN 56308
(320) 762-1290
St. Cloud Office
3339 West St. Germain, Suite 250
St. Cloud, MN 56301
(320) 217-5557

JLG architects
Alexandria
525 Broadway Street
Alexandria, MN 56302
phone 320.759.9030
facsimile 320.759.9062
www.jlgarchitects.com
copyright © 2013

PROFESSIONAL ENGINEER
KANSAS
12174
10-10-13

DRAWING TITLE
BUILDING 49 FIRE ALARM
PLAN - SUB BASEMENT
APPROVED: PROJECT DIRECTOR
DATE:

PROJECT TITLE
FIRE ALARM REPLACEMENT
DATE
08.12.2013
REVISION
AS NOTED
02213001
DRAWING NO.
AS NOTED
PROJECT
HHB
CAB
DATE
XXX
ST. CLOUD VA MEDICAL CENTER
ST. CLOUD, MN 56303
FA1005-49

St. Cloud VA Health Care System
Brainerd | Montevideo | Alexandria