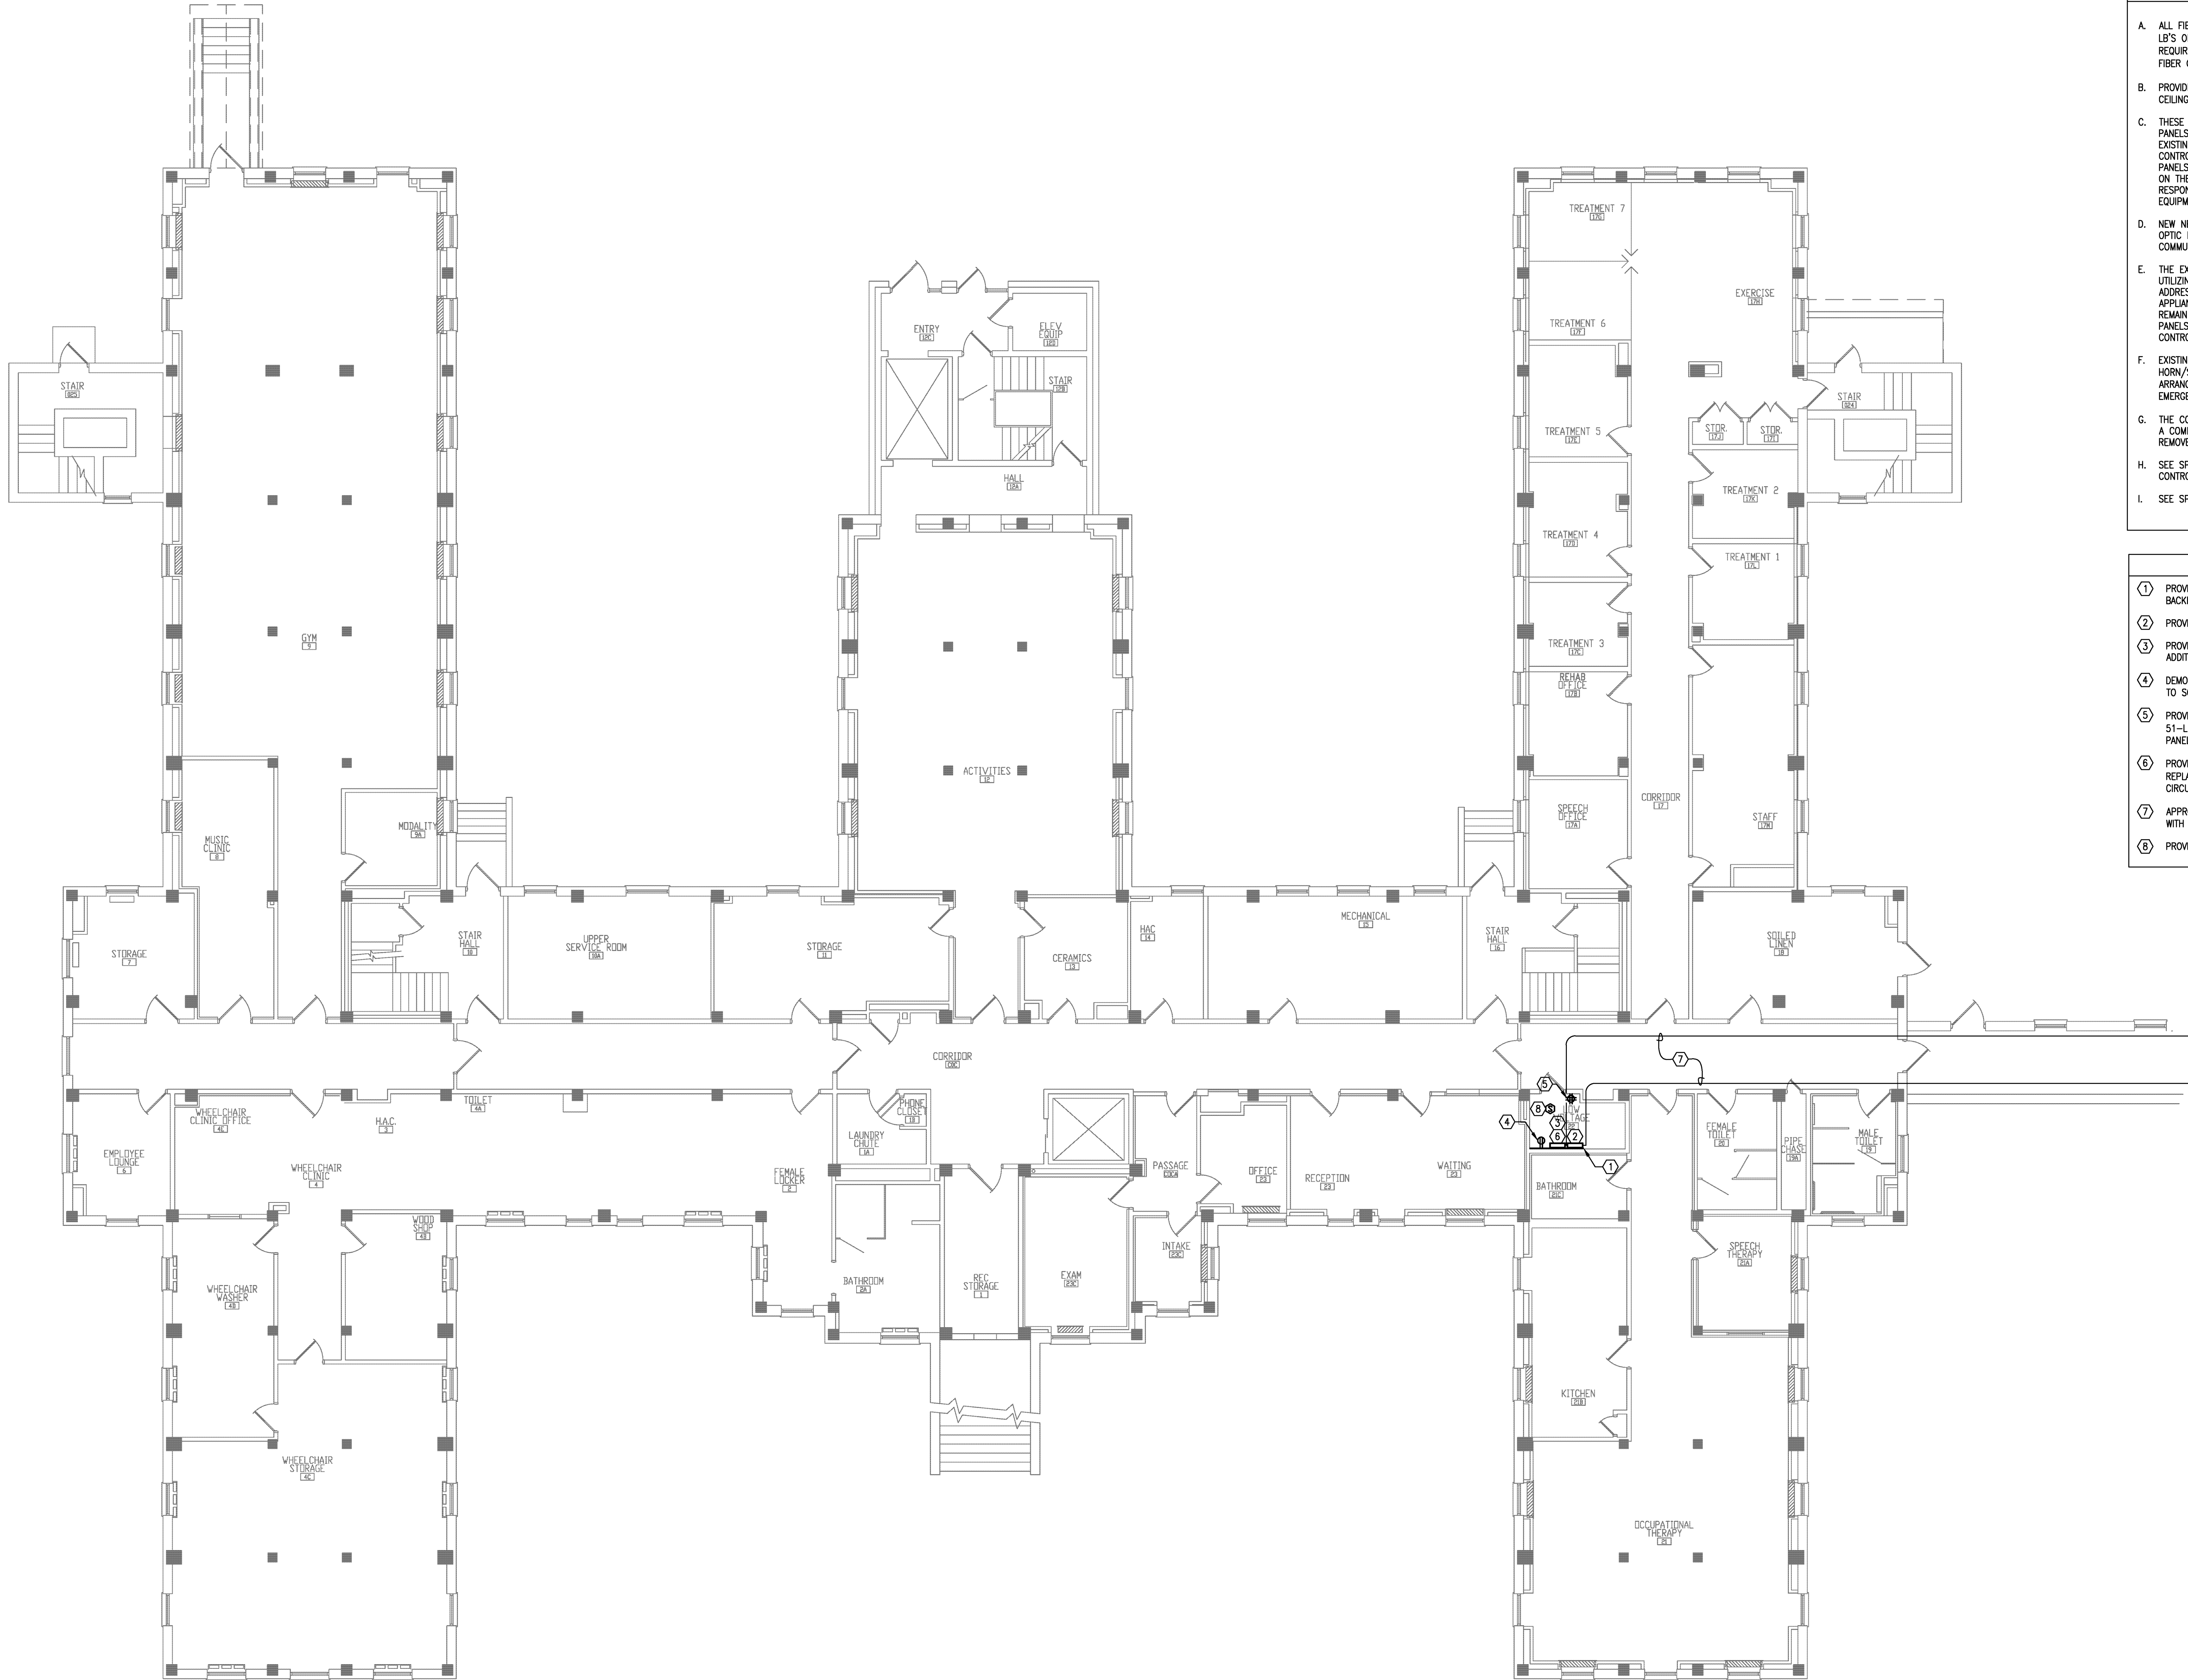


three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
three eighths inch = one foot
one quarter inch = one foot
one eighth inch = one foot
one sixteenth inch = one foot



GENERAL NOTES

- ALL FIBER OPTIC CABLES ARE TO BE ROUTED IN 1" EMT CONDUIT ORANGE IN COLOR, NO LP'S OR CONDUIT BODIES ARE ALLOWED. PROVIDE MINIMUM 12"x12" J-BOXES WHERE REQUIRED. ALL J-BOXES TO BE ORANGE IN COLOR AND TO BE STENCILED "ENGINEERING FIBER OPTIC".
- PROVIDE ALL CUTTING AND PATCHING (INCLUDING FIRE STOPPING) OF FLOORS, WALLS, OR CEILINGS REQUIRED FOR THE FIRE ALARM SYSTEM, MATCH ADJACENT SURFACES.
- THESE DRAWINGS SHOW THE GENERAL LOCATIONS OF EXISTING FIRE ALARM CONTROL PANELS AND REMOTE FIRE ALARM ANNUNCIATORS. THE CONTRACTOR SHALL REMOVE ALL EXISTING CONTROL PANELS, ANNUNCIATORS AND ASSOCIATED FIRE ALARM NETWORK CONTROL COMPONENTS AND REPLACE WITH NEW ADDRESSABLE FIRE ALARM CONTROL PANELS. REMOTE FIRE ALARM ANNUNCIATORS AND ASSOCIATED COMPONENTS AS SHOWN ON THESE DRAWINGS AND OUTLINED IN THE SPECIFICATIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING THE EXACT LOCATIONS OF ALL EXISTING AND NEW EQUIPMENT.
- NEW NETWORK FIRE ALARM CONTROL PANELS SHALL BE CONNECTED WITH A NEW FIBER OPTIC PATHWAY INSTALLED IN CONDUIT AND ARRANGED FOR DATA AND VOICE COMMUNICATION.
- THE EXISTING FIRE ALARM NETWORK IS AN EDWARDS IRC3 MULTIPLEX FIRE ALARM SYSTEM UTILIZING ANALOG ADDRESSABLE SIGNALING LINE CIRCUIT TECHNOLOGY. EXISTING ANALOG ADDRESSABLE INITIATING DEVICES, SIGNALING LINE CIRCUIT WIRING, NOTIFICATION APPLIANCES, NOTIFICATION APPLIANCE WIRING, AND CONTROL CIRCUIT WIRING SHALL REMAIN AND CONNECT TO NEW FIRE ALARM CONTROL PANELS. NEW FIRE ALARM CONTROL PANELS SHALL BE ARRANGED FOR COMPATIBILITY WITH EXISTING DEVICES, APPLIANCE AND CONTROL CIRCUITS. REFER TO SPECIFICATIONS FOR ADDITIONAL DETAILS.
- EXISTING NOTIFICATION APPLIANCE SIGNALING IS ACCOMPLISHED WITH CONVENTIONAL HORN/STROBES AND SHALL REMAIN. THE NEW NETWORK FIRE ALARM SYSTEM SHALL BE ARRANGED WITH CONNECTIONS AND COMPONENTS FOR A FUTURE UPGRADE TO DIGITAL EMERGENCY VOICE/ALARM COMMUNICATIONS AS REQUIRED BY THE SPECIFICATIONS.
- THE CONTRACTOR SHALL PROVIDE, INSTALL AND CONNECT NEW CONDUIT AND WIRING FOR A COMPLETE SYSTEM. ALL ABANDONED FIRE ALARM WIRING AND RACEWAY SHALL BE REMOVED.
- SEE SPECIFICATIONS FOR INITIATING DEVICE, NOTIFICATION APPLIANCE CIRCUIT AND CONTROL CIRCUIT SCHEDULES FOR EXISTING FIRE ALARM CONTROL PANELS.
- SEE SPECIFICATIONS FOR PHASING AND IMPAIRMENT REQUIREMENTS.

PLAN NOTES


- PROVIDE NEW (2) SHEETS OF 3/4"x4"x8" PAINTED, FIRE RETARDANT PLYWOOD BACKBOARD.
- PROVIDE NEW FIBER OPTIC TERMINATION CABINET.
- PROVIDE NEW NETWORK FIRE ALARM CONTROL PANEL. REFER TO SPECIFICATIONS FOR ADDITIONAL INFORMATION.
- DEMOLISH EXISTING (3) DUPLEX RECEPTACLES, SWITCH AND CIRCUITS COMPLETE BACK TO SOURCE.
- PROVIDE NEW FOURPLEX RECEPTACLE AND DEDICATED 120V/20A CIRCUIT FROM PANEL 51-LB3, CIRCUIT #32. PROVIDE NEW 20A/1P QOB CIRCUIT BREAKER AND NEW TYPED PANEL DIRECTORY.
- PROVIDE NEW DEDICATED 120V/20A CIRCUIT FROM PANEL 51-ES1-1, CIRCUIT #1. REPLACE EXISTING 20A/1P CIRCUIT BREAKER WITH NEW QOB CIRCUIT BREAKER. PROVIDE CIRCUIT BREAKER LOCK AND NEW TYPED PANEL DIRECTORY.
- APPROXIMATE ROUTE OF NEW FIBER OPTIC CONDUITS/CABLES. VERIFY ACTUAL ROUTE WITH EXISTING CONDITIONS. REFER TO SITE PLAN ON F5100 FOR CONTINUATION.
- PROVIDE SMOKE DETECTOR AT NEW FIRE ALARM CONTROL PANEL LOCATION.

 BUILDING 51 FIRE ALARM PLAN - BASEMENT
SCALE = 1/8"=1'-0"


100% Construction Documents - For Construction

NO	REVISION	DATE

 **FP&C Consultants, Inc.**
3770 Broadway
Kansas City, MO 64111
816.931.3377
www.fpc-consultants.com

 **Design Tree**
ENGINEERING AND
LAND SURVEYING
Alexandria Office: 1201 17th Avenue SE, Alexandria, MN 56308 (507) 762-1290
St. Cloud Office: 3339 West St. Germain, Suite 250, St. Cloud, MN 56301 (320) 217-5557

 **JLG architects**
Alexandria
525 Broadway Street
Alexandria, MN 56308
phone 320.759.9030
facsimile 320.759.9062
www.jlgarchitects.com
copyright © 2013

 KANSAS
12174
12-1-19-13
PROFESSIONAL ENGINEER

PROJECT TITLE	BUILDING 51 FIRE ALARM PLAN - BASEMENT
APPROVED: PROJECT DIRECTOR	DATE:

PROJECT TITLE	FIRE ALARM REPLACEMENT
DATE	08.12.2013
REVISION NO.	AS NOTED
REVISION	02213001
REVISION	XXX
PROJECT	ST. CLOUD VA MEDICAL CENTER ST. CLOUD, MN 56303
REVISION	FA100-51

 **St. Cloud VA Health Care System**
Brainerd | Montevideo | Alexandria