

three inches = one foot

one and one half inches = one foot

one inch = one foot

one inch = one foot

three quarters inch = one foot

one half inch = one foot

one half inch = one foot

three eighths inch = one foot

one quarter inch = one foot

one eighth inch = one foot


one eighth inch = one foot

GENERAL NOTES

- A. ALL FIBER OPTIC CABLES ARE TO BE ROUTED IN 1" EMT CONDUIT ORANGE IN COLOR, NO LP'S OR CONDUIT BODIES ARE ALLOWED. PROVIDE MINIMUM 12"x12" J-BOXES WHERE REQUIRED. ALL J-BOXES TO BE ORANGE IN COLOR AND TO BE STENCILED "ENGINEERING FIBER OPTIC".
- B. PROVIDE ALL CUTTING AND PATCHING (INCLUDING FIRE STOPPING) OF FLOORS, WALLS, OR CEILING REQUIRED FOR THE FIRE ALARM SYSTEM, MATCH ADJACENT SURFACES.
- C. THESE DRAWINGS SHOW THE GENERAL LOCATIONS OF EXISTING FIRE ALARM CONTROL PANELS AND REMOTE FIRE ALARM ANNUNCIATORS. THE CONTRACTOR SHALL REMOVE ALL EXISTING CONTROL PANELS, ANNUNCIATORS AND ASSOCIATED FIRE ALARM NETWORK CONTROL COMPONENTS AND REPLACE WITH NEW ADDRESSABLE FIRE ALARM CONTROL PANELS. REMOTE FIRE ALARM ANNUNCIATORS AND ASSOCIATED COMPONENTS AS SHOWN ON THESE DRAWINGS AND OUTLINED IN THE SPECIFICATIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING THE EXACT LOCATIONS OF ALL EXISTING AND NEW EQUIPMENT.
- D. NEW NETWORK FIRE ALARM CONTROL PANELS SHALL BE CONNECTED WITH A NEW FIBER OPTIC PATHWAY INSTALLED IN CONDUIT AND ARRANGED FOR DATA AND VOICE COMMUNICATION.
- E. THE EXISTING FIRE ALARM NETWORK IS AN EDWARDS IRCD MULTIPLEX FIRE ALARM SYSTEM UTILIZING ANALOG ADDRESSABLE SIGNALING LINE CIRCUIT TECHNOLOGY. EXISTING ANALOG ADDRESSABLE INITIATING DEVICES, SIGNALING LINE CIRCUIT WIRING, NOTIFICATION APPLIANCES, NOTIFICATION APPLIANCE WIRING, AND CONTROL CIRCUIT WIRING SHALL REMAIN AND CONNECT TO NEW FIRE ALARM CONTROL PANELS. NEW FIRE ALARM CONTROL PANELS SHALL BE ARRANGED FOR COMPATIBILITY WITH EXISTING DEVICES, APPLIANCE AND CONTROL CIRCUITS. REFER TO SPECIFICATIONS FOR ADDITIONAL DETAILS.
- F. EXISTING NOTIFICATION APPLIANCE SIGNALING IS ACCOMPLISHED WITH CONVENTIONAL HORN/STROBES AND SHALL REMAIN. THE NEW NETWORK FIRE ALARM SYSTEM SHALL BE ARRANGED WITH CONNECTIONS AND COMPONENTS FOR A FUTURE UPGRADE TO DIGITAL EMERGENCY VOICE/ALARM COMMUNICATIONS AS REQUIRED BY THE SPECIFICATIONS.
- G. THE CONTRACTOR SHALL PROVIDE, INSTALL AND CONNECT NEW CONDUIT AND WIRING FOR A COMPLETE SYSTEM. ALL ABANDONED FIRE ALARM WIRING AND RACEWAY SHALL BE REMOVED.
- H. SEE SPECIFICATIONS FOR INITIATING DEVICE, NOTIFICATION APPLIANCE CIRCUIT AND CONTROL CIRCUIT SCHEDULES FOR EXISTING FIRE ALARM CONTROL PANELS.
- I. SEE SPECIFICATIONS FOR PHASING AND IMPAIRMENT REQUIREMENTS.

PLAN NOTES

- ① DEMOLISH EXISTING FIRE ALARM ANNUNCIATOR. PROVIDE NEW FLUSH MOUNT ANNUNCIATOR AT SAME LOCATION. PROVIDE NEW CONDUIT AND WIRE FROM FIRE ALARM CONTROL PANEL. REFER TO SPECIFICATIONS FOR ADDITIONAL INFORMATION.

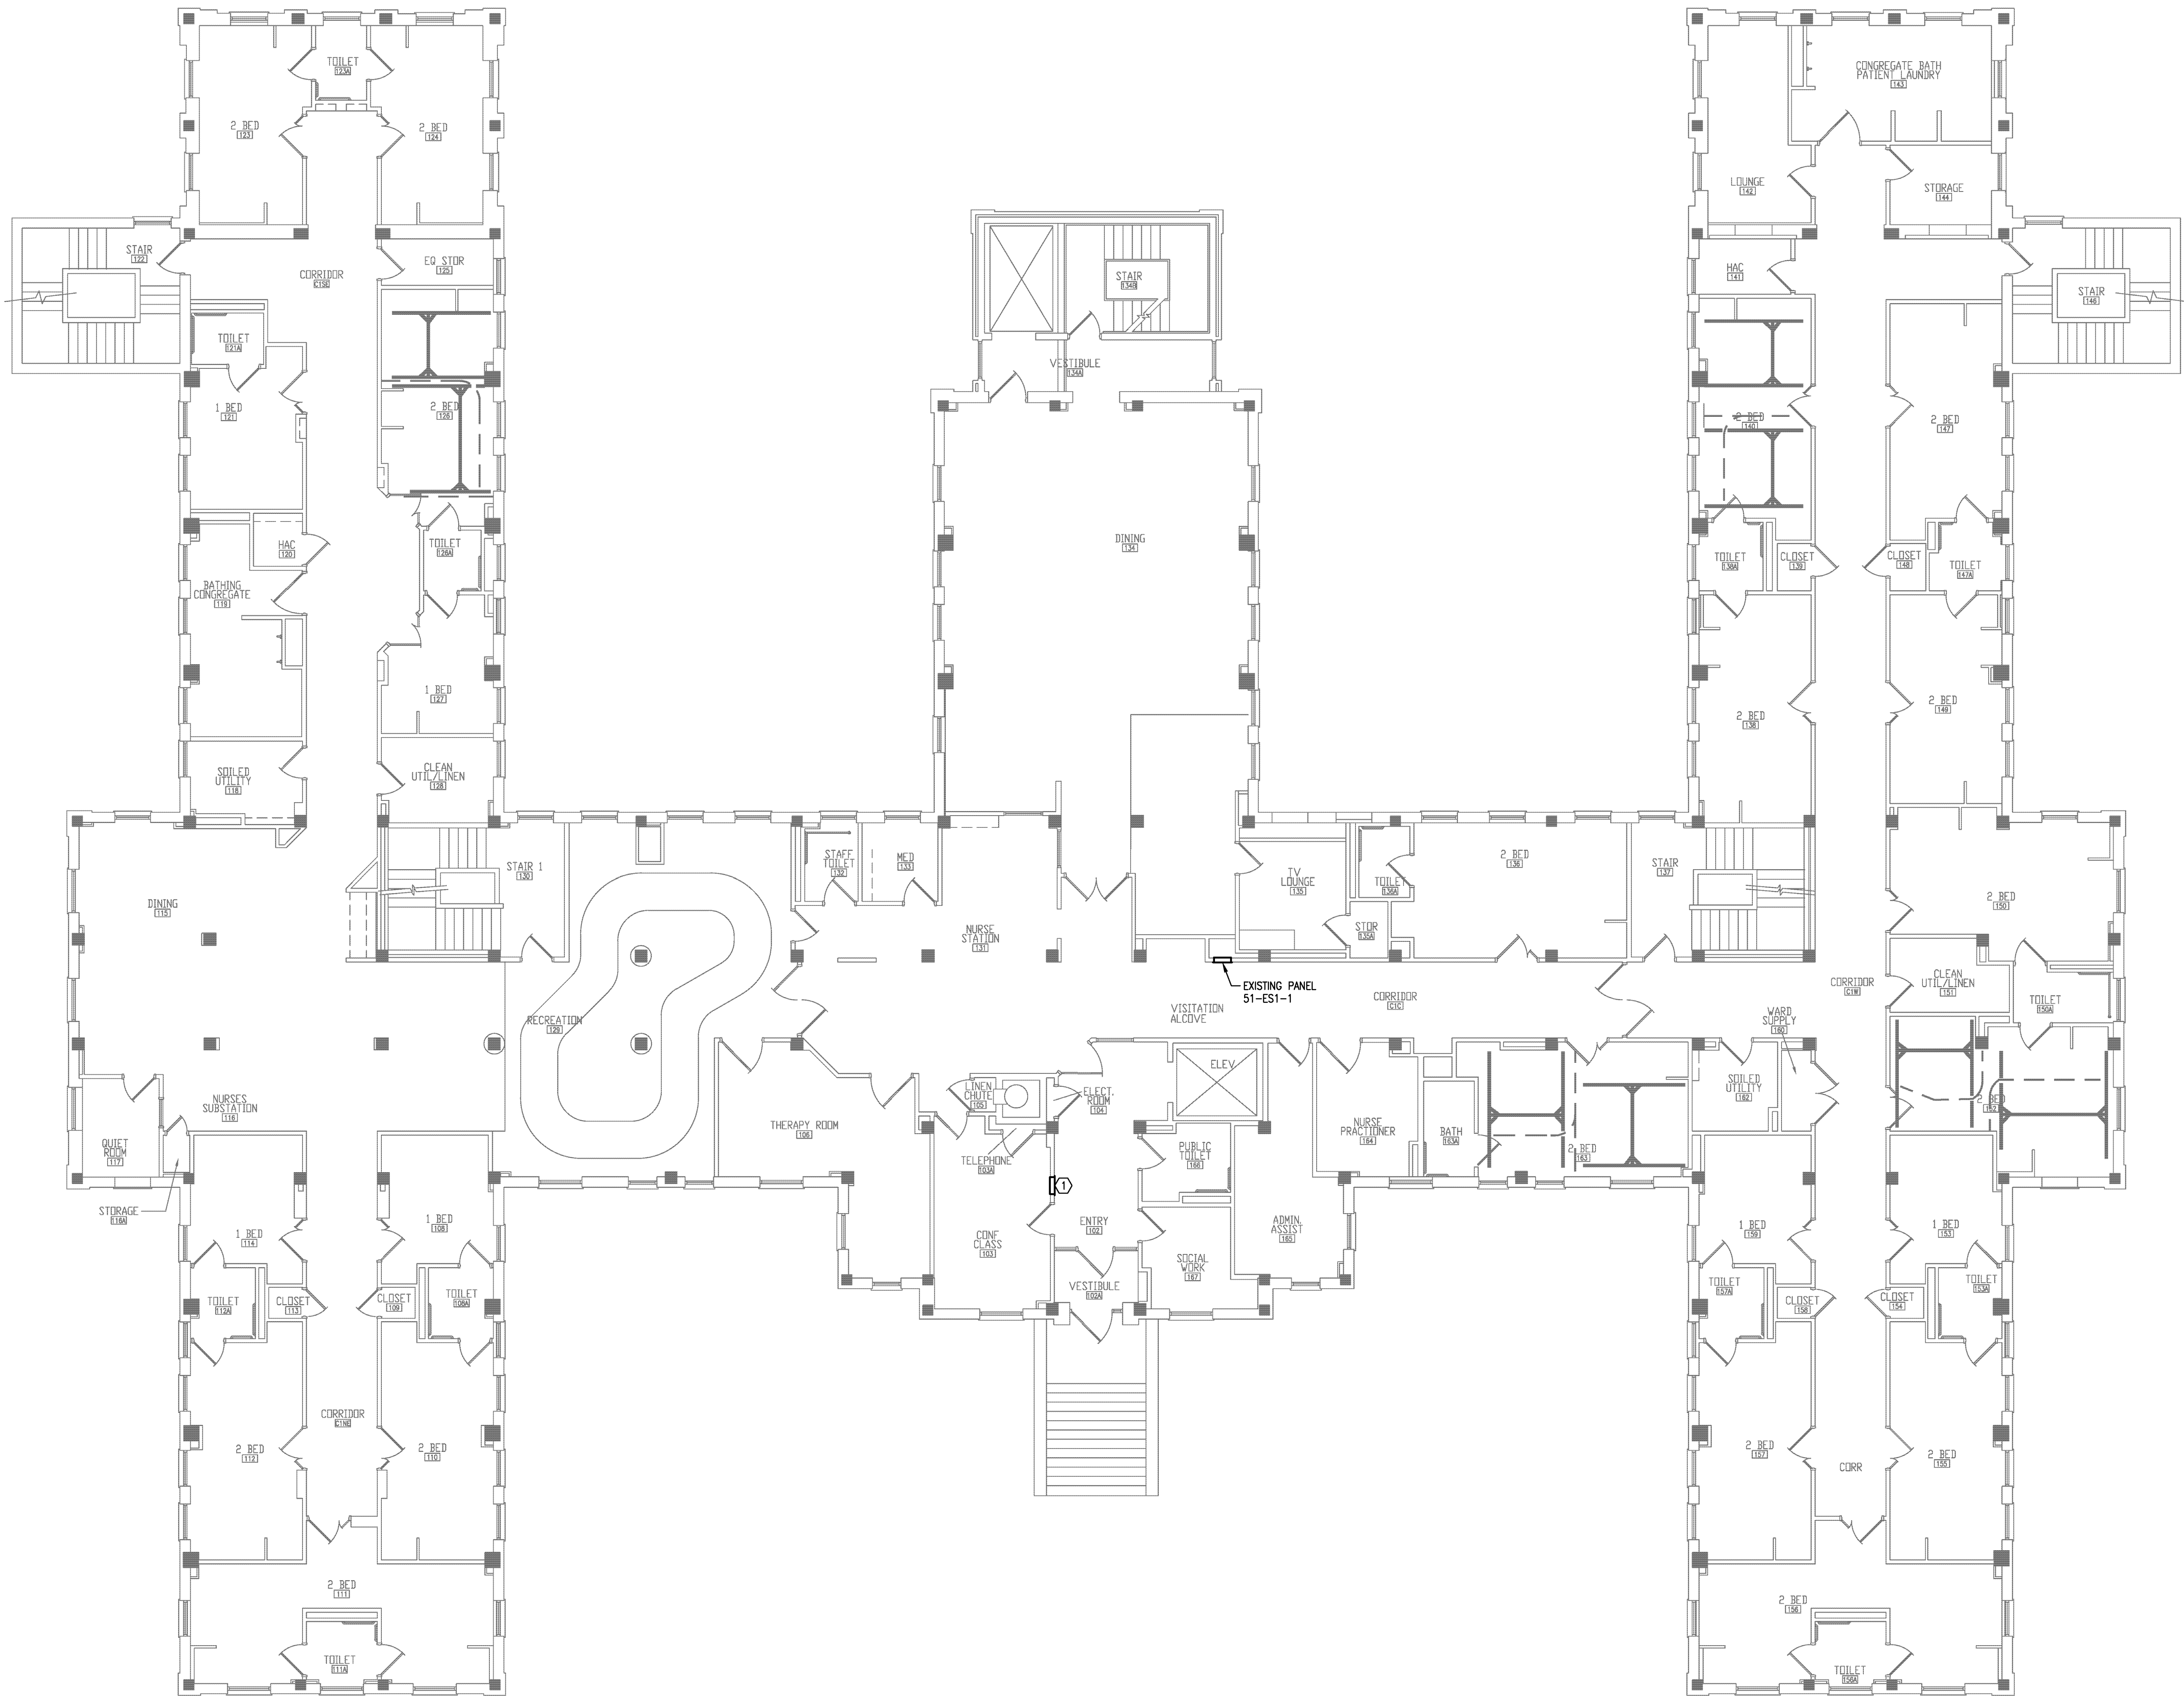


 BUILDING 51 FIRE ALARM PLAN - FIRST FLOOR
SCALE = 1/8"=1'-0"

100% Construction Documents - For Construction

NO	REVISION	DATE



FP&C Consultants, Inc.
3770 Broadway
Kansas City, MO 64111
816.931.3377
www.fpc-consultants.com




Design Tree
ENGINEERING AND
LAND SURVEYING

Alexandria Office
1201 17th Avenue SE
Alexandria, MN 56308
(507) 762-1290

St. Cloud Office
3339 West St. Germain, Suite 250
St. Cloud, MN 56301
(320) 217-5557



Alexandria
525 Broadway Street
Alexandria, MN 56308
phone 320.759.9030
fax 320.759.9062
www.jlgarchitects.com
copyright © 2013



PROJECT TITLE	DATE
BUILDING 51 FIRE ALARM PLAN - FIRST FLOOR	08.12.2013
APPROVED: PROJECT DIRECTOR	DATE:

PROJECT TITLE	DATE
FIRE ALARM REPLACEMENT	08.12.2013
REVISION	AS NOTED
REVISION	02213001
REVISION	XXX
PROJECT	ST. CLOUD VA MEDICAL CENTER
PROJECT	ST. CLOUD, MN 56303
PROJECT	FA101-51

