



CodeMax[®]

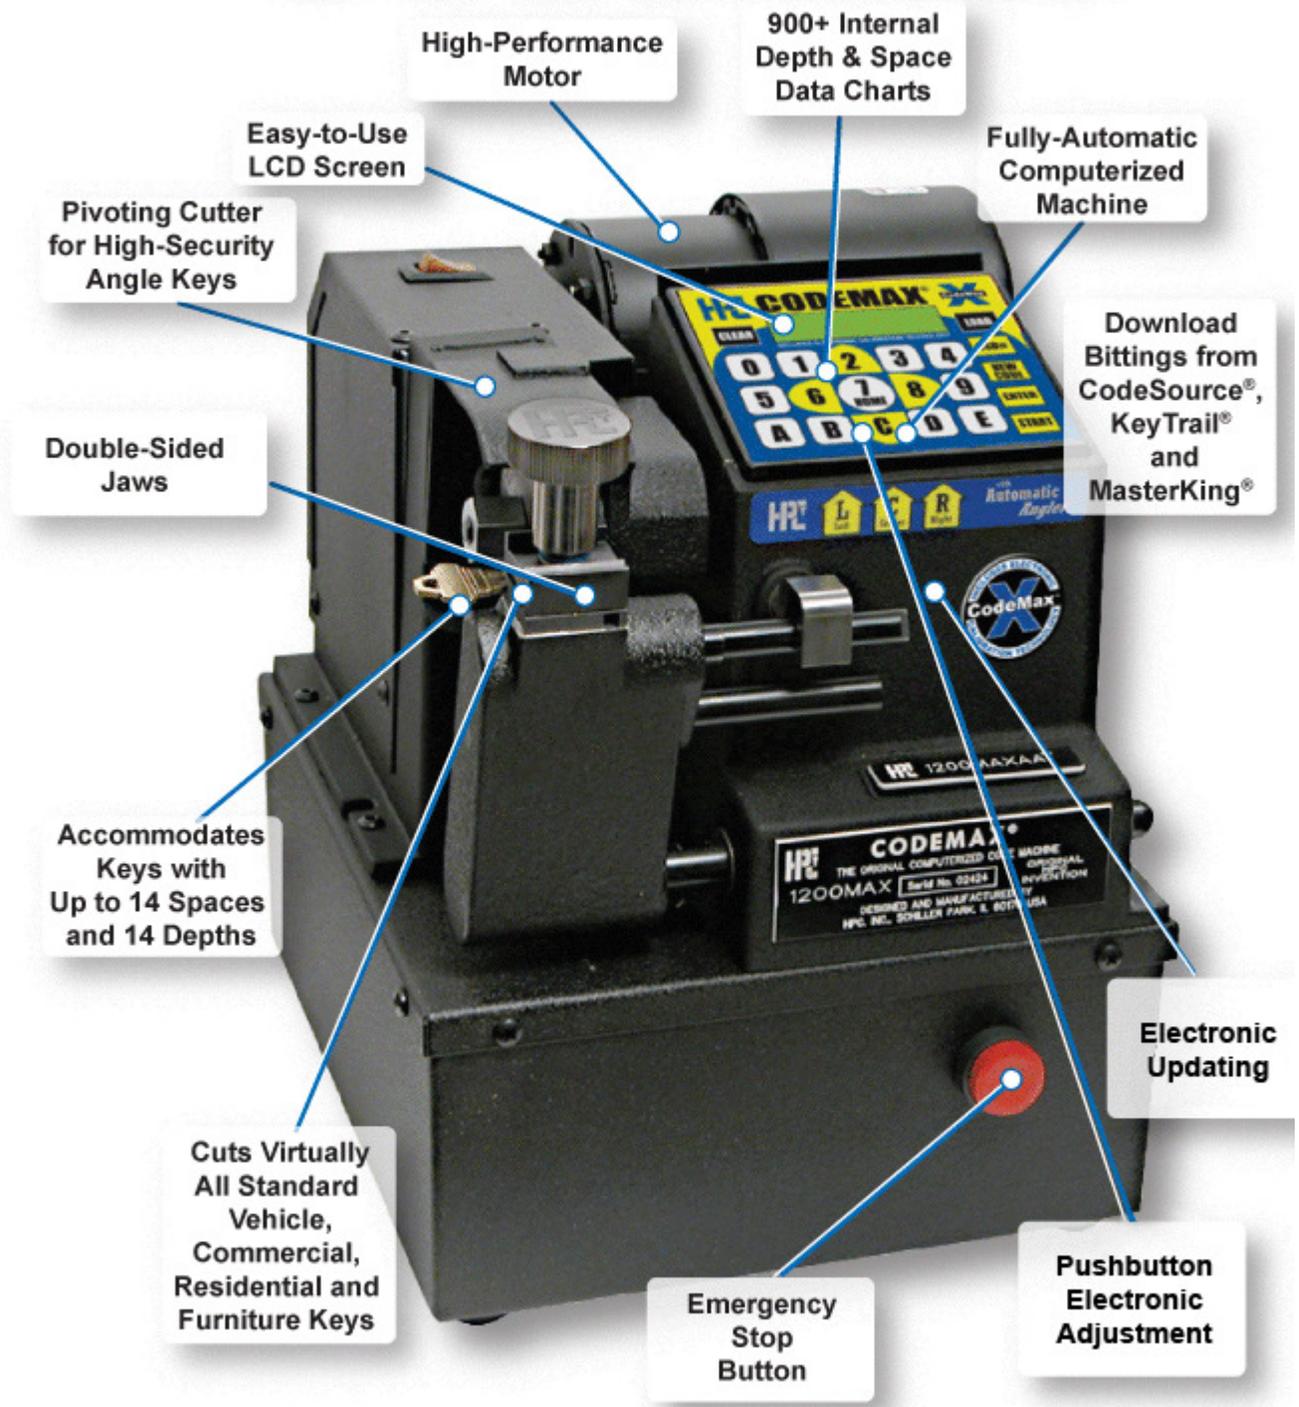

This machine can cut Automotive, Commercial, Residential, High-Security and Flat Steel Keys. Optional accessories may be necessary.

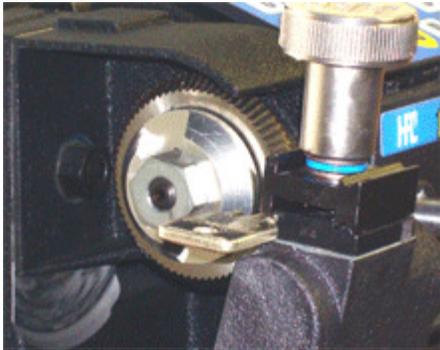

The Auto Angler model makes Medeco angle cuts automatically



The original computerized code machine, contains depth & space data for more than 950 lock types



Download bittings from CodeSource® and MasterKing® for error-free key-cutting

CodeMax® is the **Original Computerized Code Machine**. Based on the "Standard of the Industry" Blitz™, CodeMax® has an internal computer chip that contains **Depth & Space Data (DSD) for more than 900 different lock types**. This machine can **accommodate keys with up to 14 spaces and 14 depths**; it also has a micrometer function in both inch and metric formats. This versatility allows it to cut virtually all standard vehicle, commercial, residential and furniture keys throughout the world. It includes 5 cutters (No. CW-14MC, No. CW-1011, No. CW-47MC, No. CW-90MC and No. CW-20FM)

On the Automatic Angler model, (CodeMax®AA) the cutter **pivots automatically to cut high-security angle keys, such as Medeco®**, eliminating the need to turn the cutter head manually. Simply enter the depth and direction of the angle, and the CodeMax® AA does the rest. All models of CodeMax® are **equipped with a shoulder gauge safety switch**. This feature ensures the shoulder gauge is out of the way before you start cutting a key.

The **high-performance, long-life motor** on CodeMax® provides ample torque for cutting a high volume of keys. It is available in 120VAC or 240VAC for use in locksmith shops around the world.

The **total power of CodeMax® is realized when you connect it to your PC**. All machines come with a 25-foot (7.5m), 9-pin serial cable for easy connection to your PC. This gives you the ability to **download information from MasterKing®, KeyTrail® and CodeSource®**. This makes creating new keys as simple as looking up the code on your computer and downloading it to your HPC CodeMax®.

Backed by a 1-year warranty and HPC's Expert Technical Support Department, the CodeMax® is the answer for computerized code cutting!



Depth & Space Data List



See it in use!



Features Of The CodeMax®



Exploded Views



Manuals and Instructions



Key Machine Accessories



Code Max® Technical Information

KEY MACHINE MODEL NUMBER: 1200MAXAA

Motor 120VAC(1/6 hp,4 amps)
 Shipping Weight 50 lbs / 23kg
 Machine Size (Inches) 12"W x 14"D x 14"H
 Machine Size (Metric) 30.5 x 35.5 x 35.5cm
 Bench Size (Inches) 20"W x 14"D Bench Size
 Bench Size (Metric) 51 x 35.5cm

ADDITIONAL MODELS AVAILABLE:

Model Number **1200MAX**
 Motor 120VAC (1/6 hp, 4 amps)
 Shipping Weight 46 lbs / 21 kg

Model Number **1200MAX240V**
 Motor 220 / 240 VAC 50 cycle
 Shipping Weight 46 lbs / 21 kg

Model Number **1200MAXAA240V**
 Motor 220 / 240 VAC 50 cycle
 Shipping Weight 50 lbs / 23 kg

CUTTERS SUPPLIED:

No. CW-14MC Tool Steel, 100° large cylinder
 No. CW-1011 Tool Steel, 90° small cylinder
 No. CW-90MC Tool Steel, 90° large cylinder
 No. CW-20FM Tool Steel, 76° Sargent
 No. CW-47MC Tool Steel 87° some automotive

ACCESSORIES INCLUDED:

No. CABLE-25S Cable (for use with software)
 No. CM-1054R Horseshoe Tip Stop
 No. CM-1054MA Red Tip Stop
 No. WRENCH-1 Cutter Adjustment Wrench
 No. WRENCH-2 Allen Wrench, 5/64"
 No. WRENCH-3 Cutter Nut Wrench
 No. 1200MAX-MAN Manual
 No. MAX-CD DSD List, Update & Restore CD

OPTIONAL ACCESSORIES AVAILABLE:

No. CS-CD Software (CodeSource®)
 No. KC-CD Software (KeyChoice®)
 No. KT-CD Software (KeyTrail®)
 No. MK-CD Software (MasterKing®)
 No. MJ-1 Medeco® Jaw
 No. SPJ-1 Schlage Primus®/Quad Jaw
 No. HKD-75 Key Decoder
 No. HT-SD & No. RT-SD Tip Stops for Safe Deposit Box Keys
 No. HT-125 & No. HT-625 Tip Stops for L&F Safe Deposit Box Keys
 No. SPR-5 Spacer for Safe Deposit Box Keys
 No. KBPS-1 Brass Plated Key Shim

OPTIONAL CUTTERS AVAILABLE:

No. CW-1012 Tool Steel, 86° Medeco®
 No. CW-1013 Tool Steel, 90° Emhart
 No. CW-32MC Tool Steel, 90° Assa
 No. CW-1014 Tool Steel, 100° Kwikset
 No. CW-105 Tool Steel, 105° Double Angle
 No. CW-45SMS Tool Steel, Side Mill Slotter
 No. CW-BC Carbide, .054 Yale Slotter

[HPC Home Page](#)

© 2013 HPC, Inc. All rights reserved.