







FLOOR PLAN LEGEND

- | | |
|---|---|
|  | WALL FINISH TO BE DEMOLISHED,
REMOVE GYPSUM BOARD, WAINSCOT,
HANDRAIL, WALL BUMPER AND
RUBBER BASE. REPLACE WITH NEW
GYPSUM BOARD, WALL PROTECTION
AND RUBER BASE PER FLOOR PLAN |
|  | MATCHLINE |
|  | WALL TO BE DEMOLISHED |
|  | NOT IN SCOPE OF WORK |
|  | (E) VCT FLOORING TO BE DEMOLISHED |
|  | (E) CARPET FLOORING TO REMAIN,
PROTECT IN PLACE |

REFURBISHING AND REINSTALLATION OF
WALL AND CEILING ITEMS AND DEVICES
NOTE:

ALL EXISTING WALL MOUNTED ITEMS AND DEVICES ARE TO BE REMOVED PRIOR TO DEMOLITION WORK. INVENTORIED WITH THEIR LOCATION RECORDED AND REPORT SUBMITTED TO COR PRIOR TO COMMENCEMENT OF WORK, FULLY REFURBISHED, AND REINSTALLED IN THE NEW WALL AND CEILING ASSEMBLIES. LOCATION TO BE VERIFIED BY RESIDENT ENGINEER. ALSO SEE INTERIOR ELEVATIONS.

CONTRACTOR TO REPLACE & ACURATELY LOCATE ALL EXISTING
SIGNAGE AND LABELS NOTING RATED WALL ASSEMBLIES AND
SMOKE PARTITIONS

ITEMS INCLUDE, BUT NOT LIMITED TO

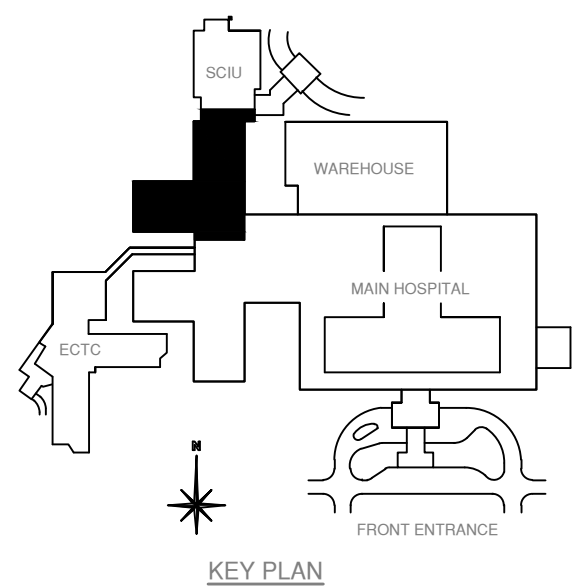
MAGNETIC HOLD-OPENS, DOOR STOPS, HAND SANITIZER DISPENSERS, MIRRORS, FIRE STROBES, SWITCHES, ELEVATOR DIRECTION SIGNAL, FIREHOSE CABINET, FIRE EXTINGUISHER CABINET, ELECTRIC COVER PLATES, FIRE ALARM PULL BOX, WATER COOLER, MONITORS, CCTV CAMERAS, ELECTRIC OUTLET SIGNAGE, BULLETIN BOARDS, DISPLAY CASE, CARD READER, CLOCK, DATA

CONTROL BOX, MOUNTED ELECTRIC DOOR, PUSH BUTTON, FIRE CONTROL BOX, MEDICAL GAS PANEL, PHONE, PORTABLE X-RAY HOOK UP, ROOM SIGNAGE, SPEAKERS, SMOKE DETECTORS, WIFI, NURSE CALL

FLOOR DEMOLITION KEYNOTES: 1-10



- | | |
|----|---|
| 1 | REMOVE EXISTING VCT, PREP FLOOR TO RECEIVE NEW FLOORING |
| 2 | REMOVE EXISTING WAINSCOT, HANDRAILS, RUBBER BASE AND GYPSUM BOARD FROM CORRIDOR WALLS, LEAVING STUDS AND INSULATION IN PLACE. ENSURE STUDS STAY PLUMB, AND IN-LINE TO RECEIVE NEW FINISH PER PLANS. |
| 3 | REMOVE (E) DEMOUNTABLE WALL TO BE REPLACED WITH NEW STUD WALL, PER FLOOR PLANS. |
| 4 | REMOVE (E) DOOR, SALVAGE TO REUSE IN (N) WALL AT THE SAME LOCATION |
| 5 | REMOVE AND REINSTALL (E) COUNTER, LOW HEIGHT PARTITION AND MODULAR NUMBER STATIONS |
| 6 | REMOVE EXPANSION JOINT, CLEAN AND PREP SURFACE TO RECEIVE NEW FLOORING |
| 7 | REMOVE EXISTING GRANITE TILE, PREP FLOOR TO RECEIVE NEW FLOORING. PROVIDE ALTERNATE BID TO REMOVE GRANITE TILE FROM C042.01. |
| 8 | REMOVE, REFURBISH AND REINSTALL EXISTING DRINKING FOUNTAIN |
| 9 | DO NOT DEMO WALL GYPSUM BRD ON THIS SECTION OF WALL IN SMOKE/FIRE WALLS ONLY. SEE AB FOR FIRE PROTECTION PLAN |
| 10 | REMOVE (E) CARPET FINISH, PREP FLOOR TO RECEIVE NEW FINISH |
| 11 | WALL-MOUNTED FIRE EXTINGUISHER AND SIGN ABOVE TO BE IN (E) LOCATION, UNLESS DIRECTED BY COR TO RELOCATE TO NEW FIRE EXTINGUISHER CABINET PER FLOOR PLAN. |

SEE SHEET A2 FOR PHASING PLAN
PHASE 'G' NOT IN CONTRACT



KEY PLAN

1 PARTIAL FLOOR PLAN
1/8" = 1'-0"

		<p>NOTE: THE RESIDENT ENGINEER MUST BE NOTIFIED 24 HOURS IN ADVANCE OF ANY COMPROMISE IN THE FIRE SUPPRESSION OR SMOKE DETECTION SYSTEMS. A COPY OF THE INTERIM LIFE SAFETY CODE MEASURES MUST BE OBTAINED AND FOLLOWED DURING CONSTRUCTION.</p>	Approved: Service Chief	Approved: Service Chief	<div>Drawing Title</div> <div>DEMOLITION FLOOR PLAN</div>	<div>Project Title</div> <div>SPINAL CORD INJURY UNIT CORRIDORS RENOVATION</div>		<div>Date</div> <div>04-04-2013</div>			
			Concur M & O	Approved: Service Chief				<div>Project No.</div> <div>671-13-105</div>			
			Concur Bio-Med	Approved: Service Chief	Approved: Chief of Engineering	<div>Building Number</div> <div>1</div>	<div>Checked</div> <div>RM</div>	<div>Drawn</div> <div>NS</div>			<div>DRAWING NO.</div> <div>A3</div>
			Concur Safety	Approved: Service Chief	Approved: Associate Director	<div>Location</div> <div>AUDIE L. MURPHY MEMORIAL VETERANS HOSPITAL - SAN ANTONIO, TEXAS</div>					
Revisions	Date			Approved: Service Chief	Approved: Admin. Officer						