

three inches = one foot
one and one-half inches = one foot
one inch = one foot
three-quarters inch = one foot
one-half inch = one foot
three-eighths inch = one foot
one-fourth inch = one foot
one-eighth inch = one foot



FLOOR PLAN LEGEND	
	WALL FINISH TO BE DEMOLISHED, REMOVE GYPSUM BOARD, WAINSCOT, HANDRAIL, WALL BUMPER AND RUBBER BASE, REPLACE WITH NEW GYPSUM BOARD, WALL PROTECTION AND RUBER BASE PER FLOOR PLAN
	MATCHLINE
	WALL TO BE DEMOLISHED
	NOT IN SCOPE OF WORK
	(E) VCT FLOORING TO BE DEMOLISHED
	(E) CARPET FLOORING TO REMAIN, PROTECT IN PLACE

REFURBISHING AND REINSTALLATION OF WALL AND CEILING ITEMS AND DEVICES NOTE:

ALL EXISTING WALL MOUNTED ITEMS AND DEVICES ARE TO BE REMOVED PRIOR TO DEMOLITION WORK. INVENTORIED WITH THEIR LOCATION RECORDED AND REPORT SUBMITTED TO COR PRIOR TO COMMENCEMENT OF WORK, FULLY REFURBISHED, AND REINSTALLED IN THE NEW WALL AND CEILING ASSEMBLIES. LOCATION TO BE VERIFIED BY RESIDENT ENGINEER. ALSO SEE INTERIOR ELEVATIONS.


CONTRACTOR TO REPLACE & ACURATELY LOCATE ALL EXISTING SIGNAGE AND LABELS NOTING RATED WALL ASSEMBLIES AND SMOKE PARTITIONS

ITEMS INCLUDE, BUT NOT LIMITED TO:

MAGNETIC HOLD-OPENS, DOOR STOPS, HAND SANITIZER DISPENSERS, MIRRORS, FIRE STROBES, SWITCHES, ELEVATOR DIRECTION SIGNAL, FIREHOSE CABINET, FIRE EXTINGUISHER CABINET, ELECTRIC COVER PLATES, FIRE ALARM PULL BOX, WATER COOLER, MONITORS, CCTV CAMERAS, ELECTRIC OUTLETS, SIGNAGE, BULLETIN BOARDS, DISPLAY CASE, CARD READER, CLOCK, DATA OUTLET, WALL MOUNTED ELECTRIC DOOR, PUSH BUTTON, FIRE CONTROL BOX, MEDICAL GAS PANEL, PHONE, PORTABLE X-RAY HOOK UP, ROOM SIGNAGE, SPEAKERS, SMOKE DETECTORS, WIFI, NURSE CALL

FLOOR DEMOLITION KEYNOTES: 1-10	
1	REMOVE EXISTING VCT, PREP FLOOR TO RECEIVE NEW FLOORING
2	REMOVE EXISTING WAINSCOT, HANDRAILS, RUBBER BASE AND GYPSUM BOARD FROM CORRIDOR WALLS, LEAVING STUDS AND INSULATION IN PLACE. ENSURE STUDS STAY PLUMB, AND IN-LINE TO RECEIVE NEW FINISH PER PLANS.
3	REMOVE (E) DEMOUNTABLE WALL TO BE REPLACED WITH NEW STUD WALL, PER FLOOR PLANS.
4	REMOVE (E) DOOR, SALVAGE TO REUSE IN (N) WALL AT THE SAME LOCATION
5	REMOVE AND REINSTALL (E) COUNTER, LOW HEIGHT PARTITION AND MODULAR NURSE STATIONS
6	REMOVE EXPANSION JOINT, CLEAN AND PREP SURFACE TO RECEIVE NEW FLOORING
7	REMOVE EXISTING GRANITE TILE, PREP FLOOR TO RECEIVE NEW FLOORING. PROVIDE ALTERNATE BID TO REMOVE GRANITE TILE FROM C042 ONLY.
8	REMOVE, REFURBISH AND REINSTALL EXISTING DRINKING FOUNTAIN
9	DO NOT DEMO WALL GYPSUM BRD ON THIS SECTION OF WALL IN SMOKE/FIRE WALLS ONLY. SEE A8 FOR FIRE PROTECTION PLAN
10	REMOVE (E) CARPET FINISH, PREP FLOOR TO RECEIVE NEW FINISH

SEE SHEET A2 FOR PHASING PLAN
PHASE 'G' NOT IN CONTRACT

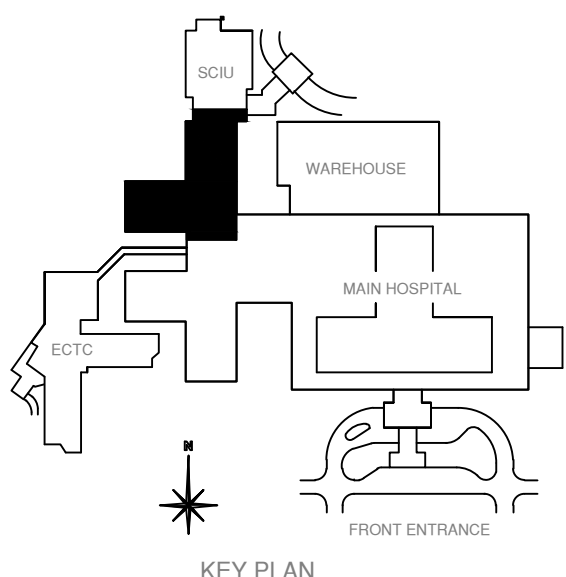

Revisions		Date	NOTE: THE RESIDENT ENGINEER MUST BE NOTIFIED 24 HOURS IN ADVANCE OF ANY COMPROMISE IN THE FIRE SUPPRESSION OR SMOKE DETECTION SYSTEMS. A COPY OF THE INTERIM LIFE SAFETY CODE MEASURES MUST BE OBTAINED AND FOLLOWED DURING CONSTRUCTION.		Approved: Service Chief	Approved: Service Chief	Drawing Title DEMOLITION FLOOR PLAN	Project Title SPINAL CORD INJURY UNIT CORRIDORS RENOVATION	Date 04-04-2013				
					Concur M & O	Approved: Service Chief	Approved: Chief of Engineering	Building Number 1	Checked RM	Drawn NS			
					Concur Bio-Med	Approved: Service Chief	Approved: Associate Director	Location AUDIE L. MURPHY MEMORIAL VETERANS HOSPITAL - SAN ANTONIO, TEXAS	Project No. 671-13-105	DRAWING NO. A4			
					Concur Safety	Approved: Service Chief							
					Approved: Service Chief	Approved: Admin. Officer							