




6 ENLARGED FLOOR PATTERN PLAN @ LOBBY C079
1/4" = 1'-0"

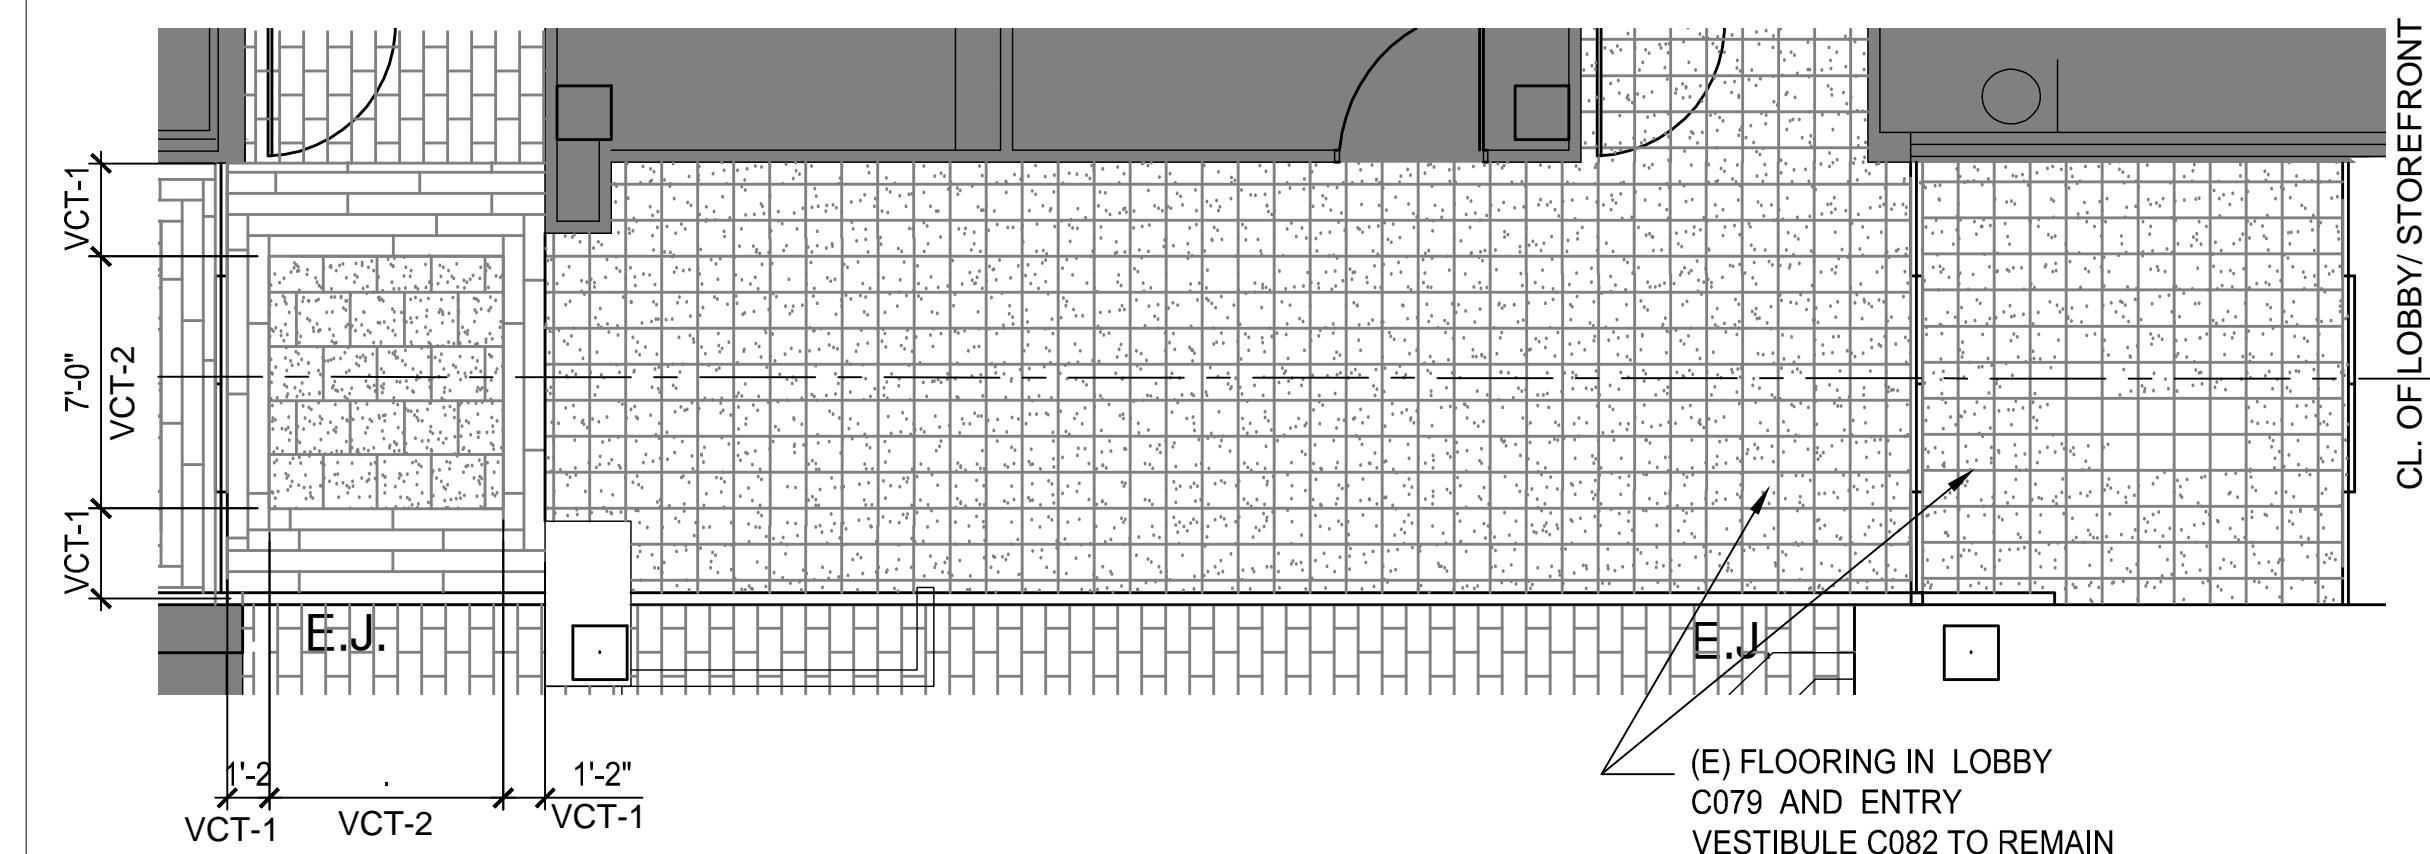


**ADD ALTERNATE - ENLARGED FLOOR PATTERN PLAN,
LOBBY C079 AND C082**

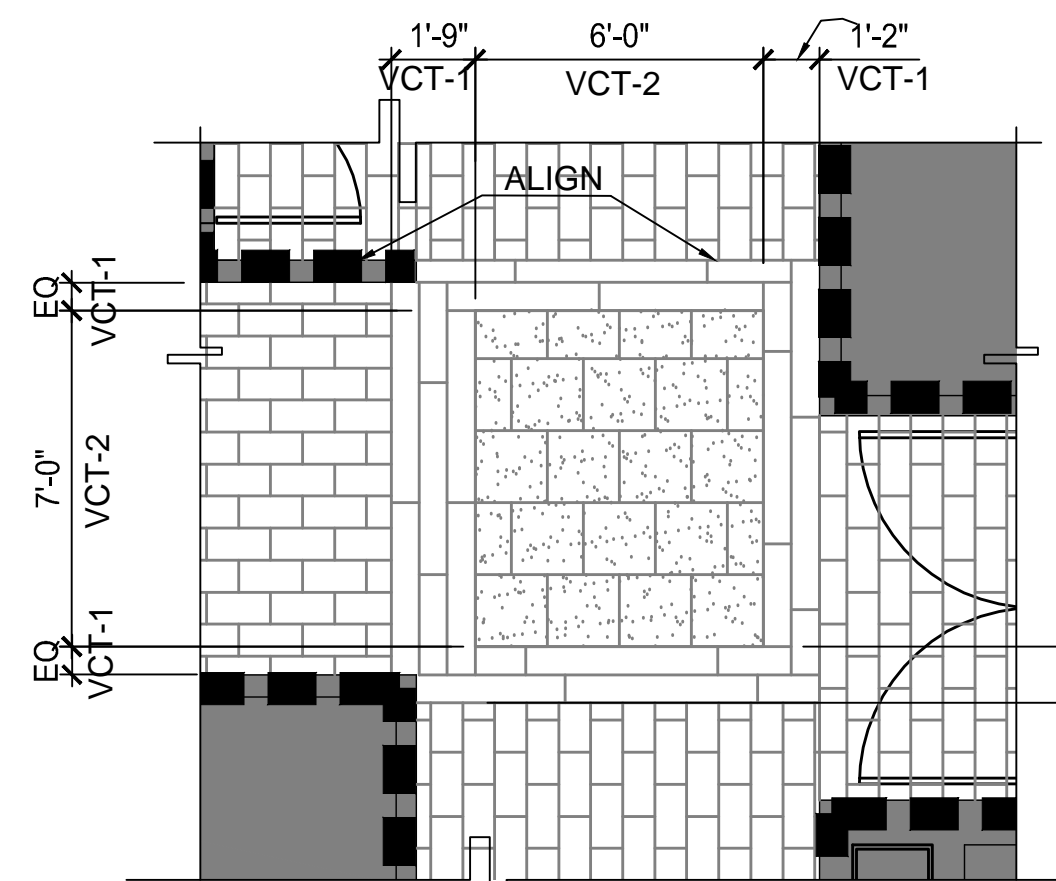


4 ENLARGED FLOOR PATTERN PLAN - CORRIDOR C076
1/4" = 1'-0"

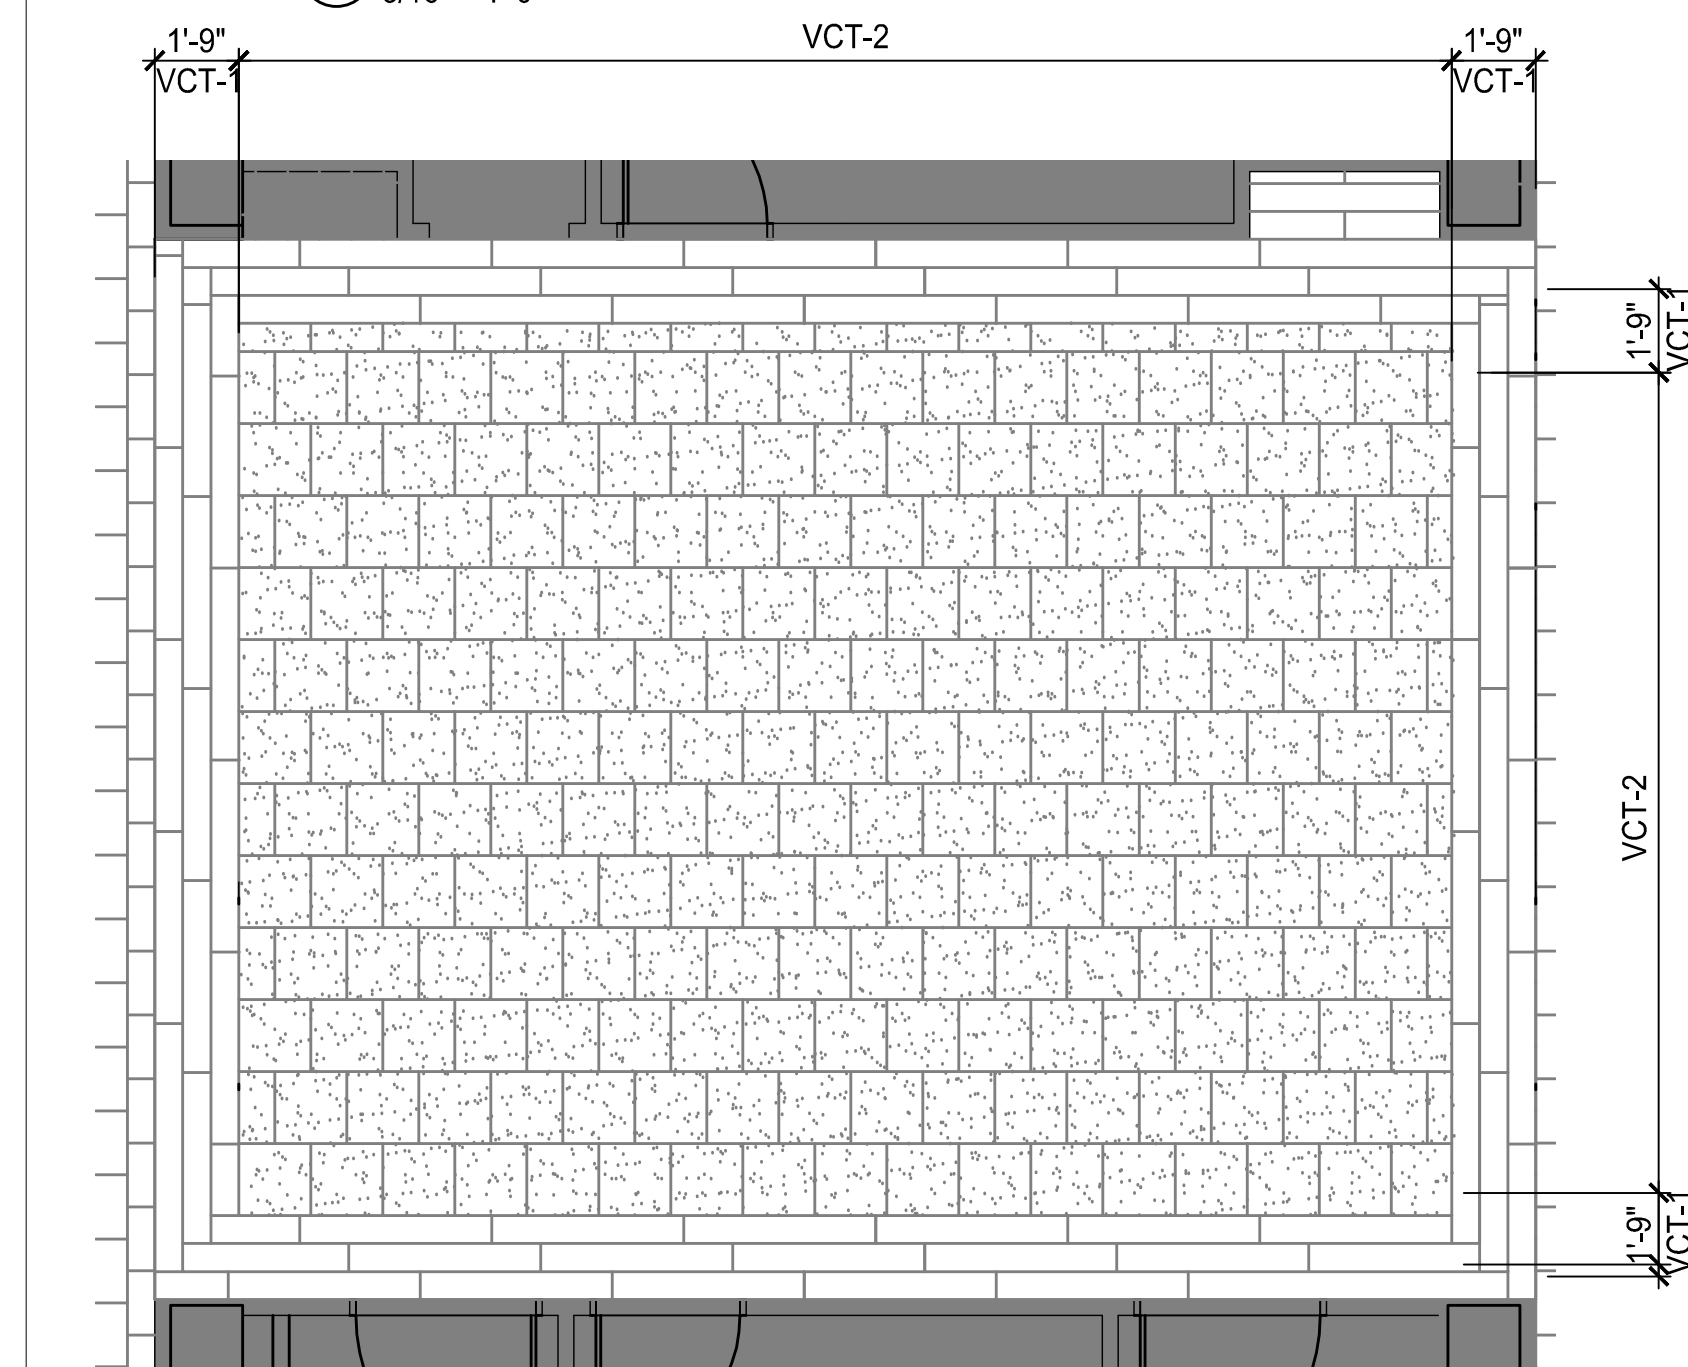


3 ENLARGED FLOOR PATTERN PLAN - D051
1/4" = 1'-0"

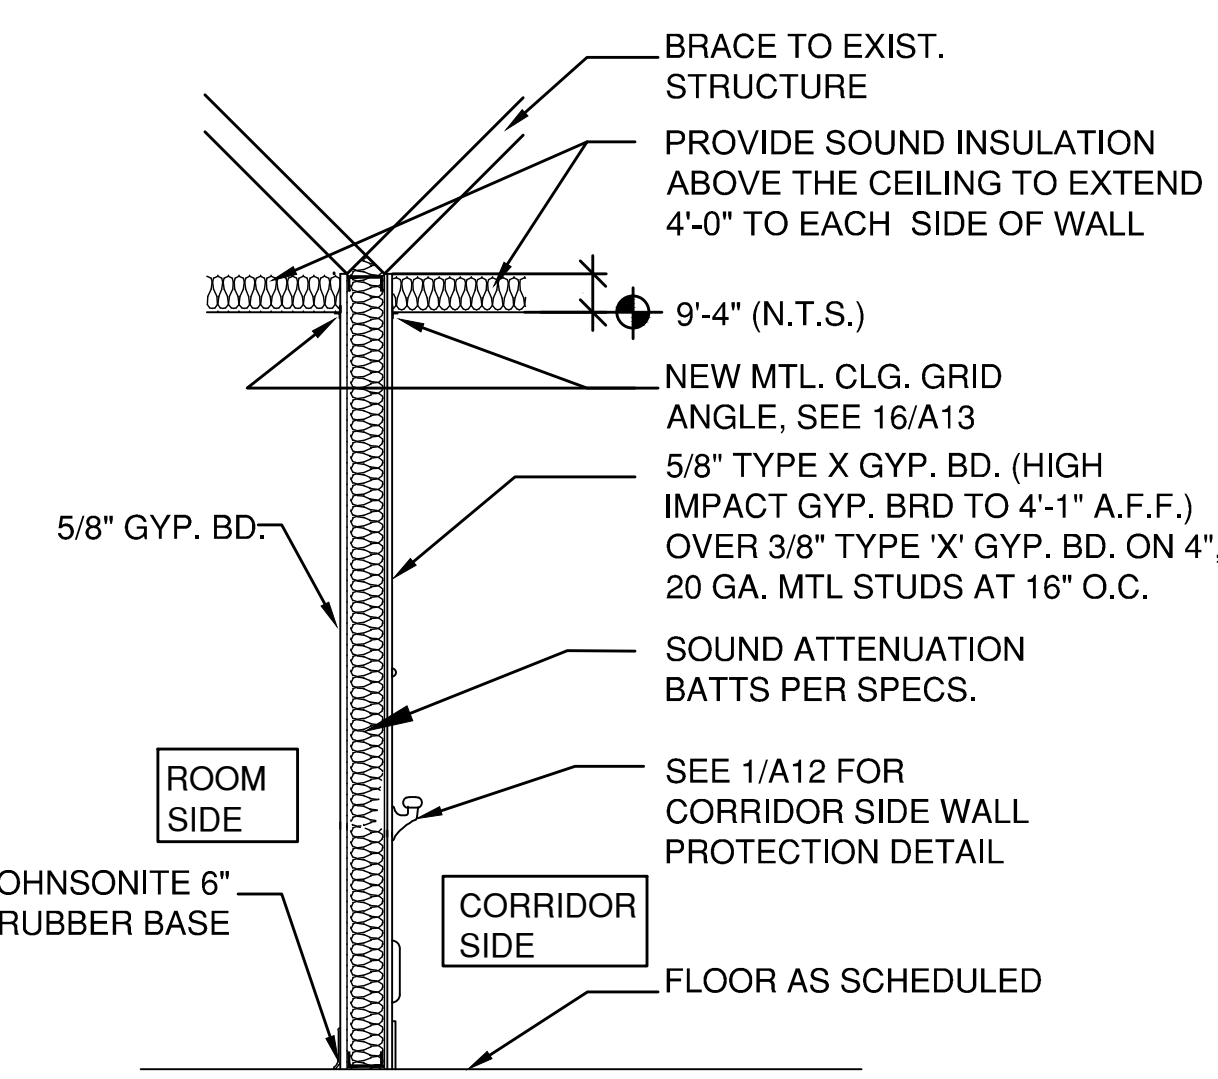

2 WALL SECTION FOR NEW WALL
1/2" = 1'-0"

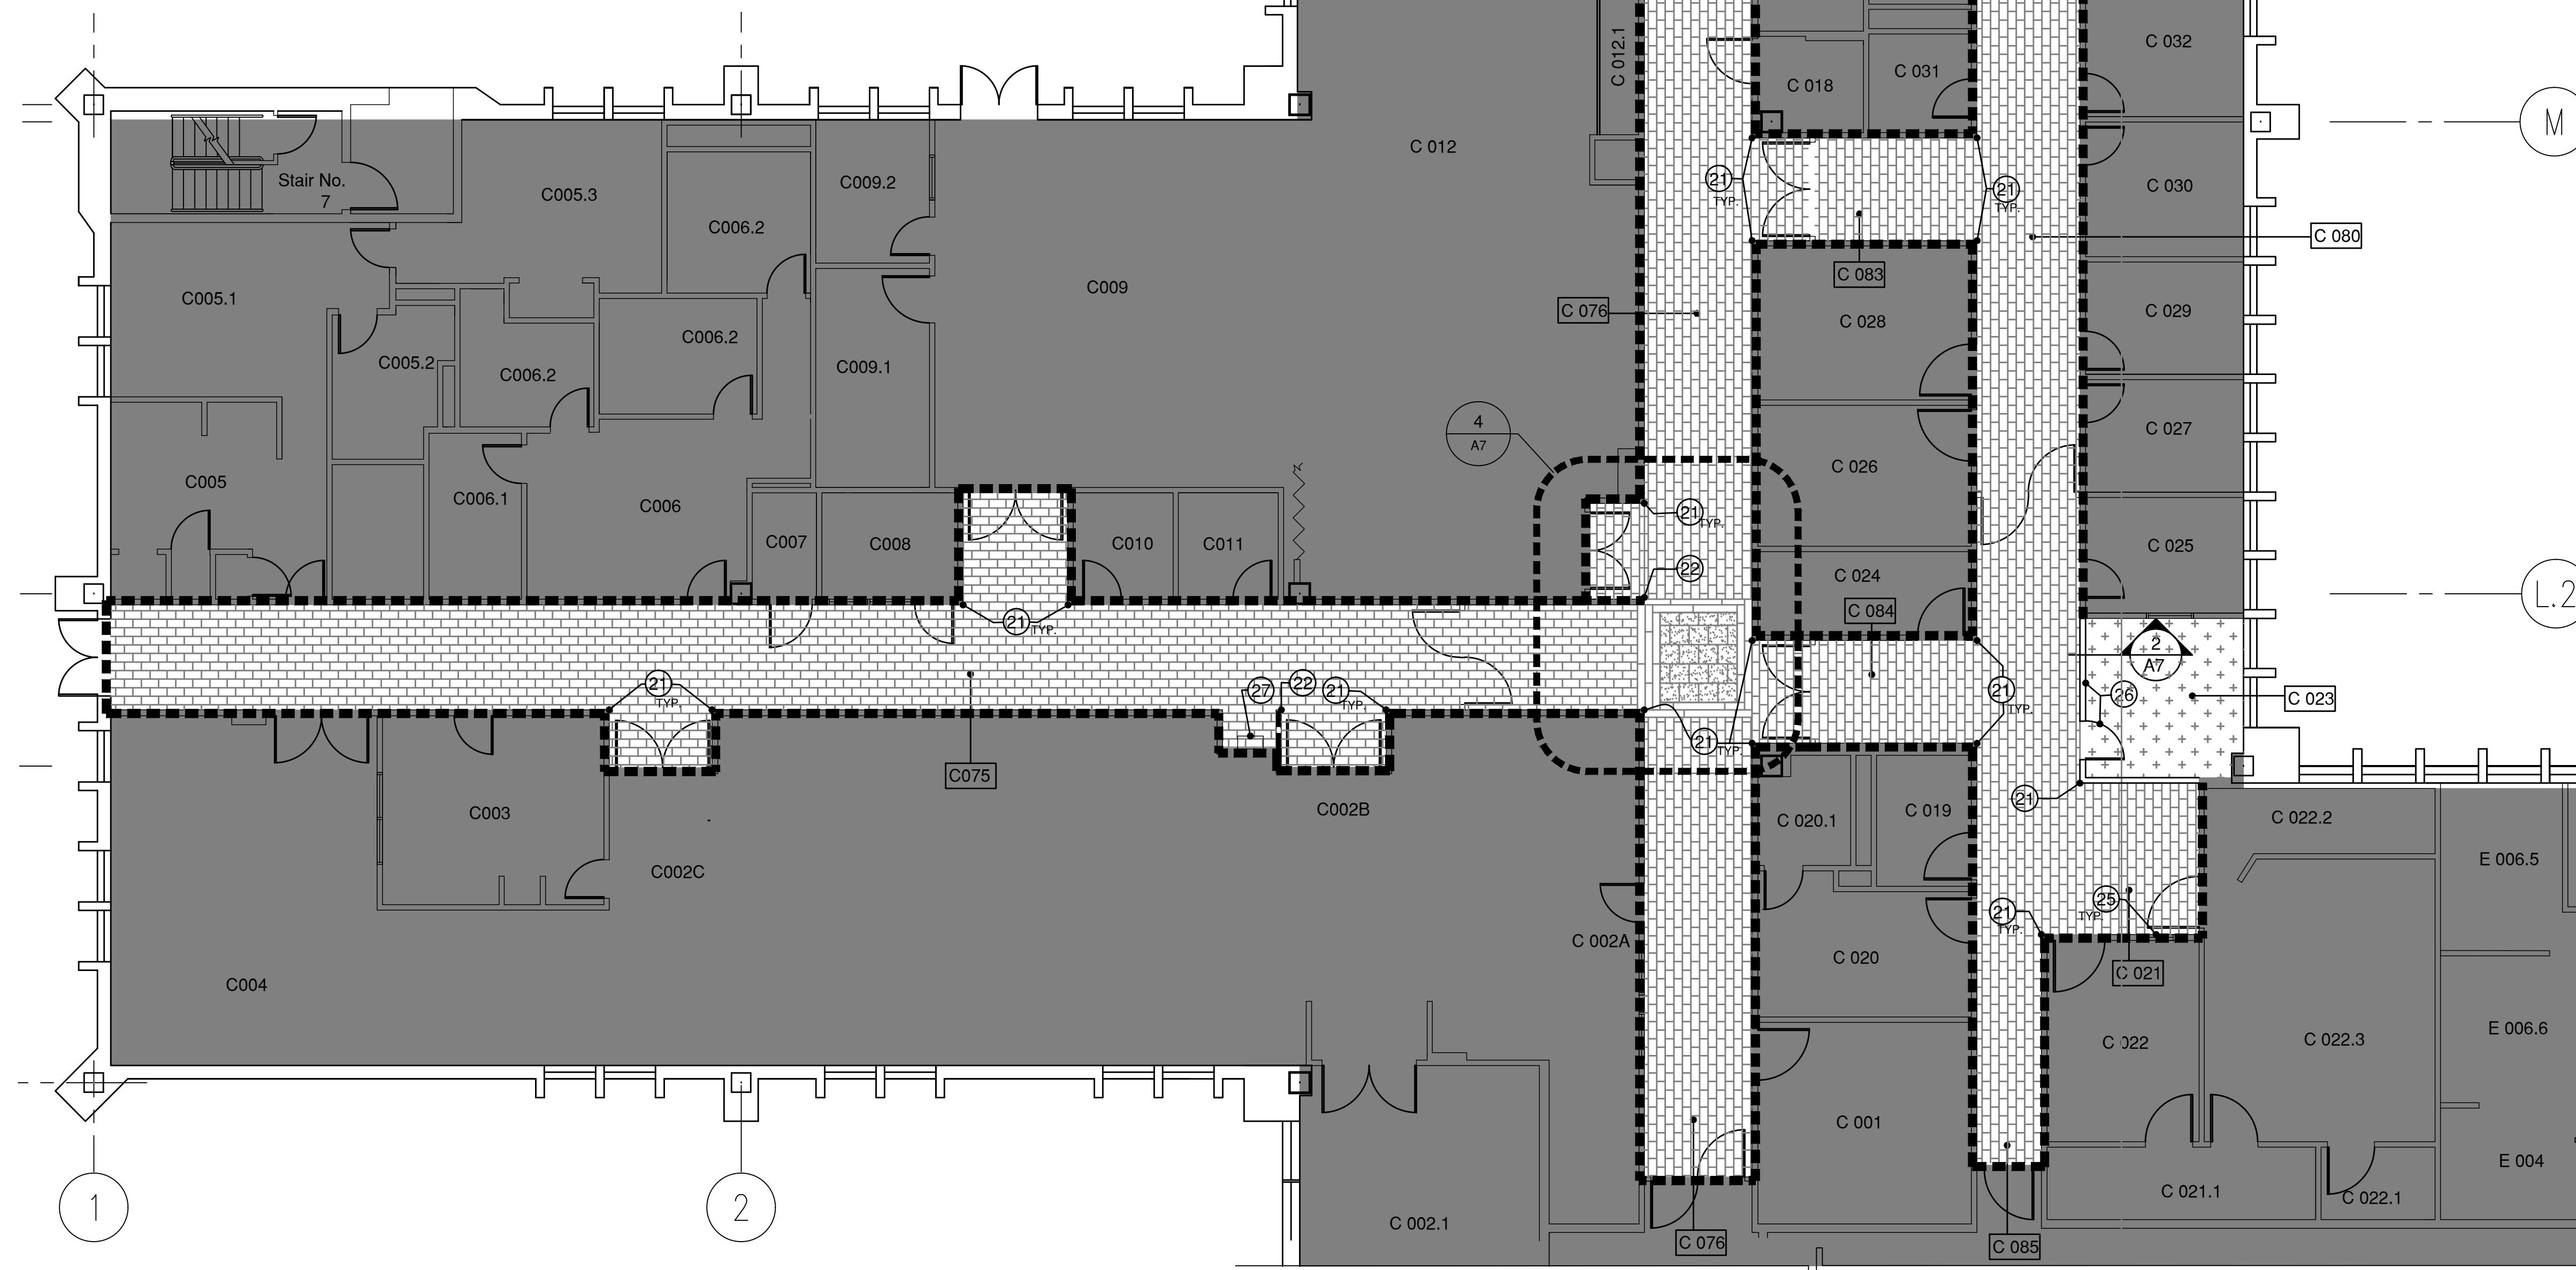





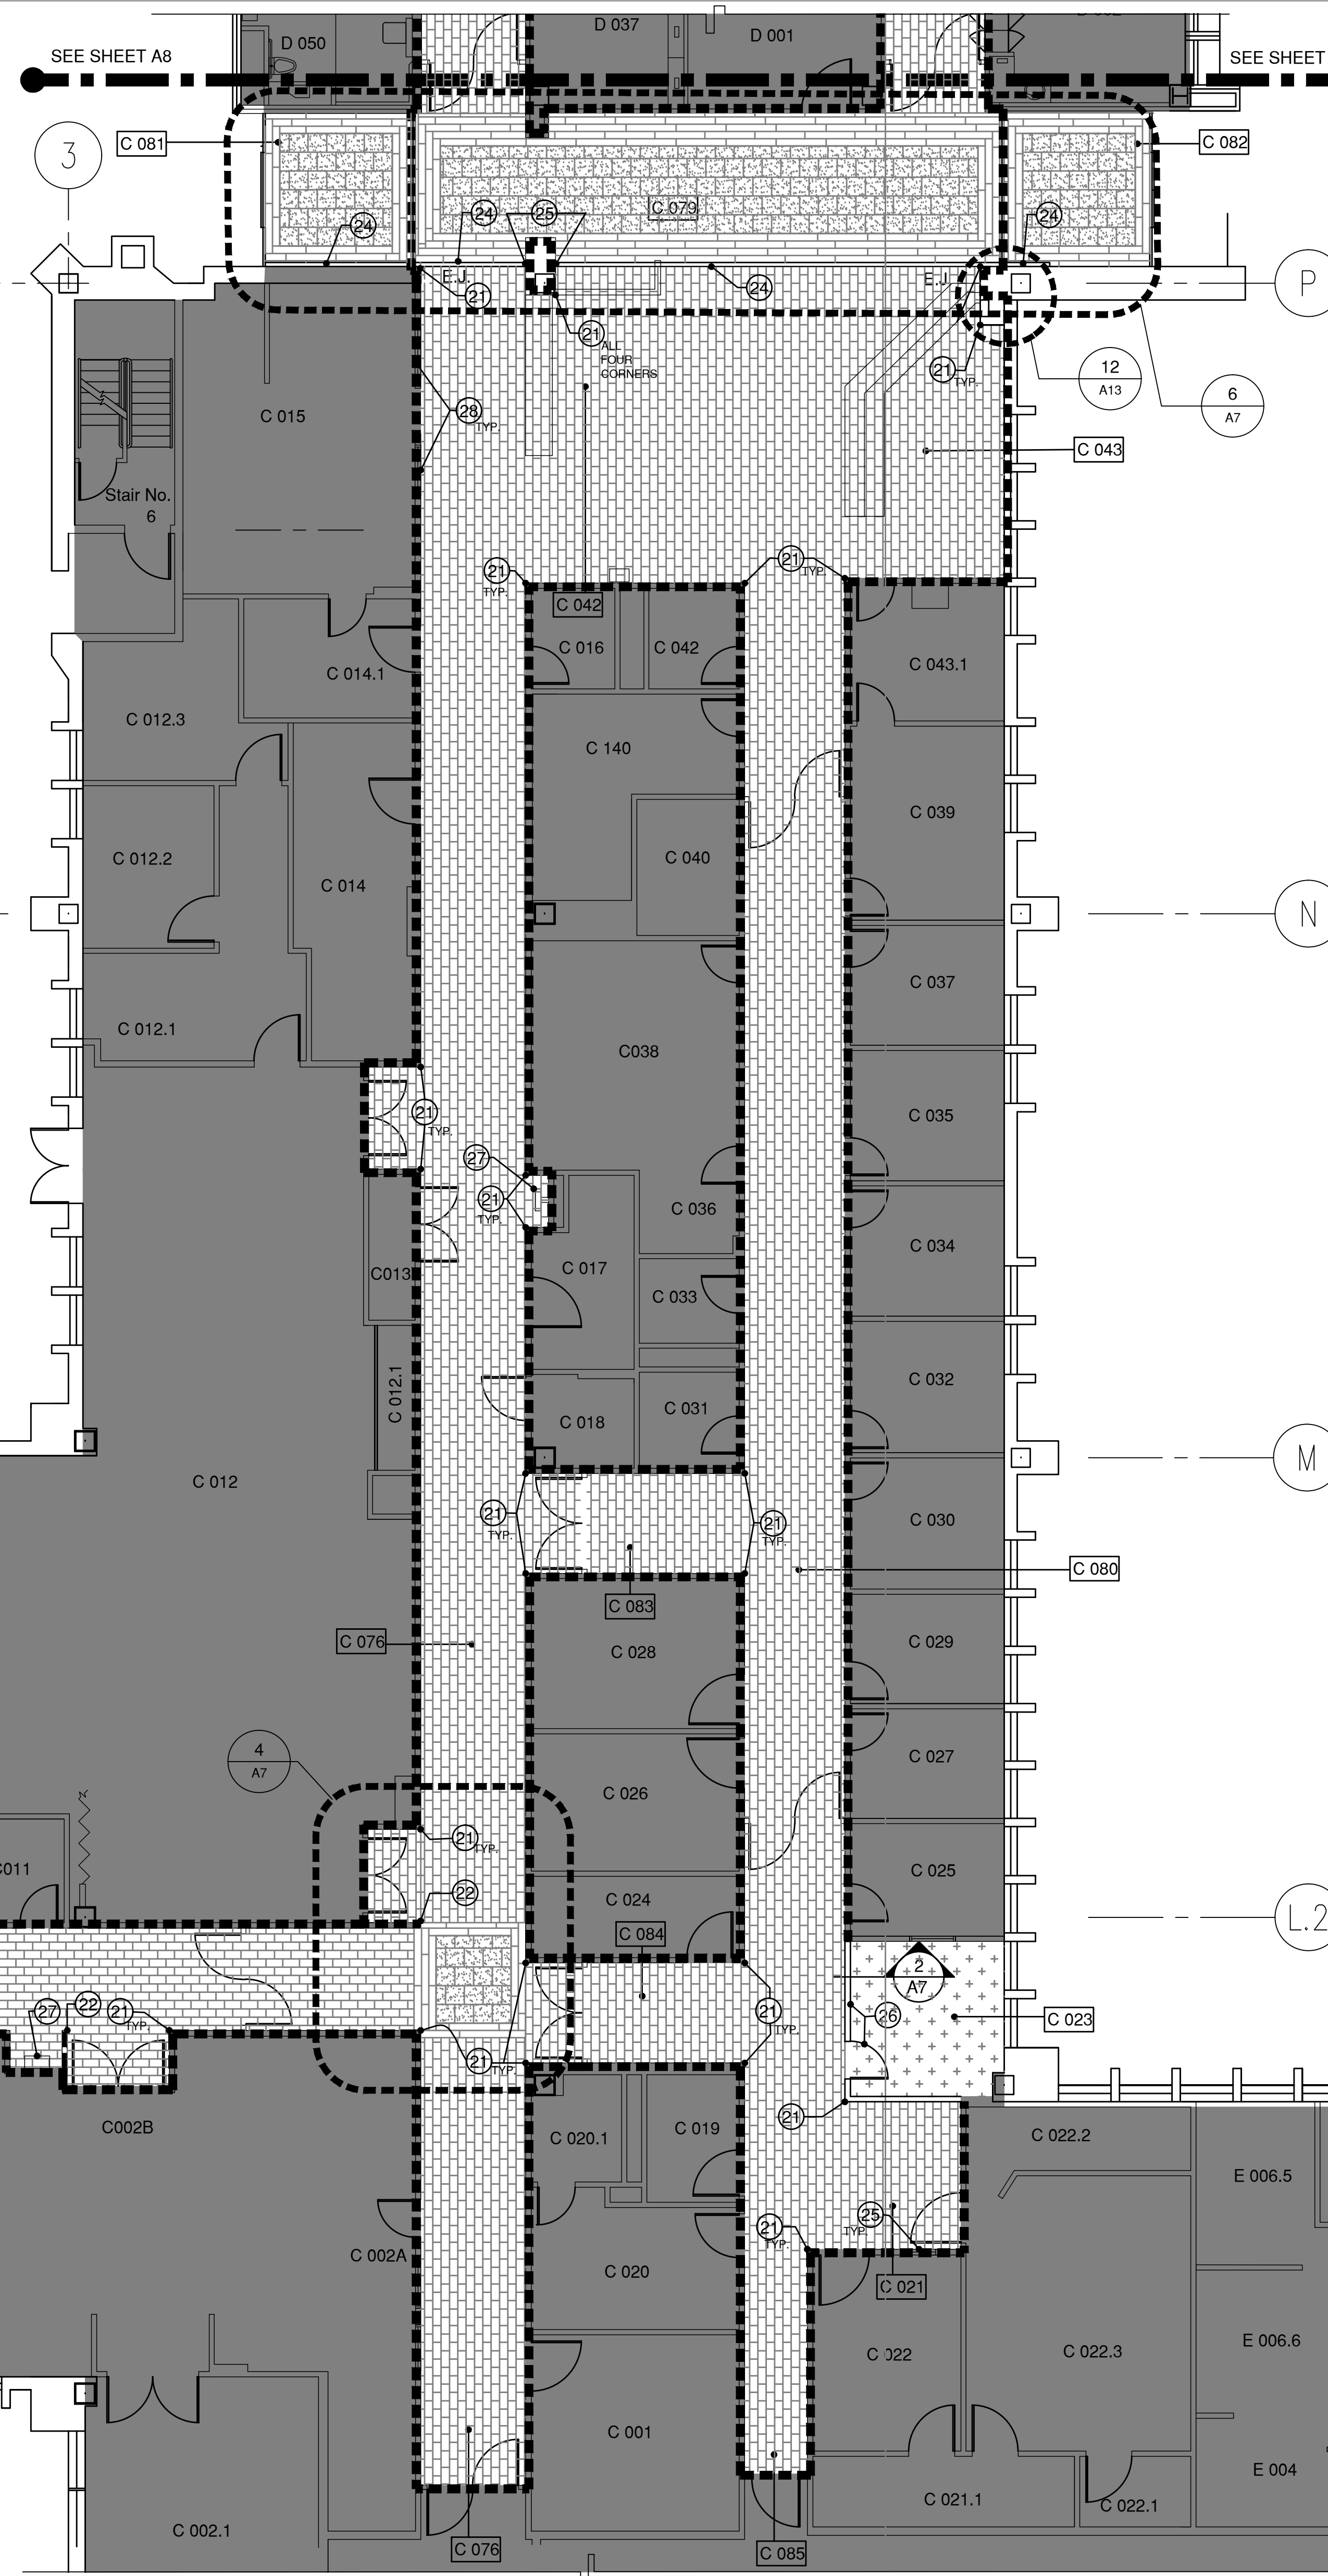


1 PARTIAL FLOOR PLAN
1/8" = 1'-0"



1 PARTIAL FLOOR PLAN
1/8" = 1'-0"

PLANS LEGEND

	NEW WALL FINISH WITH (N) GYPSUM BRD, PAINTED, (N) WALL BASE, (N) WALL PROTECTION, (N) HANDRAIL, (N) CHAIR RAIL
	MATCHLINE
	NEW WALL
	NOT IN SCOPE OF WORK
	VCT-1 48"x72" VINYL PLANK RANDOM PATTERN RE: FINISH SCHEDULE A12
	VCT-2 18" VINYL TILES ASTER PATTERN RE: FINISH SCHEDULE A12
	(E) CARPET FLOORING, FPROTECT IN PLACE

REFURBISHING AND REINSTALLATION OF
WALL AND CEILING ITEMS AND DEVICES NOTE:

ALL EXISTING WALL, MOUNTED ITEMS AND DEVICES REMOVED PRIOR TO DEMOLITION WORK, TO BE INVENTORIED AND THEIR LOCATION RECORDED, TO BE FULLY REFURBISHED, AND REINSTALLED IN THE NEW WALL AND CEILING ASSEMBLIES.

LOCATION TO BE VERIFIED BY RESIDENT ENGINEER.

ITEMS INCLUDE, BUT NOT LIMITED TO:

- MAGNETIC HOLD-OPENS, DOOR STOPS, HAND SANITIZER DISPENSERS, MIRRORS, FIRE STROBES, SWITCHES, ELEVATOR CATCHER, CLOSET, FIREHOUSE CABINET, FIRE EXTINGUISHER CABINET, ELECTRIC COVER PLATES, FIRE ALARM PULL BOX, WATER COOLER, MONITORS, CCTV CAMERAS, ELECTRIC OUTLETS, SIGNAGE, BULLETIN BOARDS, DISPLAY CASE, CARD READER, CLOCK, DATA
- OUTLET, WALL MOUNTED ELECTRIC DOOR, PUSH BUTTON, FIRE CONNECTION BOX, MEDICAL GAS PANEL, PHONE, PORTABLE XRAY-HOOK UP, ROOM SIGNAGE, SPEAKERS, SMOKE DETECTORS, WIFI, NURSE CALL

TYPICAL WALL PROTECTION NOTES

1. CG-1 SERIES TYPICAL; TO BE LOCATED AT ALL OUTSIDE CORNERS, CG-2 AT ALL FIRE-RATED WALL CORNERS, U.O.N.
2. ALL HANDRAILS TO BE MOUNTED AT 2'-10" A.F.F. TO TOP OF HANDRAIL, U.O.N.
3. WALL GUARD MOUNTING HEIGHTS (TO TOP OF WALL GUARD): WG-1, 16" A.F.F. U.O.N.
4. CHAIR RAIL W/ END CAPS COUNTINOUS ALL WALLS, TO BE 4'-2" A.F.F TO TOP OF CHAIR RAIL
5. DO NOT INSTALL HANDRAIL BEHIND BEHIND DOORS HELD OPEN., U.O.N.
6. PAINT ALL METAL EQUIPMENT, CABINET DOORS/FRAMES ON WALL (OTHER THAN STAINLESS STEEL) TO MATCH WITH WALL COLOR, TYP. OR AS DIRECTED BY COR
7. SEE SHEET A11 FOR INTERIOR ELEVATIONS

TYPICAL FLOOR PATTERN NOTES


1. CONTRACTOR SHALL INSTALL NEW FLOORING IN PATTERNS INDICATED TO THE GREATEST EXTENT POSSIBLE. PATTERN DEVIATIONS SHALL BE APPROVED BY THE C.O.T.R. PRIOR TO INSTALLATION.
2. TERMINATE OR TRANSITION DISSIMILAR FLOORING MATERIALS AT THE CENTERLINE OF DOORS. REF. DETAILS 11A/13, 12A/13 AND 13A/13 FOR FLOOR TRANSITION DETAILS.
3. PROVIDE TRANSITION STRIP WHERE ALL NEW FLOORING ABUTS EXISTING ADJACENT FINISHES. TRANSITION STRIP IS NOT REQUIRED WHERE FLOORING MATERIALS ARE IDENTICAL AND TRANSITION BETWEEN NEW AND EXISTING FLOORING MATERIALS ARE FULLY FLUSH.
4. REMOVE, REFURBISH, AND REINSTALL ALL EXISTING DOOR STOPS.
5. PROVIDE CONTINUOUS, SEALANT AROUND DOOR FRAMES AND CORNER GUARDS, VERIFY COLOR WITH COR.

TYPICAL DOOR PROTECTION NOTES

1. ALL DOORS OCCURRING IN CORRIDOR WITH PLYWOOD VENEER FINISH, INCLUDING PLYWOOD CABINET DOORS, TO BE REFINISHED ON BOTH SIDES. REFINISHING OF DOORS TO BE PER INDUSTRY STANDARDS, INCLUDING SANDING, PRIMING, STAINING TO MATCH EXISTING, AND APPLICATION OF MULTIPLE COATS OF PROTECTIVE COATING (LOW VOC POLYURETHANE).
2. REMOVE (E) KICKPLATE, FILL IN HOLES AND REFINISH PER NOTE 1. INSTALL (M) DOOR PROTECTION DP-1, PER SCHEDULE ON SHEET AT-2 AND SP-1.
3. REMOVE, REFURBISH AS REQUIRED, AND REINSTALL ALL (E) HARDWARE AND ANY SIGNAGE AS OCCURS, UNLESS DIRECTED OTHERWISE BY COR.
4. ALL METAL DOORS, DOOR FRAMES INCLUDING FRAMES OF GLASS PARTS WHERE OCCUR, METAL CABINET DOORS & FRAMES TO BE PAINTED PT-2 PER FINISH SCHEDULE.

FLOOR PLAN KEYNOTES: 21-30		DET #
21	CORNER GUARD- CG-1, TYP.	1/A12
22	END CAP CORNER GUARD- CG-2	3/A12
23	INSTALL 4" WALL BASE (RB-1) UNDER WINDOW FRAME FOR THE LENGTH OF WINDOW ONLY.	
24	FLOOR EXPANSION JOINT	8 /A13
25	WALL EXPANSION JOINT	9/A13
26	NEW WALL. INSTALL. SALVAGED AND REFURBISHED DOOR AND HARDWARE.	2/A7
27	DRINKING FOUNTAIN, REINSTALL PER ADA REQUIREMENTS	4/A12
28	REPLACE COUNTER WITH NEW NEW	11/A12

SEE SHEET A2 FOR
PHASING PLAN
PHASE 'G' NOT IN
CONTRACT

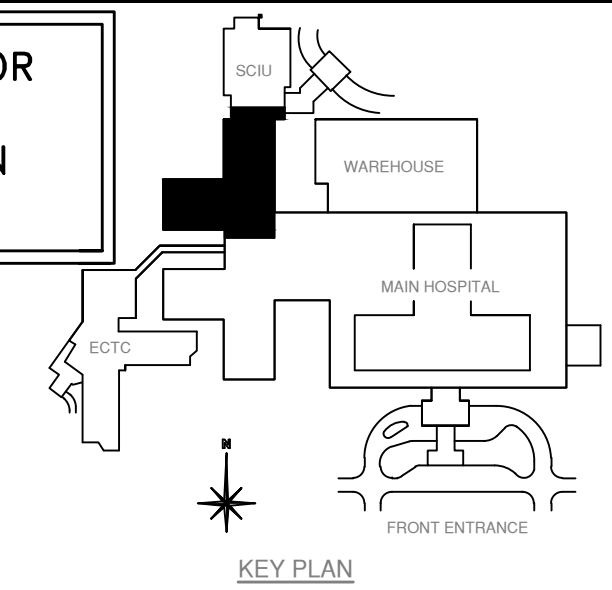

Revisions	Date

NOTE:
THE RESIDENT ENGINEER MUST
BE NOTIFIED 24 HOURS IN
ADVANCE OF ANY COMPROMISE IN
THE FIRE SUPPRESSION OR SMOKE
DETECTION SYSTEMS. A COPY OF
THE INTERIM LIFE SAFETY CODE
MEASURES MUST BE OBTAINED AND
FOLLOWED DURING CONSTRUCTION.

Approved: Service Chief	Approved: Service Chief
Concur M & O	Approved: Service Chief
Concur Bio-Med	Approved: Service Chief
Concur Safety	Approved: Service Chief
Approved: Service Chief	Approved: Admin. Officer

Drawing Title
FLOOR PLAN
Approved: Chief of Engineering
Approved: Associate Director

Project Title		
SPINAL CORD INJURY UNIT CORRIDORS RENOVATION		
Building Number 1	Checked RM	Drawn NS
Location AUDIE L. MURPHY MEMORIAL VETERAN HOSPITAL - SAN ANTONIO, TEXAS		

Date	04-04-2013
Project No.	671-13-105
DRAWING NO.	A7

