

KEYED NOTES

1.

EXISTING LIGHT FIXTURES AND SWITCHING TO REMAIN.

2.


RE-INSTALL EXISTING INCANDESCENT FIXTURE FROM THIS ROOM IN NEW CEILING. RE-CONNECT TO EXISTING LIGHTING CIRCUIT FOR THE FIXTURES IN THIS ROOM. PROVIDE NEW LAMP IN EACH FIXTURE AND CLEAN LENS. TYPICAL OF FOUR FIXTURES IN THIS ROOM.

3.

CONNECT TO EXISTING CORRIDOR LIGHTING CIRCUIT. FIXTURE SHALL BE CONTROLLED THE SAME AS NON-EMERGENCY CORRIDOR FIXTURES

4.

CONNECT TO LOCAL LIGHTING CIRCUIT, AND EXTEND UNSWITCHED POWER TO NEW LIGHTS AS SHOWN.

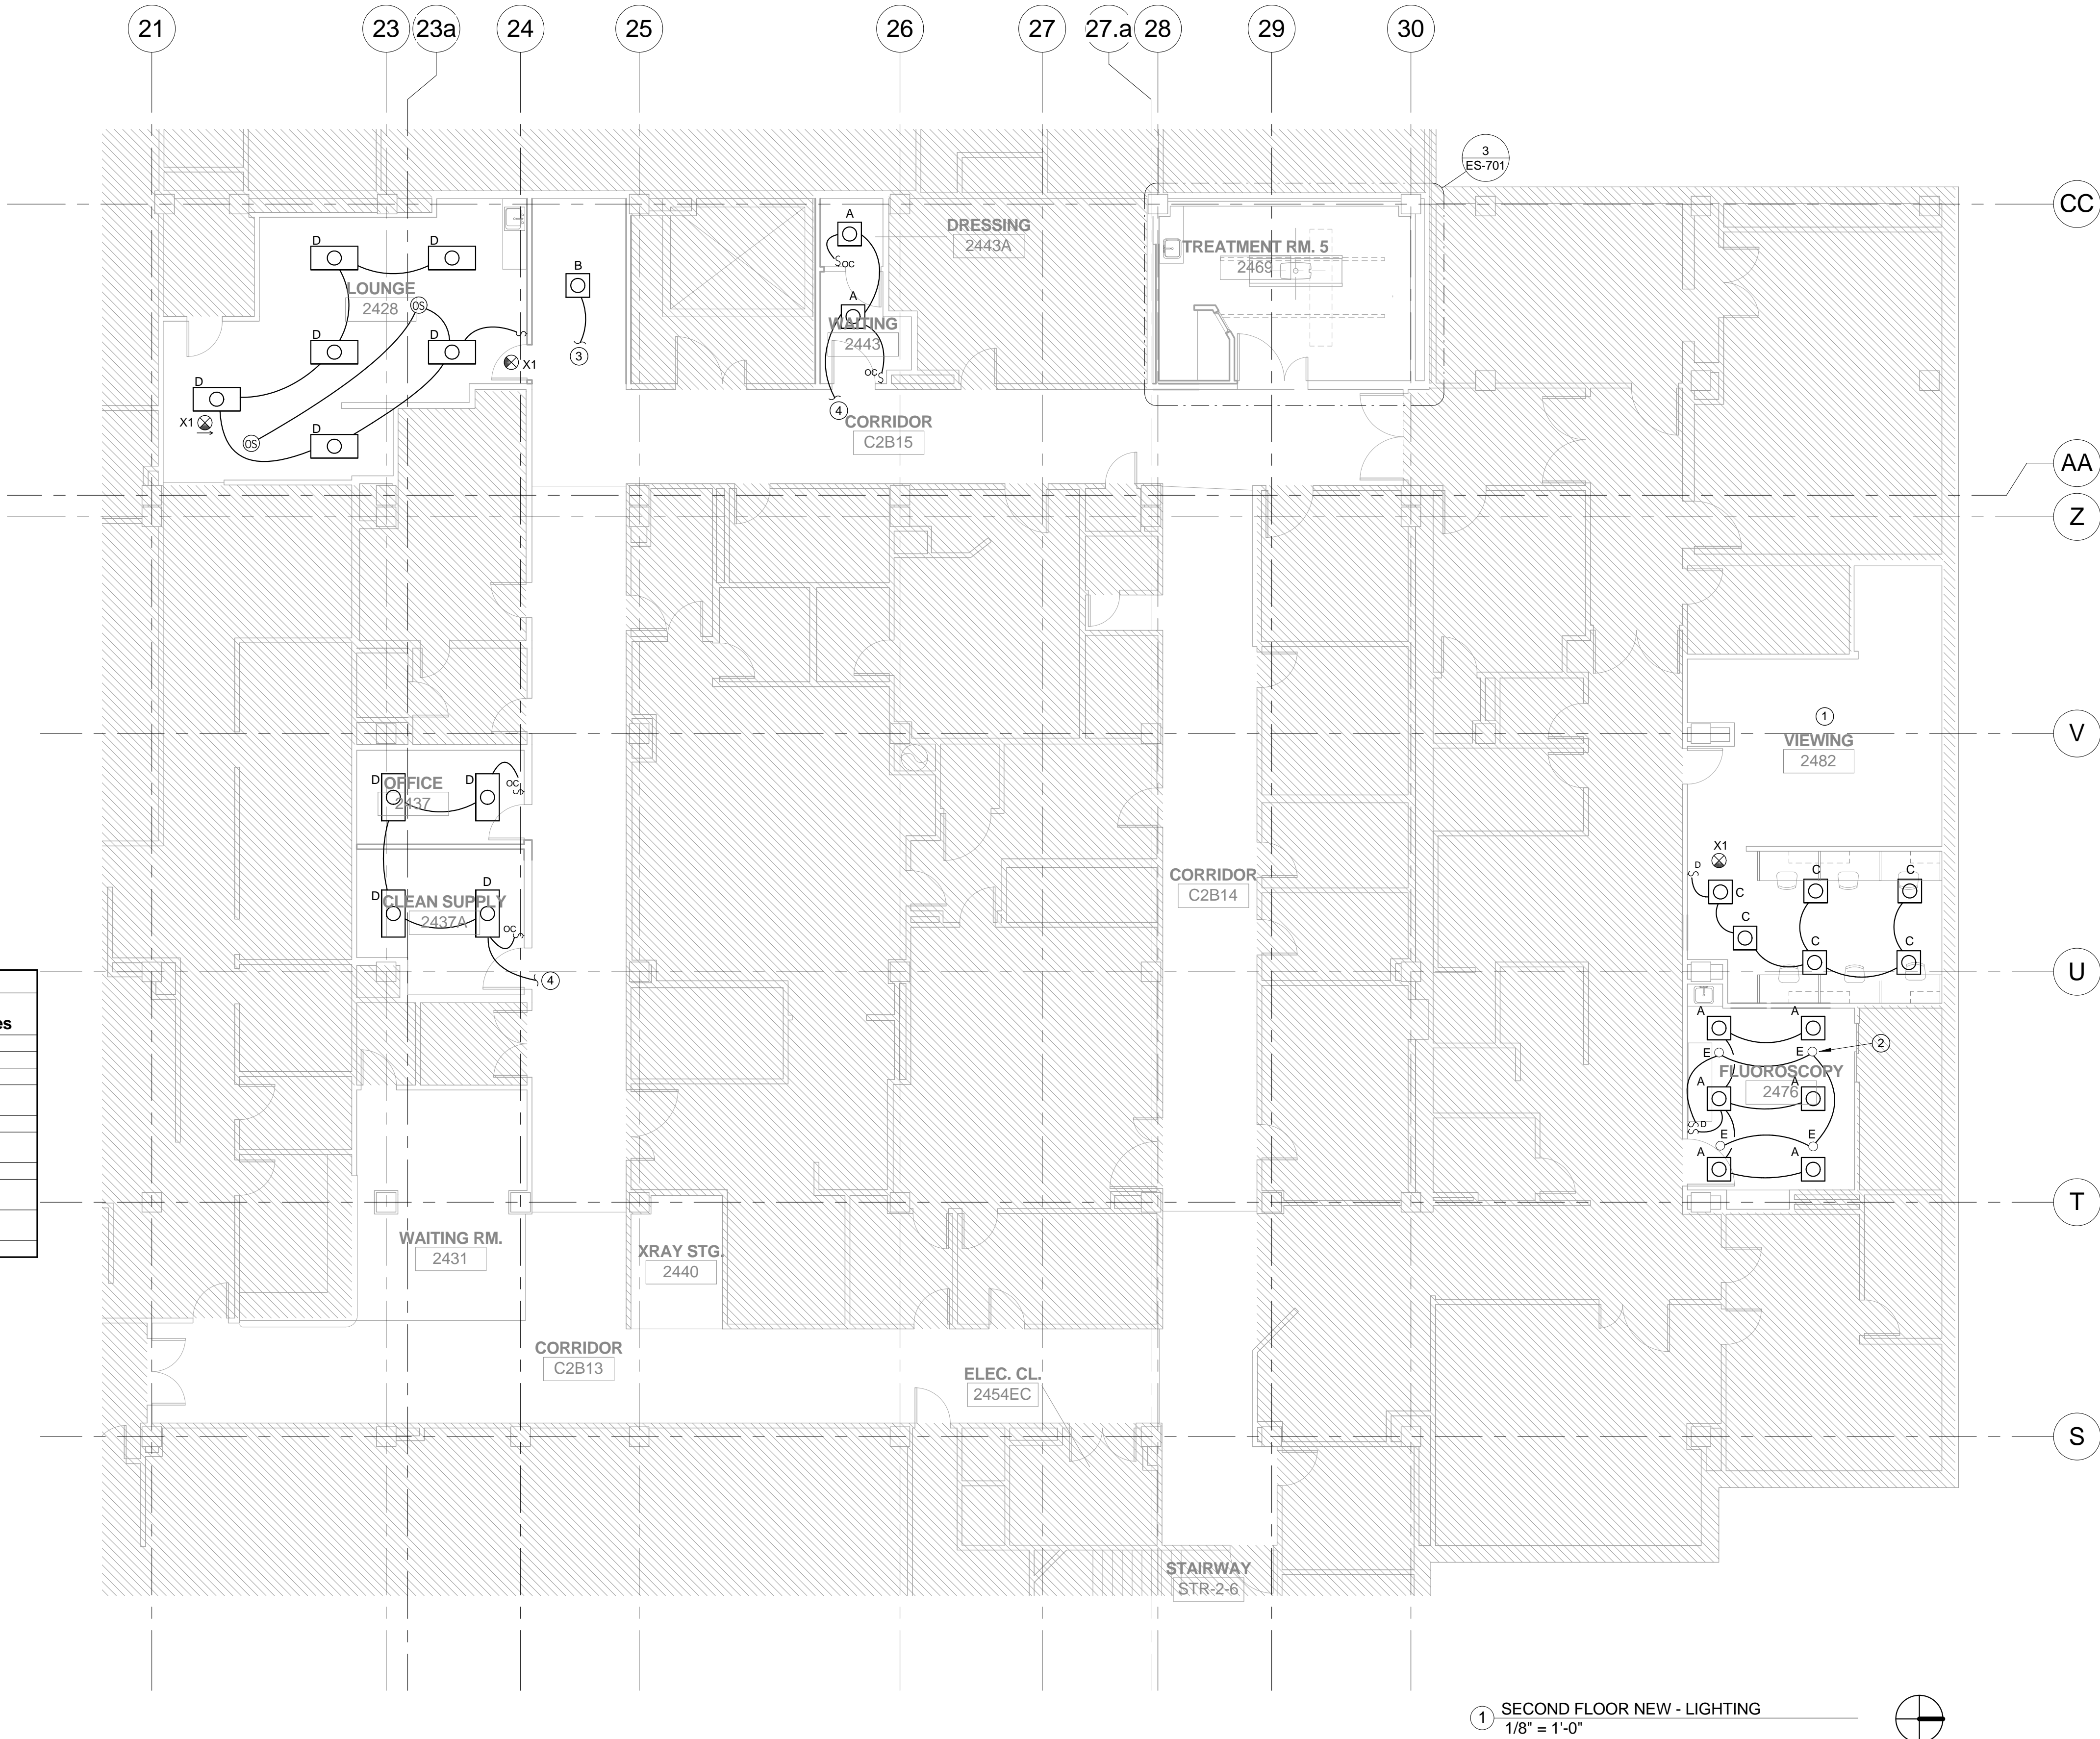

LUMINAIRE SCHEDULE								
Type Mark	Description	Lamp Quantity	Lamp	Volts	Manufacturer	Model	Options	Notes
Downlight								
E	7" RECESSED ILED DOWNLIGHT	0	LED	277	LIGHTOLIER	C7L20-N-2		
EXIT SIGNS								
X1	EXIT SIGN - UNIVERSAL AC POWER ONLY THERMOPLASTIC HOUSING	0	LED INCLUDED	UNIV	LIGHTOLIER	LLAURW SERIES		
Planged Fluorescent Fixtures								
A	2'x2' LENS TROFFER w/0.125 THICK ACRYLIC SEALED AND GASKETED	3	F8031T8-U/4100K	277	LIGHTOLIER	WES2GFSV1 SERIES		
Grid Lay-In Fixtures								
B	2'x2' CENTER BASKET TROFFER w/PERFORATED SHIELDING w/OPAL ACRYLIC LENS OVERLAY	2	40W TTS/4100K	277	LIGHTOLIER	QHE2GPFOP2FT SERIES		
C	2'x2' CENTER BASKET TROFFER w/PERFORATED SHIELDING w/OPAL ACRYLIC LENS OVERLAY, DIMMING BALLAST	2	40W TTS/4100K	277	LIGHTOLIER	QHE2GPFOP2FT SERIES		
D	2'x4' LENS TROFFER w/0.125 THICK ACRYLIC	2	F32T8/4100K	277	LIGHTOLIER	SPS2GFSVY SERIES		

1 SECOND FLOOR NEW - LIGHTING
1/8" = 1'-0"

95% SUBMISSION - NOT FOR CONSTRUCTION

Revisions:

Date

Stamp / Seal

THESE DOCUMENTS ARE FOR INTERIM REVIEW AND NOT INTENDED FOR CONSTRUCTION, BIDDING, OR PERMIT PURPOSES. DATE: 2.14.2013 ENGINEER OF RECORD DOUGLAS G. CARTER, PE STATE: KANSAS REGISTRATION #: 15811

CONSULTANTS:

IEA

9201 West Broadway Brooklyn Park, MN 55445 Tel: 763.315.7900 Fax: 763.315.7920

SSR

Smith Seckman Reid, Inc. 11460 Tomahawk Creek Pkwy, Suite 320 Leawood, KS 66211 (913) 319-3560 FAX: (913) 319-3579 www.ssr-inc.com Project #: 1254071

ARCHITECT/ENGINEERS:

COX DESIGN ASSOCIATES

ARCHITECTURE PLANNING INTERIORS

CHICAGO 345 N. Canal Street Suite 701 Chicago, Illinois 60606 T: 312.454.9434 F: 312.454.9439

AUSTIN 5121 Bee Cave Road #203 Austin, Texas 78746 T: 512.327.4149 F: 512.327.7679

Drawing Title

SECOND FLOOR NEW - LIGHTING

Location

CLEMENT J. ZABLOCKI VA MEDICAL CENTER MILWAUKEE, WI

Project Name

111 RENOVATE X-RAY 5

Project Number

695-12-195

Date

02.14.13

Drawing Number

ES-201

Dwg. of

Building Number

111

Checked

DGC

Drawn

RDS

Office of Construction and Facilities Management

