


- SITE UTILITY NOTES**
- ALL FILL MATERIAL IS TO BE IN PLACE, AND COMPACTED BEFORE INSTALLATION OF PROPOSED UTILITIES.
 - CONTRACTOR SHALL NOTIFY THE UTILITY AUTHORITIES INSPECTORS 72 HOURS BEFORE CONNECTING TO ANY EXISTING LINE.
 - UTILITIES UNDERGROUND SHALL BE INSTALLED, INSPECTED AND APPROVED BEFORE BACKFILLING.
 - DRAWINGS DO NOT PURPORT TO SHOW ALL EXISTING UTILITIES.
 - EXISTING UTILITIES SHALL BE VERIFIED IN FIELD PRIOR TO INSTALLATION OF ANY NEW LINES.
 - THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES AS SHOWN ON THESE PLANS IS BASED ON RECORDS OF THE VARIOUS UTILITY COMPANIES, AND WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THE CONTRACTOR SHALL CONTACT DIG SAFE @ 1-800-962-7962 AT LEAST 72 HOURS PRIOR TO BEGINNING CONSTRUCTION TO REQUEST EXACT FIELD LOCATION OF UTILITIES. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES WHICH CONFLICT WITH THE PROPOSED IMPROVEMENTS SHOWN.
 - CONTRACTOR SHALL COORDINATE WITH ALL UTILITY COMPANIES FOR INSTALLATION REQUIREMENTS AND SPECIFICATIONS.
 - CONTRACTOR SHALL COMPLY WITH THE LATEST OSHA STANDARDS OR DIRECTIVES OR ANY OTHER AGENCY HAVING JURISDICTION FOR EXCAVATION AND TRENCHING PROCEDURES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE DESIGN AND MAINTENANCE OF ALL SUPPORT SYSTEMS, SLOPING, BENCHING, AND OTHER MEANS OF PROTECTION.

NOTE:
GENERAL CONTRACTOR REQUIRED TO FIELD VERIFY ALL UTILITIES PRIOR TO EXCAVATION



<div>100% COMPLETION</div> <div>Revisions</div>	<div>6/5/2012</div> <div>Date</div>	<div></div> <div>6-5-12</div>	<div>D&A Doucet & Associates, Inc.</div> <div>136 West Street, Suite 103</div> <div>Northampton, Massachusetts 01060</div> <div>Phone: (413) 517-0133 Fax: (413) 517-0136</div> <div>www.doucetandassociates.com</div> <div>AUSTIN, TEXAS • NORTHAMPTON, MASSACHUSETTS • ROSEVILLE, CALIFORNIA</div>	<div>Architectural</div> <div>INSIGHTS, Inc</div> <div>3 Commerce Street Palmer, MA 01969</div> <div>(413) 258-5555 Fax: (413) 258-9993</div> <div>e-mail: admin@architectural-insights.com</div>	<div>Drawing Title</div> <div>SITE UTILITIES PLAN</div>	<div>Project Title</div> <div>RETAINING WALL REPLACEMENT LOADING DOCK AT LAUNDRY - MYRTLE AVENUE</div>	<div>Date</div> <div>6/5/2012</div>
						<div>Project No.</div> <div>528A8-10-809</div>	
					<div>APPROVED: VAMC ENGINEERING MNGR OSCAR PRUE</div>	<div>Building No.</div> <div>Checked TJH</div> <div>Drawn LAR</div>	<div>DRAWING NO.</div> <div>L104</div>
					<div>APPROVED: CHIEF, FACILITY SERVICE GLEN CYPHERS</div>	<div>Location</div> <div>ALBANY, NY</div>	

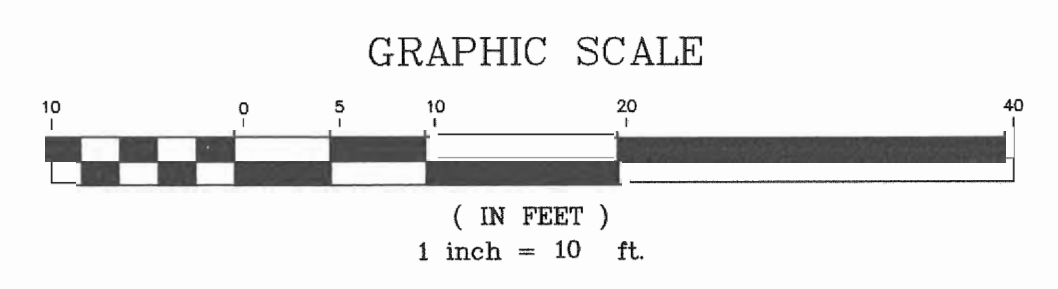