


WOOD FLOORS TO BE SEALED

--- MARKING TAPE

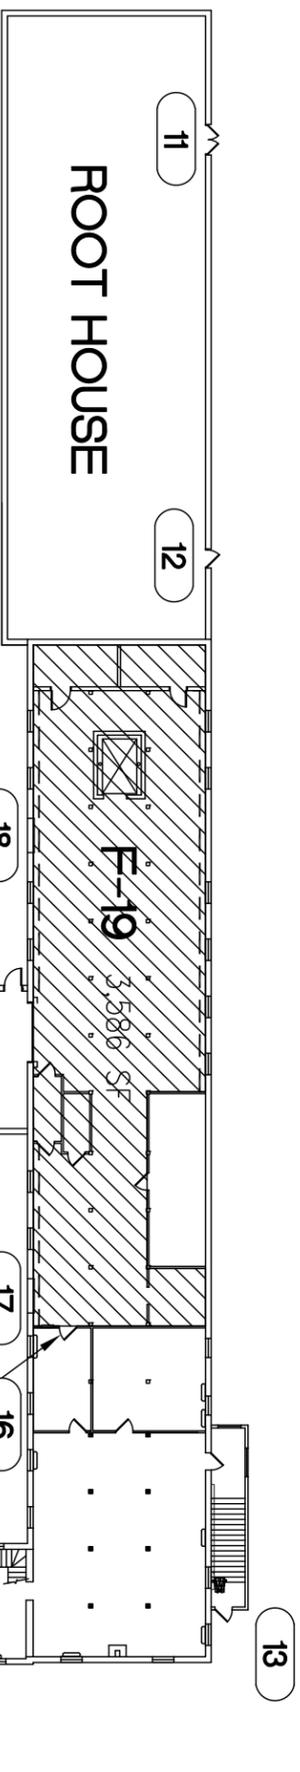

DOOR SCHEDULE

DOOR NO.	NO. DOORS & FRAME	DOOR MATERIAL	FRAME MATERIAL	REMARKS
11	2	WOOD	WOOD	SECURE WITH HASP & PADLOCK
12	1	WOOD	WOOD	SECURE WITH HASP & PADLOCK
13	1	METAL	METAL	SECURE WITH HASP & PADLOCK
14	1 W/ 2 SL	MTL/WD	WOOD	SECURE WITH HASP & PADLOCK
15	1	WOOD	WOOD	HARDWARE GROUP 1
16	1	WOOD	WOOD	SECURE WITH HASP & PADLOCK
17	1	ROLL-UP	WOOD	---
18	1	ROLL-UP	WOOD	SECURE WITH INTERIOR METAL GATE SYSTEM
19	1	ROLL-UP	WOOD	METAL ---
20	1	ROLL-UP	WOOD	---

WINDOW SCHEDULE

WINDOW NO.	REMARKS
1H	A/C UNIT TO BE REMOVED BY CONTRACTOR, VA TO INSTALL PLYWOOD INFILL PANEL
1I	FAN UNIT TO BE REMOVED BY CONTRACTOR, VA TO INFILL WITH CMU
1J	A/C UNIT TO BE REMOVED BY CONTRACTOR, VA TO INSTALL PLYWOOD INFILL PANEL
1K	FAN TO BE REMOVED AND A/C UNIT DUCTWORK INFILL PANEL TO BE REMOVED BY CONTRACTOR. A/C INFILL TO BE REPLACED WITH NEW PANEL BY VA, CONTRACTOR TO REINSTALL A/C DUCTWORK AND INSTALL GLASS PANE WHERE FAN WAS REMOVED. COORDINATE W/ VA

1 LEVEL ONE FLOOR PLAN
SCALE: 1/32" = 1'-0"
1259, AA002

No.	Revisions:	Date
	BID DOCUMENTS	03-08-2013

CONSULTANTS: 

ARCHITECT/ENGINEERS: 

Drawing Title ARCHITECTURAL LEVEL ONE FLOOR PLAN	Project Title LEAD ABATEMENT REMEDIATION PLAN	Project Number 618-12-303	Office of Construction and Facilities Management 
Approved: Project Director	Location FORT SNELLING MINNEAPOLIS, MN	Building Number 222	
Date 03-08-2013	Checked PR	Drawn WH	Drawing Number 1259, AA002 Dwg. 6 of 15