




1 INTERIOR ELEV.  
SCALE: 1/4" = 1'-0"

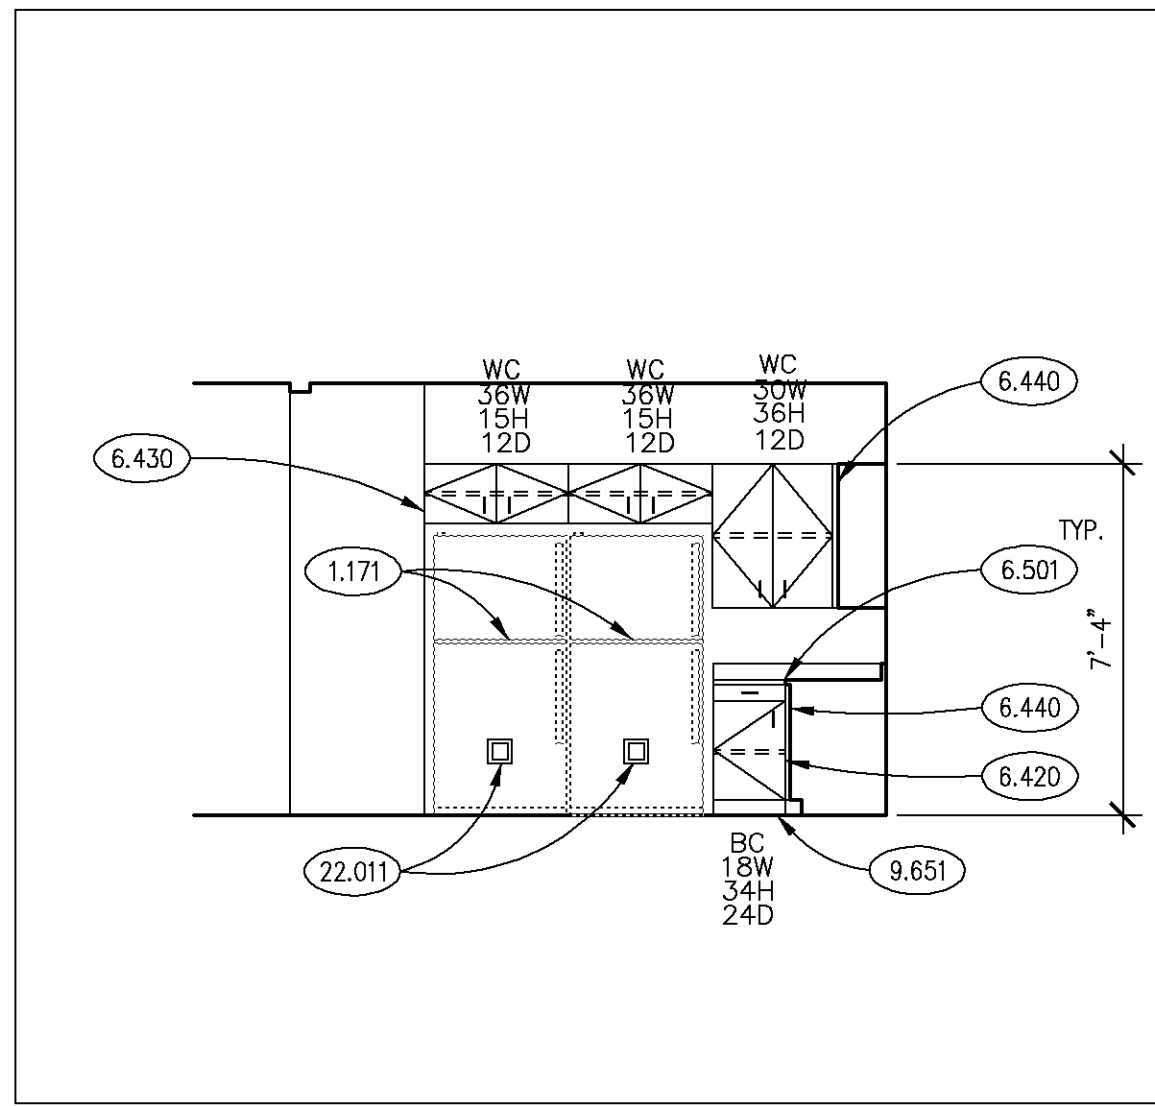


2 INTERIOR ELEV.  
SCALE: 1/4" = 1'-0"

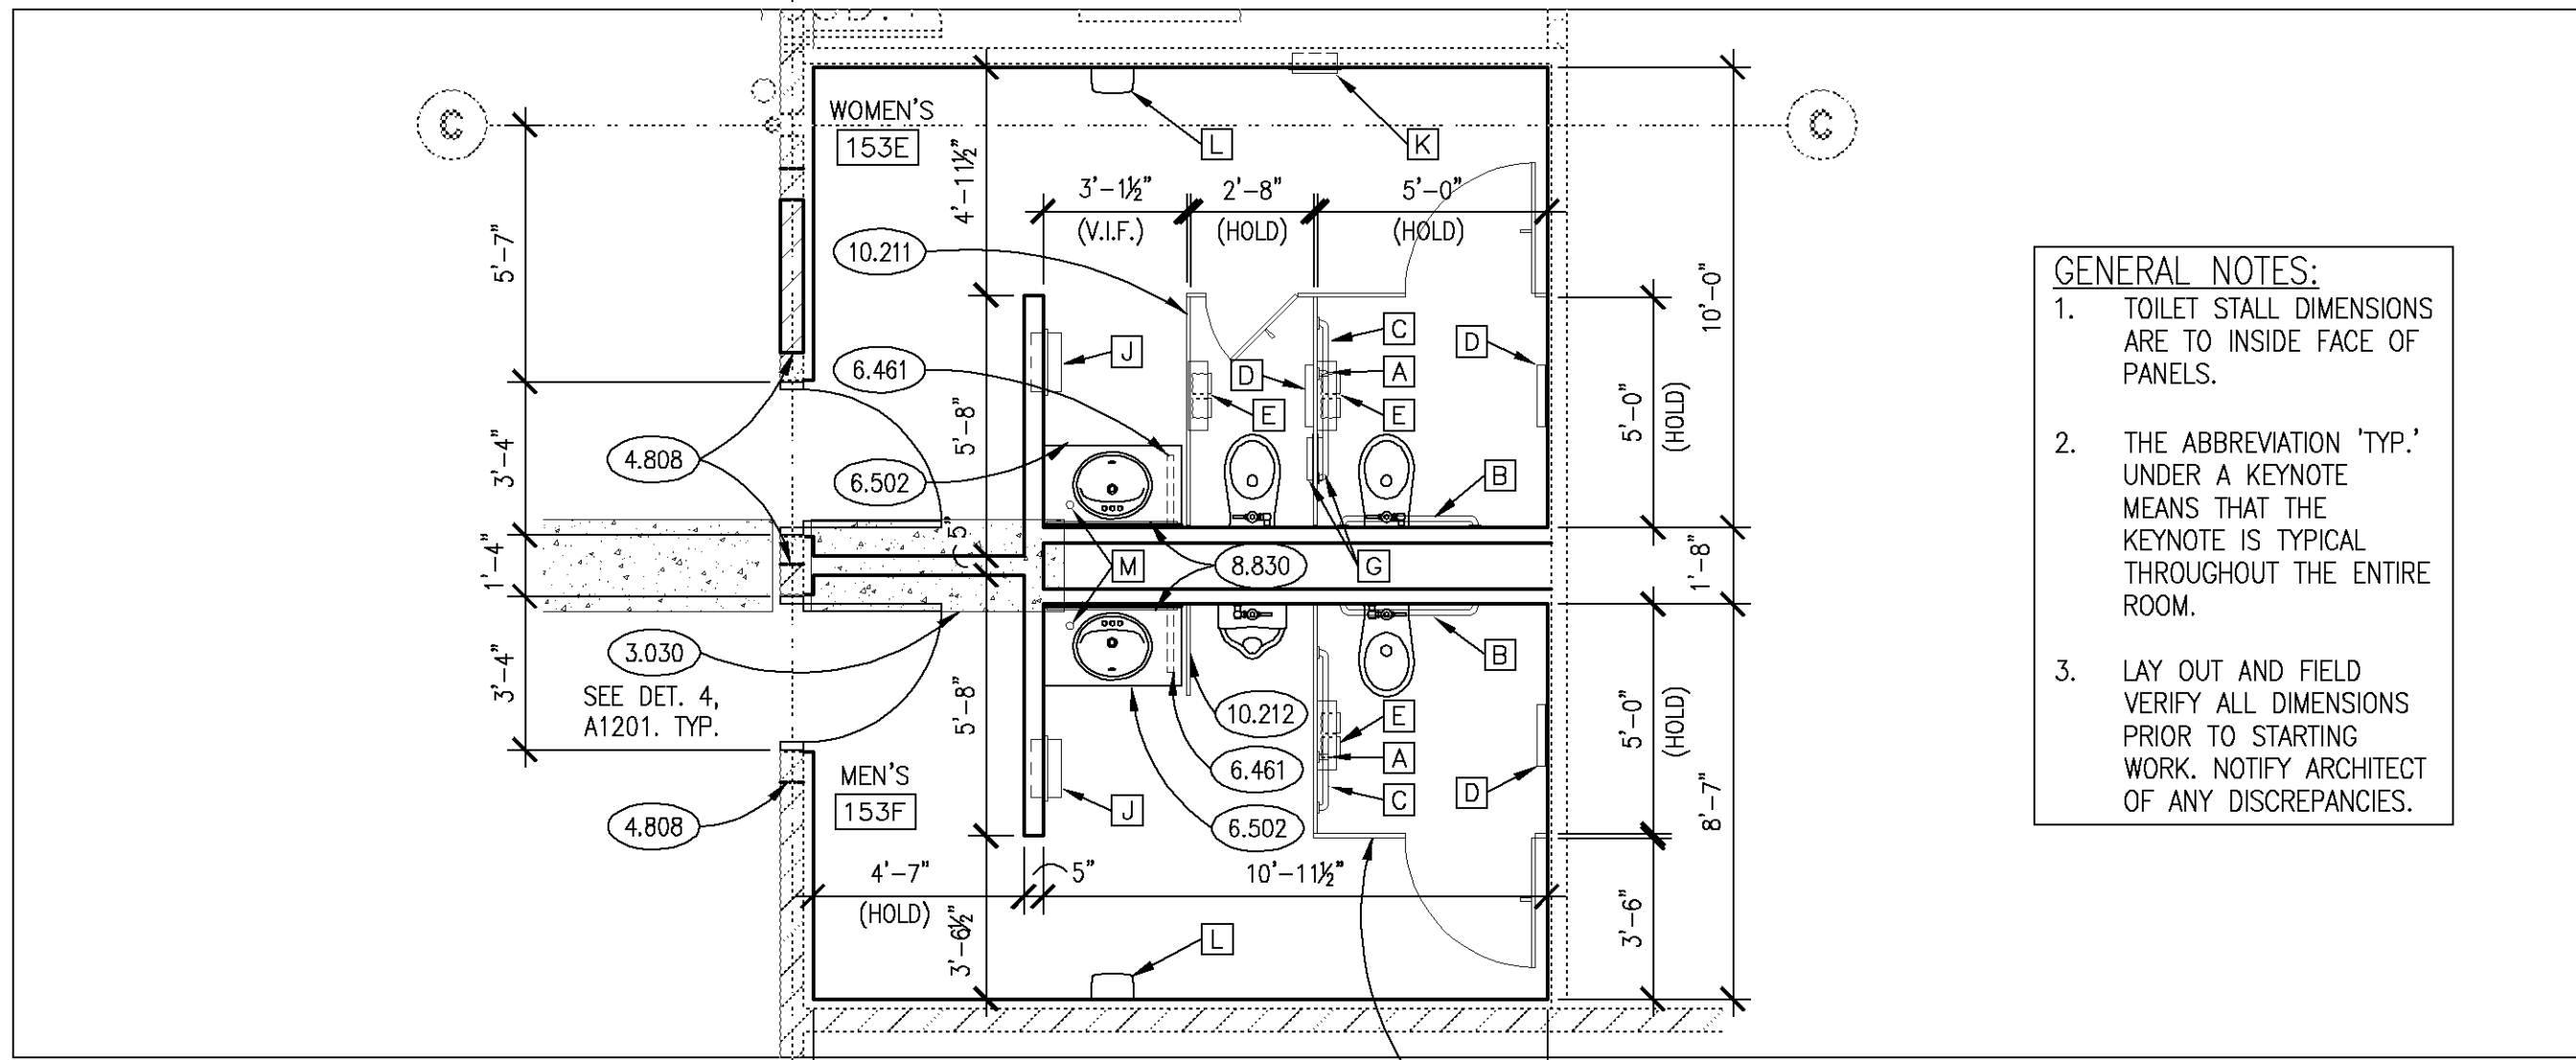

3 ENLARGED TOILET PLAN  
SCALE: 1/4" = 1'-0"



4 NOT USED  
SCALE: 1/4" = 1'-0"

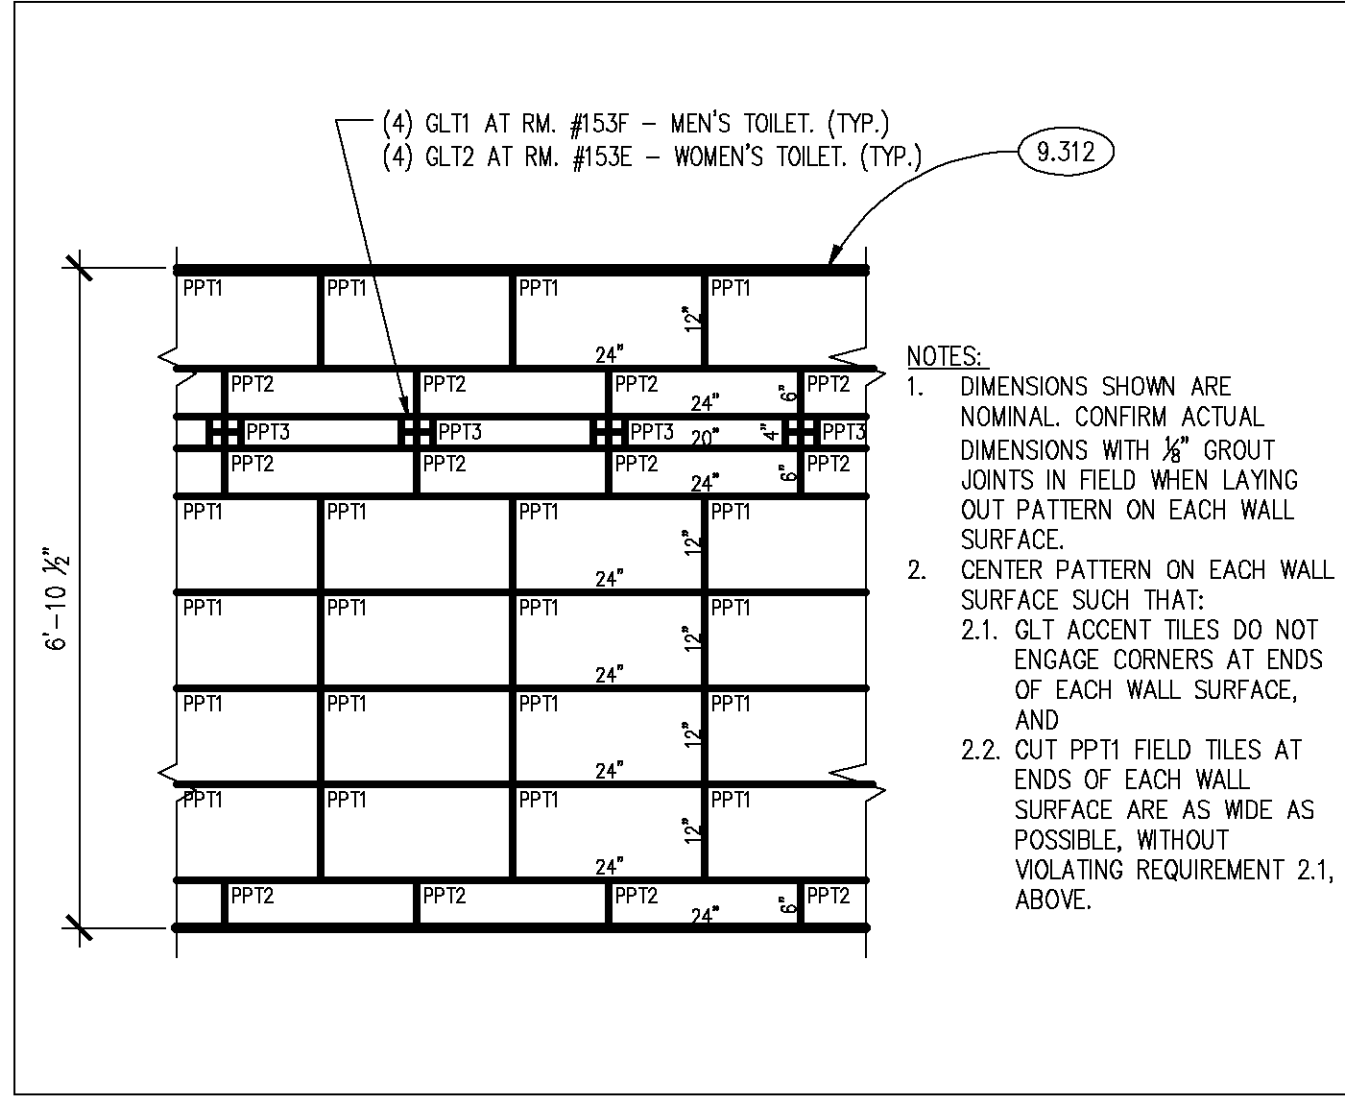

5 TYPICAL TILE WAINSCOT PATTERN  
SCALE: N.T.S.

TOILET ACCESSORY SCHEDULE

MARK	DESCRIPTION	CAT. NO.	REMARKS	MOUNTING HEIGHTS
A	S.S. GRAB BAR - 18"	3200-18	CONCEALED MOUNTING	REFER TO SHEET G002 FOR MOUNTING INFO.
B	S.S. GRAB BAR - 36"	3200-36	CONCEALED MOUNTING	REFER TO SHEET G002 FOR MOUNTING INFO.
C	S.S. GRAB BAR - 42"	3200-42	CONCEALED MOUNTING	REFER TO SHEET G002 FOR MOUNTING INFO.
D	SURFACE MOUNTED TOILET SEAT COVER DISPENSER	0477-SM	SURFACE MOUNTED	48" FROM TOP OF UNIT TO FLOOR
E	STAINLESS STEEL SHELF AND DOUBLE TOILET TISSUE HOLDER	0697-GAL	SURFACE MOUNTED	19" TO 6" OF ROLL DISPENSER A.F.F. REFER TO SH. G002 FOR MOUNTING INFO.
F	NOT USED			
G	SANITARY NAPKIN DISPOSAL	0472	RECESSED (PARTITION MTD.)	REFER TO SHEET G002 FOR MOUNTING INFO.
H	NOT USED			
J	WASTE RECEPTACLE	0458	SEMI-RECESSED	48" TO TOP OF UNIT A.F.F.
K	FEMININE NAPKIN/TAMPON VENDOR	0464	SEMI-RECESSED 25 CENTS	48" MAXIMUM TO CONTROLS A.F.F. REFER TO SH. G002 FOR MOUNTING INFO.
L	XLERATOR ELECTRIC HAND DRYER	MODEL XL-C	CHROME PLATED SURFACE MTD.	MOUNT 40" A.F.F. TO NOZZLE
M	LAVATORY MOUNTED SOAP DISPENSER	0332	LAVATORY MOUNTED	
N	NOT USED			
P	PAPER TOWEL DISPENSER	0210	SURFACE MOUNTED	42" A.F.F. TO BOTTOM.
Q	NOT USED			

TOILET ACCESSORY GENERAL NOTES


- A.S.I. CATALOG NUMBERS ARE USED FOR REFERENCE ONLY, UNLESS OTHERWISE NOTED.
- MOUNTING HEIGHTS PER ADA-AG (AMERICAN'S WITH DISABILITIES ACT ACCESSIBILITIES GUIDELINES).
- MOUNTING HEIGHTS ARE FROM FINISHED FLOOR TO HEIGHT INDICATED. A.F.F. IS THE ABBREVIATION FOR 'ABOVE FINISHED FLOOR'.

TOILET ACCESSORY REMARKS


- BOBRICK CATALOG NUMBER, USED FOR REFERENCE ONLY.
- DUROLLA MODEL NUMBER, USED FOR REFERENCE ONLY.

KEYNOTES


- 1.121 OWNER-PROVIDED ITEM (N.I.C.): RESIDENTIAL EQUIPMENT; MICROWAVE OVEN.
- 1.171 OWNER-FURNISHED ITEM TO BE INSTALLED BY CONTRACTORS: RESIDENTIAL EQUIPMENT; REFRIGERATOR.
- 3.030 CAST-IN-PLACE CONCRETE: MATCH EXISTING CONCRETE SLAB THICKNESS. REINFORCE WITH WWF-6x6 W2.0 x W2.0.
- 4.808 MASONRY ASSEMBLY: TOOTH NEW MASONRY INTO EXISTING.
- 6.420 LAMINATE CLAD WOOD CASEWORK: BASE CABINETS; COLOR-PLA.
- 6.430 LAMINATE CLAD WOOD CASEWORK: WALL CABINETS; COLOR-PLA.
- 6.431 LAMINATE CLAD WOOD CASEWORK: WALL CABINETS; MICROWAVE SHELF WITH 18 INCH DEEP EXTENDED LOWER SHELF; COLOR-PLA.
- 6.440 LAMINATE CLAD WOOD CASEWORK: FILLER PANEL, SIZE AS REQUIRED; COLOR-PLA.
- 6.453 AND ELEVATIONS: TYPICAL OF ALL FREE-STANDING COLUMNS; COLOR-PLA.
- 6.461 SOLID SURFACING COUNTERTOP/CASEWORK ACCESSORY: COUNTERTOP SUPPORT BRACKET.
- 6.501 SOLID SURFACING COUNTERTOP: 3/4" THICK WITH 3/4" PLYWOOD BACKING - FRONT EDGE 1-1/2" THICK PROFILE; WITH 4" HIGH X 3/4" THICK BACKSPLASH/SIDE SPLASHES; 1/4" RADIUS EDGE DETAIL TO TOP EDGE OF COUNTERTOP. TYPICAL. EASED EDGE FOR BACK AND SIDE SPLASHES. TYPICAL. COLOR - SSA.
- 6.502 SOLID SURFACING COUNTERTOP: 1/2" THICK WITH 3/4" PLYWOOD BACKING; WITH 4" HIGH BACKSPLASH/ SDESPLASHES; 4" HIGH FRONT EDGE; 22" COUNTER DEPTH; COUNTER SURFACE AT 34" A.F.F. UNLESS NOTED OTHERWISE.
- 8.830 MIRROR: LENGTH MATCHES LENGTH OF COUNTERTOP; TOP OF MIRROR AT TOP OF NEW TILE WAINSCOT; BOTTOM OF MIRROR AT TOP OF COUNTERTOP BACKSPLASH.
- 9.105 METAL STUD FRAMING: SEE FLOOR PLAN AND PARTITION TYPES FOR METAL STUD SIZE.
- 9.250 GYPSUM BOARD: 5/8" THICK; TYPE "X".
- 9.260 GYPSUM BOARD ACCESSORY: ACOUSTICAL SEALANT.
- 9.261 GYPSUM BOARD ACCESSORY: ACOUSTICAL INSULATION: SOUND ATTENUATION BATTS; THICKNESS AS SPECIFIED.
- 9.262 GYPSUM BOARD ACCESSORY: CONTROL JOINT.
- 9.267 GYPSUM BOARD ACCESSORY: MINERAL WOOL INSULATION.
- 9.312 STAINLESS STEEL EDGE PROTECTION TRIM.
- 9.651 RESILIENT BASE: REFER TO FINISH SCHEDULE.
- 10.211 METAL TOILET COMPARTMENT: CONFIGURATION AS INDICATED.
- 10.212 METAL URINAL SCREEN: 24" WIDE; CONFIGURATION AS INDICATED.
- 22.011 PLUMBING ACCESSORY: WATER VALVE BOX; REFER TO PLUMBING DRAWINGS.
- 26.001 LIGHT FIXTURE: REFER TO ELECTRICAL DRAWINGS.

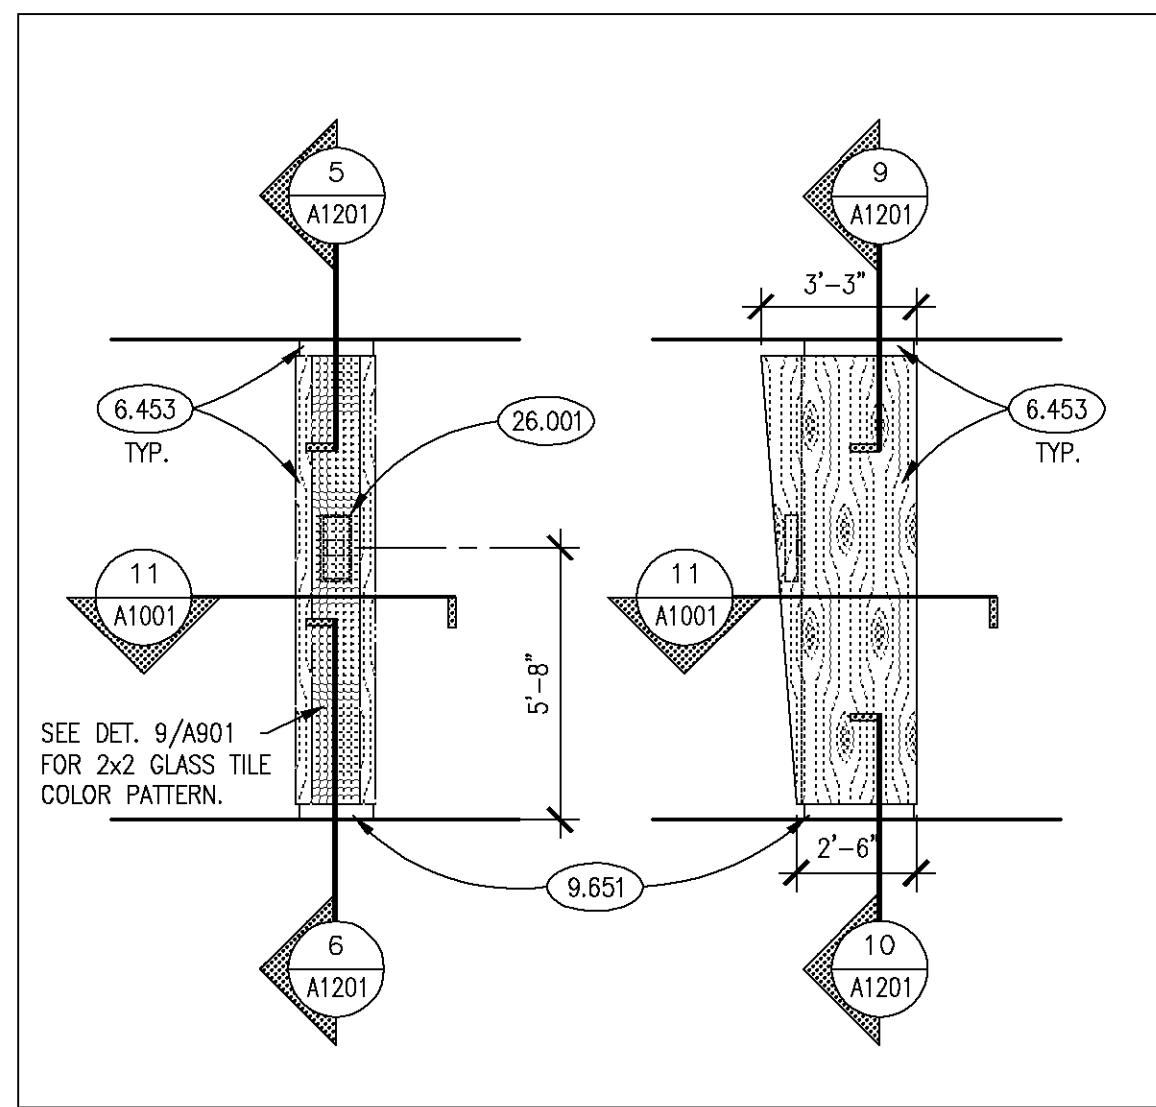


7 INTERIOR ELEV.  
SCALE: 1/4" = 1'-0"

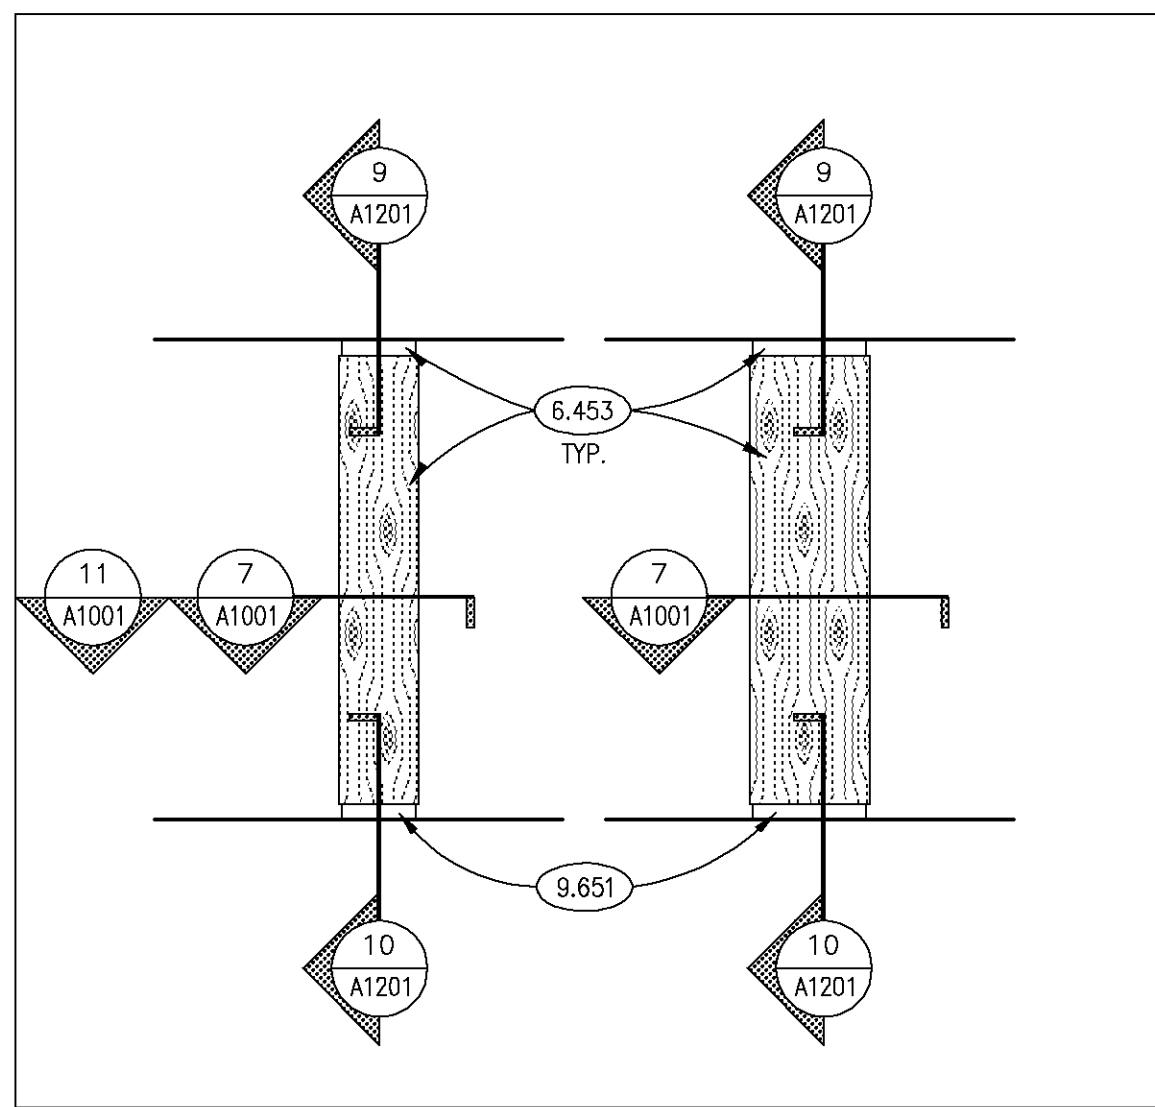

8 INTERIOR ELEV.  
SCALE: 1/4" = 1'-0"

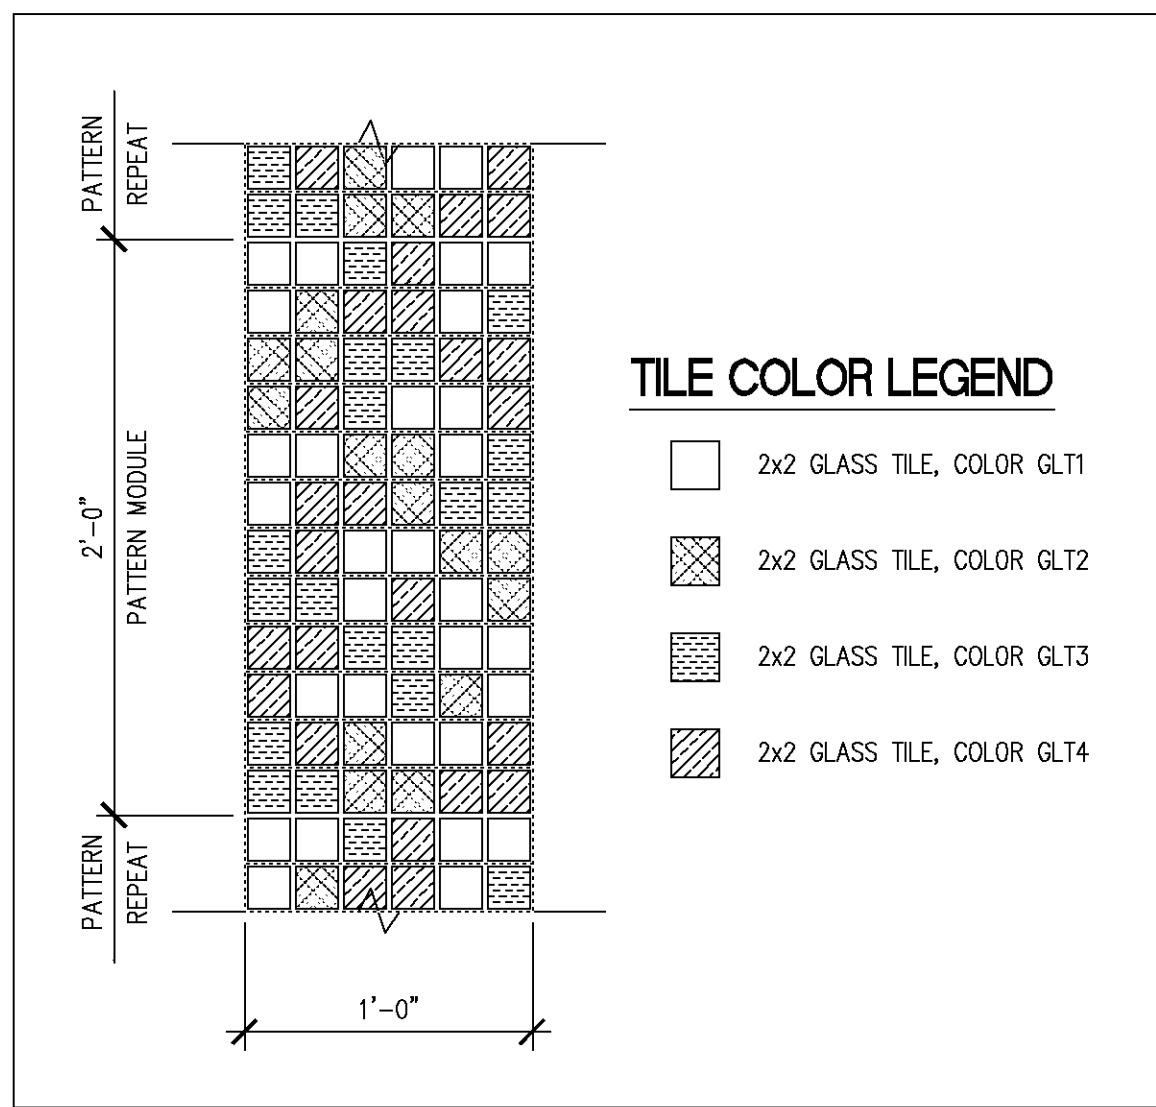

9 COLUMN ENCLOSURE TILE PATTERN  
SCALE: N.T.S.

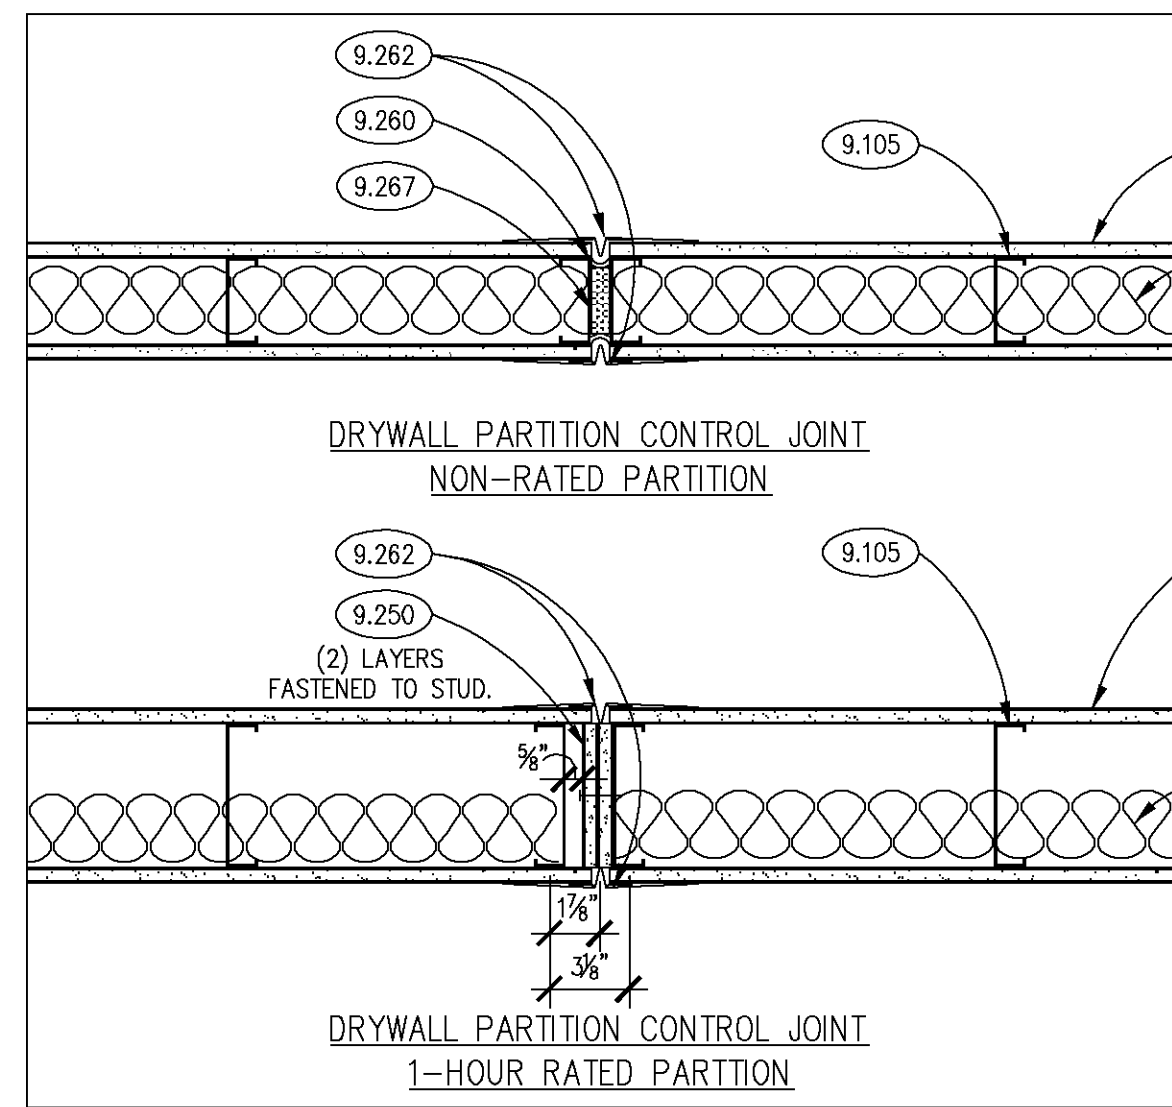

10 TYP. PLAN DETAIL  
SCALE: NOT TO SCALE

GENERAL NOTES


- REFER TO DRAWING G001 FOR PROJECT GENERAL NOTES.
- REFER TO DRAWING G003 FOR KEYNOTE DESCRIPTIONS NOT APPEARING ON THIS DRAWING.
- REFER TO DRAWING A801, FINISH SCHEDULE, FOR CEILING HEIGHTS AND DRAWING A401, PARTIAL REFLECTED CEILING PLANS, FOR SOFFIT HEIGHTS.
- COORDINATE CEILING HEIGHTS WITH SECTIONS AND DETAILS.
- COORDINATE LOCATIONS OF WALL-MOUNTED ELECTRICAL ITEMS WITH ARCHITECTURAL ITEMS TO ENSURE NO OVERLAP.
- INSTALL GYPSUM BOARD CONTROL JOINTS AT MAX. 24 FOOT CENTERS IN ALL CONTINUOUS GYPSUM BOARD WALL AND SOFFIT SURFACES THAT EXCEED 24 FEET IN LENGTH. SEE DETAIL #10 ON THIS SHEET FOR CONTROL JOINTS IN 1-HOUR RATED AND NON-RATED PARTITIONS.
- REFER TO SECTION 09 06 00 FOR DESCRIPTIONS OF COLORS OF TILES IN 'TYPICAL TILE WAINSCOT PATTERN'. SEE DETAIL #5 ON THIS SHEET.
- PROVIDE CEMENT BOARD AT WALL LOCATIONS SCHEDULED TO RECEIVE PORCELAIN/CERAMIC TILE.

NOI CONSTRUCTION DOCUMENTS FOR BID	04-12-13
NOI CONSTRUCTION DOCUMENTS SUBMITTAL	08-12-13
NOI CONSTRUCTION DOCUMENTS SUBMITTAL	02-09-13
Revisions:	Date

CONSULTANTS:

ARCHITECT/ENGINEERS:

Kluber, Inc.  
10 South Shumway  
Bataavia, Illinois 60510  
tel. 630.406.1213  
fax 630.406.9472  
www.kluberinc.com

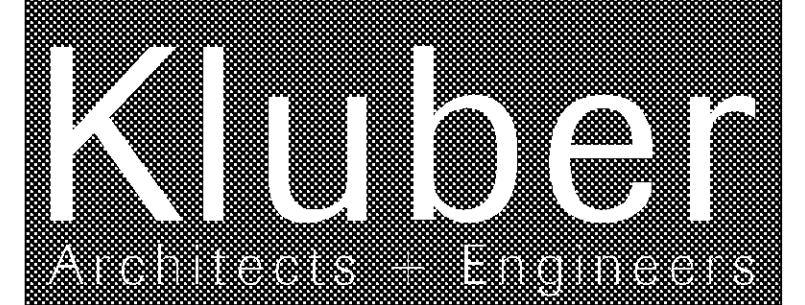

Drawing Title  
INTERIOR ELEVATIONS  
ENLARGED TOILET PLAN

Approved: Project Director

Project Title  
HINES BUILDING 37  
O.I. AND T. FIELD OFFICES - PHASE 3  
OFFICE AND RESTROOM RENOVATIONS

Location  
VA OFFICE OF ACQUISITION AND LOGISTICS  
HINES, ILLINOIS

Date  
04-12-13

Checked  
CJH

Drawn  
CJH

Project Number  
796-13-004

Building Number  
37

Drawing Number

37 - A901  
Dwg. 10 of 32

Office of  
Construction  
and Facilities  
Management

