



three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
three eighths inch = one foot
one quarter inch = one foot
one eighth inch = one foot

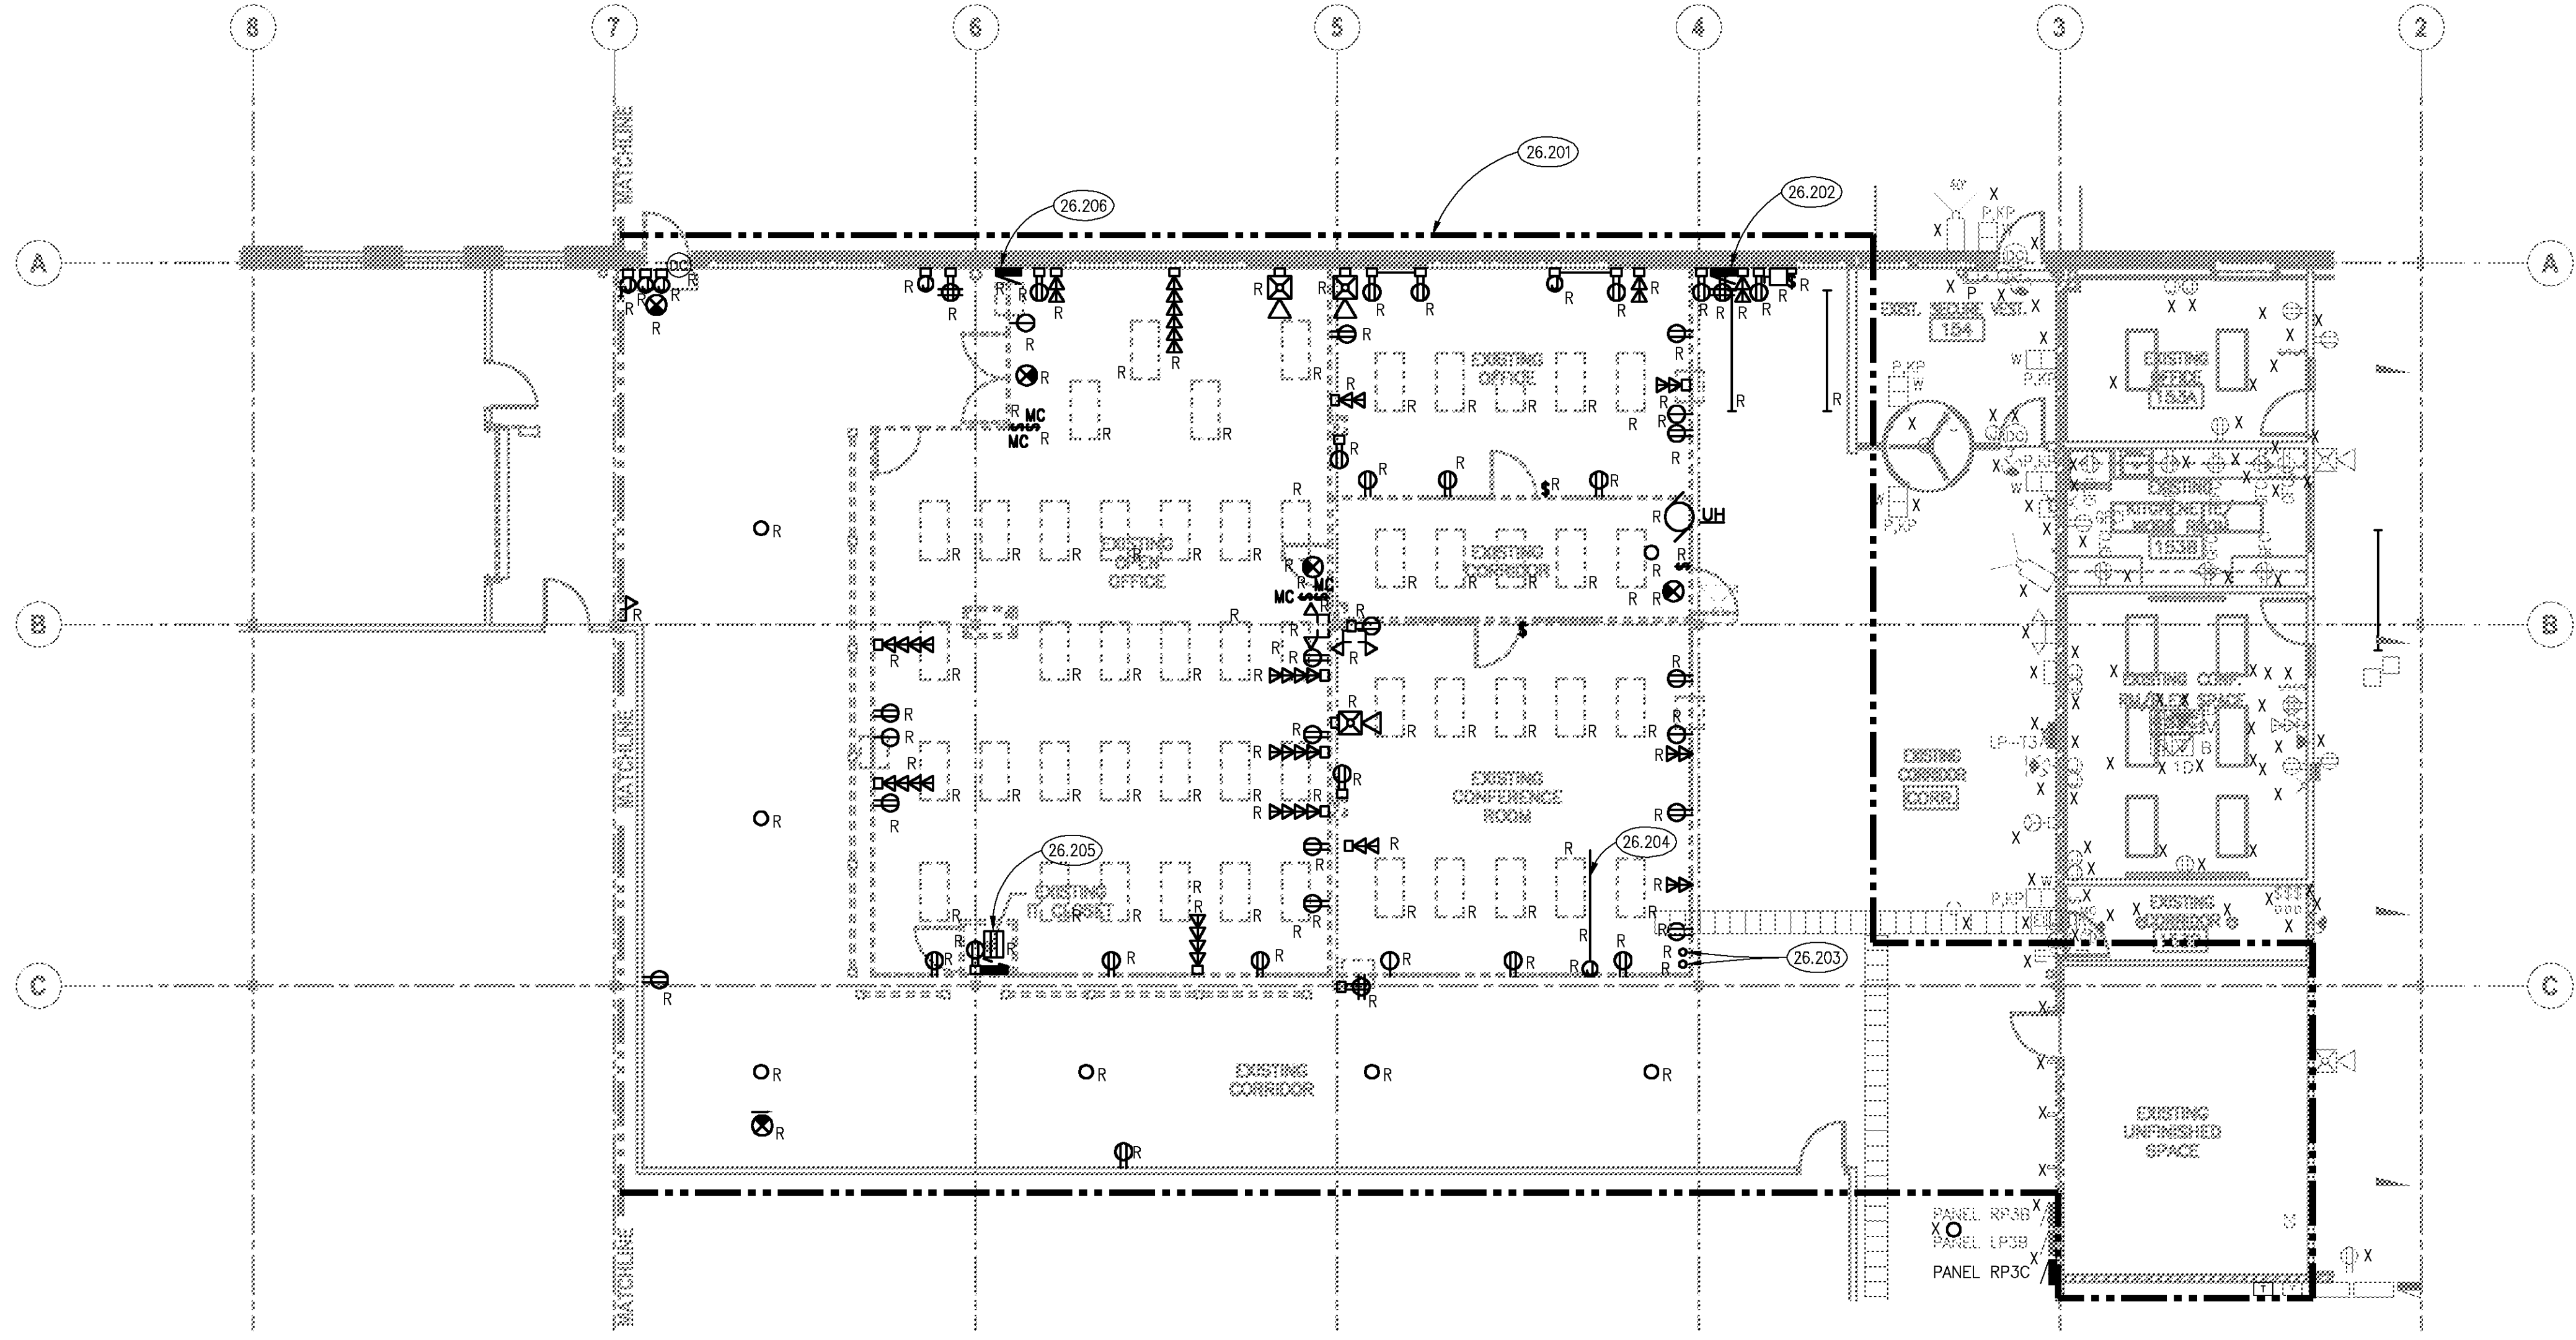


1 PARTIAL FIRST FLOOR ELECTRICAL DEMOLITION PLAN
SCALE: 1/8" = 1'-0"

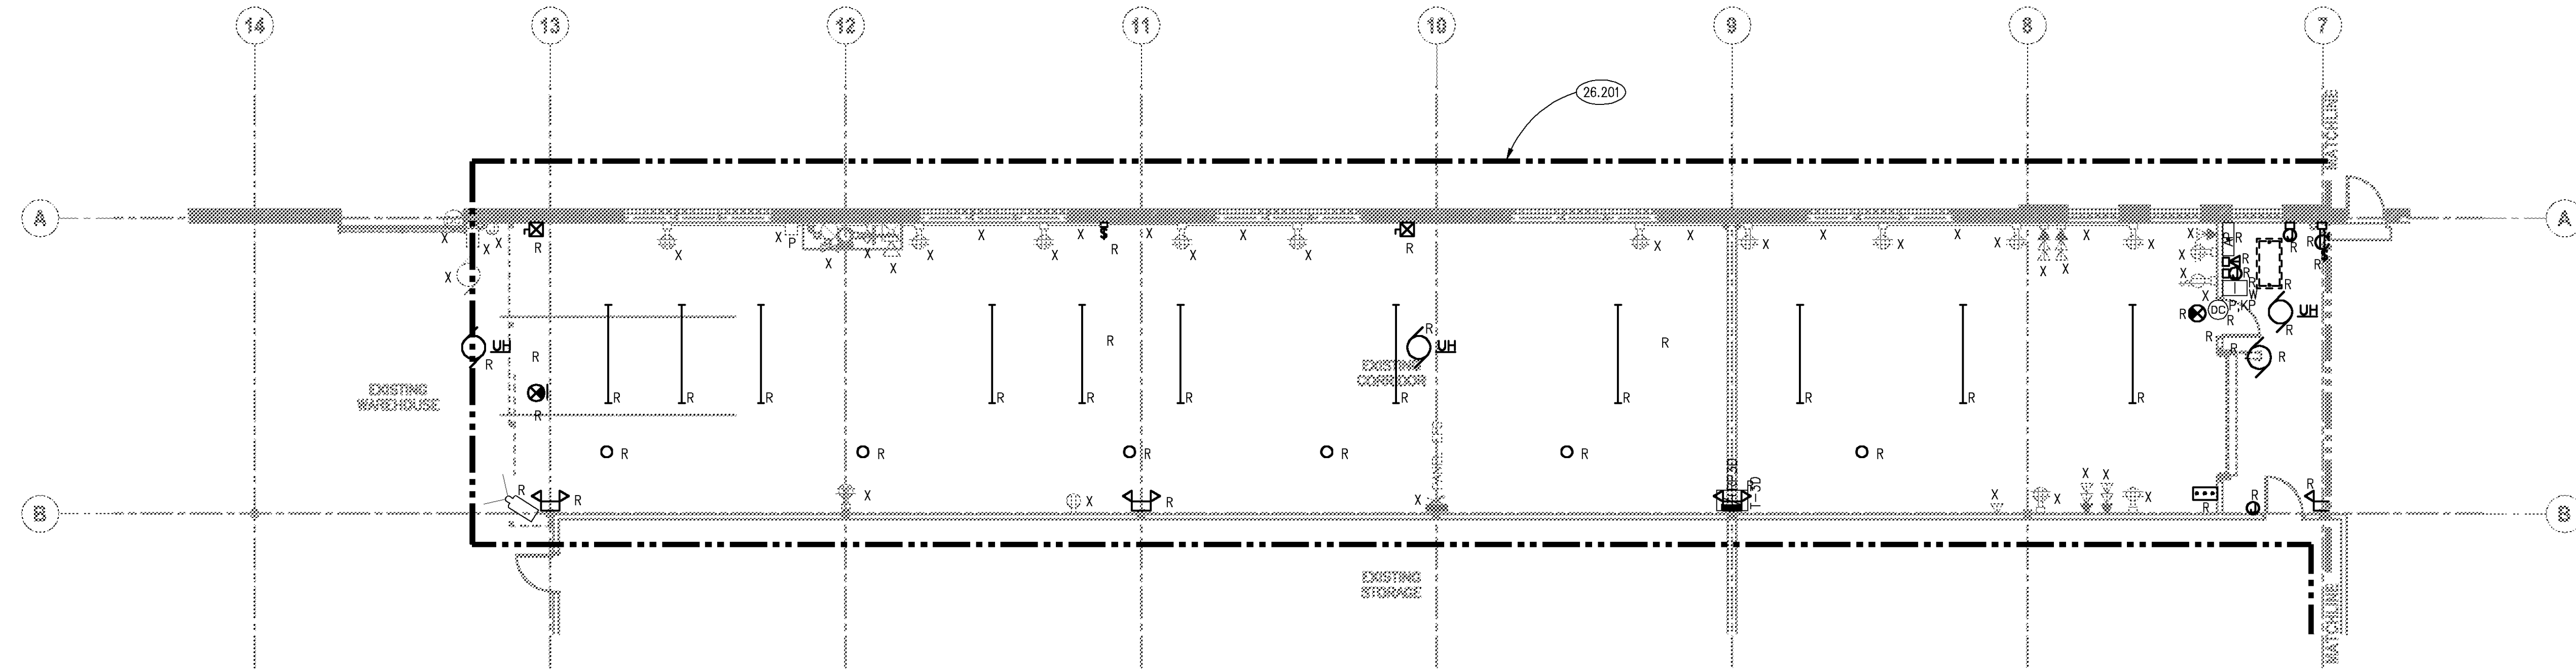

2 PARTIAL FIRST FLOOR ELECTRICAL DEMOLITION PLAN
SCALE: 1/8" = 1'-0"

- KEYNOTES**
- 26.201 LIMITS OF ELECTRICAL RENOVATION.
 - 26.202 REMOVE EXISTING LOW VOLTAGE CABINET. COORDINATE REMOVAL WITH OWNER.
 - 26.203 REMOVE CONDUIT FEEDS TO OFFICE PARTITIONS. COORDINATE REMOVAL WITH OWNER.
 - 26.204 REMOVE EXISTING SURFACE MOUNTED RACEWAY RUNNING ALONG FLOOR.
 - 26.205 REMOVE EXISTING DATA CABINET. COORDINATE REMOVAL WITH OWNER.
 - 26.206 REMOVE EXISTING PULL BOX.

- GENERAL NOTES**
- PERFORM SELECTIVE DEMOLITION AS NECESSARY TO ACHIEVE DESIGN INTENT. REMOVE ABANDONED BRANCH CIRCUITRY TO SOURCE OF SUPPLY.
 - PATCH ALL WALLS AFFECTED BY DEMOLITION AND REMODELING.
 - INTENT OF DRAWINGS: THESE DRAWINGS ARE INTENDED TO RELAY TO CONTRACTOR A DESIGN INTENT. INCLUDE IN BID ALL LABOR AND MATERIALS NECESSARY FOR A COMPLETE AND OPERATIONAL SYSTEM AS REASONABLY INFERABLE, AS DETERMINED BY ARCHITECT, TO ACCOMPLISH THE INTENT OF THESE DRAWINGS.
 - REFER TO ARCHITECTURAL, MECHANICAL, PLUMBING, FIRE PROTECTION PLANS, SHOP DRAWINGS AND MANUFACTURERS INSTALLATION INSTRUCTIONS FOR ADDITIONAL INFORMATION ON EXACT POWER, WIRING & ROUGH-IN REQUIREMENTS AND LOCATIONS OF DEVICES.
 - COMPLETELY REMOVE ALL DISCONNECTED AND ABANDONED LOW VOLTAGE WIRING.

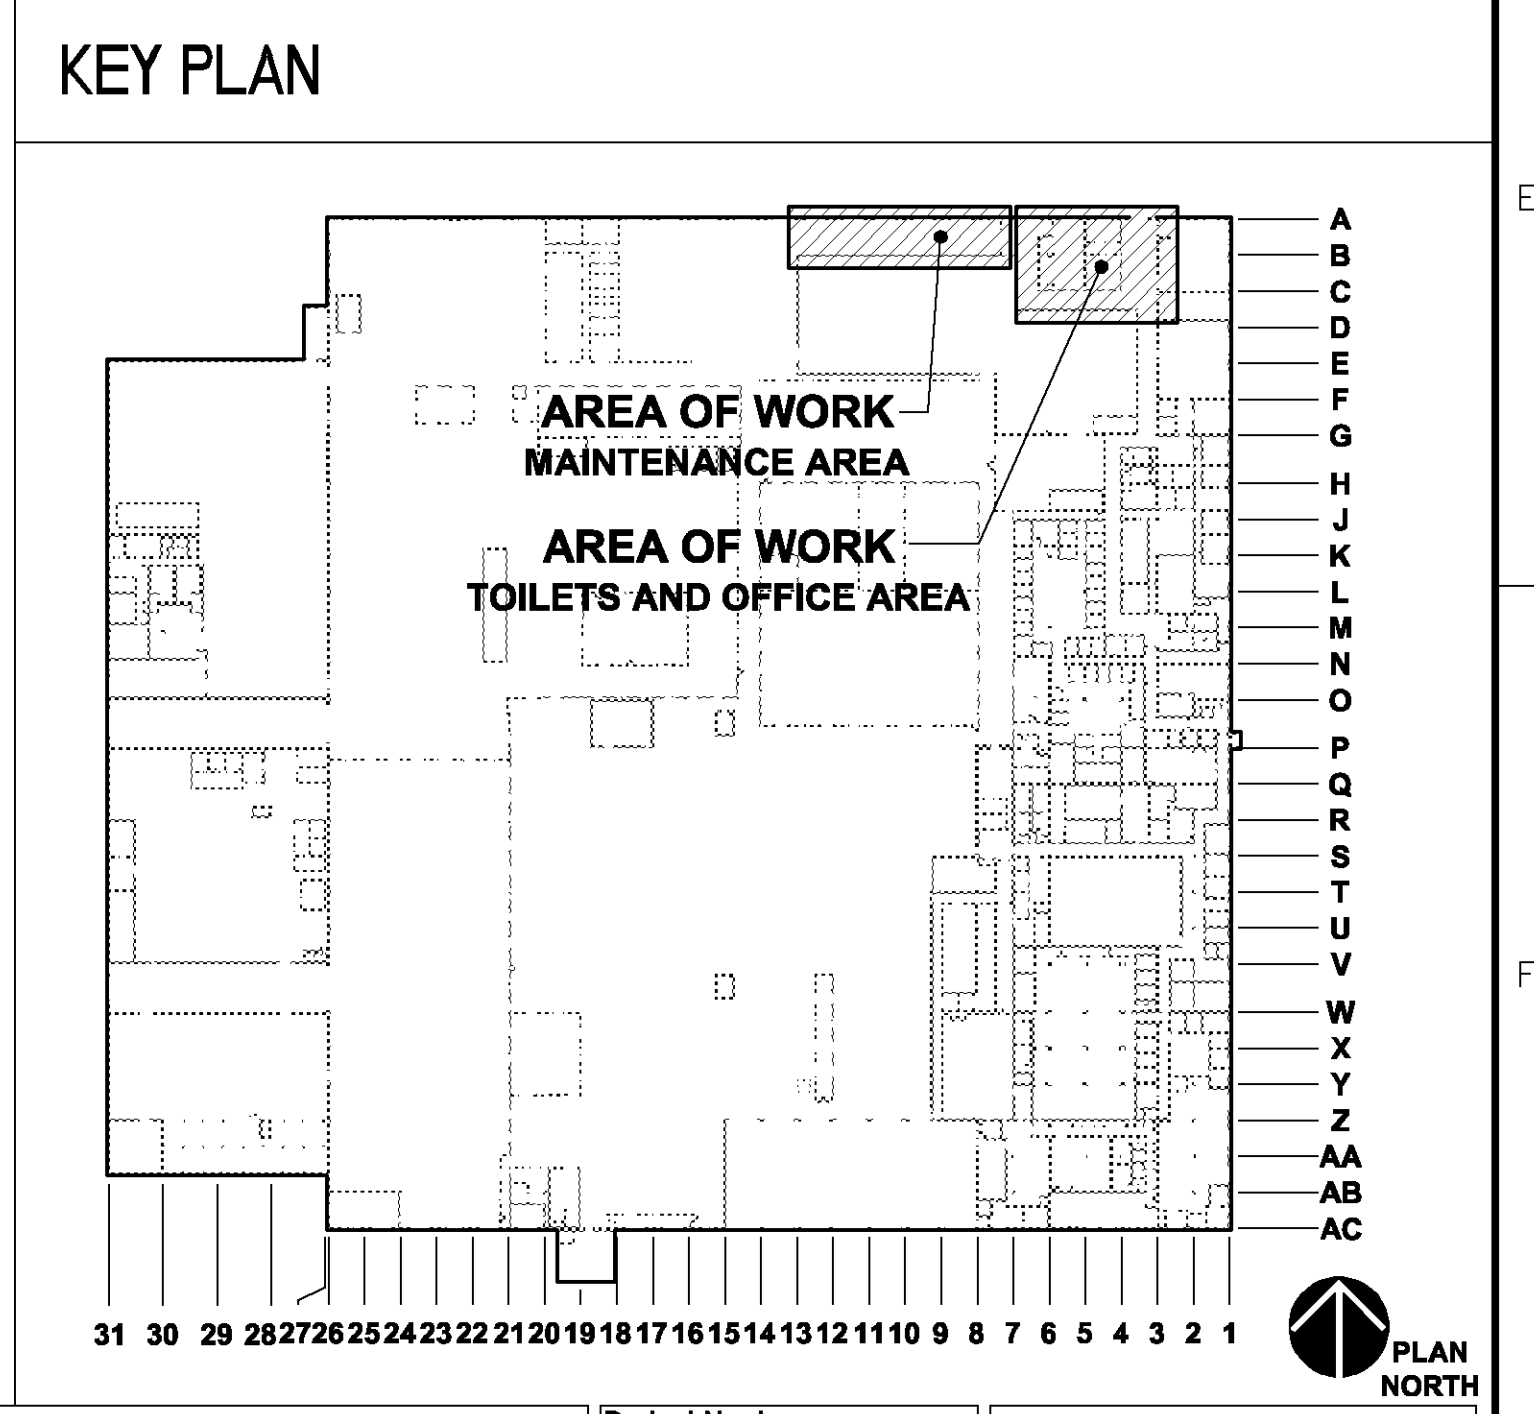

CONSULTANTS:		ARCHITECT/ENGINEERS:		Drawing Title PARTIAL FIRST FLOOR ELECTRICAL DEMO. PLANS		Project Title HINES BUILDING 37 O.I. AND T. FIELD OFFICES - PHASE 3 OFFICE AND RESTROOM RENOVATIONS		Project Number 796-13-004		Office of Construction and Facilities Management Department of Veterans Affairs	
				Approved: Project Director		Location VA OFFICE OF ACQUISITION AND LOGISTICS HINES, ILLINOIS		Building Number 37			
						Date 04-12-13		Drawing Number 37 - E201 Dwg. 24 of 32			
Revisions:				Klubler, Inc. 10 South Shumway Batavia, Illinois 60510 tel. 630.406.1213 fax 630.406.9472 www.klublerinc.com				Checked MTK		Drawn JRW	
100% CONSTRUCTION DOCUMENTS FOR BID 04-12-13											
95% CONSTRUCTION DOCUMENTS SUBMITTAL 03-12-13											
50% CONSTRUCTION DOCUMENTS SUBMITTAL 02-08-13											
Date											