

VA ROSEBURG HEALTH CARE SYSTEM

CORRECT SPD / SURGICAL DEFICIENCIES

FINAL SUBMITTAL

JANUARY 18, 2013

Prepared by:

K. F. DAVIS ENGINEERING, INC.

530 La Gonda Way, Suite E, Danville, California 94526

Tel. (925) 743-8884 ~ Fax (925) 743-8325

www.KFDE.com




Table of Contents

SPECIFICATION SECTIONS:

DESCRIPTION:

01 00 00.....	GENERAL REQUIREMENTS
01 00 00A.....	OSHA REQUIREMENTS AND SAFETY AND HEALTH REGULATIONS
01 32 16.13.....	NETWORK ANALYSIS SCHEDULES
01 33 23.....	SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES
01 45 29.....	TESTING LABORATORY SERVICES
03 30 53.....	CAST-IN-PLACE CONCRETE
05 12 00.....	STRUCTURAL STEEL FRAMING
05 12 50.....	BUCKLING RESTRAINED BRACES
05 36 00.....	COMPOSITE METAL DECKING
05 40 00.....	COLD-FORMED METAL FRAMING
05 50 00.....	METAL FABRICATIONS
05 51 00.....	METAL STAIRS
06 10 00.....	ROUGH CARPENTRY
06 16 63.....	CEMENTITIOUS SHEATHING
07 01 50.19.....	PREPARATION FOR RE-ROOFING
07 12 00.....	BUILT-UP BITUMINOUS WATERPROOFING
07 13 00.....	SHEET WATERPROOFING
07 13 14.....	SHEATHING MEMBRANE
07 21 13.....	THERMAL INSULATION
07 22 00.....	ROOF AND DECK INSULATION
07 45 00.....	EXTERIOR ALUMINUM FACED COMPOSITE PANELS
07 53 23.....	ETHYLENE-PROPYLENE-DIENE-MONOMER ROOFING
07 60 00.....	FLASHING AND SHEET METAL
07 71 00.....	ROOF SPECIALTIES
07 72 00.....	ROOF ACCESSORIES
07 81 00.....	APPLIED FIREPROOFING
07 84 00.....	FIRESTOPPING
07 92 00.....	JOINT SEALANTS
07 95 13.....	EXPANSION JOINT COVER ASSEMBLIES
08 11 13.....	HOLLOW METAL DOORS AND FRAMES
08 14 00.....	INTERIOR WOOD DOORS
08 17 10.....	INTEGRATED DOOR ASSEMBLIES
08 31 13.....	ACCESS DOORS AND FRAMES
08 51 13.....	ALUMINUM WINDOWS

08 63 00.....METAL-FRAMED SKYLIGHTS
08 71 00.....DOOR HARDWARE
08 71 13.....AUTOMATIC DOOR OPERATORS
08 80 00.....GLAZING
08 90 00.....LOUVERS AND VENTS
09 06 00.....SCHEDULE FOR FINISHES
09 22 16.....NON-STRUCTURAL METAL FRAMING
09 24 00.....PORTLAND CEMENT PLASTERING
09 29 00.....GYPSUM BOARD
09 30 13.....CERAMIC/PORCELAIN TILING
09 51 00.....ACOUSTICAL CEILINGS
09 65 13.....RESILIENT BASE AND ACCESSORIES
09 65 16.....RESILIENT SHEET FLOORING
09 67 23.60.....RESINOUS (URETHANE AND EPOXY MORTAR) FLOORING (RES-6)
09 68 00.....CARPETING
09 91 00.....PAINTING
09 96 59.....HIGH-BUILD GLAZED COATINGS
10 14 00.....SIGNAGE
10 26 00.....WALL AND DOOR PROTECTION
10 28 00.....TOILET, BATH, AND LAUNDRY ACCESSORIES
10 44 13.....FIRE EXTINGUISHER CABINETS
11 13 10.....FRONT PROJECTION SCREENS
11 17 36.....PACKAGE TRANSFER UNITS
11 71 01.....MEDICAL WASHING AND STERILIZING EQUIPMENT
12 24 00.....WINDOW SHADES
12 31 00.....MANUFACTURED METAL CASEWORK
12 32 00.....MANUFACTURED WOOD CASEWORK
12 36 00.....COUNTERTOPS
13 05 41.....SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS
13 49 00.....RADIATION PROTECTION
21 13 13.....WET-PIPE SPRINKLER SYSTEM
22 05 11.....COMMON WORK RESULTS FOR PLUMBING
22 05 23.....GENERAL-DUTY VALVES FOR PLUMBING PIPING
22 07 11.....PLUMBING INSULATION
22 08 00.....COMMISSIONING OF PLUMBING SYSTEMS
22 11 00.....FACILITY WATER DISTRIBUTION
22 13 00.....FACILITY SANITARY AND VENT PIPING
22 14 00.....FACILITY STORM DRAINAGE
22 40 00.....PLUMBING FIXTURES
22 63 00.....GAS SYSTEMS FOR LABORATORY AND HEALTH CARE FACILITIES

22	67	19.16	REVERSE-OSMOSIS WATER EQUIPMENT
23	05	11	COMMON WORK RESULTS FOR HVAC
23	05	12	GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT
23	05	41	NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT
23	05	93	TESTING, ADJUSTING, AND BALANCING FOR HVAC
23	07	11	HVAC INSULATION
23	08	00	COMMISSIONING OF HVAC SYSTEMS
23	09	23	DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC
23	21	13	HYDRONIC PIPING
23	21	23	HYDRONIC PUMPS
23	22	13	STEAM AND CONDENSATE HEATING PIPING
23	31	00	HVAC DUCTS AND CASINGS
23	34	00	HVAC FANS
23	36	00	AIR TERMINAL UNITS
23	37	00	AIR OUTLETS AND INLETS
23	40	00	HVAC AIR CLEANING DEVICES
23	74	13	PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS
23	82	00	CONVECTION HEATING AND COOLING UNITS
23	82	16	AIR COILS
26	05	11	REQUIREMENTS FOR ELECTRICAL INSTALLATIONS
26	05	21	LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLE
				(600 VOLTS AND BELOW)
26	05	26	GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS
26	05	33	RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS
26	05	71	ELECTRICAL SYSTEM PROTECTIVE DEVICE STUDY
26	09	23	LIGHTING CONTROLS
26	22	00	LOW-VOLTAGE TRANSFORMERS
26	24	11	DISTRIBUTION SWITCHBOARDS
26	24	16	PANELBOARDS
26	27	26	WIRING DEVICES
26	29	21	DISCONNECT SWITCHES
26	51	00	INTERIOR LIGHTING
26	56	00	EXTERIOR LIGHTING
27	05	11	REQUIREMENTS FOR COMMUNICATION INSTALLATIONS
27	10	00	STRUCTURED CABLING
28	13	00	ACCESS CONTROL SYSTEM
28	23	00	VIDEO SURVEILLANCE
28	31	00	FIRE ALARM SYSTEM
31	20	00	EARTH MOVING

**SECTION 01 00 00
GENERAL REQUIREMENTS**

TABLE OF CONTENTS

1.1 GENERAL INTENTION	1
1.2 STATEMENT OF BID ITEM(S)	2
1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR	3
1.4 CONSTRUCTION SECURITY REQUIREMENTS.....	3
1.5 FIRE SAFETY.....	5
1.6 OPERATIONS AND STORAGE AREAS.....	9
1.7 ALTERATIONS.....	13
1.8 INFECTION PREVENTION MEASURES.....	14
1.9 DISPOSAL AND RETENTION	17
1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS.....	18
1.11 RESTORATION	19
1.12 LAYOUT OF WORK.....	19
1.13 AS-BUILT DRAWINGS.....	20
1.14 USE OF ROADWAYS.....	20
1.15 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.....	21
1.16 TEMPORARY USE OF EXISTING ELEVATORS.....	22
1.17 TEMPORARY TOILETS.....	22
1.18 AVAILABILITY AND USE OF UTILITY SERVICES.....	23
1.19 NEW TELEPHONE AND DATA EQUIPMENT.....	24
1.20 TESTS.....	24
1.21 INSTRUCTIONS.....	25
1.22 GOVERNMENT-FURNISHED PROPERTY.....	26

1.23 COMMISSIONING OF NEW EQUIPMENT AND SYSTEMS:.....	27
1.24 CONSTRUCTION SIGN.....	28
1.25 SAFETY SIGN.....	29
1.26 PHOTOGRAPHIC DOCUMENTATION.....	29
1.27 FINAL ELEVATION DIGITAL IMAGES.....	31
1.28 HISTORIC PRESERVATION.....	31

**SECTION 01 00 00
GENERAL REQUIREMENTS**

1.1 GENERAL INTENTION

A. Contractor shall completely prepare site for building operations, including demolition and removal of existing structures, and furnish labor and materials and perform work for the construction of a new Supply, Processing and Distribution (SPD) facility and modification to the existing Operating Room (OR) and associated areas. In general, the work consists of an approximate 10,000 square foot addition to Building 1. This work includes, but is not limited to, structural steel framing, non-structural framing, concrete foundations, roofing systems, exterior aluminum cladding and interior finishes. Electrical work includes new power supplies and lighting throughout. The SPD is provided with four power circuits, three of the circuits are fed from the existing electrical room. The fourth circuit is fed from the generator building via an existing underground conduit. The light fixtures, devices and other equipment in the SPD areas are to be wet location rated and on generator power. The corridor and bathroom lights shall be controlled by occupancy sensors and manual controls. The heating, ventilation and air conditioning system will be provided with a dedicated custom built rooftop AHU complete with heat recovery system. A new mechanical room will house a majority of the mechanical equipment which will provide heating hot water, chilled water and medium and low pressure steam to SPD equipment. Airflow and pressure monitors will provide monitoring of the pressure relationships and control the exhaust dampers to maintain the set point. A new DDC temperature control panel will be provided to monitor, control, trend and alarm all control points listed as well as tie back to the existing Engineering Control Center. Plumbing work includes, but not limited to, connections to the existing domestic cold water, domestic hot water, sanitary sewer and storm drain system. It also includes a new medical compressed air system and a new reverse osmosis water purification system. Plumbing and drainage shall be provided specific for all SPD equipment. New restrooms and fixtures. A new and modified fire sprinkler systems, new access control systems, new fire alarm devices monitored and controlled by the existing fire alarm control unit shall also be provided. These statements represent a summary of the major work involved in this project but in no way represent the total work required by the contract drawings and specifications.

- B. Visits to the site by Bidders may be made only by appointment with the Medical Center Engineering Officer
- C. Offices of K. F. DAVIS ENGINEERING INC., as Architect-Engineers, will render certain technical services during construction. Such services shall be considered as advisory to the Government and shall not be construed as expressing or implying a contractual act of the Government without affirmations by Contracting Officer or his duly authorized representative.
- D. All employees of general contractor and subcontractors shall comply with VA security management program and obtain permission of the VA police, be identified by project and employer, and restricted from unauthorized access.
- E. Prior to commencing work, general contractor shall provide proof that a OSHA certified "competent person" (CP) (29 CFR 1926.20(b)(2)) will maintain a presence at the work site whenever the general or subcontractors are present.
- G. Training:
 - 1. All employees of general contractor or subcontractors shall have the 10-hour OSHA certified Construction Safety course, and all supervisors and foremen shall have the 30-hour OSHA certified Construction Safety course and/or other relevant competency training, as determined by VA CP with input from the ICRA team.
 - 2. Submit training records of all such employees for approval before the start of work.

1.2 STATEMENT OF BID ITEM(S)

- A. ITEM I, GENERAL CONSTRUCTION: Work includes general construction, alterations, drainage, mechanical and electrical work, laboratory (SPD) equipment, utility systems, necessary removal of existing structures and construction and certain other items.
- B. BID DEDUCT NO. 1: Delete all work associated with the expansion of the Operating Room.
- C. BID DEDUCT NO.2: Delete SPD equipment as follows: HP1 and HP2.

- D. BID DEDUCT NO. 3: Convert the automatic conveying system for washer disinfectors to a manual conveying system.
- E. BID DEDUCT NO. 4: Change the following pieces of SPD equipment from Contractor provided/Contractor Installed, to VA provided/Contractor Installed: ELT-1, ELT-2, ER-1, ER-2, ER-3, ER-4, ETO-1, ETO-2, PS-1, GS-1, HS-1, NS-1, ST-1, ST-2, ST-3, ST-4, US-1, and US-4 as shown on the equipment schedule MH7.1.

1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR

- A. AFTER AWARD OF CONTRACT, 3 sets of specifications and drawings will be furnished.
- B. Additional sets of drawings may be made by the Contractor, at Contractor's expense, from reproducible sepia prints furnished by Issuing Office. Such sepia prints shall be returned to the Issuing Office immediately after printing is completed.

1.4 CONSTRUCTION SECURITY REQUIREMENTS

- A. Security Plan:
1. The security plan defines both physical and administrative security procedures that will remain effective for the entire duration of the project.
 2. The General Contractor is responsible for assuring that all sub-contractors working on the project and their employees also comply with these regulations.
- B. Security Procedures:
1. General Contractor's employees shall not enter the project site without appropriate badge. They may also be subject to inspection of their personal effects when entering or leaving the project site.
 2. For working outside the "regular hours" as defined in the contract, The General Contractor shall give 3 days notice to the Contracting Officer so that security arrangements can be provided for the employees. This notice is separate from any notices required for utility shutdown described later in this section.
 3. No photography of VA premises is allowed without written permission of the Contracting Officer.

4. VA reserves the right to close down or shut down the project site and order General Contractor's employees off the premises in the event of a national emergency. The General Contractor may return to the site only with the written approval of the Contracting Officer.

C. Guards:

1. The Contractor shall be responsible for job site security. At the request of the COTR, it may be necessary for the Contractor to retain the services of a private security officer to protect job site workspace.

D. Key Control:

1. The General Contractor shall provide duplicate keys and lock combinations to the Project Engineer for the purpose of security inspections of every area of project including tool boxes and parked machines and take any emergency action.
2. The General Contractor shall turn over all permanent lock cylinders to the VA locksmith for permanent installation. See Section 08 71 00, DOOR HARDWARE and coordinate.

E. Document Control:

1. Before starting any work, the General Contractor/Sub Contractors shall submit an electronic security memorandum describing the approach to following goals and maintaining confidentiality of "sensitive information".
2. The General Contractor is responsible for safekeeping of all drawings, project manual and other project information. This information shall be shared only with those with a specific need to accomplish the project.
4. Certain documents, sketches, videos or photographs and drawings may be marked "Law Enforcement Sensitive" or "Sensitive Unclassified". Secure such information in separate containers and limit the access to only those who will need it for the project. Return the information to the Contracting Officer upon request.
5. These security documents shall not be removed or transmitted from the project site without the written approval of Contracting Officer.

6. All paper waste or electronic media such as CD's and diskettes shall be shredded and destroyed in a manner acceptable to the VA.
7. Notify Contracting Officer and Site Security Officer immediately when there is a loss or compromise of "sensitive information".
8. All electronic information shall be stored in specified location following VA standards and procedures using an Engineering Document Management Software (EDMS).
 - a. Security, access and maintenance of all project drawings, both scanned and electronic shall be performed and tracked through the EDMS system.
 - b. "Sensitive information" including drawings and other documents may be attached to e-mail provided all VA encryption procedures are followed.

F. Motor Vehicle Restrictions

1. Vehicle authorization request shall be required for any vehicle entering the site and such request shall be submitted 24 hours before the date and time of access. Access shall be restricted to picking up and dropping off materials and supplies.
2. Separate permits shall be issued for General Contractor and its employees for parking in designated areas only.

1.5 FIRE SAFETY

A. Applicable Publications: Publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.

1. American Society for Testing and Materials (ASTM):

E84-2009.....Surface Burning Characteristics of Building
Materials

2. National Fire Protection Association (NFPA):

10-2010.....Standard for Portable Fire Extinguishers

30-2008.....Flammable and Combustible Liquids Code

51B-2009.....Standard for Fire Prevention During Welding,
Cutting and Other Hot Work

70-2011.....National Electrical Code

241-2009.....Standard for Safeguarding Construction,
Alteration, and Demolition Operations

3. Occupational Safety and Health Administration (OSHA):

29 CFR 1926.....Safety and Health Regulations for Construction

- B. Fire Safety Plan: Establish and maintain a fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to Project Engineer and Facility Safety Manager for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES Prior to any worker for the contractor or subcontractors beginning work, they shall undergo a safety briefing provided by the general contractor's competent person per OSHA requirements. This briefing shall include information on the construction limits, VAMC safety guidelines, means of egress, break areas, work hours, locations of restrooms, use of VAMC equipment, etc. Documentation shall be provided to the Project Engineer that individuals have undergone contractor's safety briefing.
- C. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.
- D. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).
- E. Temporary Construction Partitions:
1. Provide temporary construction partitions and barricades at each phase/area of construction to protect construction debris and dust from entering adjacent areas. Partitions and barricades shall consist of metal studs with gypsum board finishes, as approved by the Project Manager. In areas where there is limited work of a duration

- of less than 8 hours, plastic barriers may be provided in lieu of gypsum board, subject to approval by the Project Engineer.
2. Install and maintain temporary construction partitions to provide smoke-tight separations between construction areas including each of the areas described in the phasing plan. Construct partitions of gypsum board or treated plywood (flame spread rating of 25 or less in accordance with ASTM E84) on both sides of fire retardant treated wood or metal steel studs. Extend the partitions through suspended ceilings to floor slab deck or roof. Seal joints and penetrations. At door openings, install Class C, $\frac{3}{4}$ hour fire/smoke rated doors with self-closing devices.
 3. Install two-hour fire-rated temporary construction partitions to maintain integrity of existing exit stair enclosures, exit passageways, fire-rated enclosures of hazardous areas, horizontal exits, smoke barriers, vertical shafts and openings enclosures.
 4. Close openings in smoke barriers and fire-rated construction to maintain fire ratings. Seal penetrations with listed through-penetration firestop materials in accordance with Section 07 84 00, FIRESTOPPING.
- F. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70.
- G. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with Project Engineer and facility Safety Manager.
- H. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to Project Engineer and facility Safety Manager.
- I. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.
- J. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.
- K. Sprinklers: Install and hydrostatically test new sprinkler system prior to connection to existing supply piping. Where relocating sprinklers,

system shall not be out of service for more than 8 hours and always put back in service at the end of the work shifts.

- L. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Requests for interruptions in service shall be submitted to, and approved, by the Project Manager. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the medical center. Parameters for the testing and results of any tests performed shall be recorded by the medical center and copies provided to the Project Engineer.
- M. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with Project Engineer.
- N. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with Project Engineer. Obtain permits from facility Safety Manager at least 48 hours in advance. Designate contractor's responsible project-site fire prevention program manager to permit hot work.
- O. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to Project Engineer and facility Safety Manager.
- P. Smoking: Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction. In separate and detached buildings under construction, smoking is prohibited except in designated smoking rest areas.
- Q. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.
- R. Perform other construction, alteration and demolition operations in accordance with 29 CFR 1926.
- S. If required, submit documentation to the Project Engineer that personnel have been trained in the fire safety aspects of working in areas with impaired structural or compartmentalization features.

1.6 OPERATIONS AND STORAGE AREAS

- A. The Contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The Contractor shall hold and save the Government, its officers and agents, free and harmless from liability of any nature occasioned by the Contractor's performance.
- B. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the Contracting Officer and shall be built with labor and materials furnished by the Contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work. With the written consent of the Contracting Officer, the buildings and utilities may be abandoned and need not be removed.
- C. The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads. **(FAR 52.236-10)**
- D. Working space and space available for storing materials shall be as directed by the Project Manager. This area may not be within close proximity and/or direct access to the job site, but will be within the VA campus.
- E. Workmen are subject to rules of Medical Center applicable to their conduct.
- F. Execute work so as to interfere as little as possible with normal functioning of Medical Center as a whole, including operations of utility services, fire protection systems and any existing equipment, and with work being done by others. Use of equipment and tools that transmit vibrations and noises through the building structure, are not permitted in buildings that are occupied, during construction, jointly

by patients or medical personnel, and Contractor's personnel, except as permitted by Project Engineer where required by limited working space.

1. Do not store materials and equipment in other than assigned areas.
2. Schedule delivery of materials and equipment to immediate construction working areas within buildings in use by Department of Veterans Affairs in quantities sufficient for not more than two work days. Provide unobstructed access to Medical Center areas required to remain in operation.
3. Where access by Medical Center personnel to vacated portions of buildings is not required, storage of Contractor's materials and equipment will be permitted subject to fire and safety requirements.

G. Phasing: To insure such executions, Contractor shall furnish the Project Engineer with a schedule of approximate phasing dates on which the Contractor intends to accomplish work in each specific area of site, building or portion thereof. This phasing plan shall describe in sufficient detail each area of work, impacts to the existing Medical Center operations, potential utility interferences, and duration of work. In addition, Contractor shall notify the Project Engineer two weeks in advance of the proposed date of starting work in each specific area of site, building or portion thereof. Arrange such phasing dates to insure accomplishment of this work in successive phases mutually agreeable to Medical Center Director, Project Engineer and Contractor. In preparing this Plan, Contractor shall be advised under no circumstances shall the Emergency Department be shut-down and all utilities serving both the Emergency Department and the existing Operating Room(s) shall remain operational at all times. Contractor shall provide temporary power and exhaust as needed to maintain utility services.

H. Building(s) No. 1 will be occupied during performance of work. It shall be noted that this work is in close proximity to the existing Operating Room Suite and the Emergency Department. All adjacent offices, laboratories, emergency department and operating rooms, shall remain operational throughout the construction duration.

1. Contractor shall take all measures and provide all material necessary for protecting existing equipment and property in affected areas of construction against dust and debris, so that equipment and affected

areas to be used in the Medical Centers operations will not be hindered. Contractor shall permit access to Department of Veterans Affairs personnel and patients through other construction areas which serve as routes of access to such affected areas and equipment. Coordinate alteration work in areas occupied by Department of Veterans Affairs so that Medical Center operations will continue during the construction period.

- I. Construction Fence: Before construction operations begin, Contractor shall provide a chain link construction fence, 2.1m (seven feet) minimum height, around the construction area as required by the Project Engineer. Provide gates as required for access with necessary hardware, including hasps and padlocks. Fasten fence fabric to terminal posts with tension bands and to line posts and top and bottom rails with tie wires spaced at maximum 375mm (15 inches). Bottom of fences shall extend to 25mm (one inch) above grade. Remove the fence when directed by Project Engineer.
- J. When a building is turned over to Contractor, Contractor shall accept entire responsibility therefore.
 - 1. Contractor shall maintain a minimum temperature of 4 degrees C (40 degrees F) at all times, except as otherwise specified.
- K. Utilities Services: Maintain existing utility services for Medical Center at all times. Provide temporary facilities, labor, materials, equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems (including telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by Project Engineer.
 - 1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted without prior approval of Project Engineer. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished, work on any energized circuits or equipment shall not commence without the Medical Center Director's prior knowledge and written approval. Refer to specification Sections 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS

and 28 05 11, REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATIONS for additional requirements.

2. Contractor shall submit a request to interrupt any such services to Project Engineer, in writing, five (5) working days in advance of proposed interruption for utility cutovers. Utility cutovers shall be defined as potential interruption to services of less than 15 minutes in duration. Request shall state reason, date, exact time of, and approximate duration of such interruption.
 3. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations of Medical Center. Interruption time approved by Medical Center may occur at other than Contractor's normal working hours.
 4. Major interruptions lasting more than 15 minutes in duration, of any system must be requested, in writing, at least 10 calendar days prior to the desired time and shall be performed as directed by the Project Engineer.
 5. In case of a contract construction emergency, service will be interrupted on approval of Project Engineer. Such approval will be confirmed in writing as soon as practical.
 6. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.
- L. Abandoned Lines: All service lines such as wires, cables, conduits, ducts, pipes and the like, and their hangers or supports, which are to be abandoned but are not required to be entirely removed, shall be sealed, capped or plugged. The lines shall not be capped in finished areas, but shall be removed and sealed, capped or plugged in ceilings, within furred spaces, in unfinished areas, or within walls or partitions; so that they are completely behind the finished surfaces.
- M. To minimize interference of construction activities with flow of Medical Center traffic, comply with the following:

1. Keep roads, walks and entrances to grounds, to parking and to occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles.
 2. Method and scheduling of required cutting, altering and removal of existing roads, walks and entrances must be approved by the Project Engineer.
- N. Coordinate the work for this contract with other construction operations as directed by Project Engineer. This includes the scheduling of traffic and the use of roadways, as specified in Article, USE OF ROADWAYS.

1.7 ALTERATIONS

- A. Survey: Before any work is started, the Contractor shall make a thorough survey with the Project Engineer of areas of buildings in which alterations occur and areas which are anticipated routes of access, and furnish a report, signed by both, to the Contracting Officer. This report shall list by rooms and spaces:
1. Existing condition and types of resilient flooring, doors, windows, walls and other surfaces not required to be altered throughout affected areas of building.
 2. Existence and conditions of items such as plumbing fixtures and accessories, electrical fixtures, equipment, venetian blinds, shades, etc., required by drawings to be either reused or relocated, or both.
 3. Shall note any discrepancies between drawings and existing conditions at site.
 4. Shall designate areas for working space, materials storage and routes of access to areas within buildings where alterations occur and which have been agreed upon by Contractor and Project Engineer.
- B. Any items required by drawings to be either reused or relocated or both, found during this survey to be nonexistent, or in opinion of Project Engineer, to be in such condition that their use is impossible or impractical, shall be furnished and/or replaced by Contractor with new items in accordance with specifications which will be furnished by Government. Provided the contract work is changed by reason of this subparagraph B, the contract will be modified accordingly, under provisions of clause entitled "DIFFERING SITE CONDITIONS" (FAR 52.236-2) and "CHANGES" (FAR 52.243-4 and VAAR 852.236-88).

C. Re-Survey: Thirty days before expected partial or final inspection date, the Contractor and Project Engineer together shall make a thorough re-survey of the areas of buildings involved. They shall furnish a report on conditions then existing, of resilient flooring, doors, windows, walls and other surfaces as compared with conditions of same as noted in first condition survey report:

1. Re-survey report shall also list any damage caused by Contractor to such flooring and other surfaces, despite protection measures; and, will form basis for determining extent of repair work required of Contractor to restore damage caused by Contractor's workmen in executing work of this contract.

D. Protection: Provide the following protective measures:

1. Wherever existing roof surfaces are disturbed they shall be protected against water infiltration. In case of leaks, they shall be repaired immediately upon discovery.
2. Temporary protection against damage for portions of existing structures and grounds where work is to be done, materials handled and equipment moved and/or relocated.
3. Protection of interior of existing structures at all times, from damage, dust and weather inclemency. Wherever work is performed, floor surfaces that are to remain in place shall be adequately protected prior to starting work, and this protection shall be maintained intact until all work in the area is completed.

1.8 INFECTION PREVENTION MEASURES

- A. Implement the requirements of VAMC's Infection Control Risk Assessment (ICRA) team. ICRA Group may monitor dust in the vicinity of the construction work and require the Contractor to take corrective action immediately if the safe levels are exceeded.
- B. Establish and maintain a dust control program as part of the contractor's infection preventive measures in accordance with the guidelines provided by ICRA Group. Prior to start of work, prepare a plan detailing project-specific dust protection measures, including periodic status reports, and submit to Project Engineer and Facility ICRA team for review for compliance with contract requirements in

accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

1. All personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the medical center.

C. Medical center Infection Control personnel shall monitor for airborne disease (e.g. aspergillosis) as appropriate during construction. A baseline of conditions may be established by the medical center prior to the start of work and periodically during the construction stage to determine impact of construction activities on indoor air quality. In addition:

1. The RE and VAMC Infection Control personnel shall review pressure differential monitoring documentation to verify that pressure differentials in the construction zone and in the patient-care rooms are appropriate for their settings. The requirement for negative air pressure in the construction zone shall depend on the location and type of activity. Upon notification, the contractor shall implement corrective measures to restore proper pressure differentials as needed.
2. In case of any problem, the medical center, along with assistance from the contractor, shall conduct an environmental assessment to find and eliminate the source.

D. In general, following preventive measures shall be adopted during construction to keep down dust and prevent mold.

1. Dampen debris to keep down dust and provide temporary construction partitions in existing structures where directed by Project Engineer. Blank off ducts and diffusers to prevent circulation of dust into occupied areas during construction.
2. Do not perform dust producing tasks within occupied areas without the approval of the Project Engineer. For construction in any areas that will remain jointly occupied by the medical Center and Contractor's workers, the Contractor shall:
 - a. Provide dust proof one-hour fire-rated temporary drywall construction barriers to completely separate construction from the operational areas of the hospital in order to contain dirt debris

and dust. Barriers shall be sealed and made presentable on hospital occupied side. Install a self-closing rated door in a metal frame, commensurate with the partition, to allow worker access. Maintain negative air at all times. A fire retardant polystyrene, 6-mil thick or greater plastic barrier meeting local fire codes may be used where dust control is the only hazard, and an agreement is reached with the Project Engineer and Medical Center.

- b. HEPA filtration is required where the exhaust dust may reenter the breathing zone. Contractor shall verify that construction exhaust to exterior is not reintroduced to the medical center through intake vents, or building openings. Install HEPA (High Efficiency Particulate Accumulator) filter vacuum system rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. Insure continuous negative air pressures occurring within the work area. HEPA filters should have ASHRAE 85 or other prefilter to extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Exhaust hoses shall be heavy duty, flexible steel reinforced and exhausted so that dust is not reintroduced to the medical center.
- c. Adhesive Walk-off/Carpet Walk-off Mats, minimum 600mm x 900mm (24" x 36"), shall be used at all interior transitions from the construction area to occupied medical center area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.
- d. Vacuum and wet mop all transition areas from construction to the occupied medical center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as they are created. Transport these outside the construction area in containers with tightly fitting lids.
- e. The contractor shall not haul debris through patient-care areas without prior approval of the Project Engineer and the Medical Center. When, approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through

occupied areas shall be made free from dust and moisture by vacuuming and wipe down.

- f. Using a HEPA vacuum, clean inside the barrier and vacuum ceiling tile prior to replacement. Any ceiling access panels opened for investigation beyond sealed areas shall be sealed immediately when unattended.
- g. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.
- h. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.

E. Final Cleanup:

- 1. Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.
- 2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
- 3. All new air ducts shall be cleaned prior to final inspection.

1.9 DISPOSAL AND RETENTION

A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:

- 1. Reserved items which are to remain property of the Government are noted on drawings as items to be stored. Items that remain property of the Government shall be removed or dislodged from present locations in such a manner as to prevent damage which would be detrimental to re-installation and reuse. Store such items where directed by Project Engineer.

2. Items not reserved shall become property of the Contractor and be removed by Contractor from Medical Center.
3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period, such items which are NOT required by drawings and specifications to be either relocated or reused will be removed by the Government in advance of work to avoid interfering with Contractor's operation.

1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS

- A. The Contractor shall preserve and protect all structures, equipment, and vegetation (such as trees, shrubs, and grass) on or adjacent to the work site, which are not to be removed and which do not unreasonably interfere with the work required under this contract. The Contractor shall only remove trees when specifically authorized to do so, and shall avoid damaging vegetation that will remain in place. If any limbs or branches of trees are broken during contract performance, or by the careless operation of equipment, or by workmen, the Contractor shall trim those limbs or branches with a clean cut and paint the cut with a tree-pruning compound as directed by the Contracting Officer.
- B. The Contractor shall protect from damage all existing improvements and utilities at or near the work site and on adjacent property of a third party, the locations of which are made known to or should be known by the Contractor. The Contractor shall repair any damage to those facilities, including those that are the property of a third party, resulting from failure to comply with the requirements of this contract or failure to exercise reasonable care in performing the work. If the Contractor fails or refuses to repair the damage promptly, the Contracting Officer may have the necessary work performed and charge the cost to the Contractor. **(FAR 52.236-9)**
- C. Refer to Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS, for additional requirements on protecting vegetation, soils and the environment. Refer to Articles, "Alterations", "Restoration", and "Operations and Storage Areas" for additional instructions concerning repair of damage to structures and site improvements.

1.11 RESTORATION

- A. Remove, cut, alter, replace, patch and repair existing work as necessary to install new work. Except as otherwise shown or specified, do not cut, alter or remove any structural work, and do not disturb any ducts, plumbing, steam, gas, or electric work without approval of the Project Engineer. Existing work to be altered or extended and that is found to be defective in any way, shall be reported to the Project Engineer before it is disturbed. Materials and workmanship used in restoring work, shall conform in type and quality to that of original existing construction, except as otherwise shown or specified.
- B. Upon completion of contract, deliver work complete and undamaged. Existing work (walls, ceilings, partitions, floors, mechanical and electrical work, lawns, paving, roads, walks, etc.) disturbed or removed as a result of performing required new work, shall be patched, repaired, reinstalled, or replaced with new work, and refinished and left in as good condition as existed before commencing work.
- C. At Contractor's own expense, Contractor shall immediately restore to service and repair any damage caused by Contractor's workmen to existing piping and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems (including telephone) which are indicated on drawings and which are not scheduled for discontinuance or abandonment.
- D. Expense of repairs to such utilities and systems not shown on drawings or locations of which are unknown will be covered by adjustment to contract time and price in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88) and "DIFFERING SITE CONDITIONS" (FAR 52.236-2).

1.12 LAYOUT OF WORK

- A. The Contractor shall lay out the work from previously established building grid lines, indicated on the drawings, and shall be responsible for all measurements in connection with the layout. The Contractor shall furnish, at Contractor's own expense, all stakes, templates, platforms, equipment, tools, materials, and labor required to lay out any part of the work. **(FAR 52.236-17)**
- B. Establish and plainly mark center lines for each building and/or addition to each existing building, and such other lines and grades that

are reasonably necessary to properly assure that location, orientation, and elevations established for each such structure and/or addition, are in accordance with lines and elevations shown on contract drawings.

- C. Contractor is solely responsible for all quality control. During progress of work, Contractor shall continually review and verify such items as plumbness of structural members, dimensions, vertical elevations, placement of new vertical structural elements over existing structural elements as indicated on the Plans, floor to floor elevations, verify matching alignment of new and existing second floor elevations, location of utilities with respect to new equipment, location of conduits, ductwork, fire sprinkler piping and similar utilities and coordination of all lines, general construction review relative to placement of equipment versus potential obstructions, interferences with other items, clearances and similar.

1.13 AS-BUILT DRAWINGS

- A. The contractor shall maintain two full size sets of as-built drawings which will be kept current during construction of the project, to include all contract changes, modifications and clarifications.
- B. All variations shall be shown in the same general detail as used in the contract drawings. To insure compliance, as-built drawings shall be made available for the Project Engineer's review, as often as requested.
- C. Contractor shall deliver two approved completed sets of as-built drawings to the Project Engineer within 15 calendar days after each completed phase and after the acceptance of the project by the Project Engineer.
- D. Paragraphs A, B, & C shall also apply to all shop drawings.

1.14 USE OF ROADWAYS

- A. For hauling, use only established public roads and roads on Medical Center property and, when authorized by the Project Engineer, such temporary roads which are necessary in the performance of contract work. Temporary roads shall be constructed by the Contractor at Contractor's expense. When necessary to cross curbing, sidewalks, or similar construction, they must be protected by well-constructed bridges.
- B. When new permanent roads are to be a part of this contract, Contractor may construct them immediately for use to facilitate building

operations. These roads may be used by all who have business thereon within zone of building operations.

- C. When certain buildings (or parts of certain buildings) are required to be completed in advance of general date of completion, all roads leading thereto must be completed and available for use at time set for completion of such buildings or parts thereof.

1.15 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT

- A. Use of new installed mechanical and electrical equipment to provide heat, ventilation, plumbing, light and power will be permitted subject to compliance with the following provisions:

1. Permission to use each unit or system must be given by Project Engineer. If the equipment is not installed and maintained in accordance with the following provisions, the Project Engineer will withdraw permission for use of the equipment.
2. Electrical installations used by the equipment shall be completed in accordance with the drawings and specifications to prevent damage to the equipment and the electrical systems, i.e. transformers, relays, circuit breakers, fuses, conductors, motor controllers and their overload elements shall be properly sized, coordinated and adjusted. Voltage supplied to each item of equipment shall be verified to be correct and it shall be determined that motors are not overloaded. The electrical equipment shall be thoroughly cleaned before using it and again immediately before final inspection including vacuum cleaning and wiping clean interior and exterior surfaces.
3. Units shall be properly lubricated, balanced, and aligned. Vibrations must be eliminated.
4. Automatic temperature control systems for preheat coils shall function properly and all safety controls shall function to prevent coil freeze-up damage.
5. The air filtering system utilized shall be that which is designed for the system when complete, and all filter elements shall be replaced at completion of construction and prior to testing and balancing of system.
6. All components of heat production and distribution system, metering equipment, condensate returns, and other auxiliary facilities used in

temporary service shall be cleaned prior to use; maintained to prevent corrosion internally and externally during use; and cleaned, maintained and inspected prior to acceptance by the Government.

- B. Prior to final inspection, the equipment or parts used which show wear and tear beyond normal, shall be replaced with identical replacements, at no additional cost to the Government.
- C. This paragraph shall not reduce the requirements of the mechanical and electrical specifications sections.

1.16 TEMPORARY USE OF EXISTING ELEVATORS

- A. The Contractor will be allowed to use existing elevators for personnel and small hand tools that can fit into a cart. Contractor will not be allowed the use of existing elevators for transporting building materials. An outside type hoist shall be used by Contractor for transporting materials and equipment.
- B. The Contractor shall maintain clear and obstructed access throughout the corridors leading to the elevators in accordance with the requirements of the VA Infection Control.
- C. At the request of the COTR, it may be necessary for the Contractor to provide protection of the following components;
 - a. Entrance jambs, heads soffits and threshold plates.
 - b. Entrance columns, canopy, return panels and inside surfaces of car enclosure walls.
 - c. Finish flooring.

1.17 TEMPORARY TOILETS

- A. Provide where directed, (for use of all Contractor's workmen) ample temporary sanitary toilet accommodations with suitable sewer and water connections; or, when approved by Project Engineer, provide suitable dry closets where directed. Keep such places clean and free from flies, and all connections and appliances connected therewith are to be removed prior to completion of contract, and premises left perfectly clean. Subject to COTR approval, in addition to the portable toilets, public restrooms are available on the first floor, but under no circumstances shall toilets in patient areas be used by any construction personnel.

1.18 AVAILABILITY AND USE OF UTILITY SERVICES

- A. The Government shall make all reasonably required amounts of utilities available to the Contractor from existing outlets and supplies, as specified in the contract. The amount to be paid by the Contractor for chargeable electrical services shall be the prevailing rates charged to the Government. The Contractor shall carefully conserve any utilities furnished without charge.
- B. The Contractor, at Contractor's expense and in a workmanlike manner satisfactory to the Contracting Officer, shall install and maintain all necessary temporary connections and distribution lines, and all meters required to measure the amount of electricity used for the purpose of determining charges. Before final acceptance of the work by the Government, the Contractor shall remove all the temporary connections, distribution lines, meters, and associated paraphernalia.
- C. Contractor shall install meters at Contractor's expense and furnish the Medical Center a monthly record of the Contractor's usage of electricity as hereinafter specified.
- D. Heat: Furnish temporary heat necessary to prevent injury to work and materials through dampness and cold. Use of open salamanders or any temporary heating devices which may be fire hazards or may smoke and damage finished work, will not be permitted. Maintain minimum temperatures as specified for various materials:
 - 1. Obtain heat by connecting to Medical Center heating distribution system.
 - a. Steam is available at no cost to Contractor.
- E. Electricity (for Construction and Testing): Furnish all temporary electric services.
 - 1. Obtain electricity by connecting to the Medical Center electrical distribution system. The Contractor shall meter and pay for electricity required for electric cranes and hoisting devices, electrical welding devices and any electrical heating devices providing temporary heat. Electricity for all other uses is available at no cost to the Contractor.
- F. Water (for Construction and Testing): Furnish temporary water service.

1. Obtain water by connecting to the Medical Center water distribution system. Provide reduced pressure backflow preventer at each connection. Water is available at no cost to the Contractor.
 2. Maintain connections, pipe, fittings and fixtures and conserve water-use so none is wasted. Failure to stop leakage or other wastes will be cause for revocation (at Project Engineer's discretion) of use of water from Medical Center's system.
- G. Steam: Furnish steam system for testing required in various sections of specifications.
1. Obtain steam for testing by connecting to the Medical Center steam distribution system. Steam is available at no cost to the Contractor.
 2. Maintain connections, pipe, fittings and fixtures and conserve steam-use so none is wasted. Failure to stop leakage or other waste will be cause for revocation (at Project Engineer's discretion), of use of steam from the Medical Center's system.

1.19 NEW TELEPHONE AND DATA EQUIPMENT

- A. The Contractor is responsible for providing a complete and operational telephone and data communication system. This system shall be connected to the existing Medical Center system in a location as directed by the Project Engineer. Contractor shall provide all wiring and associated equipment necessary to tie-in to the Medical Center telephone and data system located in the 1st floor electrical room.

This work shall be completed before the building is turned over to VA.

1.20 TESTS

- A. Pre-test mechanical and electrical equipment and systems and make corrections required for proper operation of such systems before requesting final tests. Final test will not be conducted unless pre-tested.
- B. Conduct final tests required in various sections of specifications in presence of an authorized representative of the Contracting Officer. Contractor shall furnish all labor, materials, equipment, instruments, and forms, to conduct and record such tests.
- C. Mechanical and electrical systems shall be balanced, controlled and coordinated. A system is defined as the entire complex which must be

coordinated to work together during normal operation to produce results for which the system is designed. For example, air conditioning supply air is only one part of entire system which provides comfort conditions for a building. Other related components are return air, exhaust air, steam, chilled water, refrigerant, hot water, controls and electricity, etc. Another example of a complex which involves several components of different disciplines is a boiler installation. Efficient and acceptable boiler operation depends upon the coordination and proper operation of fuel, combustion air, controls, steam, feedwater, condensate and other related components.

- D. All related components as defined above shall be functioning when any system component is tested. Tests shall be completed within a reasonably short period of time during which operating and environmental conditions remain reasonably constant.
- E. Individual test result of any component, where required, will only be accepted when submitted with the test results of related components and of the entire system.

1.21 INSTRUCTIONS

- A. Contractor shall furnish Maintenance and Operating manuals and verbal instructions when required by the various sections of the specifications and as hereinafter specified.
- B. Manuals: Maintenance and operating manuals (four copies each) for each separate piece of equipment shall be delivered to the Project Engineer coincidental with the delivery of the equipment to the job site. Manuals shall be complete, detailed guides for the maintenance and operation of equipment. They shall include complete information necessary for starting, adjusting, maintaining in continuous operation for long periods of time and dismantling and reassembling of the complete units and sub-assembly components. Manuals shall include an index covering all component parts clearly cross-referenced to diagrams and illustrations. Illustrations shall include "exploded" views showing and identifying each separate item. Emphasis shall be placed on the use of special tools and instruments. The function of each piece of equipment, component, accessory and control shall be clearly and thoroughly explained. All necessary precautions for the operation of the equipment and the reason for each precaution shall be clearly set forth. Manuals must reference the exact model, style and size of the piece of equipment and system

being furnished. Manuals referencing equipment similar to but of a different model, style, and size than that furnished will not be accepted.

- C. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed instructions to assigned Department of Veterans Affairs personnel in the operation and complete maintenance for each piece of equipment. All such training will be at the job site. These requirements are more specifically detailed in the various technical sections. Instructions for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a system shall be available until instructions for all items included in the system have been completed. This is to assure proper instruction in the operation of inter-related systems. All instruction periods shall be at such times as scheduled by the Project Engineer and shall be considered concluded only when the Project Engineer is satisfied in regard to complete and thorough coverage. The Department of Veterans Affairs reserves the right to request the removal of, and substitution for, any instructor who, in the opinion of the Project Engineer, does not demonstrate sufficient qualifications in accordance with requirements for instructors above.

1.22 GOVERNMENT-FURNISHED PROPERTY

- A. The Contractor shall be responsible for relocating certain Government-furnished SPD and/or OR equipment. This equipment is identified on the drawings as "VC" - Veteran provided, Contractor installed. Such equipment is located in various areas throughout the Medical Center. It shall be the Contractors responsibility to relocate equipment from its existing location and install at new location.
- B. Contractor shall retain the services of the equipment manufacturers representative or approved service agent to perform the following, MINIMUM, commissioning tasks -
- (a) Install in accordance with manufacturers recommendation
 - (b) Validate utility connections
 - (c) Verify that the unit/equipment starts and stops per operating criteria

(d) Test unit in the presence of the Project Manager to show that it performing properly.

Contractor shall correct any deficiencies or operational issues at his own expense.

C. Notify the Project Manager in writing, 60 days in advance, of date on which Contractor will be prepared to receive equipment furnished by Government.

1. Prior to receiving the equipment, Contractor shall arrange for a joint inspection thereof with a representative of the Government. At such time the Contractor shall acknowledge receipt of equipment described, make notations, and immediately furnish the Government representative with a written statement as to its condition or shortages.

2. Contractor thereafter is responsible for such equipment until such time as acceptance of contract work is made by the Government.

D. Completely assemble and install the Government furnished equipment in place ready for proper operation in accordance with specifications and drawings.

F. Provide all mechanical and electrical service connections, fittings, fastenings and any other materials necessary for assembly and installation of relocated equipment; and leave such equipment in proper operating condition.

E. All service lines for relocated equipment shall be in place at point of relocation ready for use before any existing equipment is disconnected. Make relocated existing equipment ready for operation or use immediately after reinstallation.

G. Contractor shall provide temporary caps and/or seals at location of removed equipment, as necessary to protect existing utilities or areas to be free from potential hazards associated with removed equipment.

1.23 COMMISSIONING OF NEW EQUIPMENT AND SYSTEMS:

A. Contractor shall be responsible for retaining the services of an independent third party to commission all new equipment and systems. The minimum following requirements shall be provided.

1. Heating, Ventilation and Air Conditioning system (HVAC) shall be reviewed by a Commissioning Agent to provide functional tests on the following equipment; Air Handling Unit, Heating and Chilled Water Pumps, Steam to Hot Water Heat Exchanger, Exhaust Fans, Control Dampers, Temperature Controls and other equipment as described in Section 230800.
2. Electrical System shall be coordinated by a licensed Electrical Engineer. As part of this work a Short Circuit and Relay Coordination Study shall be provided to coordinate all existing and new circuit breaker settings.
3. Life Safety systems shall be tested in accordance with referenced standards. Contractor shall provide Certificates of Completion to the Project Engineer prior to the scheduling and witnessing of final acceptance tests.
4. Plumbing systems shall be reviewed by a Commissioning Agent to validate the proper operation of the RO DI system, medical compressed air system, eye wash showers and stations, and other equipment as described in Section 220800.
5. Medical/SPD Equipment shall be reviewed by a qualified factory trained manufacturer's representative regularly employed by the equipment manufacturer to validate the installation and proper working order of all new or relocated medical/SPD equipment.

1.24 CONSTRUCTION SIGN

- A. Provide a Construction Sign where directed by the Project Engineer. All wood members shall be of framing lumber. Cover sign frame with 0.7 mm (24 gage) galvanized sheet steel nailed securely around edges and on all bearings. Provide three 100 by 100 mm (4 inch by 4 inch) posts (or equivalent round posts) set 1200 mm (four feet) into ground. Set bottom of sign level at 900 mm (three feet) above ground and secure to posts with through bolts. Make posts full height of sign. Brace posts with 50 x 100 mm (two by four inch) material as directed.
- B. Paint all surfaces of sign and posts two coats of white gloss paint. Border and letters shall be of black gloss paint, except project title which shall be blue gloss paint.
- C. Maintain sign and remove it when directed by the Project Engineer.

- D. Detail Drawing of construction sign showing required legend and other characteristics of sign is shown on the drawings.

1.25 SAFETY SIGN

- A. Provide a Safety Sign where directed by Project Engineer. Face of sign shall be 19 mm (3/4 inch) thick exterior grade plywood. Provide two 100 mm by 100 mm (four by four inch) posts extending full height of sign and 900 mm (three feet) into ground. Set bottom of sign level at 1200 mm (four feet) above ground.
- B. Paint all surfaces of Safety Sign and posts with one prime coat and two coats of white gloss paint. Letters and design shall be painted with gloss paint of colors noted.
- C. Maintain sign and remove it when directed by Project Engineer.
- D. Standard Detail Drawing Number SD10000-02 (Found on VA TIL) of safety sign showing required legend and other characteristics of sign is shown on the drawings.
- E. Post the number of accident free days on a daily basis.

1.26 PHOTOGRAPHIC DOCUMENTATION

- A. During the construction period through completion, provide photographic documentation of construction progress and at selected milestones or as directed by the Project Manager. For bidding purposes, Contractor shall provide between 300 to 400 digital images. Each digital image shall be taken with a professional grade camera with minimum size of 6 megapixels (MP) capable of producing 200x250mm (8 x 10 inch) prints with a minimum of 2272 x 1704 pixels and 400x500mm (16 x 20 inch) prints with a minimum 2592 x 1944 pixels. As a minimum, provide photographs at the following intervals;
 - 1. Before construction, the building pad, adjacent streets, roadways, parkways, driveways, curbs, sidewalks, landscaping, adjacent utilities and adjacent structures surrounding the building pad and site shall be documented. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings. If site work or pad preparation is extensive, this documentation may be required immediately before construction and at several pre-determined intervals before building work commences.

2. Construction progress for all trades shall be tracked at pre-determined intervals, but not less than once every thirty (30) calendar days ("Progressions"). Progression documentation shall track both the exterior and interior construction of the building. Exterior Progressions shall track 360 degrees around the site and each building. Interior Progressions shall track interior improvements beginning when stud work commences and continuing until Project completion.
3. As-built condition of pre-slab utilities and site utilities shall be documented prior to pouring slabs, placing concrete and/or backfilling. This process shall include all underground and in-slab utilities within the building(s) envelope(s) and utility runs in the immediate vicinity of the building(s) envelope(s). This may also include utilities enclosed in slab-on-deck in multi-story buildings. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive site utility plans.
4. As-built conditions of mechanical, electrical, plumbing and all other systems shall be documented post-inspection and pre-insulation, sheet rock or dry wall installation. This process shall include all finished systems located in the walls and ceilings of all buildings at the Project. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings.
5. As-built conditions of exterior skin and elevations shall be documented with an increased concentration of digital photographs as directed by the Project Engineer in order to capture pre-determined focal points, such as waterproofing, window flashing, radiused steel work, architectural or Exterior Insulation and Finish Systems (EIFS) detailing. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive elevations or elevation details.
6. As-built finished conditions of the interior of each building including floors, ceilings and walls shall be documented at certificate of occupancy or equivalent, or just prior to occupancy, or both, as directed by the Project Engineer. Overlapping photographic techniques shall be used to insure maximum coverage.

Indexing and navigation accomplished through interactive architectural drawings.

7. In event a greater or lesser number of images than specified above are required by the Project Engineer, adjustment in contract price will be made in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88).

1.27 FINAL ELEVATION DIGITAL IMAGES

- A. A minimum of four (4) images of each elevation shall be taken with a minimum 6 MP camera, by a professional photographer with different settings to allow the Project Engineer to select the image to be printed. All images are provided to the RE on a CD.
- B. Photographs shall be taken upon completion, including landscaping. They shall be taken on a clear sunny day to obtain sufficient detail to show depth and to provide clear, sharp pictures. Pictures shall be 400 mm x 500 mm (16 by 20 inches), printed on regular weight paper, matte finish archival grade photographic paper and produced by a RA4 process from the digital image with a minimum 300 PPI. Identifying data shall be carried on label affixed to back of photograph without damage to photograph and shall be similar to that provided for final construction photographs.
- C. Furnish six (6) 400 mm x 500 mm (16 by 20 inch) color prints of the following buildings constructed under this project (elevations as selected by the RE from the images taken above). Photographs shall be artistically composed showing full front elevations. All images shall become property of the Government. Each of the selected six prints shall be place in a frame with a minimum of 2 inches of appropriate matting as a border. Provide a selection of a minimum of 3 different frames from which the SRE will select one style to frame all six prints. Photographs with frames shall be delivered to the Project Engineer in boxes suitable for shipping.
 1. Hospital Building No.1.
 2. SPD Department

1.28 HISTORIC PRESERVATION

Where the Contractor or any of the Contractor's employees, prior to, or during the construction work, are advised of or discover any possible

archeological, historical and/or cultural resources, the Contractor shall immediately notify the Project Engineer verbally, and then with a written follow up.

- - - E N D - - -

SECTION 010000A

OSHA REQUIREMENTS AND SAFETY AND HEALTH REGULATIONS

PART 1 - OSHA REQUIREMENTS

1.1 GENERAL

- A. This specification shall serve as a *supplement* to 010000 'General Requirements'.
- B. Contractors are required to comply with the Occupational Safety and Health Act of 1970. This will include the safety and health standard found in CFR 1910 and 1926. Copies of those standards can be acquired from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20420
- C. In addition, Contractor will be required to comply with other applicable Medical Center policies and safety regulations. These policies and regulations will be presented to the Contractor at the pre-construction meeting. Each of the Contractor's employees will be required to read the statement of policies and regulations and sign an acknowledgment that such policies and regulations are understood. Signed acknowledgment will be returned to the COTR.
- D. Contractors involved with the removal, alteration, or disturbance of asbestos type insulation or materials will be required to comply strictly with the regulations found in CFR 1910.1001 and the appropriate EPA regulations regarding disposal of asbestos. Assistance in identifying asbestos can be requested from the Medical Center's Industrial Hygienist and the COTR.
- E. Contractors entering locations of asbestos contamination (i.e. pipe basements) shall be responsible for providing respiratory protection to their employees and ensuring respirators are worn in accordance with OSHA (CFR 1910.1001 (g)). Asbestos contaminated areas may be defined on project drawings, although some unknown asbestos containing materials may exist. All contract workers on-site must be trained in asbestos building material recognition. The minimum equipment requirements will be a half-mask air-purifying respirator equipped with high efficiency filters and disposable coveralls.
- F. Contractor, along with other submittals, and at least two weeks prior to bringing any materials on-site, must submit a complete list of chemicals the Contractor will use and MSDS for all hazardous materials as defined in OSHA 1910.1200 (d) Hazard Determination. Contracting Officer shall have final approval of all materials brought on site.
- G. The contractor will be held solely responsible for the safety and health of their employees. The contractor will also be held

responsible to protect the health and safety of the VA Community (patients, staff, and visitors) from the unwanted effects of construction. VA staff will monitor the contractor's performance in complying with all safety and health aspects of the project. Additionally, sensitive computer and phone equipment, and other government property must be protected from dust and other construction hazards at all times. Severe or constant violations may result in an immediate work stoppage or request for a Compliance Officer from the Occupational Safety and Health Administration. {NOTE: Contractor is responsible for conducting daily site safety inspections and maintaining documentation of such inspections and actions taken to abate deficiencies and unsafe conditions as required by the contractor or at the request of the CO/COTR. The Contractor shall be provided the appropriate inspection form by the CO or COTR (See Attachment B "Daily Construction Area Safety Inspection")}.}

- H. During all phases of demolition, construction and alterations, Contractors are required to understand and strictly follow NFPA 241 "Standard for Safeguarding Construction, Alteration and Demolition Operations". The Medical Center's Safety and Occupational Health Specialist, Industrial Hygienist and Fire Department will closely monitor the work area for compliance. Appropriate action will be taken for non-compliance.

PART 2 - SPECIFIC VA MEDICAL CENTER FIRE & SAFETY POLICIES, PROCEDURES & REGULATIONS (ALSO SEE SECTION 010000, GENERAL REQUIREMENTS)

2.1 INTRODUCTION

- A. The safety and fire protection of patients, employees, members of the public and government is one of continuous concern to this Medical Center.
- B. Contractors, their supervisors and employees are required to comply with Medical Center policies to ensure the occupational safety and health of all. Failure to comply may result in work stoppage.
- C. While working at this Medical Center, Contractors are responsible for the occupational safety and health of their employees. Contractors are required to comply with the applicable OSHA standards found in 29 CFR 1910 for general industry and 29 CFR 1926 for construction. Failure to comply with these standards may result in work stoppage and a request to the Area Director of OSHA for a Compliance Officer to inspect your work site.
- D. Contractors are to comply with the requirements found in the National Fire Protection Association (NFPA) #241, "Building Construction and

Demolition Operation" and NFPA #51B, "Fire Prevention in Use of Cutting and Welding Processes".

- E. Questions regarding occupational safety and health issues can be addressed to the Contracting Officer's Technical Representative (COTR) (ext. 44302). The Medical Center Safety and Occupational Health Specialist (ext. 44794 or cell phone 580-8751) or Industrial Hygienist (ext. 44793 or cell phone 580-4898) will advise the COTR when requested.
- F. Smoking is not permitted in any interior areas of the Medical Center, including all interior stairwells, tunnels, construction and/or service/maintenance sites. (Note: This includes interior posted patient smoking areas, if applicable). Compliance with this policy by your direct and subcontracted labor force is required.

2.2 HAZARD COMMUNICATION

- A. Contractors shall comply with OSHA Standard 29 CFR 1926.59 "Hazard Communication".
- B. Contractors shall submit to the VA Safety and Occupational Health Specialist, copies of Material Safety Data Sheets covering all hazardous materials to which the Contractor and VA employees are exposed.
- C. Copies of Material Safety Data Sheets covering all hazardous materials to be used by the contractor shall be submitted to the COTR prior to bringing them on VA property.
- D. Contractors shall inform the COTR of the hazards to which VA personnel and patients may be exposed.
- E. Contractors shall have a written Hazard Communication Program available at the construction site, which details how the Contractor will comply with 29 CFR 1926.59.

2.3 FIRES

- A. All fires must be reported. In the event of a fire in your work area, use the nearest pull box station and also notify Medical Center staff in the immediate area. Emergency notification can also be accomplished by dialing ext. 44319, 24 hours per day.
- B. Be sure to give the exact location from where you are calling and the nature of the emergency. If a Contractor experiences a fire that was rapidly extinguished by your staff, you still must notify the VA Safety Officer (ext. 44794 or cell 580-8751) within an hour of the event such that an investigation of the fire can be accomplished.

2.4 FIRE ALARMS, SMOKE DETECTION AND SPRINKLER SYSTEM

- A. If the nature of your work requires the deactivation of the fire alarm, smoke detection or sprinkler system, you must notify the COTR. Notification must be made well in advance such that ample time can be allowed to deactivate the system and provide alternative measures for fire protection. Under no circumstance is a Contractor allowed to deactivate any of the fire protection systems in this Medical Center.

2.5 SMOKE DETECTORS

- A. False alarms will not be tolerated. You are required to be familiar with the location of the smoke detectors in your work area. When performing cutting, burning or welding or any other operations that may cause smoke or dust, you must take steps to temporarily cover smoke detectors in order to prevent false alarms. Failure to take the appropriate action will result in the Contracting Officer assessing actual costs for government response for each false alarm that is preventable. Prior to covering the smoke detectors, the Contractor will notify the COTR, who will also be notified when the covers are removed.

2.6 HOT WORK PERMIT

- A. Hot work is defined as operations including, but not limited to, cutting, welding, thermal welding, brazing, soldering, grinding, thermal spraying, thawing pipes, or any similar situation. If such work is required, whenever possible the Contractor must notify the COTR no less than one day in advance of such work. The COTR will inspect the work area and issue a "Hot Work Permit" authorizing the performance of such work.
- B. All hot work will be performed in compliance with the Medical Center's policy regarding Hot Work Permits and NFPA 241, Safeguarding Construction, Alteration, and Demolition Operations, and NFPA 51B, Fire Prevention in Use of Cutting and Welding Processes, and applicable OSHA standard. A hot work permit will only be issued to individuals familiar with these regulations.
- C. A hot work permit will only be issued when the following conditions are met:
1. Combustible materials are located a minimum of 25 feet from the work site, or protected by flameproof covers or shielded with metal or fire-resistant guards or curtains.
 2. Openings or cracks in walls, floors, or ducts within 25 feet of the site are covered to prevent the passage of sparks to adjacent areas.

3. Where cutting or welding is done near walls, partitions, ceiling, or roof of combustible construction, fire resistant guards or shields are provided to prevent ignition.
 4. Cutting or welding on pipes or other metal in contact with combustible walls, ceilings or roofs is not undertaken if the work is close enough to cause ignition by conduction.
 5. Fully charged and operable fire extinguishers, appropriate for the type of possible fire, are available at the work area.
 6. When cutting or welding is done in close proximity to a sprinkler head, a wet rag is laid over the head during operation.
 7. Assure that nearby personnel are protected against heat, sparks, cut off, etc.
 8. Assure that a fire watch is at the site. Make a final check-up 30 minutes after completion of operations to detect and extinguish any smoldering fires.
- D. A fire watch shall be provided by the Contractor whenever cutting, welding, or performing other hot work. Fire watcher(s) shall:
1. Have fire-extinguishing equipment readily available and be trained in its use.
 2. Be familiar with facilities and procedures for sounding an alarm in the event of fire.
 3. Watch for fires in all exposed areas, sound the fire alarm immediately, and try to extinguish only within the capability of the portable extinguishing equipment available. In all cases if a fire is detected the alarm shall be activated even if the fire is extinguished.
 4. Maintain the watch for at least a half-hour after completion of operations to detect and extinguish smoldering fires.
- E. A "Hot Work Permit" will be issued only for the period necessary to perform such work. In the event the time necessary will exceed one day, a "Hot Work Permit" may be issued for the period needed; however, the COTR will inspect the area daily. Hot work permit will apply only to the location identified on the permit. If additional areas involve hot work, then additional permits must be requested.
- F. Contractors will not be allowed to perform hot work processes without the appropriate permit.
- G. Any work involving the Medical Center's fire protection system will sufficient notification. Under no circumstances will the Contractor or employee attempt to alter or tamper with the existing fire protection system.

- H. The COTR will be notified within 30 minutes of the completion of all hot work to perform an inspection of the area to confirm that sparks or drops of hot metal are not present.

2.7 TEMPORARY ENCLOSURES

- A. Only non-combustible materials will be used to construct temporary enclosures or barriers at this Medical Center. Plastic materials and fabrics used to construct dust barriers must conform to NFPA #701, Standard Methods of Fire Tests for Flame-Resistant Textiles and Films.

2.8 FLAMMABLE LIQUIDS

- A. All flammable liquids will be kept in approved safety containers. Only the amount necessary for your immediate work will be allowed in the building. Flammable liquids must be removed from the building at the end of each day.

2.9 COMPRESSED GAS CYLINDERS

- A. Compressed gas shall be secured in an upright position at all times. A suitable cylinder cart will be used to transport compressed gas cylinders. Only those compressed gas cylinders necessary for immediate work will be allowed in occupied buildings. All other compressed gas cylinders will be stored outside of buildings in a designated area. Contractor will comply with applicable standards compressed gas cylinders found in 29 CFR 1910 and 1926 (OSHA).

2.10 INTERNAL COMBUSTION ENGINE-POWERED EQUIPMENT

- A. Equipment powered by an internal combustion engine such as saws, compressors, generators and etc. will not be used in an occupied building. Special consideration may be given for unoccupied buildings only if the OSHA and NFPA requirements have been met.

2.11 POWER ACTIVATED TOOLS

- A. The operator of power activated tools must be trained and certified to use them. Power activated tools will be kept in a secured manner at all times. When not in use, the tools will be locked up. When in use, the operator will have the tool under his immediate control.

2.12 TOOLS

- A. Under no circumstances are equipment, tools and other items of work to be left unattended for any reason. All tools, equipment and items of work must be under the immediate control of your employee.
- B. If for some reason a work area must be left unattended, then it will be required that tools and other equipment be placed in an appropriate box or container and locked. All tool boxes, containers or any other device used for the storage of tool and equipment, will be provided with a latch and padlock. All tool boxes, containers or any other device used

for the storage of tools and equipment, will be locked at all times except for putting in and removing tools.

- C. All doors to work areas will be closed and locked when rooms are left unattended. Failure to comply with this directive will be considered a violation of VA Regulations 1.218 (b), "Failure to comply with signs of a directive and restrictive nature posted for safety purposes," subject to a \$50.00 fine. Subsequent similar violations may result in both imposition of such a fine as well as the Contracting Officer taking action under the Contract's "Accident Prevention Clause" (FAR 52.236-13) to suspend all contract work until violations such may be satisfactorily resolved or under FAR 52.236-5 "Material and Workmanship Clause" to remove from the work site any personnel deemed by the Contracting Officer to be careless to the point of jeopardizing the welfare of Facility patients or staff.
- D. You must report to the VA Police Department, Ext. 44330, any tools or equipment that are missing.
- E. Tools and equipment found unattended will be confiscated and removed from the work area.

2.13 LADDERS

- A. It is required that ladders not be left unattended in an upright position. Ladders must be attended at all times or taken down and chained securely to a stationary object.

2.14 SCAFFOLDS

- A. All scaffolds will be attended at all times. When not in use, an effective barricade (fence) will be erected around the scaffold to prevent use by unauthorized personnel. (Reference OSHA 1926. Subpart L)

2.15 EXCAVATIONS

- A. The contractor shall comply with OSHA 1926 Subpart P. An OSHA "competent person" must be on site during the excavation. The contractor shall coordinate with the COTR and utility companies prior to the excavation to identify underground utilities, tanks etc. All excavations left unattended will be provided with a barricade suitable to prevent entry by unauthorized persons.

2.16 STORAGE

- A. You must make prior arrangements with the CO for the storage of building materials. Storage will not be allowed to accumulate in the Medical Center buildings.

2.17 TRASH AND DEBRIS

- A. You must remove all trash and debris from the work area on a daily basis. Trash and debris will not be allowed to accumulate inside or

outside of the buildings. You are responsible for making arrangements for removal of trash from the Medical Center facility.

2.18 PROTECTION OF FLOORS

- A. It may be necessary at times to take steps to protect floors from dirt, debris, paint, etc. A tarp or other protective covering may be used. However, you must maintain a certain amount of floor space for the safe passage of pedestrian traffic. Common sense must be used in this matter.

2.19 SIGNS

- A. Signs must be placed at the entrance to work areas warning people of your work. Signs must be suitable for the condition of the work. Small pieces of paper with printing or writing are not acceptable. The VAMC Safety Officer can be consulted in this matter.

2.20 ACCIDENTS AND INJURIES

- A. Contractors must report all accidents and injuries involving your employees. The Contractor may use the VAMC Health Center, located in Building #1, for emergency care, or call 911.

2.21 INFECTION CONTROL

- A. Contractors must control the generation of dust and the contamination of patient care surfaces, supplies and equipment. Additionally, the Contractor will be required to follow measures described in the Infection Control Construction Checklist (See Attachment A). Generally, the Contractor needs to perform the following measures during any demolition phase:
- B. The construction area shall be under negative pressure, ensuring there is an appreciable flow of clean air from the VA occupied portion of the facility into the construction area. The air flow shall be sufficiently strong to draw in the plastic door flaps commonly located at the construction entrance or at the specific site within the construction area;
- C. Construction debris being transported through the VA occupied portion of the facility shall be covered and /or wetted.
- D. Construction employees shall remove dust-laden clothing before entering the VA occupied portion of the facility.
- E. Carpet / sticky mats shall be placed at all construction entrances and satisfactorily maintained so as to minimize the tracking of dust into the VA occupied portion of the facility.
- F. Dry sweeping of dust and debris is not to be performed.
- G. Control measures B - F above must be practiced during the construction phase.

2.22 CONFINED SPACE ENTRY

- A. Contractor will be informed that the workplace contains permit required confined space and that permit space entry is allowed only through compliance with a permit space program meeting the requirements of 29 CFR 1910.146 and 1926.21 (b)(6).
- B. Contractor will be apprised of the elements including the hazards identified and the Medical Center's (last employer) experience with the space that makes the space in question a permit space.
- C. Contractor will be apprised of any precautions or procedures that the Medical Center has implemented for the protection of employees in or near permit space where Contractor personnel will be working.
- D. Medical Center and Contractor will coordinate entry operations when both Medical Center personnel and Contractor personnel will be working in or near permit spaces as required by 29 CFR 1910.146 (d)(ii) and 1926.21 (b)(6).
- E. Contractor will obtain any available information regarding permit space hazards and entry operation from the Medical Center.
- F. At the conclusion of the entry operations the Medical Center and Contractor will discuss any hazards confronted or created in permit spaces.
- G. The Contractor is responsible for complying with 29 CFR 1910.246 (d) through (g) and 1926.21 (b)(6). The Medical Center, upon request, may provide rescue and emergency services required by 29 CFR 1910.246 (k) and 1926.21 (b)(6).

2.23 CONTRACTOR PARKING & MATERIAL DELIVERY

- A. Contractor's parking and the delivery of building materials tools etc. must be prearranged with the COTR

Infection Control Construction Permit					
NOTE: To Be Posted in Construction and Remodel Areas During Work					
Location of Construction:				Project Start Date:	
Project Coordinator:				Estimated Duration:	
Contractor Performing Work:				Foreman Telephone:	
Contract Foreman/ Supervisor:				COTR Telephone:	
YES	NO	CONSTRUCTION ACTIVITY	YES	NO	INFECTION CONTROL RISK GROUP
		TYPE A: Inspection, non-invasive activity			GROUP 1: Low Risk
		TYPE B: Small scale, short duration, moderate to high levels			GROUP 2: Medium Risk
		TYPE C: Activity generates moderate to high levels of dust, requires greater 1 work shift for completion			GROUP 3: Medium/High Risk
		TYPE D: Major duration and construction activities Requiring consecutive work shifts			GROUP 4: Highest Risk
CLASS I		1. Execute work by methods to minimize raising dust from construction operations. 2. Immediately replace any ceiling tile displaced for visual inspection. 3. Minor Demolition for Remodeling			

CLASS II	<ol style="list-style-type: none"> 1. Provides active means to prevent air-borne dust from dispersing into atmosphere 2. Water mist work surfaces to control dust while cutting. 3. Seal unused doors with duct tape. 4. Block off and seal air vents. 5. Wipe surfaces with disinfectant. 	<ol style="list-style-type: none"> 6. Contain construction waste before transport in tightly covered containers. 7. Wet mop and/or vacuum with HEPA filtered vacuum before leaving work area. 8. Place dust mat at entrance and exit of work area. 9. Remove or isolate HVAC system in areas where work is being performed.
CLASS III	<ol style="list-style-type: none"> 1. Obtain infection control permit before construction begins. 2. Isolate HVAC system in area where work is being done to prevent contamination of the duct system. 3. Complete all critical barriers or implement control cube method before construction begins. 	<ol style="list-style-type: none"> 6. Vacuum work with HEPA filtered vacuums. 7. Wet mop with disinfectant 8. Remove barrier materials carefully to minimize spreading of dirt and debris associated with construction. 9. Contain construction waste before transport in
Date	4. Maintain negative air pressure	tightly covered containers.
Initial	<ol style="list-style-type: none"> within work site utilizing HEPA equipped air filtration units. 5. Do not remove barriers from work area until complete project is thoroughly cleaned by Env. Services Dept. 	<ol style="list-style-type: none"> 10. Cover transport receptacles or carts. Tape covering. 11. Remove or isolate HVAC system in areas where work is being performed/
Class IV	<ol style="list-style-type: none"> 1. Obtain infection control permit before construction begins. 2. Isolate HVAC system in area where work is being done to prevent contamination of duct system. 	<ol style="list-style-type: none"> 7. All personnel entering work site are required to wear shoe covers 8. Do not remove barriers from work area until completed project is thoroughly cleaned by the Environmental Service Dept.
Date		

Initial	<p>3. Complete all critical barriers or implement control cube method before construction begins.</p> <p>4. Maintain negative air pressure within work site utilizing HEPA equipped air filtration units.</p> <p>5. Seal holes, pipes, conduits, and punctures appropriately.</p> <p>6. Construct anteroom and require all personnel to pass through this room so they can be vacuumed using a HEPA vacuum cleaner before leaving work site or they can wear cloth or paper coveralls that are removed each time they leave the work site.</p>	<p>9. Vacuum work area with HEPA filtered vacuums.</p> <p>10. Wet mop with disinfectant.</p> <p>11. Remove barrier materials carefully to minimize spreading of dirt and debris associated with construction.</p> <p>12. Contain construction waste before transport in tightly covered containers.</p> <p>13. Cover transport receptacles or carts. Tape covering.</p> <p>14. Remove or isolate HVAC system in areas where is being done.</p>
<p>Additional Requirements:</p> <p>Exceptions/Additions:</p>		
SIGNATURES		
Infection Control Coordinator:	Date:	
COTR:	Date:	
Contract Foreman:	Date:	

Daily Construction Area Safety Inspection

Date: _____ Contract Number or Description:

Area or Building Name: _____

Inspectors: _____

1. Please survey the work area and explain any deficiencies that you find in section 2.

Section A							
Has the Safety Office been notified of all work processes that could							
	M	T	W	T	F	Sa	Su
1. Compromise Life Safety?							
2. Cause harsh smells or generate large quantities of dust?							
3. Interfere with the operation of the fixed fire detection or suppression systems?							
4. Other: (list)							

Section B							
Means of Egress							
	M	T	W	T	F	Sa	Su
1. Fire/Smoke Doors unlocked, free of obstructions?							
2. Sufficient Means of Egress free of obstructions and properly marked?							
3. Other: (list)							

Section C							
Fire Alarm, Fire Detection, & Fire Suppression Systems							
	M	T	W	T	F	Sa	Su
1. Fire Alarm Pull Stations unobstructed?							

2. Are smoke detector dust caps in use (if required)?							
Contractor employee assigned to insure caps are removed at close of day?							
3. Hot Work Permits in use?							
4. Are sprinkler heads unobstructed?							
5. Other: (list)							

Section D Housekeeping and Environmental Controls							
	M	T	W	T	F	Sa	Su
1. Trash and debris removed within a reasonable time frame or daily?							
2. Debris covered / dampened prior to being transported outside the construction area							
3. Floor mats and dust tack mats located at the entrance to the construction area and replaced as needed							
4. Tool & material storage neat and orderly (18" below sprinkler heads)?							
5 Signs installed to restrict patient access							
6. Dust is picked up using a shop vacuum or other dust reducing technique. (Dry sweeping is not performed)							
7. Doors closed, sheetrock or fire resistant plastic sheeting installed to enclose wall openings							
8. Barriers are wiped down prior to being removed							
9. Other (list)							

Section E Air Handling & HVAC							
	M	T	W	T	F	Sa	Su
1. Negative pressure with respect to the patient occupied space is maintained within the construction area.							
2. HVAC exhaust and supply ducts are covered during demolition							
3. Construction debris chutes are not adjacent to open windows or HVAC air intakes							
4. Other (list)							

Section F Hazardous Chemicals / Conditions							
	M	T	W	T	F	Sa	Su
1. Appropriate Storage?							
2. MSDS posted on job site?							
3. Permit Required Confined Space Procedures in place?							
4. Lock Out / Tag Out procedures in place?							
5. Hazardous building materials, such as asbestos, have been identified and addressed?							
6. Other: (list)							

Y = Yes

N = NO

-- = N/A

2. Please explain nature of deficiency:

Item #	Deficiency	Corrective Actions

3. Please send copy to the Safety Office

**SECTION 01 32 16.13
NETWORK ANALYSIS SCHEDULES**

PART 1- GENERAL

1.1 DESCRIPTION:

- A. The Contractor shall develop a Network Analysis System (NAS) plan and schedule demonstrating fulfillment of the contract requirements, shall keep the network up-to-date in accordance with the requirements of this section and shall utilize the plan for scheduling, coordinating and monitoring work under this contract (including all activities of subcontractors, equipment vendors and suppliers). Conventional Critical Path Method (CPM) Precedence Diagramming Method (PDM) technique will be utilized to satisfy both time and cost applications. All schedule data and reports required under this specification section shall be based upon regular total float, not relative total float schedules.

1.2 CONTRACTOR'S REPRESENTATIVE:

- A. The Contractor shall designate an authorized representative in the firm who will be responsible for the preparation of the network diagram, review and report progress of the project with and to the Contracting Officer's representative.
- B. The Contractor's representative shall have direct project control and complete authority to act on behalf of the Contractor in fulfilling the requirements of this specification section and such authority shall not be interrupted throughout the duration of the project.

1.3 CONTRACTOR'S CONSULTANT:

- A. To prepare the network diagram, and compact disk(s), which reflects the Contractor's project plan, the Contractor shall engage an independent CPM consultant who is skilled in the time and cost application of scheduling using (PDM) network techniques for construction projects, the cost of which is included in the Contractor's bid. This consultant shall not have any financial or business ties to the Contractor, and shall not be an affiliate or subsidiary company of the Contractor, and shall not be employed by an affiliate or subsidiary company of the Contractor.
- B. Prior to engaging a consultant, and within 10 calendar days after award of the contract, the Contractor shall submit to the Contracting Officer:
1. The name and address of the proposed consultant.

2. Sufficient information to show that the proposed consultant has the qualifications to meet the requirements specified in the preceding paragraph.
 3. A list of prior construction projects, along with selected PDM network diagram samples on current projects which the proposed consultant has performed complete project scheduling services. These network diagram samples must show complete project planning for a project of similar size and scope as covered under this contract.
- C. The Contracting Officer has the right to approve or disapprove employment of the proposed consultant, and will notify the Contractor of the VA decision within seven calendar days from receipt of information. In case of disapproval, the Contractor shall resubmit another consultant within 10 calendar days for renewed consideration. The Contractor must have their CPM Consultant approved prior to submitting any diagram.

1.4 COMPUTER PRODUCED SCHEDULES

- A. The contractor shall provide to the VA Project Engineer and CPM Schedule Analyst, monthly computer processing of all computer-produced time/cost schedules and reports generated from monthly project updates. This monthly computer service will include: three copies of up to five different reports (inclusive of all pages) available within the user defined reports of Primavera (P3 or P6) to the contracting officer's representative; a hard copy listing of all project schedule changes, and associated data, made at the update and an electronic file of this data in Primavera (P3 or P6) batch format; and the resulting monthly updated schedule in a compressed electronic file in Primavera (P3 or P6), (PDM) format. These must be submitted with and substantively support the contractor's monthly payment request and the signed lookahead report. The Project Engineer shall identify the five different report formats that the contractor shall provide based upon the monthly schedule updates.
- B. The contractor is responsible for the correctness and timeliness of the computer-produced reports. The Contractor is also responsible for the accurate and timely submittal of the updated project schedule and all CPM data necessary to produce the computer reports and payment request that is specified.
- C. The VA shall report errors in computer-produced reports to the Contractor's representative within ten calendar days from receipt of

reports. The Contractor will reprocess the computer-produced reports and associated compact disk(s), when requested by the Contracting Officer's representative, to correct errors which affect the payment and schedule for the project.

1.5 THE COMPLETE PROJECT NETWORK DIAGRAM SUBMITTAL

- A. Within 45 calendar days after receipt of Notice to Proceed, the Contractor shall submit for the Contracting Officer's review; three blue line copies of the complete network diagram on sheets of paper 765 x 1070 mm (30 x 42 inches) and an electronic file in a compressed Primavera (P3 or P6), (PDM) format. The submittal shall also include three copies of a computer-produced activity/event ID schedule showing project duration; phase completion dates; and other data, including event cost. Each activity/event on the computer-produced schedule shall contain as a minimum, but not limited to, activity/event ID, duration, predecessor and successor relationships, trade code, area code, description, budget amount, early start date, early finish date, late start date, late finish date and total float. Work activity/event relationships shall be restricted to finish-to-start and start-to-start without lead or lag constraints. The lead or lag for the SS relationships may only be allowed in limited basis if justified in writing and must be approved by the Contracting Officer. Activity/event date constraints, not required by the contract, will not be accepted unless submitted to and approved by the Contracting Officer. The contractor shall make a separate written detailed request to the Contracting Officer identifying these date constraints and secure the Contracting Officer's written approval before incorporating them into the network diagram. The Contracting Officer's separate approval of the network diagram shall not excuse the contractor of this requirement. Logic events (non-work) will be permitted where necessary to reflect proper logic among work events, but must have a zero duration. The complete working network diagram shall reflect the Contractor's approach to scheduling the complete project. **The final network diagram in its original form shall contain no contract changes or delays which may have been incurred during the final network diagram development period and shall reflect the entire contract duration as defined in the bid documents.** These changes/delays shall be entered at the first update after the final network diagram has been approved. The Contractor should provide their requests for time and supporting time

extension analysis for contract time as a result of contract changes/delays, after this update, and in accordance with Article, ADJUSTMENT OF CONTRACT COMPLETION.

- B. Within 30 calendar days after receipt of the complete project network diagram, the Contracting Officer or his representative, will do one or both of the following:
 - 1. Notify the Contractor concerning his actions, opinions, and objections.
 - 2. A meeting with the Contractor at or near the job site for joint review, correction or adjustment of the proposed plan will be scheduled if required. Within 14 calendar days after the joint review, the Contractor shall revise and shall submit three blue line copies of the revised network diagram, three copies of the revised computer-produced activity/event ID schedule and a revised electronic file as specified by the Contracting Officer. The revised submission will be reviewed by the Contracting Officer and, if found to be as previously agreed upon, will be approved.
- C. The approved baseline network diagram schedule and the corresponding computer-produced schedule(s) shall constitute the approved baseline schedule until subsequently revised in accordance with the requirements of this section.
- D. The Complete Project Network Diagram will contain approximately _____work activities/events.

1.6 WORK ACTIVITY/EVENT COST DATA

- A. The Contractor shall cost load all work activities/events except procurement activities. The cost loading shall reflect the appropriate level of effort of the work activities/events. The cumulative amount of all cost loaded work activities/events (including alternates) shall equal the total contract price. Prorate overhead, profit and general conditions on all work activities/events for the entire project length. The contractor shall generate from this information cash flow curves indicating graphically the total percentage of work activity/event dollar value scheduled to be in place on early finish, late finish. These cash flow curves will be used by the Contracting Officer to assist him in determining approval or disapproval of the cost loading. In the event of disapproval, the Contractor shall revise and resubmit in accordance with Article, THE COMPLETE PROJECT NETWORK DIAGRAM

SUBMITTAL. Negative work activity/event cost data will not be acceptable, except on VA issued contract changes.

- B. The Contractor shall cost load work activities/events for guarantee period services, test, balance and adjust various systems in accordance with the provisions in the FAR 52.232 - 5 (PAYMENTS UNDER FIXED-PRICE CONSTRUCTION), Article, and VAAR 852.236 - 83(PAYMENTS UNDER FIXED-PRICE CONSTRUCTION).
- C. In accordance with Article PERFORMANCE OF WORK BY THE CONTRACTOR in FAR 52.236 - 1 and VAAR 852.236 - 72, the Contractor shall submit, simultaneously with the cost per work activity/event of the construction schedule required by this Section, a responsibility code for all activities/events of the project for which the Contractor's forces will perform the work.
- D. Work activities/events for Contractor bond shall have a trade code and area code of BOND.


1.7 NETWORK DIAGRAM REQUIREMENTS

- A. Show on the network diagram the sequence and interdependence of work activities/events required for complete performance of all items of work. In preparing the network diagram, the Contractor shall:
 - 1. Exercise sufficient care to produce a clear, legible and accurate network diagram, refer to the drawing, CPM-1 (Sample CPM Network). Computer plotted network diagrams shall legibly display and plot all information required by the VA CPM activity/event legend or the computer plotted network diagram will not be acceptable. If the computer plotted network diagram is not found acceptable by the contracting officer's representative, then the network diagram will need to be hand drafted and meet legibility requirements. Group activities related to specific physical areas of the project, on the network diagram for ease of understanding and simplification. Provide a key plan on each network diagram sheet showing the project area associated with the work activities/events shown on that sheet.
 - 2. Show the following on each work activity/event:
 - a. Activity/Event ID number.
 - b. Concise description of the work represented by the activity/event. (35 characters or less including spaces preferred).

- c. Performance responsibility or trade code (five alpha characters or less): GEN, MECH, ELEC, CARP, PLAST, or other acceptable abbreviations.
- d. Duration (in work days.)
- e. Cost (in accordance with Article, ACTIVITY/EVENT COST DATA of this section and less than \$9,999,999 per activity).
- f. Work location or area code (five characters or less), descriptive of the area involved.
- g. Manpower required (average number of men per day).
- h. The SYMBOL LEGEND format shown below and on the drawing, CPM-1 (Sample CPM Network) is mandatory and shall be followed in preparing final network diagrams.

SYMBOL LEGEND

Show Network Diagram page number location(s) for all incoming/outgoing node connector(s).

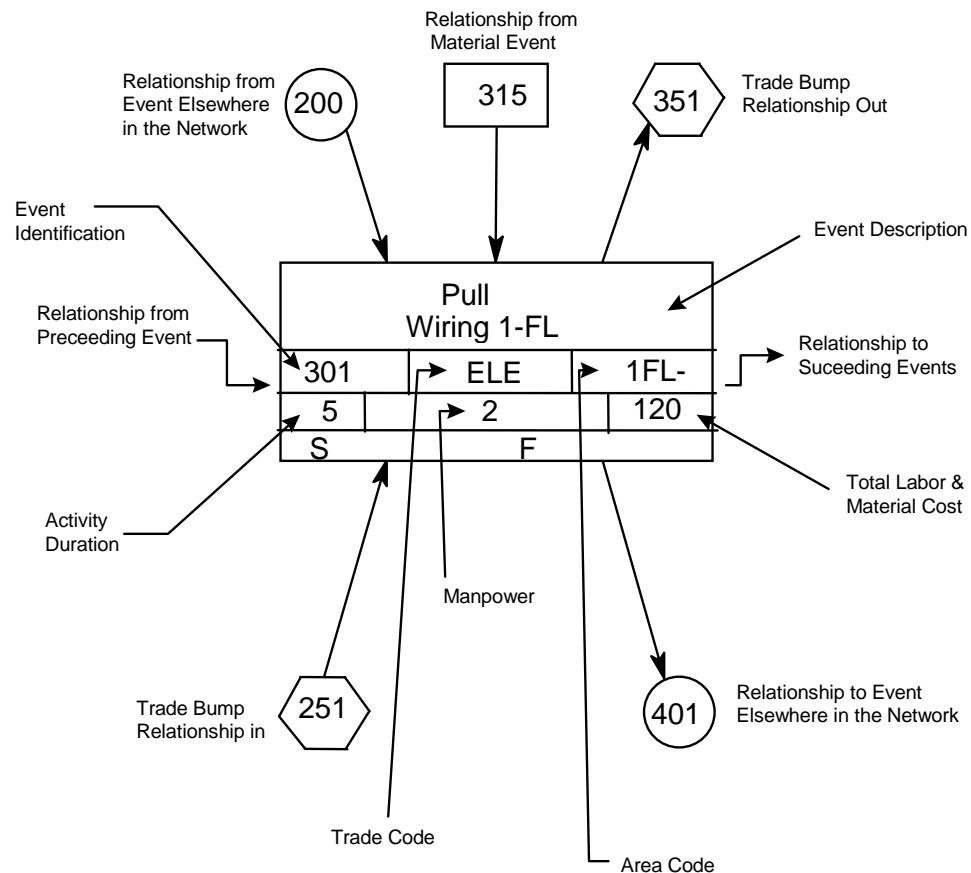

3. Show activities/events as:

- a. Contractor's time required for submittal of shop drawings, templates, fabrication, delivery and similar pre-construction work.
- b. Contracting Officer's and Architect-Engineer's review and approval of shop drawings, equipment schedules, samples, template, or similar items.
- c. Interruption of VA Medical Center utilities, delivery of Government furnished equipment, and rough-in drawings, project phasing and any other specification requirements.
- d. Test, balance and adjust various systems and pieces of equipment, maintenance and operation manuals, instructions and preventive maintenance tasks.
- e. **Commissioning Activities** - Based upon the project specific Commissioning plan, the contractor shall include in the **Day 1 CPM Diagram all the systems commissioning activities (see systems covered in Division 7, 8, 21, 22, 23, 26, 28, 31 and others as specified)** such as start up, Pre-functional check list, Pre - test, individual component and system level Functional test, Operator's training, O.& M. Manuals etc.(including any deficiency correction and re-testing). **The majority of commissioning activities should be completed as part of the normal construction schedule and finalized prior to the construction contract completion date.** To this end, it is imperative that the Commissioning Agent and the Contractor collaborate to integrate commissioning activities into the Contractor's overall construction schedule. All commissioning activities shall be cost loaded as required in the earlier paragraphs.
- f. The Commissioning Plan will identify critical commissioning activities and associated construction/start up tasks that must precede these activities to allow for successful execution of the commissioning activities. In order to coordinate these activities with the construction schedule, a **Commissioning Duration Schedule** should be provided by the Commissioning Agent to the VA Project Engineer and the Contractor to provide a rational basis for integration of commissioning into the Day 1 diagram and the construction schedule. The Commissioning Duration Schedule should include the following information:
 - 1) Description of Commissioning Activity

- 2) Prerequisite Construction Tasks Required to Execute the Cx Activity
 - 3) Elapsed Time Duration of Each Activity
 - 4) Documentation Associated with Each Task/Document Responsibility
- g. Once the duration schedule is delivered to the Contractor, the Commissioning Agent will collaborate with the Contractor to integrate all commissioning activities into the fixed duration construction schedule in accordance with VA NAS requirements for scheduling the project.
- h. Bid items other than the Base Bid (ITEM 1) and Asbestos Abatement item shall have trade codes corresponding to the appropriate bid item number (e.g., ITM 3, ITM 4 and other items).
4. Show not only the activities/events for actual construction work for each trade category of the project, but also trade relationships to indicate the movement of trades from one area, floor, or building, to another area, floor, or building, for at least five trades who are performing major work under this contract.
 5. Break up the work into activities/events of a duration no longer than 20 work days each, except as to non-construction activities/events (i.e., procurement of materials, delivery of equipment, concrete and asphalt curing) and any other activities/events for which the Contracting Officer may approve the showing of a longer duration. The duration for VA approval of any required submittal, shop drawing, or other submittals shall not be less than 20 work days. Refer to drawing CPM-1 for VA approval activities/events which will require minimum duration longer than 20 workdays. The construction time as determined by the CPM schedule from early start to late finish for any sub-phase, phase or the entire project shall not exceed the contract time(s) specified or shown.
 6. Describe work activities/events clearly, so the work is readily identifiable for assessment of completion. Activities/events labeled "start," "continue," or "completion," are not specific and will not be allowed. Lead and lag time activities will not be acceptable.
 7. Uniquely number each activity/event with numbers ranging from 1 to 99998 only. The network diagram should be generally numbered in such a way to reflect either discipline, phase or location of the work.

- B. Submit the following supporting data in addition to the network diagram, activity/event ID schedule and electronic file (s). Failure of the Contractor to include this data will delay the review of the submittal until the Contracting Officer is in receipt of the missing data:
1. The proposed number of working days per week.
 2. The holidays to be observed during the life of the contract (by day, month, and year).
 3. The planned number of shifts per day.
 4. The number of hours per shift.
 5. List the major construction equipment to be used on the site, describing how each piece relates to and will be used in support of the submitted network diagram work activities/events.
 6. Provide a typed, doubled spaced, description, at least one page in length, of the plan and your approach to constructing the project.
- C. To the extent that the network diagram or any revised network diagram shows anything not jointly agreed upon, it shall not be deemed to have been approved by the Contracting Officer. Failure to include any element of work required for the performance of this contract shall not excuse the Contractor from completing all work required within any applicable completion date of each phase regardless of the Contracting Officer's approval of the network diagram.
- D. Compact Disk Requirements and CPM Activity/Event Record Specifications: Submit to the VA Project Engineer and CPM Schedule Analyst an electronic file(s) containing one file of the data required to produce a Primavera (P3 or P6), (PDM) produced schedule, reflecting all the activities/events of the complete project network diagram being submitted.

1.8 PAYMENT TO THE CONTRACTOR:

- A. Monthly, the contractor shall submit the AIA application and certificate for payment documents G702 & G703 reflecting updated schedule activities and cost data in accordance with the provisions of the following Article, PAYMENT AND PROGRESS REPORTING, as the basis upon which progress payments will be made pursuant to Article FAR 52.232 - 5 (PAYMENTS UNDER FIXED-PRICE CONSTRUCTION), and VAAR 852.236 - 83(PAYMENTS UNDER FIXED-PRICE CONSTRUCTION). The Contractor is entitled to a monthly progress payment upon approval of estimates as determined from the currently approved updated computer-produced

calendar-dated schedule unless, in special situations, the Contracting Officer permits an exception to this requirement. Monthly payment requests shall include: three copies of up to five different reports (inclusive of all pages) available within the user defined reports of Primavera (P3 or P6), (PDM) to the contracting officer's representative; a listing of all project schedule changes, and associated data, made at the update; and an electronic file (s) of the resulting monthly updated schedule in a compressed Primavera (P3 or P6), (PDM) format. These must be submitted with and substantively support the contractor's monthly application and certificate for payment request documents.

- B. When the Contractor fails or refuses to furnish to the Contracting Officer the information and the associated updated Primavera (P3 or P6), (PDM) schedule in electronic format, which, in the sole judgment of the Contracting Officer, is necessary for processing the monthly progress payment, the Contractor shall not be deemed to have provided an estimate and supporting schedule data upon which progress payment may be made.

1.9 PAYMENT AND PROGRESS REPORTING

- A. Monthly job site progress meetings shall be held on dates mutually agreed to by the Contracting Officer (or Contracting Officer's representative) and the Contractor. Contractor and the CPM consultant will be required to attend all monthly progress meetings. Presence of Subcontractors during progress meeting is optional unless required by the Contracting Officer (or Contracting Officer's representative). The Contractor shall update the project schedule and all other data required by this section shall be accurately filled in and completed prior to the monthly progress meeting. The Contractor shall provide this information to the Contracting Officer or the VA representative in completed form three work days in advance of the progress meeting. Job progress will be reviewed to verify:
 - 1. Actual start and/or finish dates for updated/completed activities/events.
 - 2. Remaining duration, required to complete each activity/event started, or scheduled to start, but not completed.
 - 3. Logic, time and cost data for change orders, and supplemental agreements that are to be incorporated into the network diagram and computer-produced schedules. Changes in activity/event sequence and

- duration which have been made pursuant to the provisions of following Article, ADJUSTMENT OF CONTRACT COMPLETION.
4. Percentage for completed and partially completed activities/events.
 5. Logic and duration revisions required by this section of the specifications.
 6. Activity/event duration and percent complete shall be updated independently.
- B. The Contractor shall submit a narrative report as a part of his monthly review and update, in a form agreed upon by the Contractor and the Contracting Officer. The narrative report shall include a description of problem areas; current and anticipated delaying factors and their estimated impact on performance of other activities/events and completion dates; and an explanation of corrective action taken or proposed. This report is in addition to the daily reports pursuant to the provisions of Article, DAILY REPORT OF WORKERS AND MATERIALS in the GENERAL CONDITIONS.
- C. After completion of the joint review and the Contracting Officer's approval of all entries, the contractor will generate an updated computer-produced calendar-dated schedule and supply the Contracting Officer's representative with reports in accordance with the Article, COMPUTER PRODUCED SCHEDULES, specified.
- D. After completing the monthly schedule update, the contractor's scheduling consultant shall rerun all current period contract change(s) against the prior approved monthly project schedule. The analysis shall only include original workday durations and schedule logic agreed upon by the contractor and Project Engineer for the contract change(s). When there is a disagreement on logic and/or durations, the consultant shall use the schedule logic and/or durations provided and approved by the Project Engineer. After each rerun update, the resulting electronic project schedule data file shall be appropriately identified and submitted to the VA in accordance to the requirements listed in articles 1.4 and 1.7. This electronic submission is separate from the regular monthly project schedule update requirements and shall be submitted to the Project Engineer within fourteen (14) calendar days of completing the regular schedule update. **Before inserting the contract changes durations, care must be taken to ensure that only the original durations will be used for the analysis, not the reported durations after progress. In addition, once the final network diagram is**

approved, the contractor must recreate all manual progress payment updates on this approved network diagram and associated reruns for contract changes in each of these update periods as outlined above for regular update periods. This will require detailed record keeping for each of the manual progress payment updates.

- E. After VA acceptance and approval of the final network diagram, and after each monthly update, the contractor shall submit to the Contracting Officer three blue line copies of a revised complete network diagram showing all completed and partially completed activities/events, contract changes and logic changes made on the intervening updates or at the first update on the final diagram. The Contracting Officer may elect to have the contractor do this on a less frequent basis, but it shall be done on a quarterly basis as a minimum.
- F. Following approval of the CPM schedule, the VA, the General Contractor, its approved CPM Consultant, RE office representatives, and all subcontractors needed, as determined by the SRE, shall meet to discuss the monthly updated schedule. The main emphasis shall be to address work activities to avoid slippage of project schedule and to identify any necessary actions required to maintain project schedule during the reporting period. The Government representatives and the Contractor should conclude the meeting with a clear understanding of those work and administrative actions necessary to maintain project schedule status during the reporting period. This schedule coordination meeting will occur after each monthly project schedule update meeting utilizing the resulting schedule reports from that schedule update. If the project is behind schedule, discussions should include ways to prevent further slippage as well as ways to improve the project schedule status, when appropriate.

1.10 RESPONSIBILITY FOR COMPLETION

- A. Whenever it becomes apparent from the current monthly progress review meeting or the monthly computer-produced calendar-dated schedule that phasing or contract completion dates will not be met, the Contractor shall execute some or all of the following remedial actions:
 - 1. Increase construction manpower in such quantities and crafts as necessary to eliminate the backlog of work.
 - 2. Increase the number of working hours per shift, shifts per working day, working days per week, the amount of construction equipment, or any combination of the foregoing to eliminate the backlog of work.

3. Reschedule the work in conformance with the specification requirements.

B. Prior to proceeding with any of the above actions, the Contractor shall notify and obtain approval from the Contracting Officer for the proposed schedule changes. If such actions are approved, the CPM revisions shall be incorporated by the Contractor into the network diagram before the next update, at no additional cost to the Government.

1.11 CHANGES TO NETWORK DIAGRAM AND SCHEDULE

A. Within 30 calendar days after VA acceptance and approval of any updated computer-produced schedule, the Contractor will submit a revised network diagram, the associated compact disk(s), and a list of any activity/event changes including predecessors and successors for any of the following reasons:

1. Delay in completion of any activity/event or group of activities/events, indicate an extension of the project completion by 20 working days or 10 percent of the remaining project duration, whichever is less. Such delays which may be involved with contract changes, strikes, unusual weather, and other delays will not relieve the Contractor from the requirements specified unless the conditions are shown on the CPM as the direct cause for delaying the project beyond the acceptable limits.
2. Delays in submittals, or deliveries, or work stoppage are encountered which make rescheduling of the work necessary.
3. The schedule does not represent the actual prosecution and progress of the project.
4. When there is, or has been, a substantial revision to the activity/event costs of the network diagram regardless of the cause for these revisions.

B. CPM revisions made under this paragraph which affect the previously approved computer-produced schedules for Government furnished equipment, vacating of areas by the VA Medical Center, contract phase(s) and sub phase(s), utilities furnished by the Government to the Contractor, or any other previously contracted item, must be furnished in writing to the Contracting Officer for approval.

C. Contracting Officer's approval for the revised network diagram and all relevant data is contingent upon compliance with all other paragraphs

of this section and any other previous agreements by the Contracting Officer or the VA representative.

- D. The cost of revisions to the network diagram resulting from contract changes will be included in the proposal for changes in work as specified in Article, FAR 52.243 -4 (CHANGES), VAAR 852.236 - 88 (CHANGES - SUPPLEMENTS), and will be based on the complexity of the revision or contract change, man hours expended in analyzing the change, and the total cost of the change.
- E. The cost of revisions to the network diagram not resulting from contract changes is the responsibility of the Contractor.

1.12 ADJUSTMENT OF CONTRACT COMPLETION

- A. The contract completion time will be adjusted only for causes specified in this contract. Request for an extension of the contract completion date by the Contractor shall be supported with a justification, CPM data and supporting evidence as the Contracting Officer may deem necessary for determination as to whether or not the Contractor is entitled to an extension of time under the provisions of the contract. Submission of proof based on revised activity/event logic, durations (in work days) and costs is obligatory to any approvals. The schedule must clearly display that the Contractor has used, in full, all the float time available for the work involved in this request. The Contracting Officer's determination as to the total number of days of contract extension will be based upon the current computer-produced calendar-dated schedule for the time period in question and all other relevant information.
- B. Actual delays in activities/events which, according to the computer-produced calendar-dated schedule, do not affect the extended and predicted contract completion dates shown by the critical path in the network, will not be the basis for a change to the contract completion date. The Contracting Officer will within a reasonable time after receipt of such justification and supporting evidence, review the facts and advise the Contractor in writing of the Contracting Officer's decision.
- C. The Contractor shall submit each request for a change in the contract completion date to the Contracting Officer in accordance with the provisions specified under Article, FAR 52.243 -4 (CHANGES), VAAR 852.236 - 88 (CHANGES - SUPPLEMENTS). The Contractor shall include, as a part of each change order proposal, a sketch showing all CPM logic

revisions, duration (in work days) changes, and cost changes, for work in question and its relationship to other activities on the approved network diagram.

- D. All delays due to non-work activities/events such as RFI's, WEATHER, STRIKES, and similar non-work activities/events shall be analyzed on a month by month basis.

1.13 CONSTRUCTION SCHEDULE RISK ANALYSIS / MITIGATION PLAN

- A. Schedule Risk Analysis - The contractor shall conduct the statistical schedule risk analysis based on the above detailed construction activities in the Day 1 approved diagram, identifying major schedule risk areas and recommended risk mitigation plans as outlined below.
- B. The risk analysis shall be conducted by a person or firm skilled in the statistical method of schedule risk analysis based on the (PDM) network techniques for major construction projects, preferably in the major health care related projects. The cost of this service shall be included in the Contractor's proposal.
- C. The Contracting Officer has the right to approve or disapprove the Person or firm designated to perform the risk analysis.

1.14 RISK ANALYSIS FORMAT / REQUIREMENTS / SUBMITTALS

- A. Risk Analysis Software / Format - Within 45 calendar days (60 calendar days on projects over \$50,000,000) after receipt of Notice to Proceed, the Contractor shall submit for the Contracting Officer's review; a Risk Analysis software to be utilized, the method of performing the analysis, the format of presenting the data and the reports for VA approval.
- B. Conduct Risk Analysis / **Submittals - Based on the approved software / format, the consultant shall** perform statistical risk analysis on the detailed approved Day 1 diagram. The contractor shall review and utilize any previous Risk analysis performed by the A/E of record based on the "semi-detailed" (yet at an overall level) construction logic and schedule to ensure the continuity of previous schedule risk analysis. The contractor's project manager and Superintendent shall identify the major schedule risk areas and possible risk mitigation strategy/plan and record it in a narrative format, with **electronic file submission** to the VA. **The risk analysis exercise shall be performed or updated at least on a quarterly basis or as directed by the VA Contracting officer.**

- C. The submittal shall include three copies of a computer-produced risk analysis results, predicting the various meaningful probability curves of achieving the contract schedules. It shall also include a detailed narrative list of all major and minor potential and specific schedule and cost risk areas, and a contractor's recommendations of mitigating the identified risks which must be addressed by the VA Project Engineer teams to maintain the contract schedule.

- - - E N D - - -

SECTION 01 33 23
SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES

- 1-1. Refer to Articles titled SPECIFICATIONS AND DRAWINGS FOR CONSTRUCTION (FAR 52.236-21) and, SPECIAL NOTES (VAAR 852.236-91), in GENERAL CONDITIONS.
- 1-2. For the purposes of this contract, samples (including laboratory samples to be tested), test reports, certificates, and manufacturers' literature and data shall also be subject to the previously referenced requirements. The following text refers to all items collectively as SUBMITTALS.
- 1-3. Submit for approval, all of the items specifically mentioned under the separate sections of the specification, with information sufficient to evidence full compliance with contract requirements. CONTRACTOR SHALL PROVIDE A SUBMITTAL, FOR APPROVAL, OF ANY MAJOR ITEM OR EQUIPMENT WHETHER OR NOT SPECIFICALLY STATED WITHIN THE INDIVIDUAL SPECIFICATION SECTIONS. SHOULD THE CONTRACTOR FAIL TO SUBMIT AND OBTAIN WRITTEN APPROVAL PRIOR TO PURCHASE AND INSTALLATION OF ANY ITEM OR EQUIPMENT, THE CONTRACTOR ASSUMES ALL ASSOCIATED RISK. IN THE EVENT THE PROJECT MANAGER DOES NOT APPROVE THE ITEM OR EQUIPMENT, THE CONTRACTOR WILL BE REQUIRED TO REMOVE AND REPLACE, AT HIS EXPENSE. Materials, fabricated articles and the like to be installed in permanent work shall equal those of approved submittals. After an item has been approved, no change in brand or make will be permitted unless:
 - A. Satisfactory written evidence is presented to, and approved by Contracting Officer, that manufacturer cannot make scheduled delivery of approved item or;
 - B. Item delivered has been rejected and substitution of a suitable item is an urgent necessity or;
 - C. Other conditions become apparent which indicates approval of such substitute item to be in best interest of the Government.
- 1-4. Forward submittals in sufficient time to permit proper consideration and approval action by Government. Time submission to assure adequate lead time for procurement of contract - required items. Delays attributable to untimely and rejected submittals (including any laboratory samples to be tested) will not serve as a basis for extending contract time for completion.

- 1-5. Submittals will be reviewed for compliance with contract requirements by Architect-Engineer, and action thereon will be taken by Project Engineer on behalf of the Contracting Officer.
- 1-6. Upon receipt of submittals, Architect-Engineer will assign a file number thereto. Contractor, in any subsequent correspondence, shall refer to this file and identification number to expedite replies relative to previously approved or disapproved submittals.
- 1-7. The Government reserves the right to require additional submittals, whether or not particularly mentioned in this contract. If additional submittals beyond those required by the contract are furnished pursuant to request therefor by Contracting Officer, adjustment in contract price and time will be made in accordance with Articles titled CHANGES (FAR 52.243-4) and CHANGES - SUPPLEMENT (VAAR 852.236-88) of the GENERAL CONDITIONS.
- 1-8. Schedules called for in specifications and shown on shop drawings shall be submitted for use and information of Department of Veterans Affairs and Architect-Engineer. However, the Contractor shall assume responsibility for coordinating and verifying schedules. The Contracting Officer and Architect-Engineer assumes no responsibility for checking schedules or layout drawings for exact sizes, exact numbers and detailed positioning of items.
- 1-9. Submittals must be submitted by Contractor only and shipped prepaid. Contracting Officer assumes no responsibility for checking quantities or exact numbers included in such submittals.
 - A. Submit samples required by Section 09 06 00, SCHEDULE FOR FINISHES, in quadruplicate. Submit other samples in single units unless otherwise specified. Submit shop drawings, schedules, manufacturers' literature and data, and certificates in quadruplicate, except where a greater number is specified.
 - B. Submittals will receive consideration only when covered by a transmittal letter signed by Contractor. Letter shall be sent via first class mail and shall contain the list of items, name of Medical Center, name of Contractor, contract number, applicable specification paragraph numbers, applicable drawing numbers (and other information required for exact identification of location for each item), manufacturer and brand, ASTM or Federal Specification Number (if any) and such additional information as may be required by specifications for particular item being

furnished. In addition, catalogs shall be marked to indicate specific items submitted for approval.

1. A copy of letter must be enclosed with items, and any items received without identification letter will be considered "unclaimed goods" and held for a limited time only.
 2. Each sample, certificate, manufacturers' literature and data shall be labeled to indicate the name and location of the Medical Center, name of Contractor, manufacturer, brand, contract number and ASTM or Federal Specification Number as applicable and location(s) on project.
 3. Required certificates shall be signed by an authorized representative of manufacturer or supplier of material, and by Contractor.
- C. In addition to complying with the applicable requirements specified in preceding Article 1.9, samples which are required to have Laboratory Tests, at the expense of Contractor, in a commercial laboratory approved by Contracting Officer.
1. Laboratory shall furnish Contracting Officer with a certificate stating that it is fully equipped and qualified to perform intended work, is fully acquainted with specification requirements and intended use of materials and is an independent establishment in no way connected with organization of Contractor or with manufacturer or supplier of materials to be tested.
 2. Certificates shall also set forth a list of comparable projects upon which laboratory has performed similar functions during past five years.
 3. Samples and laboratory tests shall be sent directly to approved commercial testing laboratory.
 4. Contractor shall send a copy of transmittal letter to the Project Engineer with submission of material to a commercial testing laboratory.
 5. Laboratory test reports shall be sent directly to Project Engineer for appropriate action.
 6. Laboratory reports shall list contract specification test requirements and a comparative list of the laboratory test results. When tests show that the material meets specification requirements, the laboratory shall so certify on test report.
 7. Laboratory test reports shall also include a recommendation for approval or disapproval of tested item.
- D. If submittal samples have been disapproved, resubmit new samples as soon as possible after notification of disapproval. Such new samples shall be

- marked "Resubmitted Sample" in addition to containing other previously specified information required on label and in transmittal letter.
- E. Approved samples will be kept on file by the Project Engineer at the site until completion of contract, at which time such samples will be delivered to Contractor as Contractor's property. Where noted in technical sections of specifications, approved samples in good condition may be used in their proper locations in contract work. At completion of contract, samples that are not approved will be returned to Contractor only upon request and at Contractor's expense. Such request should be made prior to completion of the contract. Disapproved samples that are not requested for return by Contractor will be discarded after completion of contract.
- F. Submittal drawings (shop, erection or setting drawings) and schedules, required for work of various trades, shall be checked before submission by technically qualified employees of Contractor for accuracy, completeness and compliance with contract requirements. These drawings and schedules shall be stamped and signed by Contractor certifying to such check.
1. For each drawing required, submit one legible photographic paper or vellum reproducible.
 2. Reproducible shall be full size.
 3. Each drawing shall have marked thereon, proper descriptive title, including Medical Center location, project number, manufacturer's number, reference to contract drawing number, detail Section Number, and Specification Section Number.
 4. A space 120 mm by 125 mm (4-3/4 by 5 inches) shall be reserved on each drawing to accommodate approval or disapproval stamp.
 5. Submit drawings, ROLLED WITHIN A MAILING TUBE, fully protected for shipment.
 6. One reproducible print of approved or disapproved shop drawings will be forwarded to Contractor.
 7. When work is directly related and involves more than one trade, shop drawings shall be submitted to Architect-Engineer under one cover.
- 1-10. Samples (except laboratory samples), shop drawings, test reports, certificates and manufacturers' literature and data, shall be submitted for approval to
- 1-11. At the time of transmittal to the Architect-Engineer, the Contractor shall also send a copy of the complete submittal directly to the Project Engineer.

- 1-12. Samples (except laboratory samples) for approval shall be sent to Architect-Engineer and/or the Project Manager at the address or electronically as directed by the Contracting Officer.
- 1.13 NOTE - Subject to confirmation by the Contracting Officer it may be allowable to submit RFI's in electronic format. However, again subject to confirmation by the Contracting Officer, it is anticipated that all submittals and shop drawings SHALL BE SUBMITTED AS HARD COPY MATERIAL in the number of copies stated above.

- - - E N D - - -

SECTION 01 45 29
TESTING LABORATORY SERVICES

PART 1 - GENERAL**1.1 DESCRIPTION:**

This section specifies materials testing activities and inspection services required during project construction to be provided by a Testing Laboratory retained and paid for by Contractor.

1.2 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.
- B. American Association of State Highway and Transportation Officials (AASHTO):
- T27-06.....Sieve Analysis of Fine and Coarse Aggregates
- T96-02 (R2006).....Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine
- T99-01 (R2004).....The Moisture-Density Relations of Soils Using a 2.5 Kg (5.5 lb.) Rammer and a 305 mm (12 in.) Drop
- T104-99 (R2003).....Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate
- T180-01 (R2004).....Moisture-Density Relations of Soils using a 4.54 kg (10 lb.) Rammer and a 457 mm (18 in.) Drop
- T191-02(R2006).....Density of Soil In-Place by the Sand-Cone Method
- C. American Concrete Institute (ACI):
- 506.4R-94 (R2004).....Guide for the Evaluation of Shotcrete
- D. American Society for Testing and Materials (ASTM):
- A325-06.....Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength
- A370-07.....Definitions for Mechanical Testing of Steel Products
- A416/A416M-06.....Steel Strand, Uncoated Seven-Wire for Prestressed Concrete

A490-06.....Heat Treated Steel Structural Bolts, 150 ksi
Minimum Tensile Strength

C31/C31M-06.....Making and Curing Concrete Test Specimens in
the Field

C33-03.....Concrete Aggregates

C39/C39M-05.....Compressive Strength of Cylindrical Concrete
Specimens

C109/C109M-05.....Compressive Strength of Hydraulic Cement
Mortars

C138-07.....Unit Weight, Yield, and Air Content
(Gravimetric) of Concrete

C140-07.....Sampling and Testing Concrete Masonry Units and
Related Units

C143/C143M-05.....Slump of Hydraulic Cement Concrete

C172-07.....Sampling Freshly Mixed Concrete

C173-07.....Air Content of freshly Mixed Concrete by the
Volumetric Method

C330-05.....Lightweight Aggregates for Structural Concrete

C567-05.....Density Structural Lightweight Concrete

C780-07.....Pre-construction and Construction Evaluation of
Mortars for Plain and Reinforced Unit Masonry

C1019-08.....Sampling and Testing Grout

C1064/C1064M-05.....Freshly Mixed Portland Cement Concrete

C1077-06.....Laboratories Testing Concrete and Concrete
Aggregates for Use in Construction and Criteria
for Laboratory Evaluation

C1314-07.....Compressive Strength of Masonry Prisms

D698-07.....Laboratory Compaction Characteristics of Soil
Using Standard Effort

D1143-07.....Piles Under Static Axial Compressive Load

D1188-07.....Bulk Specific Gravity and Density of Compacted
Bituminous Mixtures Using Paraffin-Coated
Specimens

D1556-07.....Density and Unit Weight of Soil in Place by the
Sand-Cone Method

D1557-07.....Laboratory Compaction Characteristics of Soil
Using Modified Effort

D2166-06.....Unconfined Compressive Strength of Cohesive
Soil

D2167-94(R2001).....Density and Unit Weight of Soil in Place by the
Rubber Balloon Method

D2216-05.....Laboratory Determination of Water (Moisture)
Content of Soil and Rock by Mass

D2922-05.....Density of soil and Soil-Aggregate in Place by
Nuclear Methods (Shallow Depth)

D2974-07.....Moisture, Ash, and Organic Matter of Peat and
Other Organic Soils

D3666-(2002).....Minimum Requirements for Agencies Testing and
Inspection Bituminous Paving Materials

D3740-07.....Minimum Requirements for Agencies Engaged in
the Testing and Inspecting Road and Paving
Material

E94-04.....Radiographic Testing

E164-03.....Ultrasonic Contact Examination of Weldments

E329-07.....Agencies Engaged in Construction Inspection
and/or Testing

E543-06.....Agencies Performing Non-Destructive Testing

E605-93(R2006).....Thickness and Density of Sprayed Fire-Resistive
Material (SFRM) Applied to Structural Members

E709-(2001).....Guide for Magnetic Particle Examination

E1155-96(R2008).....Determining FF Floor Flatness and FL Floor
Levelness Numbers

E. American Welding Society (AWS):

D1.1-07.....Structural Welding Code-Steel

1.3 REQUIREMENTS:

A. Accreditation Requirements: Construction materials testing laboratories must be accredited by a laboratory accreditation authority and will be required to submit a copy of the Certificate of Accreditation and Scope of Accreditation. The laboratory's scope of accreditation must include the appropriate ASTM standards (i.e.; E 329, C 1077, D 3666, D3740, A 880, E 543) listed in the technical sections of the specifications. Laboratories engaged in Hazardous Materials Testing shall meet the requirements of OSHA and EPA. The policy applies to the specific laboratory performing the actual testing, not just the "Corporate Office."

- B. Inspection and Testing: Testing laboratory shall inspect materials and workmanship and perform tests described herein and additional tests requested by COTR. When it appears materials furnished, or work performed by Contractor fail to meet construction contract requirements, Testing Laboratory shall direct attention of COTR to such failure.
- C. Written Reports: Testing laboratory shall submit test reports to COTR, Contractor, unless other arrangements are agreed to in writing by the COTR. Submit reports of tests that fail to meet construction contract requirements on colored paper.
- D. Verbal Reports: Give verbal notification to COTR immediately of any irregularity.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 EARTHWORK:

- A. General: The Testing Laboratory shall provide qualified personnel, materials, equipment, and transportation as required to perform the services identified/required herein, within the agreed to schedule and/or time frame. The work to be performed shall be as identified herein and shall include but not be limited to the following:
 - 1. Observe fill and subgrades during proof-rolling to evaluate suitability of surface material to receive fill or base course. Provide recommendations to the COTR regarding suitability or unsuitability of areas where proof-rolling was observed. Where unsuitable results are observed, witness excavation of unsuitable material and recommend to COTR extent of removal and replacement of unsuitable materials and observe proof-rolling of replaced areas until satisfactory results are obtained.
 - 2. Provide part time observation of fill placement and compaction and field density testing in building areas to verify that earthwork compaction obtained is in accordance with contract documents.
 - 3. Provide supervised geotechnical technician to inspect excavation, subsurface preparation, and backfill for structural fill.
- B. Testing Compaction:
 - 1. Determine maximum density and optimum moisture content for each type of fill, backfill and subgrade material used, in compliance with ASTM D698.

2. Make field density tests in accordance with the primary testing method following ASTM D2922 wherever possible. Field density tests utilizing ASTM D1556 or ASTM D2167 shall be utilized on a case by case basis only if there are problems with the validity of the results from the primary method due to specific site field conditions. Should the testing laboratory propose these alternative methods, they should provide satisfactory explanation to the COTR before the tests are conducted.
 - a. Building Slab Subgrade: At least one test of subgrade for every 185 m² (2000 square feet) of building slab, but in no case fewer than three tests. In each compacted fill layer, perform one test for every 185 m² (2000 square feet) of overlaying building slab, but in no case fewer than three tests.
 - b. Footing Subgrade: At least one test for each layer of soil on which footings will be placed. Subsequent verification and approval of each footing subgrade may be based on a visual comparison of each subgrade with related tested subgrade when acceptable to COTR. In each compacted fill layer below wall footings, perform one field density test for every 30 m (100 feet) of wall. Verify subgrade is level, all loose or disturbed soils have been removed, and correlate actual soil conditions observed with those indicated by test borings.
- C. Testing for Footing Bearing Capacity: Evaluate if suitable bearing capacity material is encountered in footing subgrade.
- D. Testing Materials: Test suitability of on-site and off-site borrow as directed by COTR.

3.8 CONCRETE:

- A. Batch Plant Inspection and Materials Testing:
 1. Perform continuous batch plant inspection until concrete quality is established to satisfaction of COTR with concurrence of Contracting Officer and perform periodic inspections thereafter as determined by COTR.
 2. Periodically inspect and test batch proportioning equipment for accuracy and report deficiencies to COTR.
 3. Sample and test mix ingredients as necessary to insure compliance with specifications.
 4. Sample and test aggregates daily and as necessary for moisture content. Test the dry rodded weight of the coarse aggregate whenever

a sieve analysis is made, and when it appears there has been a change in the aggregate.

5. Certify, in duplicate, ingredients and proportions and amounts of ingredients in concrete conform to approved trial mixes. When concrete is batched or mixed off immediate building site, certify (by signing, initialing or stamping thereon) on delivery slips (duplicate) that ingredients in truck-load mixes conform to proportions of aggregate weight, cement factor, and water-cement ratio of approved trial mixes.

B. Field Inspection and Materials Testing:

1. Provide a technician at site of placement at all times to perform concrete sampling and testing.
2. Review the delivery tickets of the ready-mix concrete trucks arriving on-site. Notify the Contractor if the concrete cannot be placed within the specified time limits or if the type of concrete delivered is incorrect. Reject any loads that do not comply with the Specification requirements. Rejected loads are to be removed from the site at the Contractor's expense. Any rejected concrete that is placed will be subject to removal.
3. Take concrete samples at point of placement in accordance with ASTM C172. Mold and cure compression test cylinders in accordance with ASTM C31. Make at least three cylinders for each 40 m³ (50 cubic yards) or less of each concrete type, and at least three cylinders for any one day's pour for each concrete type. Label each cylinder with an identification number. COTR may require additional cylinders to be molded and cured under job conditions.
4. Perform slump tests in accordance with ASTM C143. Test the first truck each day, and every time test cylinders are made. Test pumped concrete at the hopper and at the discharge end of the hose at the beginning of each day's pumping operations to determine change in slump.
5. Determine the air content of concrete per ASTM C173. For concrete required to be air-entrained, test the first truck and every 20 m³ (25 cubic yards) thereafter each day. For concrete not required to be air-entrained, test every 80 m³ (100 cubic yards) at random. For pumped concrete, initially test concrete at both the hopper and the discharge end of the hose to determine change in air content.

6. If slump or air content fall outside specified limits, make another test immediately from another portion of same batch.
7. Perform unit weight tests in compliance with ASTM C138 for normal weight concrete and ASTM C567 for lightweight concrete. Test the first truck and each time cylinders are made.
8. Notify laboratory technician at batch plant of mix irregularities and request materials and proportioning check.
9. Verify that specified mixing has been accomplished.
10. Environmental Conditions: Determine the temperature per ASTM C1064 for each truckload of concrete during hot weather and cold weather concreting operations:
 - a. When ambient air temperature falls below 4.4 degrees C (40 degrees F), record maximum and minimum air temperatures in each 24 hour period; record air temperature inside protective enclosure; record minimum temperature of surface of hardened concrete.
 - b. When ambient air temperature rises above 29.4 degrees C (85 degrees F), record maximum and minimum air temperature in each 24 hour period; record minimum relative humidity; record maximum wind velocity; record maximum temperature of surface of hardened concrete.
11. Inspect the reinforcing steel placement, including bar size, bar spacing, top and bottom concrete cover, proper tie into the chairs, and grade of steel prior to concrete placement. Submit detailed report of observations.
12. Observe conveying, placement, and consolidation of concrete for conformance to specifications.
13. Observe condition of formed surfaces upon removal of formwork prior to repair of surface defects and observe repair of surface defects.
14. Observe curing procedures for conformance with specifications, record dates of concrete placement, start of preliminary curing, start of final curing, end of curing period.
15. Observe preparations for placement of concrete:
 - a. Inspect handling, conveying, and placing equipment, inspect vibrating and compaction equipment.
 - b. Inspect preparation of construction, expansion, and isolation joints.

16. Observe preparations for protection from hot weather, cold weather, sun, and rain, and preparations for curing.
 17. Observe concrete mixing:
 - a. Monitor and record amount of water added at project site.
 - b. Observe minimum and maximum mixing times.
 18. Measure concrete flatwork for levelness and flatness as follows:
 - a. Perform Floor Tolerance Measurements F_F and F_L in accordance with ASTM E1155. Calculate the actual overall F- numbers using the inferior/superior area method.
 - b. Perform all floor tolerance measurements within 48 hours after slab installation and prior to removal of shoring and formwork.
 - c. Provide the Contractor and the COTR with the results of all profile tests, including a running tabulation of the overall F_F and F_L values for all slabs installed to date, within 72 hours after each slab installation.
 19. Other inspections:
 - a. Grouting under base plates.
 - b. Grouting anchor bolts and reinforcing steel in hardened concrete.
- C. Laboratory Tests of Field Samples:
1. Test compression test cylinders for strength in accordance with ASTM C39. For each test series, test one cylinder at 7 days and one cylinder at 28 days. Use remaining cylinder as a spare tested as directed by COTR. Compile laboratory test reports as follows: Compressive strength test shall be result of one cylinder, except when one cylinder shows evidence of improper sampling, molding or testing, in which case it shall be discarded and strength of spare cylinder shall be used.
 2. Make weight tests of hardened lightweight structural concrete in accordance with ASTM C567.
 3. Furnish certified compression test reports (duplicate) to COTR. In test report, indicate the following information:
 - a. Cylinder identification number and date cast.
 - b. Specific location at which test samples were taken.
 - c. Type of concrete, slump, and percent air.
 - d. Compressive strength of concrete in MPa (psi).
 - e. Weight of lightweight structural concrete in kg/m^3 (pounds per cubic feet).
 - f. Weather conditions during placing.

- g. Temperature of concrete in each test cylinder when test cylinder was molded.
- h. Maximum and minimum ambient temperature during placing.
- i. Ambient temperature when concrete sample in test cylinder was taken.
- j. Date delivered to laboratory and date tested.

3.9 REINFORCEMENT:

- A. Review mill test reports furnished by Contractor.
- B. Written report shall include, in addition to test results, heat number, manufacturer, type and grade of steel, and bar size.

3.10 STRUCTURAL STEEL:

- A. General: Provide shop and field inspection and testing services to certify structural steel work is done in accordance with contract documents. Welding shall conform to AWS D1.1 Structural Welding Code.
- B. Prefabrication Inspection:
 - 1. Review design and shop detail drawings for size, length, type and location of all welds to be made.
 - 2. Approve welding procedure qualifications either by pre-qualification or by witnessing qualifications tests.
 - 3. Approve welder qualifications by certification or retesting.
 - 4. Approve procedure for control of distortion and shrinkage stresses.
 - 5. Approve procedures for welding in accordance with applicable sections of AWS D1.1.
- C. Fabrication and Erection:
 - 1. Weld Inspection:
 - a. Inspect welding equipment for capacity, maintenance and working condition.
 - b. Verify specified electrodes and handling and storage of electrodes in accordance with AWS D1.1.
 - c. Inspect preparation and assembly of materials to be welded for conformance with AWS D1.1.
 - d. Inspect preheating and interpass temperatures for conformance with AWS D1.1.
 - e. Measure 25 percent of fillet welds.
 - f. Welding Magnetic Particle Testing: Test in accordance with ASTM E709 for a minimum of:
 - 1) 20 percent of all shear plate fillet welds at random, final pass only.

- 2) 20 percent of all continuity plate and bracing gusset plate fillet welds, at random, final pass only.
 - 3) 100 percent of tension member fillet welds (i.e., hanger connection plates and other similar connections) for root and final passes.
 - 4) 20 percent of length of built-up column member partial penetration and fillet welds at random for root and final passes.
 - 5) 100 percent of length of built-up girder member partial penetration and fillet welds for root and final passes.
 - g. Welding Ultrasonic Testing: Test in accordance with ASTM E164 and AWS D1.1 for 100 percent of all full penetration welds, braced and moment frame column splices, and a minimum of 20 percent of all other partial penetration column splices, at random.
 - h. Verify that correction of rejected welds are made in accordance with AWS D1.1.
 - j. Testing and inspection do not relieve the Contractor of the responsibility for providing materials and fabrication procedures in compliance with the specified requirements.
2. Bolt Inspection:
- a. Inspect high-strength bolted connections in accordance AISC Specifications for Structural Joints Using ASTM A325 or A490 Bolts.
 - b. Slip-Critical Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in each connection in accordance with AISC Specifications for Structural Joints Using ASTM A325 or A490 Bolts. Inspect all bolts in connection when one or more are rejected.
 - c. Fully Pre-tensioned Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in 25 percent of connections in accordance with AISC Specification for Structural Joints Using ASTM A325 or A490 Bolts. Inspect all bolts in connection when one or more are rejected.
 - d. Bolts installed by turn-of-nut tightening may be inspected with calibrated wrench when visual inspection was not performed during tightening.

- e. Snug Tight Connections: Inspect 10 percent of connections verifying that plies of connected elements have been brought into snug contact.
 - f. Inspect field erected assemblies; verify locations of structural steel for plumbness, level, and alignment.
- D. Submit inspection reports, record of welders and their certification, and identification, and instances of noncompliance to COTR.

3.15 STEEL DECKING:

- A. Provide field inspection of welds of metal deck to the supporting steel, and testing services to insure steel decking has been installed in accordance with contract documents and manufacturer's requirements.
- B. Qualification of Field Welding: Qualify welding processes and welding operators in accordance with "Welder Qualification" procedures of AWS D1.1. Refer to the "Plug Weld Qualification Procedure" in Part 3 "Field Quality Control."
- C. Submit inspection reports, certification, and instances of noncompliance to COTR.

3.16 SHEAR CONNECTOR STUDS:

- A. Provide field inspection and testing services required by AWS D.1 to insure shear connector studs have been installed in accordance with contract documents.
- B. Tests: Test 20 percent of headed studs for fastening strength in accordance with AWS D1.1.
- C. Submit inspection reports, certification, and instances of noncompliance to COTR.

3.17 SPRAYED-ON FIREPROOFING:

- A. Provide field inspection and testing services to certify sprayed-on fireproofing has been applied in accordance with contract documents.
- B. Obtain a copy of approved submittals from COTR.
- C. Use approved installation in test areas as criteria for inspection of work.
- D. Test sprayed-on fireproofing for thickness and density in accordance with ASTM E605.
 - 1. Thickness gauge specified in ASTM E605 may be modified for pole extension so that overhead sprayed material can be reached from floor.
- E. Location of test areas for field tests as follows:

1. Thickness: Select one bay per floor, or one bay for each 930 m² (10,000 square feet) of floor area, whichever provides for greater number of tests. Take thickness determinations from each of following locations: Metal deck (where applicable), beam, and column.
 2. Density: Take density determinations from each floor, or one test from each 930 m² (10,000 square feet) of floor area, whichever provides for greater number of tests, from each of the following areas: Underside of metal deck (where applicable), beam flanges, and beam web.
- F. Submit inspection reports, certification, and instances of noncompliance to COTR.

- - - E N D - - -

**SECTION 03 30 53
CAST-IN-PLACE CONCRETE**

PART 1 - GENERAL**1.1 DESCRIPTION:**

This section specifies cast-in-place structural concrete and material and mixes for other concrete.

1.2 RELATED WORK:

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Concrete roads, walks, and similar exterior site work: Section 32 05 23, CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS.

1.3 TOLERANCES:

- A. ACI 117.
- B. Slab Finishes: ACI 117, F-number method in accordance with ASTM E1155.

1.4 REGULATORY REQUIREMENTS:

- A. ACI SP-66 ACI Detailing Manual
- B. ACI 318 - Building Code Requirements for Reinforced Concrete.

1.5 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Concrete Mix Design.
- C. Shop Drawings: Reinforcing steel: Complete shop drawings.
- D. Manufacturer's Certificates: Air-entraining admixture, chemical admixtures, curing compounds.

1.6 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Concrete Institute (ACI):
 - 117R-06.....Tolerances for Concrete Construction and Materials
 - 211.1-91(R2002).....Proportions for Normal, Heavyweight, and Mass Concrete
 - 301-05.....Specification for Structural Concrete
 - 305R-06.....Hot Weather Concreting
 - 306R-2002.....Cold Weather Concreting
 - SP-66-04ACI Detailing Manual

- 318/318R-05.....Building Code Requirements for Reinforced
Concrete
- 347R-04.....Guide to Formwork for Concrete
- C. American Society for Testing And Materials (ASTM):
- A185-07.....Steel Welded Wire, Fabric, Plain for Concrete
Reinforcement
- A615/A615M-08.....Deformed and Plain Billet-Steel Bars for
Concrete Reinforcement
- C31/C31M-08.....Making and Curing Concrete Test Specimens in the
Field
- C33-07.....Concrete Aggregates
- C39/C39M-05.....Compressive Strength of Cylindrical Concrete
Specimens
- C94/C94M-07.....Ready-Mixed Concrete
- C143/C143M-05.....Standard Test Method for Slump of Hydraulic
Cement Concrete
- C150-07.....Portland Cement
- C171-07.....Sheet Material for Curing Concrete
- C172-07.....Sampling Freshly Mixed Concrete
- C173-07.....Air Content of Freshly Mixed Concrete by the
Volumetric Method
- C192/C192M-07.....Making and Curing Concrete Test Specimens in the
Laboratory
- C231-08.....Air Content of Freshly Mixed Concrete by the
Pressure Method
- C260-06.....Air-Entraining Admixtures for Concrete
- C494/C494M-08.....Chemical Admixtures for Concrete
- C618-08.....Coal Fly Ash and Raw or Calcined Natural
Pozzolan for Use in Concrete
- D1751-04.....Preformed Expansion Joint Fillers for Concrete
Paving and Structural Construction (Non-
extruding and Resilient Bituminous Types)
- D4397-02.....Polyethylene Sheeting for Construction,
Industrial and Agricultural Applications
- E1155-96(2008).....Determining F_F Floor Flatness and F_L Floor
Levelness Numbers

PART 2 - PRODUCTS

2.1 FORMS:

Wood, plywood, metal, or other materials, approved by Resident Engineer,
of grade or type suitable to obtain type of finish specified.

2.2 MATERIALS:

- A. Portland Cement: ASTM C150, Type I or II.
- B. Fly Ash: ASTM C618, Class C or F including supplementary optional requirements relating to reactive aggregates and alkalis, and loss on ignition (LOI) not to exceed 5 percent.
- C. Coarse Aggregate: ASTM C33, Size 67. Size 467 may be used for footings and walls over 300 mm (12 inches) thick. Coarse aggregate for applied topping and metal pan stair fill shall be Size 7.
- D. Fine Aggregate: ASTM C33.
- E. Mixing Water: Fresh, clean, and potable.
- F. Air-Entraining Admixture: ASTM C260.
- G. Chemical Admixtures: ASTM C494.
- H. Vapor Barrier: ASTM D4397, 0.25 mm (10 mil).
- I. Reinforcing Steel: ASTM A615, deformed.
- J. Welded Wire Fabric: ASTM A185.
- K. Expansion Joint Filler: ASTM D1751.
- L. Sheet Materials for Curing Concrete: ASTM C171.
- M. Liquid Densifier/Sealer: 100 percent active colorless aqueous silicate solution.
- N. Grout, Non-Shrinking: Premixed ferrous or non-ferrous, mixed and applied in accordance with manufacturer's recommendations. Grout shall show no settlement or vertical drying shrinkage at 3 days or thereafter based on initial measurement made at time of placement, and produce a compressive strength of at least 18mpa (2500 psi) at 3 days and 35mpa (5000 psi) at 28 days.
- O. Epoxy for Reinforcing Steel Dowels: Simpson SET High-Strength Epoxy-Tie Anchoring Adhesive, Hilti HIT HY 150, or approved equal.

2.3 CONCRETE MIXES:

- A. Design of concrete mixes using materials specified shall be the responsibility of the Contractor as set forth under Option C of ASTM C94.
- B. Compressive strength at 28 days shall be not less than 30 Mpa (4000 psi).
- C. Establish strength of concrete by testing prior to beginning concreting operation. Test consists of average of three cylinders made and cured in accordance with ASTM C192 and tested in accordance with ASTM C39.
- D. Maximum slump for vibrated concrete is 100 mm (4 inches) tested in accordance with ASTM C143.
- E. Cement and water factor (See Table I):

TABLE I - CEMENT AND WATER FACTORS FOR CONCRETE

Concrete: Strength	Non-Air-Entrained		Air-Entrained	
Min. 28 Day Comp. Str. MPa (psi)	Min. Cement kg/m ³ (lbs/c. yd)	Max. Water Cement Ratio	Min. Cement kg/m ³ (lbs/c. yd)	Max. Water Cement Ratio
30 (4000) ^{1,2}	325 (550)	0.55	340 (570)	0.50

1. If trial mixes are used, the proposed mix design shall achieve a compressive strength 8.3 MPa (1200 psi) in excess of f'c. For concrete strengths above 35 Mpa (5000 psi), the proposed mix design shall achieve a compressive strength 9.7 MPa (1400 psi) in excess of f'c.

F. Air-entrainment is required for all exterior concrete. Air content shall conform with the following table:

**TABLE I - TOTAL AIR CONTENT
FOR VARIOUS SIZES OF COARSE AGGREGATES (NORMAL CONCRETE)**

Nominal Maximum Size of Coarse Aggregate	Total Air Content Percentage by Volume
10 mm (3/8 in)	6 to 10
13 mm (1/2 in)	5 to 9
19 mm (3/4 in)	4 to 8
25 mm (1 in)	3 1/2 to 6 1/2
40 mm (1 1/2 in)	3 to 6

2.4 BATCHING & MIXING:

A. Store, batch, and mix materials as specified in ASTM C94.

1. Job-Mixed: Concrete mixed at job site shall be mixed in a batch mixer in manner specified for stationary mixers in ASTM C94.
2. Ready-Mixed: Ready-mixed concrete comply with ASTM C94, except use of non-agitating equipment for transporting concrete to the site will not be permitted. With each load of concrete delivered to project, ready-mixed concrete producer shall furnish, in duplicate, certification as required by ASTM C94.

PART 3 - EXECUTION**3.1 FORMWORK:**

- A. Installation conforms to ACI 347. Sufficiently tight to hold concrete without leakage, sufficiently braced to withstand vibration of concrete, and to carry, without appreciable deflection, all dead and live loads to which they may be subjected.
- B. Treating and Wetting: Treat or wet contact forms as follows:
 - 1. Coat plywood and board forms with non-staining form sealer. In hot weather cool forms by wetting with cool water just before concrete is placed.
 - 2. Clean and coat removable metal forms with light form oil before reinforcement is placed. In hot weather cool metal forms by thoroughly wetting with water just before placing concrete.
 - 3. Use sealer on reused plywood forms as specified for new material.
- C. Inserts, sleeves, and similar items: Flashing reglets, masonry ties, anchors, inserts, wires, hangers, sleeves, boxes for floor hinges and other items specified as furnished under this and other sections of specifications and required to be in their final position at time concrete is placed shall be properly located, accurately positioned and built into construction, and maintained securely in place.
- D. Construction Tolerances:
 - 1. Contractor is responsible for setting and maintaining concrete formwork to assure erection of completed work within tolerances specified to accommodate installation or other rough and finish materials. Remedial work necessary for correcting excessive tolerances is the responsibility of the Contractor. Erected work that exceeds specified tolerance limits shall be remedied or removed and replaced, at no additional cost to the Government.
 - 2. Permissible surface irregularities for various classes of materials are defined as "finishes" in specification sections covering individual materials. They are to be distinguished from tolerances specified which are applicable to surface irregularities of structural elements.

3.2 REINFORCEMENT:

Details of concrete reinforcement, unless otherwise shown, in accordance with ACI 318 and ACI SP-66. Support and securely tie reinforcing steel to prevent displacement during placing of concrete.

3.3 PLACING CONCRETE:

- A. Remove water from excavations before concrete is placed. Remove hardened concrete, debris and other foreign materials from interior of forms, and

from inside of mixing and conveying equipment. Obtain approval of Resident Engineer before placing concrete. Provide screeds at required elevations for concrete slabs.

- B. Before placing new concrete on or against concrete which has set, existing surfaces shall be roughened and cleaned free from all laitance, foreign matter, and loose particles.
- C. Convey concrete from mixer to final place of deposit by method which will prevent segregation or loss of ingredients. Do not deposit in work concrete that has attained its initial set or has contained its water or cement more than 1 1/2 hours. Do not allow concrete to drop freely more than 1500 mm (5 feet) in unexposed work nor more than 900 mm (3 feet) in exposed work. Place and consolidate concrete in horizontal layers not exceeding 300 mm (12 inches) in thickness. Consolidate concrete by spading, rodding, and mechanical vibrator. Do not secure vibrator to forms or reinforcement. Vibration shall be carried on continuously with placing of concrete.
- D. Hot weather placing of concrete: Follow recommendations of ACI 305R to prevent problems in the manufacturing, placing, and curing of concrete that can adversely affect the properties and serviceability of the hardened concrete.
- E. Cold weather placing of concrete: Follow recommendations of ACI 306R, to prevent freezing of thin sections less than 300 mm (12 inches) and to permit concrete to gain strength properly, except that use of calcium chloride shall not be permitted without written approval from Resident Engineer.

3.4 PROTECTION AND CURING:

Protect exposed surfaces of concrete from premature drying, wash by rain or running water, wind, mechanical injury, and excessively hot or cold temperature. Curing method shall be subject to approval by Resident Engineer.

3.5 FORM REMOVAL:

Forms remain in place until concrete has a sufficient strength to carry its own weight and loads supported. Removal of forms at any time is the Contractor's sole responsibility.

3.6 SURFACE PREPARATION:

Immediately after forms have been removed and work has been examined and approved by Resident Engineer, remove loose materials, and patch all stone pockets, surface honeycomb, or similar deficiencies with cement mortar made with 1 part portland cement and 2 to 3 parts sand.

3.7 FINISHES:**A. Slab Finishes:**

1. Scratch Finish: Slab surfaces to receive a bonded applied cementitious application shall all be thoroughly raked or wire broomed after partial setting (within 2 hours after placing) to roughen surface to insure a permanent bond between base slab and applied cementitious materials.
2. Floating: Allow water brought to surface by float used for rough finishing to evaporate before surface is again floated or troweled. Do not sprinkle dry cement on surface to absorb water.
3. Float Finish: Ramps, stair treads, and platforms, both interior and exterior, equipment pads, and slabs to receive non-cementitious materials, except as specified, shall be screened and floated to a smooth dense finish. After first floating, while surface is still soft, surfaces shall be checked for alignment using a straightedge or template. Correct high spots by cutting down with a trowel or similar tool and correct low spots by filling in with material of same composition as floor finish. Remove any surface projections on floated finish by rubbing or dry grinding. Refloat the slab to a uniform sandy texture.
4. Steel Trowel Finish: Applied toppings, concrete surfaces to receive resilient floor covering or carpet, future floor roof and all monolithic concrete floor slabs exposed in finished work and for which no other finish is shown or specified shall be steel troweled. Final steel troweling to secure a smooth, dense surface shall be delayed as long as possible, generally when the surface can no longer be dented with finger. During final troweling, tilt steel trowel at a slight angle and exert heavy pressure on trowel to compact cement paste and form a dense, smooth surface. Finished surface shall be free of trowel marks, uniform in texture and appearance.
5. Broom Finish: Finish all exterior slabs, ramps, and stair treads with a bristle brush moistened with clear water after the surfaces have been floated.
6. Finished slab flatness (FF) and levelness (FL) values comply with the following minimum requirements:

Slab on grade & Shored suspended slabs		Unshored suspended slabs	
Specified overall value	F_F 25/ F_L 20	Specified overall value	F_F 25
Minimum local value	F_F 17/ F_L 15	Minimum local value	F_F 17

3.8 SURFACE TREATMENTS:

- A. Surface treatments shall be mixed and applied in accordance with manufacturer's printed instructions.
- B. Liquid Densifier/Sealer: Use on all exposed concrete floors and concrete floors to receive carpeting except those specified to receive non-slip finish.

3.9 APPLIED TOPPING:

- A. Separate concrete topping with thickness and strength shown with only enough water to insure a stiff, workable, plastic mix.
- B. Continuously place applied topping until entire section is complete, struck off with straightedge, compact by rolling or tamping, float and steel trowel to a hard smooth finish.

3.10 EPOXY DOWELS:

- A. Drill and epoxy reinforcing steel dowels into hardened concrete following the instructions of the epoxy product manufacturer.
- B. Special Inspection is required for all epoxy dowel installations.

- - - E N D - - -

**0SECTION 05 12 00
STRUCTURAL STEEL FRAMING**

PART 1 - GENERAL**1.1 DESCRIPTION:**

This section specifies structural steel shown and classified by Section 2, Code of Standard Practice for Steel Buildings and Bridges.

1.2 RELATED WORK:

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Painting: Section 09 91 00, PAINTING.
- C. Composite Steel Deck: Section 05 36 00, COMPOSITE METAL DECKING.
- D. Fireproofing: Section 07 81 00, APPLIED FIREPROOFING.
- E. Buckling Restrained Braces: Section 05 12 50 BUCKLING RESTRAINED BRACES.
- F. Firestopping: Section 07 84 00, FIRESTOPPING.

1.3 QUALITY ASSURANCE:

- A. Before authorizing the commencement of steel erection, the controlling contractor shall ensure that the steel erector is provided with the written notification required by 29 CFR 1926.752. Provide copy of this notification to the COTR.

1.4 TOLERANCES:

Fabrication tolerances for structural steel shall be held within limits established by ASTM A6, by Section 7, Code of Standard Practice for Buildings and Bridges, and by Standard Mill Practice - General Information (AISC ASD Manual, Ninth Edition, Page 1-145, except as follows:

- A. Elevation tolerance for column splice points at time member is erected is 10 mm (3/8 inch).
- B. Elevation tolerance for top surface of steel beams and girders at connections to columns at time floor is erected is 13 mm (1/2 inch).
- C. Elevation tolerance for closure plates at the building perimeter and at slab openings prior to concrete placement is 6 mm (1/4 inch).

1.5 REGULATORY REQUIREMENTS:

- A. AISC: Specification for Structural Steel Buildings - Allowable Stress Design.
- B. AISC: Code of Standard Practice for Steel Buildings and Bridges.

1.6 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop and Erection Drawings: Complete

C. Certificates:

1. Structural steel.
2. Steel for all connections.
3. Welding materials.
4. Shop coat primer paint.

D. Test Reports:

1. Welders' qualifying tests.

E. Record Surveys.

1.8 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Institute of Steel Construction (AISC):

1. Specification for Structural Steel Buildings - Allowable Stress Design and Plastic Design (Ninth Edition, 1989)
2. Load and Resistance Factor Design Specification for Structural Steel Buildings (Second Edition, 1995)
3. Code of Standard Practice for Steel Buildings and Bridges (March 2000).

C. American National Standards Institute (ANSI):

B18.22.1-98.....Plain Washers

B18.22M-00.....Metric Plain Washers

D. American Society for Testing and Materials (ASTM):

A6/A6M-02.....Standard Specification for General Requirements
for Rolled Structural Steel Bars, Plates,
Shapes, and Sheet Piling

A36/A36M-01.....Standard Specification for Carbon Structural
Steel

A53/A53M-01.....Standard Specification for Pipe, Steel, Black
and Hot-Dipped, Zinc-Coated Welded and Seamless

A123/A123M-02.....Standard Specification for Zinc (Hot-Dip
Galvanized) Coatings on Iron and Steel Products

A307-00.....Standard Specification for Carbon Steel Bolts
and Studs, 60,000 psi Tensile Strength

A325-02.....Standard Specification for Structural Bolts,
Steel, Heat Treated, 120/105 ksi Minimum Tensile
Strength

A501-01.....Standard Specification for Hot-Formed Welded and
Seamless Carbon Steel Structural Tubing

A992/A992M-02.....Standard Specification for Structural Steel
Shapes

F1554-02a1.....Standard Specification for Anchor Bolts, Steel,
36, 55, and 105-ksi Yield Strength

E. American Welding Society (AWS):

D1.1-02.....Structural Welding Code-Steel

F. Research Council on Structural Connections (RCSC) of The Engineering
Foundation:

Specification for Structural Joints Using ASTM A325 or A490 Bolts

G. Military Specifications (Mil. Spec.):

MIL-P-21035.....Paint, High Zinc Dust Content, Galvanizing,
Repair

H. Occupational Safety and Health Administration (OSHA):

29 CFR Part 1926-2001...Safety Standards for Steel Erection

PART 2 - PRODUCTS

2.1 MATERIALS:

A. Structural Steel Channels, Angles, and Plate: ASTM A36.

B. Structural Steel Wide Flange Shapes: ASTM A992, Grade 50.

C. Structural HSS Tubing: ASTM A500, Grade B.

D. Steel Pipe: ASTM A53, Grade B.

E. Bolts, Nuts and Washers:

1. High-strength bolts, including nuts and washers: ASTM A325N.

2. Bolts and nuts, other than high-strength: ASTM A307, Grade A.

3. Plain washers, other than those in contact with high-strength bolt
heads and nuts: ANSI Standard B18.22.1.

F. Threaded Rod Anchors: ASTM F1554, Grade 55.

G. Zinc Coating: ASTM A123.

H. Galvanizing Repair Paint: Mil. Spec. MIL-P-21035.

I. Epoxy for Steel Threaded Rod Anchors: Simpson SET High-Strength Epoxy-
Tie Anchoring Adhesive, Hilti HIT HY 150, or approved equal.

PART 3 - EXECUTION

3.1 CONNECTIONS (SHOP AND FIELD):

A. Welding: Welding in accordance with AWS D1.1. Welds shall be made only
by welders and welding operators who have been previously qualified by
tests as prescribed in AWS D1.1 to perform type of work required.

B. High-Strength Bolts: High-strength bolts tightened to a bolt tension not
less than proof load given in Specification for Structural Joints Using
ASTM A325 Bolts. Tightening done with properly calibrated wrenches, by
turn-of-nut method or by use of direct tension indicators (bolts or
washers). Tighten bolts in connections identified as slip-critical using

Direct Tension Indicators or the turn-of-the-nut method. Twist-off torque bolts are not an acceptable alternate fastener for Slip-Critical connections.

- C. Epoxy Anchors: Drill and epoxy steel threaded rod anchors into hardened concrete following the instructions of the epoxy product manufacturer. Special Inspection is required for all epoxy dowel installations.

3.2 FABRICATION:

Fabrication in accordance with Chapter M, Specification for Steel Buildings - Load and Resistance Factor Design

3.3 SHOP PAINTING:

- A. General: Shop paint steel with primer in accordance with Section 6, Code of Standard Practice for Steel Buildings and Bridges.
- B. Shop paint for steel surfaces is specified in Section 09 91 00, PAINTING.
- C. Do not apply paint to following:
 - 1. Surfaces within 50 mm (2 inches) of joints to be welded in field.
 - 2. Surfaces which will be encased in concrete.
 - 3. Surfaces which will receive sprayed on fireproofing.
 - 4. Top flange of members which will have shear connector studs applied.
 - 5. Faying surfaces of Slip-Critical connections.
- D. Zinc Coated (Hot Dip Galvanized) per ASTM A123 (after fabrication):
Touch-up after erection: Clean and wire brush any abraded and other spots worn through zinc coating, including threaded portions of bolts and welds and touch-up with galvanizing repair paint.

3.4 ERECTION:

- A. General: Erection in accordance with Section 7, Code of Standard Practice for Steel Buildings and Bridges.
- B. Temporary Supports: Temporary support of structural steel frames during erection in accordance with Section 7, Code of Standard Practice for Steel Buildings and Bridges.

3.5 FIELD PAINTING:

- A. After erection, touch-up steel surfaces specified to be shop painted. After welding is completed, clean and prime areas not painted due to field welding.
- B. Finish painting of steel surfaces is specified in Section 09 91 00, PAINTING.

3.6 SURVEY:

Upon completion of finish bolting or welding on any part of the work, and prior to start of work by other trades that may be supported, attached, or applied to the structural steel work, submit a certified

report of survey to COTR for approval. Reports shall be prepared by Registered Land Surveyor or Registered Civil Engineer as specified in Section 01 00 00, GENERAL REQUIREMENTS. Report shall specify that location of structural steel is acceptable for plumbness, level and alignment within specified tolerances specified in the AISC Manual.

- - - E N D - - -

SECTION 05 12 50
BUCKLING RESTRAINED BRACES

PART 1 - GENERAL**1.1 SUMMARY****A. Section Includes:**

1. Furnishing Buckling Restrained Braces (BRB's).
2. Engineering design of BRB's.
3. Qualification of BRB's by uniaxial and subassemblage cyclic testing.
If a pin and collar connection is used the subassemblage test need not be performed.

B. Related Sections:

1. Section 05 12 00 - Structural Steel: For installation of BRB's and furnishing of connection hardware for BRB's, including loose plates and fasteners.

1.2 REFERENCES**A. Standards listed below apply where designation is cited in this Section.**
Where the applicable year of adoption or revision is not listed below, the latest edition applies.**B. AISC - American Institute of Steel Construction**

1. American Institute of Steel Construction's "Manual of Steel Construction", Thirteenth Edition (AISC)
 - a. "Specification for the Design, Fabrication, and Erection of Structural Steel for Buildings", 2005 Edition (AISC 360).
 - b. "Code of Standard Practice for Steel Buildings and Bridges", 2005 Edition (AISC 303).
 - c. "Specification for Structural Joints Using ASTM A325 or A490 Bolts", June 30, 2004 (RCSC).
2. American Institute of Steel Construction: "Seismic Provisions for Structural Steel Buildings", 2005 edition including Supplement 1 dated 2006 (AISC 341).

C. ASTM - American Society for Testing and Materials

1. A6 - Specification for General Requirements for Rolled Steel Plates, Shapes, Sheet Piling and Bars for Structural Use.
2. A36 - Specification for Steel.
3. A500 - Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing.
4. A325 - Specification for Structural Steel Bolts
5. A490 - Specification for Heat-Treated Steel Structural Bolts, 150 ksi min. tensile strength.

D. AWS - American Welding Society

1. "Structural Welding Code - Steel", 2006 Edition (AWS D1.1).

2. "Structural Welding Code - Seismic Supplement", 2005 edition (AWS D1.8).

E. JIS - Japanese Industrial Standard

1. G 3136 SN400 B - Rolled Steels for Building Structure.
2. G 3466 STKR 400 - Carbon Steel Square Pipes for General Structural Purposes.

1.3 DEFINITIONS

- A. Buckling Restrained Brace (BRB): Specialty structural brace element consisting of an axial force resisting steel core encased by a system that prevents buckling of the steel core.

1.4 SUBMITTALS

- A. Submit the following in accordance with requirements of Division 1.
1. All requested submittals shall be furnished in English language.
- B. Qualification Testing Report evidencing manufacturer's compliance with Article 2.1D.
1. The Qualification Testing Report shall conform to requirements of Appendix T of the American Institute of Steel Construction "Seismic Provisions for Structural Steel Buildings", (AISC 341-2005).
 2. If project specific testing is required to supplement available test data, include schedule for fabrication of BRB test specimens, description of proposed testing program and name of test facility and schedule for testing and reporting.
- C. Manufacturer's Quality Assurance Plan: Conform to requirements of Article 1.5D, "Quality Assurance".
- D. Engineering Design: Refer to Article 2.1A for design requirements.
1. Design Drawings: Show size and configuration of steel core for full length of BRB. Indicate casing size, thickness and length.
 2. Calculations: Provide design calculations showing the adequacy of proposed BRB's to achieve Performance Requirements specified herein.
 3. Certification: In accordance with Article 2.1A, Design Requirements.
 4. Preliminary Design: At Contractor's option, make an initial submittal of the items listed above, based on assumed material properties, prior to delivery of materials to be employed in work.
 5. Final Design: Submit final drawings, calculations and certifications that include the final dimensions of steel core plates based on results of coupon testing of steel to be employed in Work.
 - a. The Design Engineer shall seal final calculations and required certification.
 - b. Submittal shall be accompanied by the results of coupon testing.
- E. Erection Drawings:

1. Show location and size and of BRB's. Give complete information necessary for fabrication of elements of structural steel frame to receive braces and fabrication of connection plates. Show methods of assembly, including type and size of bolts and/or pins, hole diameter, and preparation and finish of faying surfaces. Identify tolerances for fabrication and erection.
- F. Submit certified material test reports to Testing Laboratory for record purposes.
1. All steel: Tensile tests and chemical analysis. Include trace elements for steel core plates.
 2. Steel Core Plates:
 - a. Coupon test results for each lot of steel used in fabrication showing initial yield, ultimate tensile stress, and ultimate elongation.
 - b. Charpy V-Notch testing for plates 2 inches (50 mm) and thicker.
 3. Welding Electrodes: Include tensile, elongation, and CVN toughness tests. Identify diffusible hydrogen.
- G. Submit Quality Assurance test and inspection reports to Testing Laboratory for record purposes prior to shipping of braces.

1.5 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Shall have manufactured and successfully tested braces in accordance with Article 2.1D, "Qualification Tests" prior to opening of bids.
- B. Design Engineer Qualifications: Civil Engineer, registered in the State where the project is located, that is knowledgeable with the results of cyclic testing of BRB's and experienced in the design of BRB's based on engineering analysis.
- C. Quality Assurance Plan: The manufacturer shall have a detailed Quality Assurance Plan to evidence that the BRB's being manufactured continue to be the same as those tested. The Plan shall include the following elements:
1. Indicate how the product is to be identified, such that it can be traced back to production quality assurance records.
 2. Include a flow chart of the process by which the product is manufactured, including description of production methods.
 3. List tests for materials, including the applicable recognized standard for each test and the qualifications of testing agency and/or personnel.
 4. Identify manufacturing tolerances for each production process.
 5. In-process quality control, including all points of internal inspection for control and monitoring of the fabrication and assembly process.

- a. Include copies of forms and checklists used to document inspections.
- b. Include required qualifications of personnel performing each inspection.
- c. Identify how inspection reports are reviewed and approved.
- 6. Plan shall also include manufacturer furnished quality assurance for erection, including, at a minimum, attendance at pre-erection conference and a minimum of one visit thereafter to observe installation of braces.
- D. Qualification Testing: Refer to Article 2.1D, "Qualification Tests" for requirements.
- E. Extrapolation of Qualification Testing: All deviations from materials, details of fabrication, and quality assurance controls used for the fabrication of tested prototype braces shall be identified by manufacturer and reviewed by Design Engineer to ensure that production braces meet or exceed the level of quality used in fabrication of prototype braces. Include the following items:
 - a. Weld filler material, including CVN toughness.
 - b. Welding procedures and details, including weld terminations.
 - c. Shape and finish of plate edges at transitions.
 - d. Finish of plate edges, including roughness and treatment of occasional notches.
 - e. Tolerances for flatness and straightness of plates.
 - f. Details of isolation between plates and core at transitions, to accommodate lengthening and shortening.
 - g. Type and thickness of coating materials.
- F. Pre-Erection Conference: Contractor shall schedule meeting with Owner's Representative, BRB-manufacturer, and the steel erector's personnel supervising installation of buckling restrained braces to review installation procedures including handling, fit-up and fastening.

PART 2 PRODUCTS

2.1 DESIGN AND PERFORMANCE REQUIREMENTS

- A. Design Requirements:
 - 1. Engage a Structural Engineer, licensed in the State where the project is located, to design braces to achieve the Performance Criteria. Design shall be based on detailed examination and understanding of the results of qualifying cyclic tests and interpolation of results to project conditions.
 - 2. Interpolation of test results for different member sizes shall be justified by rational analysis that demonstrates stress distributions and magnitudes of internal strains that are consistent with or less severe than the tested assemblies and

that considers the adverse effects of larger material and variations in material properties.

3. Consider the effect of imposed end rotations.

B. Performance Criteria:

1. Initial "BRB" yield force or area shall be as indicated, within the tolerances specified on the Contract Documents.
2. Braces shall provide for stable cyclic displacement within the ranges required per AISC 341.
 - a. Hysteretic behavior in the non-linear range shall show no sign of degradation or loss of strength.
 - b. Graphs of test results shall show no signs of pinched hysteretic behavior.
3. The portion of the steel core that projects beyond the casing shall provide for stable cyclic loading.
4. Tension and compression shall be resisted entirely by the steel core. The buckling restraining system shall prevent brace buckling and control plate buckling without restraining the steel core from transverse expansion and longitudinal shortening for deformations corresponding to 2 times the design interstory drift.
5. End connections and connection configuration, including gusset stiffeners, must be similar to the tested conditions.

- C. Coupon Tests: Perform coupon test results for each lot of steel used in fabrication of steel core areas showing initial yield, ultimate tensile stress, and ultimate elongation. Coupons shall be taken from plates at point of brace manufacture and shall be used as the basis for brace design.

- D. Qualification Tests: The design of braces shall be based on results from qualifying cyclic tests. Tests shall consist of at least two successful cyclic tests: one is required to be a test of a brace subassemblage that includes brace connection imposed rotations and the other may be either a uniaxial or subassemblage test. If a pin and collar connection is used the subassemblage test is not be required.

1. Qualification Tests shall conform to requirements of Appendix T of the AISC 341.
2. Qualification tests are permitted to be based on documented full-scale cyclic tests performed for other projects or tests reported in research, provided that there is sufficient basis for extrapolation to project conditions.
3. Extrapolation of previous test results beyond the limitations AISC 341 Appendix T will not be permitted.

2.2 ACCEPTABLE MANUFACTURERS

- A. The following manufacturer's, which have successfully completed qualification testing of braces similar to those required for the project, will be considered acceptable manufacturers, subject to compliance with other requirements of the Contract Documents, including limitations on maximum brace dimensions.

1. STAR Seismic; Park City, UT.
2. Nippon Steel Corporation; Tokyo, Japan

2.3 MATERIALS

- A. Steel Core Areas: JIS G 3136 SN400 B or ASTM A36; except initial yield stress shall be within the tolerances shown on the Contract Documents, as evidenced by coupon testing of plates to be incorporated in work. If the contract documents do not state the initial yield stress it shall be 42.0 ksi with the averages of the coupon tests be between 39 and 46 ksi.

1. Plates 2 inches (50 mm) and thicker shall be supplied with Charpy V-Notch testing in accordance with ASTM A6 Supplementary Requirement S5, or approved equal. The impact test shall meet a minimum average value of 20 ft-lbs absorbed energy at +70 degrees F and shall be conducted in accordance with AISC Specification, or approved equal.

- B. Casing: JIS G3466 STKR 400 or ASTM A500, Grade B.

- C. Welding Filler Material: Meet or exceed CVN toughness and elongation of material used for fabrication of tested assemblies.

1. H16 (diffusible hydrogen), AWS A4.3.

- D. Shop Primer -not required

- E. Debonding Agent: Manufacturer's standard; demonstrated suitable to maintain separation of steel core and grout encasement when subjected to a minimum of 30 cycles of inelastic yielding at 2.0 percent strain; resistant to aging effects for a life cycle of 50 years.

- F. Fill Material: Manufacturer's standard cementitious grout; demonstrated suitable for function as a confining in-fill material by uniaxial or subassembly qualification testing.

2.4 FABRICATION

- A. Fabricate steel in accordance with Section 05 1200, "Structural Steel".

1. Cut core plates to profile shown on Design Drawings. Conform to tolerances of Quality Assurance Manual, except tolerance on plate width shall not exceed plus or minus 0.2 inches (5 mm).
2. Splices in the steel core are not acceptable.
3. Roughness: After cutting, edges of core plates shall have roughness less than 1000 micro-inches.

4. Gouges and Notches: Occasional gouges and notches less than 0.2 inches (5 mm) deep in edges of core plates may be repaired by grinding to a smooth transition. The length of transition shall be a minimum of 10 times the depth of gouge. The area shall be inspected by MT after grinding to ensure the entire depth of gouge has been removed. Deeper gouges shall be cause for rejection of piece.
- B. The maximum dimensions of the casing of the buckling restrained brace shall be as indicated on the Contract Documents.
- C. Bolted Connections: All holes for bolted connections shall be drilled and burrs removed.
- D. Pin Connections: All holes for pinned connections shall be machined 1/32 in larger than the pin diameter. Pin hole tolerance shall not exceed plus 1/64 in or minus 1/32 in.
- E. Welding: Weld joints using procedures intended to minimize distortion.
 1. Where cruciform plates are terminated in core, pay particular attention to the detailing and finishing of weld termination; meet or exceed qualification tested assembly as minimum standard.
- F. Assembly: Assemble components of the Buckling Restrained Brace in a manner to ensure proper performance of the brace.
 1. Examine steel core areas for straightness prior to coating with debonding agent or pouring with concrete.
 2. Provide end-confining plates to ensure confinement of the fill material while allowing for non-restricting movement of the steel core.
 3. For braces exposed to exterior or corrosive conditions, interior of brace shall be sealed or otherwise protected from moisture/corrosive element infiltration into the interior core region.

2.5 SOURCE QUALITY CONTROL

- A. Testing Laboratory will:
 1. Review Manufacturer's Quality Assurance Plan, mill certificates and results of coupon testing.
 2. Review Manufacturer's quality assurance test and inspection reports.
 3. Observe fabrication and assembly as requested by Owner's Representative.
- B. Contractor shall:
 1. Notify Owner's Representative no less than 30 days before the start of fabrication of the buckling restrained braces, to

allow Owner's Representative to observe fabrication and assembly process.

2. Perform testing and inspection in accordance with approved Quality Assurance Plan and requirements of Contract Documents.

PART 3 EXECUTION

3.1 ERECTION

- A. Braces are erected under Section 05 12 00, "Structural Steel".
- B. Prior to erection, clean faying surfaces of brace to be in contact with bolted connections to remove temporary coatings applied for transport and surface contaminants.
- C. Buckling restrained braces shall not be field cut or altered. Alterations to structural steel components to receive Buckling Restrained Braces shall be as permitted by Section 05 12 00.
- D. No field welding to buckling restrained brace members will be permitted, including attachment of nonstructural components.

- - - E N D - - -

**SECTION 05 36 00
COMPOSITE METAL DECKING**

PART 1 - GENERAL**1.1 DESCRIPTION:**

- A. This section specifies material and services required for installation of composite steel decking including, shear connector studs and miscellaneous closures required to prepare deck for concrete placement as shown and specified.

1.2 RELATED WORK:

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Penetrations through fire rated construction: Section 07 84 00, FIRESTOPPING.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Shop and erection drawings showing decking unit layout, connections to supporting members, and information necessary to complete the installation as shown and specified, including supplementary framing, cant strips, cut openings, special jointing or other accessories. Show welding, side lap, closure, deck reinforcing and closure reinforcing details. Show openings required for work of other trades, including openings not shown on structural drawings. Indicate where temporary shoring is required to satisfy design criteria.
- C. Manufacturer's Literature and Data: Showing steel decking section properties and specifying structural characteristics as specified herein.
- D. Manufacturer's written recommendations for: Cleaning of steel decking prior to concrete placement.
- E. Test Report - Establishing structural characteristics of composite concrete and steel decking system.
- F. Test Report - Stud base qualification.
- G. Welding power setting recommendation by shear stud manufacturer.
- H. Shear Stud Layouts: Submit drawings showing the number, pattern, spacing and configuration of the shear studs for each beam and girder.
- I. Certification: For each type and gauge of metal deck supporting concrete slab or fill, furnish certification of the specified fire ratings. Certify that the units supplied are U.L. listed as a "Steel Floor and Form Unit".

1.4 QUALITY ASSURANCE:

Underwriters' Label: Provide metal floor deck units listed in Underwriters' Laboratories "Fire Resistance Directory", with each deck unit bearing the UL label and marking for specific system detailed.

1.5 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only. Refer to the latest edition of all referenced Standards and codes.
- B. American Iron and Steel Institute (AISI):
Specification and Commentary for the Design of Cold-Formed Steel Structural Members (Latest Edition).
- C. American Society of Testing and Materials (ASTM):
A36/A36M.....Standard Specification for Carbon Structural Steel
A108.....Standard Specification for Steel Bars, Carbon, Cold Finished, Standard Quality
A653/A653M.....Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvanized) by the Hot-Dip Process
- D. American Institute of Steel Construction (AISC):
 - 1. Specification for Structural Steel Buildings - Allowable Stress Design and Plastic Design (Latest Edition)
 - 2. Load and Resistance Factor Design Specification for Structural Steel Buildings (Latest Edition)
- E. American Welding Society (AWS):
D1.1.....Structural Welding Code - Steel
D1.3.....Structural Welding Code - Sheet Steel
- F. Military Specifications (Mil. Spec.):
MIL-P-21035B.....Paint, High Zinc Dust Content, Galvanizing Repair

PART 2 - PRODUCTS**2.1 MATERIALS:**

- A. Steel Decking and all Flashings: ASTM A653, Structural Quality suitable for shear stud weld-through techniques
- B. Galvanizing: ASTM A653, G60
- C. Shear connector studs: ASTM A108, Grades 1015-1020, yield 350 Mpa (50,000 psi) minimum, tensile strength - 400 Mpa (60,000 psi) minimum, reduction of area 50 percent minimum. Studs of uniform diameter; heads shall be concentric and normal to shaft; stud, after welding free from any substance or defect which would interfere with its function as a

shear connector. Studs shall not be painted or galvanized. Size of studs shall be as shown on drawings. Studs manufactured by a company normally engaged in the manufacture of shear studs and can furnish equipment suitable for weld-through installation of shear studs.

D. Galvanizing Repair Paint: Mil. Spec. MIL-P-21035B.

E. Miscellaneous Steel Shapes: ASTM A36.

F. Welding Electrode: E60XX minimum.

G. Sheet Metal Accessories: ASTM A653, galvanized, unless noted otherwise. Provide accessories of every kind required to complete the installation of metal decking in the system shown. Finish sheet metal items to match deck including, but not limited to, the following items:

1. Metal Cover Plates: For end-abutting deck units, to close gaps at changes in deck direction, columns, walls and openings. Same quality as deck units but not less than 1.3 mm (18 gauge) sheet steel.
2. Continuous sheet metal edging: at openings and concrete slab edges. Same quality as deck units but not less than 1.3 mm (18 gauge) steel. Side and end closures supporting concrete and their attachment to supporting steel shall be designed by the manufacturer to safely support the wet weight of concrete and construction loads. The deflection of cantilever closures shall be limited to 3 mm (1/8 inch) maximum.
3. Metal Closure Strips: For openings between decking and other construction, of not less than 1.3 mm (18 gauge) sheet steel of the same quality as the deck units. Form to the configuration required to provide tight-fitting closures at open ends of flutes and sides of decking.
4. Seat angles for deck: Where a beam does not frame into a column.

2.2 REQUIREMENTS:

- A. Steel decking depth, gage, and section properties to be as shown. Provide edges of deck with vertical interlocking male and female lip providing for a positive mechanical connection.
- B. Fabricate deck units with integral embossments to provide mechanical bond with concrete slab. In combination with concrete slab, capable of supporting total design loads on spans shown.
- C. Steel decking capable of safely supporting total, normal construction service loads without damage to decking unit.
- D. Steel decking units shall include an integral system which provides a simple point of attachment for light duty hanger devices for flexibility for attaching hangers for support of acoustical, lathing, plumbing, heating, air conditioning and electrical items. System shall provide for

minimum spacing pattern of 300 mm (12 inches) on centers longitudinally and 600 mm or 900 mm (24 or 36 inches) on centers transversely.

Suspension system shall be capable of safely supporting a maximum allowable load of 45 kg (100 pounds) concentrated at any one hanger attachment point. System may consist of fold-down type hanger tabs or a lip hanger.

PART 3 - EXECUTION

3.1 ERECTION:

- A. Do not start installation of metal decking until corresponding steel framework has been plumbed, aligned and completed and until temporary shoring, where required, has been installed. Remove any oil, dirt, paint, ice, water and rust from steel surfaces to which metal decking will be welded.
- B. Coordinate and cooperate with structural steel erector in locating decking bundles to prevent overloading of structural members.
- C. Do not use floor deck units for storage or working platforms until permanently secured. Do not overload deck units once placed. Replace any deck units that become damaged after erection and prior to casting concrete at no cost to the Government.
- D. Erect steel deck in accordance with manufacturer's printed instructions.
- E. Ship steel deck units to project in standard widths and cut to proper length.
- F. Provide steel decking in sufficient lengths to extend over 3 or more spans, except where structural steel layout does not permit.
- G. Place steel decking units on supporting steel framework and adjust to final position before being permanently fastening. Bring each unit to proper bearing on supporting beams. Place deck units in straight alignment for entire length of run of flutes and with close registration of flutes of one unit with those of abutting unit. Maximum space between ends of abutting units is 13 mm (1/2 inch). If space exceeds 13 mm (1/2 inch), install closure plates at no additional cost to Government.
- H. Ceiling hanger loops, if used, must be flattened or removed to obtain bearing of units on structural steel.
- I. Fastening Deck Units:
 - 1. Fasten floor deck units to steel supporting members by not less than 16 mm (5/8 inch) diameter puddle welds or elongated welds of equal strength, spaced not more than 305 mm (12 inches) o.c. with a minimum of three welds per unit at each support. Where two units abut, fasten each unit individually to the supporting steel framework. Welded shear connector studs qualify as an alternate for a puddle weld.

2. Tack weld or use self-tapping No. 8 or larger machine screws at 610 mm (2 feet) o.c. for fastening end closures. Only use welds to attach longitudinal end closures.
 3. Weld side laps of adjacent floor deck units that span more than 1524 mm (5 feet). Fasten at midspan or 915 mm (3 feet) o.c., whichever is smaller.
- J. Welding to conform to AWS D1.3 and done by competent experienced welding mechanics.
- K. Areas scarred during erection and welds shall be thoroughly cleaned and touched-up with zinc rich galvanizing repair paint. Paint touch-up is not required for welds or scars that are to be in direct contact with concrete.
- L. Provide metal concrete stops at edges of deck as required.
- M. Cutting and Fitting:
1. Cut all metal deck units to proper length in the shop prior to shipping.
 2. Field cutting by the metal deck erector is restricted to bevel cuts, notching to fit around columns and similar items, and cutting openings that are located and dimensioned on the structural drawings.
 3. Other penetrations shown on the approved metal deck shop drawings but not shown on the structural drawings are to be located, cut and reinforced by the trade requiring the opening.
 4. Make all cuts neat and trim using a metal saw, drill or punchout device; cutting with torches is expressly prohibited.
 5. Do not make any cuts in the metal deck that are not shown on the approved metal deck drawings. If an additional opening not shown on the approved shop drawings is required, submit a sketch, to scale, locating the required new opening and any other openings and supports in the immediate area. Do not cut the opening until the sketch has been reviewed and accepted by the COTR. Provide any additional reinforcing or framing required for the opening at no cost to the Government. Failure to comply with these requirements is cause for rejection of the work and removal and replacement of the affected metal deck.
 6. Reinforcement at Openings: Provide additional metal reinforcement and closure pieces as required for strength, continuity of decking and support of other work shown.
- N. Installation of shear connector studs through previously installed metal deck to conform to AWS D1.1, Section 7, except all studs will be

installed with automatically timed welding equipment and as specified below:

1. Do not place reinforcing steel temperature mesh or other materials and equipment which will interfere with stud installation on steel deck until shear connector studs are installed.
2. Steel deck sheets shall be free of oil, rust, dirt, and paint. Release water in deck's valley so that it does not become entrapped between deck and beam. Surface to which stud is to be welded shall be clean and dry.
3. Rest metal deck tightly upon top flange of structural member with bottom of deck rib in full contact with top of beam flange.
4. Weld studs only through a single thickness of deck. Place decking so that a butt joint is obtained. Place studs directly over beam web, where one row of studs are required.
5. Ferrules specially developed for the weld-through technique must be used. Ferrules shall be appropriate for size of studs used and be removed after welding.
6. Submit report of successful test program for stud base qualification as required by AWS D1.1, Appendix K.

3.2 CLEANING:

Clean deck in accordance with manufacturer's recommendation before concrete placement.

- - - E N D - - -

SECTION 05 40 00
COLD-FORMED METAL FRAMING

PART 1 - GENERAL**1.1 DESCRIPTION:**

- A. This section specifies materials and services required for installation of cold-formed steel, including tracks and required accessories as shown and specified. This Section includes the following:
1. Exterior non-load-bearing steel stud curtain wall.

1.2 RELATED WORK:

- A. Structural steel framing: Section 05 12 00, STRUCTURAL STEEL FRAMING.
- B. Non-load-bearing metal stud framing assemblies: Section 09 22 16, NON-STRUCTURAL METAL FRAMING.
- C. Insulation: Section 07 21 13, THERMAL INSULATION.
- C. Gypsum board assemblies: Section 09 29 00, GYPSUM BOARD.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Shop and erection drawings showing steel unit layout, connections to supporting members, and information necessary to complete installation as shown and specified.
- C. Manufacturer's Literature and Data: Showing steel component sections and specifying structural characteristics.

1.4 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Iron and Steel Institute (AISI):
Specification and Commentary for the Design of Cold-Formed Steel Structural Members (1996)
- C. American Society of Testing and Materials (ASTM):
A36/A36M(REV. A)-2003...Standard Specifications for Carbon Structural Steel
A123/A123M-2002.....Standard Specifications for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
A153/A153M-2003.....Standard Specifications for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
A307-2002.....Standard Specifications for Carbon Steel Bolts and Studs

- A653/A653M-2003.....Standard Specifications for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
- C955-2003.....Standard Specifications for Load-Bearing (Transverse and Axial) Steel Studs, Runners (Tracks), and Bracing or Bridging for Screw Application of Gypsum Panel Products and Metal Plaster Bases
- C1107-2002.....Standard Specifications for Packaged Dry, Hydraulic-Cement Grout (Non-shrink)
- E488-96(Reapproved 2003)Standard Test Methods for Strength of Anchors in Concrete and Masonry Elements
- E1190-95(Reapproved 2000)Standard Test Methods for Strength of Power-Actuated Fasteners Installed in Structural Members
- D. American Welding Society (AWS):
- D1.3-(98).....Structural Welding Code-Sheet Steel
- E. Military Specifications (Mil. Spec.):
- MIL-P-21035B(Reinst. Notice 2) Paint, High Zinc Dust Content, Galvanizing Repair

PART 2 - PRODUCTS

2.1 MATERIALS:

- A. Sheet Steel for joists, studs and accessories 16 gage and heavier: ASTM A653, structural steel, zinc coated G60, with a yield of 340 MPa (50 ksi) minimum.
- B. Sheet Steel for joists, studs and accessories 18 gage and lighter: ASTM A653, structural steel, zinc coated G60, with a yield of 230 MPa (33 ksi) minimum.
- C. Galvanizing Repair Paint: MIL-P-21035B.

2.2 WALL FRAMING:

- A. Steel Studs: Manufacturer's standard C-shaped steel studs of web depth indicated, with lipped flanges, and complying with the following:
1. Design Uncoated-Steel Thickness: As indicated on the Drawings.
 2. Flange Width: As indicated on the Drawings.
 3. Web: Punched
- B. Steel Track: Manufacturer's standard U-shaped steel track, unpunched, of web depths indicated, with straight flanges, and complying with the following:

1. Design Uncoated-Steel Thickness: Matching steel studs.
2. Flange Width: Manufacturer's standard deep flange where indicated, standard flange elsewhere.

2.3 FRAMING ACCESSORIES:

- A. Fabricate steel framing accessories of the same material and finish used for framing members, with a minimum yield strength of 230 MPa (33 ksi).
- B. Provide accessories of manufacturer's standard thickness and configuration, unless otherwise indicated, as follows:
 1. Supplementary framing.
 2. Bracing, bridging, and solid blocking.
 3. Web stiffeners.
 4. Gusset plates.
 5. Deflection track and vertical slide clips.
 6. Stud kickers and girts.
 7. Reinforcement plates.

2.4 ANCHORS, CLIPS, AND FASTENERS:

- A. Steel Shapes: ASTM A36, zinc coated by the hot-dip process according to ASTM A123.
- B. Clips: Fabricated from zinc-coated sheet steel and manufactured by Scafco Steel Stud Manufacturing Company as indicated on the Drawings or approved equivalent.
- C. Expansion Anchors: Fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 5 times the design load, as determined by testing per ASTM E488 conducted by a qualified independent testing agency.
- D. Power-Actuated Anchors: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 10 times the design load, as determined by testing per ASTM E1190 conducted by a qualified independent testing agency.
- E. Mechanical Fasteners: Corrosion-resistant coated, self-drilling, self-threading steel drill screws. Low-profile head beneath sheathing, manufacturer's standard elsewhere.

2.5 REQUIREMENTS:

- A. Welding in accordance with AWS D1.3
- B. Furnish members and accessories by one manufacturer only.

PART 3 - EXECUTION**3.1 FABRICATION:**

- A. Framing components may be preassembled into panels. Panels shall be square with components attached.
- B. Cut framing components squarely or as required for attachment. Cut framing members by sawing or shearing; do not torch cut.
- C. Hold members in place until fastened.
- D. Fasten cold-formed metal framing members by welding or screw fastening, as indicated on the Drawings. Wire tying of framing members is not permitted.
 - 1. Comply with AWS requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
 - 2. Locate mechanical fasteners and install according to cold-formed metal framing manufacturer's instructions with screw penetrating joined members by not less than 3 exposed screw threads.
- E. Where required, provide specified insulation in double header members and double jamb studs which will not be accessible after erection.

3.2 ERECTION:

- A. Handle and lift prefabricated panels in a manner as to not distort any member.
- B. Securely anchor tracks and studs to supports as shown.
- C. At butt joints, securely anchor two pieces of track to same supporting member or butt-weld or splice together.
- D. Plumb, align, and securely attach studs to flanges or webs of both upper and lower tracks.
- E. All axially loaded members shall be aligned vertically to allow for full transfer of the loads down to the foundation. Vertical alignment shall be maintained at floor/wall intersections.
- F. Install jack studs above and below openings and as required to furnish support. Securely attach jack studs to supporting members.
- G. Install headers in all openings that are larger than the stud spacing in that wall.
- H. Attach bridging for studs in a manner to prevent stud rotation. Space bridging rows as shown.
- I. Studs in one piece for their entire length, splices will not be permitted.
- J. Provide temporary bracing and leave in place until framing is permanently stabilized.

- K. Do not bridge building expansion joints with cold-formed metal framing. Independently frame both sides of joints.
- L. Fasten reinforcement plate over web penetrations that exceed size of manufacturer's standard punched openings.

3.3 TOLERANCES:

- A. Vertical alignment (plumbness) of studs shall be within 1/960th of the span.
- B. Horizontal alignment (levelness) of walls shall be within 1/960th of their respective lengths.
- C. Spacing of studs shall not be more than 3 mm (1/8 inch) +/- from the designed spacing providing that the cumulative error does not exceed the requirements of the finishing materials.
- D. Prefabricated panels shall be not more than 3 mm (1/8 inch) +/- out of square within the length of that panel.

3.4 FIELD REPAIR:

Touch-up damaged galvanizing with galvanizing repair paint.

- - - E N D - - -

**SECTION 05 50 00
METAL FABRICATIONS**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies items and assemblies fabricated from structural steel shapes and other materials as shown and specified.
- B. Items specified.
 - 1. Support for Wall and Ceiling Mounted Items
 - 2. Plate Door Sill
 - 3. Ladders
 - 4. Railings
 - 5. Steel Counter or Bench Top Frame and Leg
 - 6. Rooftop Mechanical Equipment Screen
 - 7. CMU Lintels

1.2 RELATED WORK

- A. Railings attached to steel stairs: Section 05 51 00, METAL STAIRS.
- B. Colors, finishes, and textures: Section 09 06 00, SCHEDULE FOR FINISHES.
- C. Prime and finish painting: Section 09 91 00, PAINTING.
- D. Stainless steel corner guards: Section 10 26 00, WALL AND DOOR PROTECTION.
- E. Penetrations through fire rated construction: Section 07 84 00, FIRESTOPPING.
- F. Anchoring and bracing of wall and ceiling mounted items: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
 - 1. Each item specified, showing complete detail, location in the project, material and size of components, method of joining various components and assemblies, finish, and location, size and type of anchors.
 - 2. Mark items requiring field assembly for erection identification and furnish erection drawings and instructions.
 - 3. Provide templates and rough-in measurements as required.
- C. Manufacturer's Certificates:
 - 1. Anodized finish as specified.

- D. Furnish setting drawings and instructions for installation of anchors to be preset into concrete and masonry work, and for the positioning of items having anchors to be built into concrete or masonry construction.

1.4 QUALITY ASSURANCE

- A. Each manufactured product shall meet, as a minimum, the requirements specified, and shall be a standard commercial product of a manufacturer regularly presently manufacturing items of type specified.
- B. Each product type shall be the same and be made by the same manufacturer.
- C. Assembled product to the greatest extent possible before delivery to the site.
- D. Include additional features, which are not specifically prohibited by this specification, but which are a part of the manufacturer's standard commercial product.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers (ASME):
- B18.6.1-81(R1997).....Wood Screws
- B18.2.2-87(R2005).....Square and Hex Nuts
- C. American Society for Testing and Materials (ASTM):
- A36/A36M-05.....Structural Steel
- A47-99(R2004).....Malleable Iron Castings
- A48-03.....Gray Iron Castings
- A53-06.....Pipe, Steel, Black and Hot-Dipped, Zinc-Coated
Welded and Seamless
- A123-02.....Zinc (Hot-Dip Galvanized) Coatings on Iron and
Steel Products
- A167-99(R2004).....Stainless and Heat-Resisting Chromium-Nickel
Steel Plate, Sheet and Strip
- A269-07.....Seamless and Welded Austenitic Stainless Steel
Tubing for General Service
- A307-07.....Carbon Steel Bolts and Studs, 60,000 PSI Tensile
Strength
- A312/A312M-06.....Seamless, Welded, and Heavily Cold Worked
Austenitic Stainless Steel Pipes
- A391/A391M-01.....Grade 80 Alloy Steel Chain

- A501-01.....Standard Specification for Hot-Formed Welded and
Seamless Carbon Steel Structural Tubing
- A653/A653M-07.....Steel Sheet, Zinc Coated (Galvanized) or Zinc-
Iron Alloy Coated (Galvannealed) by the Hot-Dip
Process
- A786/A786M-05.....Rolled Steel Floor Plate
- B221-06.....Aluminum and Aluminum-Alloy Extruded Bars, Rods,
Wire, Shapes, and Tubes
- B456-03.....Electrodeposited Coatings of Copper Plus Nickel
Plus Chromium and Nickel Plus Chromium
- B632-02.....Aluminum-Alloy Rolled Tread Plate
- C1107-07.....Packaged Dry, Hydraulic-Cement Grout (Nonshrink)
- D3656-04.....Insect Screening and Louver Cloth Woven from
Vinyl-Coated Glass Yarns
- F436-07.....Hardened Steel Washers
- F468-06.....Nonferrous Bolts, Hex Cap Screws, and Studs for
General Use
- F593-02.....Stainless Steel Bolts, Hex Cap Screws, and Studs
- F1554-02a1.....Standard Specification for Anchor Bolts, Steel,
36, 55, and 105-ksi Yield Strength
- F1667-05.....Driven Fasteners: Nails, Spikes and Staples
- D. American Welding Society (AWS):
- D1.1-04.....Structural Welding Code Steel
- D1.2-03.....Structural Welding Code Aluminum
- D1.3-98.....Structural Welding Code Sheet Steel
- E. National Association of Architectural Metal Manufacturers (NAAMM)
- AMP521-01.....Pipe Railing Manual
- AMP 500-505-1988.....Metal Finishes Manual
- MBG 531-00.....Metal Bar Grating Manual
- MBG 532-00.....Heavy Duty Metal Bar Grating Manual
- F. Structural Steel Painting Council (SSPC):
- SP 1-05.....No. 1, Solvent Cleaning
- SP 2-05.....No. 2, Hand Tool Cleaning
- SP 3-05.....No. 3, Power Tool Cleaning
- G. Federal Specifications (Fed. Spec):
- RR-T-650E.....Treads, Metallic and Nonmetallic, Nonskid

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Structural Steel: ASTM A36.

- B. Stainless Steel: ASTM A167, Type 302 or 304.
- C. Aluminum, Extruded: ASTM B221, Alloy 6063-T5 unless otherwise specified.
For structural shapes use alloy 6061-T6 and alloy 6061-T4511.
- D. Floor Plate:
 - 1. Steel ASTM A786.
 - 2. Aluminum: ASTM B632.
- E. Steel Pipe: ASTM A53.
 - 1. Galvanized for exterior locations.
 - 2. Type S, Grade A unless specified otherwise.
 - 3. NPS (inside diameter) as shown.
- F. Steel Tubing: ASTM A500, Grade B.
- G. Cast-Iron: ASTM A48, Class 30, commercial pattern.
- H. Malleable Iron Castings: A47.
- I. Primer Paint: As specified in Section 09 91 00, PAINTING.
- J. Stainless Steel Tubing: ASTM A269, type 302 or 304.
- K. Modular Channel Units:
 - 1. Factory fabricated, channel shaped, cold formed sheet steel shapes, complete with fittings bolts and nuts required for assembly.
 - 2. Form channel with in turned pyramid shaped clamping ridges on each side.
 - 3. Provide case hardened steel nuts with serrated grooves in the top edges designed to be inserted in the channel at any point and be given a quarter turn so as to engage the channel clamping ridges. Provide each nut with a spring designed to hold the nut in place.
 - 4. Factory finish channels and parts with oven baked primer when exposed to view. Channels fabricated of ASTM A525, G90 galvanized steel may have primer omitted in concealed locations. Finish screws and nuts with zinc coating.
 - 5. Fabricate snap-in closure plates to fit and close exposed channel openings of not more than 0.3 mm (0.0125 inch) thick stainless steel.
- J. Threaded Rod Anchors: ASTM F1554, Grade 55.
- K. Epoxy for Steel Threaded Rod Dowels: Simpson SET High-Strength Epoxy-Tie Anchoring Adhesive, Hilti HIT HY 150, or approved equal.

2.2 HARDWARE

- A. Rough Hardware:
 - 1. Furnish rough hardware with a standard plating, applied after punching, forming and assembly of parts; galvanized, cadmium plated, or zinc-coated by electro-galvanizing process. Galvanized G-90 where specified.

2. Use G90 galvanized coating on ferrous metal for exterior work unless non-ferrous metal or stainless is used.

B. Fasteners:

1. Bolts with Nuts:

- a. ASME B18.2.2.
- b. ASTM A307 for 415 MPa (60,000 psi) tensile strength bolts.
- c. ASTM F468 for nonferrous bolts.
- d. ASTM F593 for stainless steel.

2. Screws: ASME B18.6.1.

3. Washers: ASTM F436, type to suit material and anchorage.

4. Nails: ASTM F1667, Type I, style 6 or 14 for finish work.

2.3 FABRICATION GENERAL

A. Material

1. Use material as specified. Use material of commercial quality and suitable for intended purpose for material that is not named or its standard of quality not specified.
2. Use material free of defects which could affect the appearance or service ability of the finished product.

B. Size:

1. Size and thickness of members as shown.
2. When size and thickness is not specified or shown for an individual part, use size and thickness not less than that used for the same component on similar standard commercial items or in accordance with established shop methods.

C. Connections

1. Except as otherwise specified, connections may be made by welding, riveting or bolting.
2. Field riveting will not be approved.
3. Design size, number and placement of fasteners, to develop a joint strength of not less than the design value.
4. Holes, for rivets and bolts: Accurately punched or drilled and burrs removed.
5. Size and shape welds to develop the full design strength of the parts connected by welds and to transmit imposed stresses without permanent deformation or failure when subject to service loadings.
6. Use Rivets and bolts of material selected to prevent corrosion (electrolysis) at bimetallic contacts. Plated or coated material will not be approved.
7. Use stainless steel connectors for removable members machine screws or bolts.

D. Fasteners and Anchors

1. Use methods for fastening or anchoring metal fabrications to building construction as shown or specified.
2. Where fasteners and anchors are not shown, design the type, size, location and spacing to resist the loads imposed without deformation of the members or causing failure of the anchor or fastener, and suit the sequence of installation.
3. Use material and finish of the fasteners compatible with the kinds of materials which are fastened together and their location in the finished work.
4. Fasteners for securing metal fabrications to new construction only, may be by use of threaded or wedge type inserts or by anchors for welding to the metal fabrication for installation before the concrete is placed or as masonry is laid.
5. Fasteners for securing metal fabrication to existing construction or new construction may be expansion bolts, toggle bolts, power actuated drive pins, welding, self drilling and tapping screws or bolts.

E. Workmanship

1. General:

- a. Fabricate items to design shown.
- b. Furnish members in longest lengths commercially available within the limits shown and specified.
- c. Fabricate straight, true, free from warp and twist, and where applicable square and in same plane.
- d. Provide holes, sinkages and reinforcement shown and required for fasteners and anchorage items.
- e. Provide openings, cut-outs, and tapped holes for attachment and clearances required for work of other trades.
- f. Prepare members for the installation and fitting of hardware.
- g. Cut openings in gratings and floor plates for the passage of ducts, sumps, pipes, conduits and similar items. Provide reinforcement to support cut edges.
- h. Fabricate surfaces and edges free from sharp edges, burrs and projections which may cause injury.

2. Welding:

- a. Weld in accordance with AWS.
- b. Welds shall show good fusion, be free from cracks and porosity and accomplish secure and rigid joints in proper alignment.

- c. Where exposed in the finished work, continuous weld for the full length of the members joined and have depressed areas filled and protruding welds finished smooth and flush with adjacent surfaces.
- d. Finish welded joints to match finish of adjacent surface.
- 3. Joining:
 - a. Miter or butt members at corners.
 - b. Where frames members are butted at corners, cut leg of frame member perpendicular to surface, as required for clearance.
- 4. Anchors:
 - a. Where metal fabrications are shown to be preset in concrete, weld 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 150 mm (6 inches) long with 25 mm (one inch) hooked end, to back of member at 600 mm (2 feet) on center, unless otherwise shown.
 - b. Where metal fabrications are shown to be built into masonry use 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 250 mm (10 inches) long with 50 mm (2 inch) hooked end, welded to back of member at 600 mm (2 feet) on center, unless otherwise shown.
- 5. Cutting and Fitting:
 - a. Accurately cut, machine and fit joints, corners, copes, and miters.
 - b. Fit removable members to be easily removed.
 - c. Design and construct field connections in the most practical place for appearance and ease of installation.
 - d. Fit pieces together as required.
 - e. Fabricate connections for ease of assembly and disassembly without use of special tools.
 - f. Joints firm when assembled.
 - g. Conceal joining, fitting and welding on exposed work as far as practical.
 - h. Do not show rivets and screws prominently on the exposed face.
 - i. The fit of components and the alignment of holes shall eliminate the need to modify component or to use exceptional force in the assembly of item and eliminate the need to use other than common tools.
- F. Finish:
 - 1. Finish exposed surfaces in accordance with NAAMM Metal Finishes Manual.
 - 2. Aluminum: NAAMM AMP 501.
 - a. Mill finish, AA-M10, as fabricated, use unless specified otherwise.

3. Steel and Iron: NAAMM AMP 504.
 - a. Zinc coated (Galvanized): ASTM A123, G90 unless noted otherwise.
 - b. Surfaces exposed in the finished work:
 - 1) Finish smooth rough surfaces and remove projections.
 - 2) Fill holes, dents and similar voids and depressions with epoxy type patching compound.
 - c. Shop Prime Painting:
 - 1) Surfaces of Ferrous metal:
 - a) Items not specified to have other coatings.
 - b) Galvanized surfaces specified to have prime paint.
 - c) Remove all loose mill scale, rust, and paint, by hand or power tool cleaning as defined in SSPC-SP2 and SP3.
 - d) Clean of oil, grease, soil and other detrimental matter by use of solvents or cleaning compounds as defined in SSPC-SP1.
 - e) After cleaning and finishing apply one coat of primer as specified in Section 09 91 00, PAINTING.
 - 2) Non ferrous metals: Comply with MAAMM-500 series.
4. Stainless Steel: NAAMM AMP-504 Finish No. 4.

G. Protection:

1. Insulate aluminum surfaces that will come in contact with concrete, masonry, plaster, or metals other than stainless steel, zinc or white bronze by giving a coat of heavy-bodied alkali resisting bituminous paint or other approved paint in shop.
2. Spot prime all abraded and damaged areas of zinc coating which expose the bare metal, using zinc rich paint on hot-dip zinc coat items and zinc dust primer on all other zinc coated items.

2.4 SUPPORTS

A. General:

1. Fabricate ASTM A36 structural steel shapes.
2. Use clip angles or make provisions for welding hangers and braces to overhead construction.
3. Field connections may be welded or bolted.

B. For Wall Mounted Items:

1. For items supported by metal stud partitions.
2. Steel strip or hat channel minimum of 1.5 mm (0.0598 inch) thick.
3. Steel strip minimum of 150 mm (6 inches) wide, length extending one stud space beyond end of item supported.
4. Steel hat channels where shown. Flange cut and flattened for anchorage to stud.

5. Structural steel tube or channel for grab bar at water closets floor to structure above with clip angles or end plates formed for anchors.
6. Use steel angles for thru wall counters. Drill angle for fasteners at ends and not over 100 mm (4 inches) on center between ends.

C. For Trapeze Bars:

1. Construct assembly above ceilings as shown and design to support not less than a 340 kg (750 pound) working load at any point.
2. Fabricate trapeze supports as required, with all exposed members, including screws, nuts, bolts and washers, fabricated of stainless steel.
3. Fabricate concealed components of structural steel shapes unless shown otherwise.
4. Stainless steel ceiling plate drilled for eye bolt.
5. Continuously weld connections where welds shown.
6. Use modular channel where shown with manufacturers bolts and fittings.
 - a. Weld ends of steel angle braces to steel plates and secure to modular channel units as required. Drill plates for anchor bolts.
 - b. Fabricate eye bolt, special clamp bolt, and plate closure full length of modular channel at ceiling line and secure to modular channel unit with manufacturers standard fittings.

D. Drill angle bent ends for anchor screws to acoustical suspension system and angle for hanger wires.

E. Provide pipe sleeve welded to angle.

2.5 PLATE DOOR SILL

A. Fabricate of checkered plate.

1. Aluminum Plate: ASTM B632, 3 mm (0.125 inch) thick.
2. Steel Plate: ASTM A786, 3 mm (0.125 inch thick), galvanized G90.

B. Fabricate for anchorage with flat head countersunk bolts at each end and not over 300 mm (12 inches), o.c.

2.6 LADDERS

A. Steel Ladders:

1. Fixed-rail type with steel rungs shouldered and headed into and welded to rails.
2. Fabricate angle brackets of 50 mm (2 inch) wide by 13 mm (1/2 inch) thick steel; brackets spaced maximum of 1200 mm (4 feet) apart and of length to hold ladder 175 mm (7 inches) from wall to center of rungs. Provide turned ends or clips for anchoring.

3. Provide holes for anchoring with expansion bolts through turned ends and brackets.
 4. Where shown, fabricate side rails curved, twisted and formed into a gooseneck.
 5. Galvanize exterior ladders after fabrication, ASTM A123, G-90.
- B. Galvanized steel members after fabrication in accordance with ASTM A123, G-90 coating.

2.7 RAILINGS

- A. In addition to the dead load design railing assembly to support a live load of 200 pounds at any point or a 50 pound per lineal foot uniform load.
- B. Fabrication General:
1. Provide continuous welded joints, dressed smooth and flush.
 2. Standard flush fittings, designed to be welded, may be used.
 3. Exposed threads will not be approved.
 4. Form handrail brackets to size and design shown.
 5. Exterior Post Anchors.
 - a. Fabricate tube or pipe sleeves with closed ends or plates as shown.
 - b. Where inserts interfere with reinforcing bars, provide flanged fittings welded or threaded to posts for securing to concrete with expansion bolts.
 - c. Provide heavy pattern sliding flange base plate with set screws at base of pipe or tube posts.
- C. Handrails:
1. Close free ends of rail with flush metal caps welded in place except where flanges for securing to walls with bolts are shown.
 2. Make provisions for attaching handrail brackets to wall, posts, and handrail as shown.
- D. Steel Pipe Railings:
1. Fabricate of steel pipe with welded joints.
 2. Number and space of rails as shown.
 3. Space posts for railings not over 1800 mm (6 feet) on centers between end posts.
 4. Form handrail brackets from malleable iron.
 5. Fabricate removable sections with posts at end of section.

2.8 STEEL COUNTER OR BENCH TOP FRAME AND LEGS

- A. Fabricate channel or angle frame with mitered and welded corners as shown.

- B. Drill top of frame with 6 mm (1/4inch) holes spaced 200 mm (8 inches) on center for securing countertop.
- C. Fabricate legs of angle or pipe shapes and continuously weld to frame.
- D. Finish frame with backed on enamel prime coat.

2.9 ROOFTOP MECHANICAL EQUIPMENT SCREEN

- A. Fabricate supports of structural steel tube and plate construction as shown.
- B. Fabricate screen frame and louvered screens in pre-fabricated sections to size and spacing shown.
- C. Finish supports with hot dipped galvanized finish and primed to receive painted finish.
- D. Provide prefinished frames and louvers from manufacturer's standard color indicated in Section 09 06 00, SCHEDULE FOR FINISHES.

2.10 CMU LINTELS

- A. Fabricate lintels of structural steel angles and plate as shown.
- B. Finish lintels with primed coat of paint for concealed condition.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Set work accurately, in alignment and where shown, plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.
- B. Items set into concrete or masonry.
 - 1. Provide temporary bracing for such items until concrete or masonry is set.
 - 2. Place in accordance with setting drawings and instructions.
 - 3. Build strap anchors, into masonry as work progresses.
- C. Set frames of gratings, covers, corner guards and similar items flush with finish floor or wall surface and, where applicable, flush with side of opening.
- D. Field weld in accordance with AWS.
 - 1. Design and finish as specified for shop welding.
 - 2. Use continuous weld unless specified otherwise.
- E. Install anchoring devices and fasteners as shown and as necessary for securing metal fabrications to building construction as specified. Power actuated drive pins may be used except for removable items and where members would be deformed or substrate damaged by their use.

- F. Spot prime all abraded and damaged areas of zinc coating as specified and all abraded and damaged areas of shop prime coat with same kind of paint used for shop priming.
- G. Isolate aluminum from dissimilar metals and from contact with concrete and masonry materials as required to prevent electrolysis and corrosion.
- H. Secure escutcheon plate with set screw.
- I. Epoxy Dowels: Drill and epoxy steel threaded rod dowels into hardened concrete following the instructions of the epoxy product manufacturer. Special Inspection is required for all epoxy dowels installation.

3.2 INSTALLATION OF SUPPORTS

- A. Anchorage to structure.
 - 1. Secure angles or channels and clips to overhead structural steel by continuous welding unless bolting is shown.
 - 2. Secure supports to concrete inserts by bolting or continuous welding as shown.
 - 3. Secure steel plate or hat channels to studs as required.
- B. Supports for Wall Mounted items:
 - 1. Locate center of support at anchorage point of supported item.
 - 2. Locate support at top and bottom of wall hung cabinets.
 - 3. Locate support at top of floor cabinets and shelving installed against walls.
 - 4. Locate supports where required for items shown.
- C. Supports for Trapeze Bars:
 - 1. Secure plates to overhead construction with appropriate fasteners.
 - 2. Secure angle brace assembly to overhead construction with appropriate fasteners and bolt plate to braces.
 - 3. Fit modular channel unit flush with finish ceiling, and secure to plate with modular channel unit manufacturer's standard fittings through steel shims or spreaders as shown.
 - a. Install closure plates in channel between eye bolts.
 - b. Install eyebolts in channel.

3.3 PLATE DOOR SILL

- A. Install after roofing base flashing and counter flashing work is completed.
- B. Set in sealant and bolt to curb.

3.4 LADDERS

- A. Secure ladders in place with flanged fittings and toggle bolt to steel support in metal framed walls.

3.6 RAILINGS

- A. Steel Posts:

1. Secure fixed posts to concrete with expansion bolts through flanged fittings except where sleeves are shown with pourable grout.
2. Install sleeves in concrete formwork.
3. Set post in sleeve and pour grout to surface. Apply beveled bead of urethane sealant at perimeter of post or under flange fitting as specified in Section 07 92 00, JOINT SEALANTS—on exterior posts.
4. Secure sliding flanged fittings to posts at base with set screws.
5. Secure fixed flanged fittings to concrete with expansion bolts.
6. Secure posts to steel with welds.
7. Set posts in sleeve and pour grout to surface on exterior locations and to within 6 mm (1/4 inch) of surface for interior locations except to where posts are required to be removable.
8. Apply beveled bead of urethane sealant over sleeve at post perimeter for exterior posts and flush with surface for interior posts as specified in Section 07 92 00, JOINT SEALANTS.

C. Anchor to Walls:

1. Anchor rails to concrete or solid masonry with machine screws through flanged fitting to steel plate.
 - a. Anchor steel plate to concrete or solid masonry with expansion bolts.
 - b. Anchor steel plate to hollow masonry with toggle bolts.
2. Anchor flanged fitting with toggle bolt to steel support in frame walls.

D. Handrails:

1. Anchor brackets for metal handrails as detailed.
2. Install brackets within 300 mm (12 inches) of return of walls, and at evenly spaced intermediate points not exceeding 1200 mm (4 feet) on centers unless shown otherwise.
3. Expansion bolt to concrete or solid masonry.
4. Toggle bolt to blocking installed in supporting frame wall and to hollow masonry unless shown otherwise.

3.7 STEEL COMPONENTS FOR MILLWORK ITEMS

Coordinate and deliver to Millwork fabricator for assembly where millwork items are secured to metal fabrications.

3.8 ROOFTOP MECHANICAL EQUIPMENT SCREEN

- A. Secure supports to steel deck as shown.
- B. Flash and seal supports to roof insulation and roofing to create a water tight installation.

3.9 CMU LINTELS

- A. Secure plates and angles by anchoring to solid concrete or masonry with anchor bolts as shown.

3.8 CLEAN AND ADJUSTING

- A. Adjust movable parts including hardware to operate as designed without binding or deformation of the members centered in the opening or frame and, where applicable, contact surfaces fit tight and even without forcing or warping the components.
- B. Clean after installation exposed prefinished and plated items and items fabricated from stainless steel, aluminum and copper alloys, as recommended by the metal manufacturer and protected from damage until completion of the project.

- - - E N D - - -

**SECTION 05 51 00
METAL STAIRS**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Section specifies steel stairs with railings.
- B. Types:
 - 1. Closed riser stairs with plank grating treads and platforms.

1.2 RELATED WORK

- A. Wall handrails and railings for other than steel stairs: Section 05 50 00, METAL FABRICATIONS.
- B. Requirements for shop painting: Section 09 91 00, PAINTING.
- C. Metal Stair Framing: Section 05 12 00, STRUCTURAL STEEL FRAMING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Show fabrication details, installation, connections, material, and size of members.

1.4 APPLICATION PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation.
- B. American Society for Testing and Materials (ASTM):
 - A36/A36M-05.....Structural Steel
 - A47-99 (R2004).....Ferritic Malleable Iron Castings
 - A48-03.....Gray Iron Castings
 - A53-06.....Pipe, Steel, Black and Hot-Dipped Zinc-Coated
Welded and Seamless
 - A307-07.....Carbon Steel Bolts and Studs, 60000 psi Tensile
Strength
 - A501-01.....Standard Specification for Hot-Formed Welded and
Seamless Carbon Steel Structural Tubing
 - A653/653M-07.....Steel Sheet, Zinc Coated (Galvanized) or Zinc
Alloy Coated (Galvannealed) by the Hot-Dip
Process
 - A563-07.....Carbon and Alloy Steel Nuts
 - A1008-07.....Steel, Sheet, Cold-Rolled, Carbon, Structural,
High-Strength, Low-Alloy
 - A786/A786M-00.....Rolled Steel Floor Plates

A1011-04.....Steel, Sheet and Strip, Strip, Hot-Rolled
Carbon, Structural, High-Strength, Low-Alloy
F1554-02a1.....Standard Specification for Anchor Bolts, Steel,
36, 55, and 105-ksi Yield Strength

C. American Welding Society (AWS):

D1.1-04.....Structural Welding Code-Steel
D1.3-98.....Structural Welding Code-Sheet Steel

D. The National Association of Architectural Metal Manufacturers (NAAMM)
Manuals:

Metal Bar Gratings (ANSI/NAAMM MBG 531-00)
AMP521-01.....Pipe Railing Manual, Including Round Tube

E. American Iron and Steel Institute (AISI):

2001.....Design of Cold-Formed Steel Structural Members

PART 2 - PRODUCTS

2.1 DESIGN CRITERIA

- A. Structural design, fabrication and assembly in accordance with requirements of NAAMM Metal Stairs Manual, except as otherwise specified or shown.
- B. Design pipe railings in accordance with NAAMM Pipe Railing Manual for 900 N (200 pounds) in any direction at any point.
- C. Design for assembly with all field bolted connections.

2.2 MATERIALS

- A. Steel Pipe: ASTM A53, Standard Weight, zinc coated.
- B. Steel Grating: Metal plank type grating Fed Spec RR-G-1602
- C. Sheet Steel: ASTM A1008.
- D. Structural Steel Channels and Angles: ASTM A36.
- E. Steel Floor Plate: ASTM 786.
- F. Steel Plate: ASTM A1011.
- G. Iron Castings: ASTM A48, Class 30.
- H. Malleable Iron Castings: ASTM A47.
- I. Bolts: ASTM A307, Hot Dip Galvanized
- J. Threaded Rod Anchors: ASTM F1554, Grade 55.
- K. Threaded Rod Bracing: ASTM A307.

2.3 FABRICATION GENERAL

- A. Fasteners:
 - 1. Conceal bolts and screws wherever possible.
- B. Welding:
 - 1. Structural steel, AWS D1.1 and sheet steel, AWS D1.3.

2. Where possible, locate welds on unexposed side.
 3. Grind exposed welds smooth and true to contour of welded member.
 4. Remove welding splatter.
- C. Remove sharp edges and burrs.

2.4 RAILINGS

- A. Fabricate railings, including handrails, from steel pipe.
1. Connections may be standard fittings designed for welding, or coped or mitered pipe with full welds.
- B. Return ends of handrail to wall and close free end.
- C. Provide standard terminal castings where fastened to newel.
- D. Space intermediate posts not over four feet on center between end posts.
- E. Fabricate handrail brackets from cast malleable iron.
- F. Provide standard terminal fittings at ends of post and rails.

2.5 CLOSED RISER STAIRS

- A. Provide treads, risers, landings, railings, stringers, headers and other supporting members.
- B. Provide pre-fabricated treads for stair runs as indicated on the Drawings.
- C. Provide pre-fabricated planks for stair landings as indicated on the Drawings.
- D. Fabricate risers from sheet steel.
- E. Fabricate stringers, headers, and other supporting members from structural steel.
- F. Construct newel posts of steel tubing having wall thickness not less than 5 mm (3/16-inch), with forged steel caps and drops.

2.6 FINISH

- A. Hot Dip Galvanize in Accordance with ASTM A123.
- B. Fabricate steel grating treads and platforms in accordance with requirements of NAAMM Metal Bar Grating Manuals.
- C. Provide abrasive nosing on treads and edge of platforms at head of stairs.
- D. Provide toe plates on platforms where shown.
- E. Painted finish per Section 09 91 00, PAINTING.
1. Color per Section 09 06 00, SCHEDULE FOR FINISHES.

PART 3 - EXECUTION

3.1 STAIR INSTALLATION

- A. Provide hangers and struts required to support the loads imposed.
- B. Perform job site welding and bolting as specified for shop fabrication.

- C. Set stairs and other members in position and secure to structure as shown.
- D. Install stairs plumb, level and true to line.

3.2 RAILING INSTALLATION

- A. Install standard terminal fittings at ends of posts and rails.
- B. Secure brackets, posts and rails to steel by bolting, secure posts at concrete by setting in sleeves filled with commercial non-shrink grout.
- C. Set rails horizontal or parallel to rake of stairs to within 3 mm in 3650 mm (1/8-inch in 12 feet).
- D. Set posts plumb and aligned to within 3 mm in 3650 mm (1/8-inch in 12 feet).

3.3 FIELD PAINTING

- A. Touch up abraded galvanized areas with zinc rich paint as specified in section 09 91 00, PAINTING.

- - - E N D - - -

**SECTION 06 10 00
ROUGH CARPENTRY**

PART 1 - GENERAL**1.1 DESCRIPTION:**

Section specifies wood blocking, sheathing, nailers, and rough hardware.

1.2 RELATED WORK:

- A. Gypsum sheathing: Section 09 29 00, GYPSUM BOARD.
- B. Cement board sheathing: Section 06 16 63, CEMENTITIOUS SHEATHING.
- C. Penetrations through fire rated construction: Section 07 84 00, FIRESTOPPING.
- D. Framing: Sections 05 40 00, COLD-FORMED METAL FRAMING and 09 22 16, NON-STRUCTURAL METAL FRAMING.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings showing framing connection details, fasteners, connections and dimensions.

1.4 PRODUCT DELIVERY, STORAGE AND HANDLING:

- A. Protect lumber and other products from dampness both during and after delivery at site.
- B. Pile lumber in stacks in such manner as to provide air circulation around surfaces of each piece.
- C. Stack plywood and other board products so as to prevent warping.
- D. Locate stacks on well drained areas, supported at least 150 mm (6 inches) above grade and cover with well ventilated sheds having firmly constructed over hanging roof with sufficient end wall to protect lumber from driving rain.

1.5 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.
- B. American Forest and Paper Association (AFPA):
National Design Specification for Wood Construction
NDS-05.....Conventional Wood Frame Construction
- C. American Institute of Timber Construction (AITC):
A190.1-02.....Structural Glued Laminated Timber
- D. American Society of Mechanical Engineers (ASME):
B18.2.1A-96(R2005).....Square and Hex Bolts and Screws
B18.2.2-87(R2005).....Square and Hex Nuts

- B18.6.1-81 (R97).....Wood Screws
- B18.6.4-98(R2005).....Thread Forming and Thread Cutting Tapping Screws
and Metallic Drive Screws
- E. American Plywood Association (APA):
- E30-03.....Engineered Wood Construction Guide
- F. American Society for Testing And Materials (ASTM):
- A47-99(R2004).....Ferritic Malleable Iron Castings
- A48-03.....Gray Iron Castings
- A653/A653M-07.....Steel Sheet Zinc-Coated (Galvanized) or Zinc-
Iron Alloy Coated (Galvannealed) by the Hot Dip
Process
- C954-04.....Steel Drill Screws for the Application of Gypsum
Board or Metal Plaster Bases to Steel Studs from
0.033 inch (2.24 mm) to 0.112-inch (2.84 mm) in
thickness
- C1002-04.....Steel Self-Piercing Tapping Screws for the
Application of Gypsum Panel Products or Metal
Plaster Bases to Wood Studs or Metal Studs
- D143-94(R2004).....Small Clear Specimens of Timber, Method of
Testing
- D1760-01.....Pressure Treatment of Timber Products
- D2559-04.....Adhesives for Structural Laminated Wood Products
for Use Under Exterior (Wet Use) Exposure
Conditions
- D3498-03.....Adhesives for Field-Gluing Plywood to Lumber
Framing for Floor Systems
- F844-07.....Washers, Steel, Plan (Flat) Unhardened for
General Use
- F1667-05.....Nails, Spikes, and Staples
- G. Federal Specifications (Fed. Spec.):
- MM-L-736C.....Lumber; Hardwood
- H. Commercial Item Description (CID):
- A-A-55615.....Shield, Expansion (Wood Screw and Lag Bolt Self
Threading Anchors)
- I. Military Specification (Mil. Spec.):
- MIL-L-19140E.....Lumber and Plywood, Fire-Retardant Treated
- J. Truss Plate Institute (TPI):
- TPI-85.....Metal Plate Connected Wood Trusses
- K. U.S. Department of Commerce Product Standard (PS)
- PS 1-95.....Construction and Industrial Plywood

PS 20-05.....American Softwood Lumber Standard

PART 2 - PRODUCTS

2.1 LUMBER:

- A. Unless otherwise specified, each piece of lumber bear grade mark, stamp, or other identifying marks indicating grades of material, and rules or standards under which produced.
 - 1. Identifying marks in accordance with rule or standard under which material is produced, including requirements for qualifications and authority of the inspection organization, usage of authorized identification, and information included in the identification.
 - 2. Inspection agency for lumber approved by the Board of Review, American Lumber Standards Committee, to grade species used.
- B. Structural Members: Species and grade as listed in the AFPA, National Design Specification for Wood Construction having design stresses as shown.
- C. Lumber Other Than Structural:
 - 1. Unless otherwise specified, species graded under the grading rules of an inspection agency approved by Board of Review, American Lumber Standards Committee.
 - 2. Framing lumber: Minimum extreme fiber stress in bending of 1100.
 - 3. Furring, blocking, nailers and similar items 100 mm (4 inches) and narrower Standard Grade; and, members 150 mm (6 inches) and wider, Number 2 Grade.
- D. Sizes:
 - 1. Conforming to Prod. Std., PS20.
 - 2. Size references are nominal sizes, unless otherwise specified, actual sizes within manufacturing tolerances allowed by standard under which produced.
- E. Moisture Content:
 - 1. At time of delivery and maintained at the site.
 - 2. Boards and lumber 50 mm (2 inches) and less in thickness: 19 percent or less.
 - 3. Lumber over 50 mm (2 inches) thick: 25 percent or less.
- F. Fire Retardant Treatment:
 - 1. Mil Spec. MIL-L-19140 with piece of treated material bearing identification of testing agency and showing performance rating.
 - 2. Treatment and performance inspection, by an independent and qualified testing agency that establishes performance ratings.
- G. Preservative Treatment:
 - 1. Do not treat Heart Redwood and Western Red Cedar.

2. Treat wood members and plywood exposed to weather or in contact with plaster, masonry or concrete, including framing of open roofed structures; sills, sole plates, furring, and sleepers that are less than 600 mm (24 inches) from ground; nailers, edge strips, blocking, crickets, curbs, cant, vent strips and other members used in connection with roofing and flashing materials.
3. Treat other members specified as preservative treated (PT).
4. Preservative treat by the pressure method complying with ASTM D1760, except any process involving the use of Chromated Copper arsenate (CCA) for pressure treating wood is not permitted.

2.2 PLYWOOD

- A. Comply with Prod. Std., PS 1.
- B. Bear the mark of a recognized association or independent inspection agency that maintains continuing control over quality of plywood which identifies compliance by veneer grade, group number, span rating where applicable, and glue type.
- C. Sheathing:
 1. APA rated Exposure 1 or Exterior; panel grade CD or better.

2.3 STRUCTURAL-USE PANELS

- A. Comply with APA.
- B. Bearing the mark of a recognized association or independent agency that maintains continuing control over quality of panel which identifies compliance by end use, Span Rating, and exposure durability classification.
- C. Wall and Roof Sheathing:
 1. APA Rated sheathing panels, durability classification of Exposure 1 or Exterior Span Rating of 16/0 or greater for supports 400 mm (16 inches) on center and 24/0 or greater for supports 600 mm (24 inches) on center.

2.4 ROUGH HARDWARE AND ADHESIVES:

- A. Anchor Bolts:
 1. ASME B18.2.1 and ANSI B18.2.2 galvanized, 13 mm (1/2 inch) unless shown otherwise.
 2. Extend at least 200 mm (8 inches) into masonry or concrete with ends bent 50 mm (2 inches).
- B. Miscellaneous Bolts: Expansion Bolts: C1D, A-A-55615; lag bolt, long enough to extend at least 65 mm (2-1/2 inches) into masonry or concrete. Use 13 mm (1/2 inch) bolt unless shown otherwise.
- C. Washers
 1. ASTM F844.

2. Use zinc or cadmium coated steel or cast iron for washers exposed to weather.

D. Screws:

1. Wood to Wood: ANSI B18.6.1 or ASTM C1002.
2. Wood to Steel: ASTM C954, or ASTM C1002.

E. Nails:

1. Size and type best suited for purpose unless noted otherwise. Use aluminum-alloy nails, plated nails, or zinc-coated nails, for nailing wood work exposed to weather and on roof blocking.
2. ASTM F1667:
 - a. Common: Type I, Style 10.
 - b. Concrete: Type I, Style 11.
 - c. Barbed: Type I, Style 26.
 - d. Underlayment: Type I, Style 25.
 - e. Masonry: Type I, Style 27.

F. Adhesives:

1. For structural laminated Wood: ASTM D2559.

PART 3 - EXECUTION

3.1 INSTALLATION OF FRAMING AND MISCELLANEOUS WOOD MEMBERS:

A. Conform to applicable requirements of the following:

1. AFPA WCD-number 1, Manual for House Framing for nailing and framing unless specified otherwise.
2. APA for installation of plywood or structural use panels.
3. ASTM F 499 for wood underlayment.

B. Fasteners:

1. Nails.
 - a. Nail in accordance with the Recommended Nailing Schedule as specified in AFPA Manual for House Framing. Select nail size and nail spacing sufficient to develop adequate strength for the connection without splitting the members.
 - b. For sheathing, select length of nails sufficient to extend 25 mm (1 inch) into supports.
 - c. Use eight penny or larger nails for nailing through 25 mm (1 inch) thick lumber and for toe nailing 50 mm (2 inch) thick lumber.
 - d. Use 16 penny or larger nails for nailing through 50 mm (2 inch) thick lumber.
 - e. Select the size and number of nails in accordance with the Nailing Schedule.
2. Bolts:
 - a. Fit bolt heads and nuts bearing on wood with washers.

- b. Countersink bolt heads flush with the surface of nailers.
- c. Embed in concrete and solid masonry or use expansion bolts.
Special bolts or screws designed for anchor to solid masonry or concrete in drilled holes may be used.
- d. Use toggle bolts to hollow masonry or sheet metal.
- e. Use bolts to steel over 2.84 mm (0.112 inch, 11 gage) in thickness. Secure wood nailers to vertical structural steel members with bolts, placed one at ends of nailer and 600 mm (24 inch) intervals between end bolts. Use clips to beam flanges.
- 3. Drill Screws to steel less than 2.84 mm (0.112 inch) thick.
 - a. ASTM C1002 for steel less than 0.84 mm (0.033 inch) thick.
 - b. ASTM C 954 for steel over 0.84 mm (0.033 inch) thick.
- 4. Power actuated drive pins may be used where practical to anchor to solid masonry, concrete, or steel.
- 5. Do not anchor to wood plugs or nailing blocks in masonry or concrete. Use metal plugs, inserts or similar fastening.
- 6. Screws to Join Wood:
 - a. Where shown or option to nails.
 - b. ASTM C1002, sized to provide not less than 25 mm (1 inch) penetration into anchorage member.
 - c. Spaced same as nails.
- C. Set sills or plates level in full bed of mortar on masonry or concrete walls.
 - 1. Space anchor bolts 1200 mm (4 feet) on centers between ends and within 150 mm (6 inches) of end. Stagger bolts from side to side on plates over 175 mm (7 inches) in width.
 - 2. Use shims of slate, tile or similar approved material to level wood members resting on concrete or masonry. Do not use wood shims or wedges.
 - 3. Closely fit, and set to required lines.
- D. Cut notch, or bore in accordance with NFPA Manual for House-Framing for passage of ducts wires, bolts, pipes, conduits and to accommodate other work. Repair or replace miscut, misfit or damaged work.
- E. Blocking and Nailers:
 - 1. Install blocking, nailers, and grounds where shown.
 - 2. Use longest lengths practicable.
 - 3. Use fire retardant treated wood blocking where shown at openings and where shown or specified.
 - 4. Layers of Blocking or Plates:
 - a. Stagger end joints between upper and lower pieces.

- b. Nail at ends and not over 600 mm (24 inches) between ends.
 - c. Stagger nails from side to side of wood member over 125 mm (5 inches) in width.
- F. Sheathing:
- 1. Use plywood or structural-use panels for sheathing.
 - 2. Lay panels with joints staggered, with edge and ends 3 mm (1/8 inch) apart and nailed over bearings as specified.
 - 3. Set nails not less than 9 mm (3/8 inch) from edges.
 - 4. Install 50 mm by 100 mm (2 inch by 4 inch) blocking spiked between joists, rafters and studs to support edge or end joints of panels.
 - 5. Match and align sheathing which is an extension of work in place to existing.

- - - E N D - - -

**SECTION 06 16 63
CEMENTITIOUS SHEATHING**

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies cement board sheathing applied to frame wall construction, ready to receive subsequent finishes.

1.2 RELATED WORK

- A. Penetrations through fire rated construction: Section 07 84 00, FIRESTOPPING.
- B. Waterproofing: Section 07 13 00, SHEET WATERPROOFING.
- C. Ceramic Tile: Section 09 30 13, CERAMIC / PORCELAIN TILING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples: 1. Cement board panels, 200 mm by 200 mm (8 inches by 8 inches), minimum size.
 - 2. Fasteners, each type used.
 - 3. Reinforcing tape for joints 300 mm (12 inches) long.
 - 4. Water barrier backing, 300 mm (12 inches) square.
- C. Product Data:
 - 1. Cement board sheathing.
 - 2. Reinforcing tape.
 - 3. Fasteners.

1.4 DELIVERY AND STORAGE

- A. Deliver materials in containers with labels legible and intact.
- B. Store materials so as to prevent damage or contamination.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American National Standards Institute (ANSI):
 - A108.11-1999.....Interior Installation of Cementitious Backer Units
 - A118.9-1999.....Cementitious Backer Units
- C. American Society for Testing and Materials (ASTM):
 - C954-04.....Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness.
 - D226-06.....Asphalt-Saturated Organic Felt Used in Roofing and Waterproofing.

D4586-07.....Asphalt Roof Cement, Asbestos-Free

D. Federal Specifications (FS):

UU-B-790.....Building Paper, Vegetable Fiber INT AMD 1 (Kraft,
Waterproofed, Water Repellant and Fire Resistant)

PART 2 - PRODUCTS

2.1 CEMENT BOARD SHEATHING

A. Conform to ANSI A118.9, except physical property requirements defined in Table 1 changed to not less than the minimum values stated below.

B. Property Minimum Average Value

1. Water Absorption by Weight, ASTM D1037	20 percent maximum
2. Flame Spread	5
3. Smoke Density	0
4. Thickness	13 mm (1/2 inch)
5. Minimum Width	800 mm (32 inches)

2.2 ACCESSORY MATERIALS

A. Steel Drill Screws: ASTM C954. Modified for flat head. Bugle head not acceptable.

B. Organic Felt: ASTM D226, Type II, 13.6 kg (30 lb).

C. Roof Cement: ASTM D4586

D. Joint Reinforcing Tape:

1. Minimum 100 mm (4-inches) wide open mesh alkali resistant.
2. Glass fiber mesh polymer coated as recommended by Cement Board manufacturer.

E. Water Barrier: FS UU-B-790. Type I (Barrier paper), Grade D (Water-vapor permeable). Other products meeting or exceeding the Federal specification for a water barrier with water vapor permeability are acceptable.

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS

A. Do not install units when temperature is below 4.5 degrees Celsius (40 degrees F).

B. Do not install joint reinforcing tape when temperature is below 10 degrees Celsius (50 degrees F).

3.2 INSTALLATION

A. Remove wrapping and separate to allow air circulation for not less than seven days before installation.

B. Installing Water Barrier over Framing Members:

1. Apply roof cement or tape to framing members sufficient to adhere and support water barrier.
2. Use either organic felt or water barrier.

3. Apply barrier shingle fashion with horizontal joints lapped not less than 50 mm (2 inches). Lap end joints over framing, not less than 100 mm (4 inches) cemented together with roof cement, stagger end joints.
4. Do not leave over 300 mm (12-inch) wide strip exposed when work is stopped.
5. Coordinate with installation of flashing to lap water barrier over flashing. Install weeps every 600 mm (24 inches) or as detailed, directly above flashing. Provide for clear exit of water to exterior.
6. Repair torn or cut barrier with barrier patch spanning framing space cemented to surface along top and side edges.

C. Installing Cement Board Units:

1. Apply cement board sheathing immediately over water barrier in accordance with ANSI A108.11, with rounded edges and rough side to exterior, except as specified otherwise.
2. Secure units to framing members with screws spaced not more than 200 mm (8 inches) on center and not closer than 13 mm (1/2-inch) from the edge of the unit.
3. Install screws so that the screw heads do not penetrate the surface of unit.
4. Install 13 mm (1/2-inch) wide horizontal control joints at floors and vertical control joints not over 4.87 m (16 feet) on center unless shown otherwise, maintain alignment.
5. Stop units at edges of building expansion joints.
6. Minimum bearing over framing members: 19 mm (3/4-inch.)

D. Joint and Surface Treatment: Apply joint reinforcing tape over joints, exposed edges, and corners using adhesive recommended by manufacturer.

E. Leave surface flush and ready to receive subsequent finishes.

3.3 PROTECTION AND REPAIR

- A. Protect board with temporary coverings against moisture until subsequent finish is applied.
- B. Patch and repair damaged surface prior to application of subsequent finish.
 1. Fill cracks.
 2. Replace loose, spalling or missing joint finish.
 3. Replace broken or damaged boards.

- - - E N D - - -

**SECTION 07 01 50.19
PREPARATION FOR RE-ROOFING**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Roof tear-off, partial roof tear-off, temporary roofing membrane removal of base flashings on existing construction in preparation to receive new roofing membrane.
- B. Existing Membrane Roofing System: Roofing membrane, with related insulation, surfacing, and components and accessories between deck and roofing membrane.

1.2 RELATED WORK

- A. Use of the premises and phasing requirements: Section 01 00 00 GENERAL REQUIREMENTS.
- B. Temporary construction and environmental-protection measures for reroofing preparation: Section 01 00 00 GENERAL REQUIREMENTS
- C. HVAC equipment removal and reinstallation: Division 23 sections.
- D. Electrical equipment disconnection and reconnection: Division 26 sections.
- E. penetrations through existing roof deck: Section 07 84 00, FIRESTOPPING.

1.3 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.
- B. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):
 - ANSI/SPRI FX-1-01(R2006) Standard Field Test Procedure for
Determining the Withdrawal Resistance of
Roofing Fasteners.
- C. ASTM International (ASTM):
 - C208-08.....Cellulosic Fiber Insulating Board
 - C728-05.....Perlite Thermal Insulation Board
 - C1177/C1177M-08.....Standard Specification for Glass Mat Gypsum
Substrate for Use as Sheathing
 - C1278/C1278M-07.....Standard Specification for Fiber-Reinforced
Gypsum Panel
 - D1079-09.....Standard Terminology Relating to Roofing and
Waterproofing

- D. FM Approvals: RoofNav Approved Roofing Assemblies and Products.
- 4450-89.....Approved Standard for Class 1 Insulated Steel
Deck Roofs
- 4470-10.....Approved Standard for Class 1 Roof Coverings
- 1-28-09.....Loss Prevention Data Sheet: Design Wind Loads.
- 1-29-09.....Loss Prevention Data Sheet: Above-Deck Roof
Components
- 1-49-09.....Loss Prevention Data Sheet: Perimeter Flashing
- E. National Roofing Contractors Association: Roofing and Waterproofing
Manual

1.4 MATERIALS OWNERSHIP

- A. Assume ownership of demolished materials and remove from Project site and dispose of legally, unless indicated to be reused, reinstalled, or otherwise to remain VA's property.

1.5 DEFINITIONS

- A. Refer to ASTM D1079 and NRCA "The NRCA Roofing and Waterproofing Manual" for definition of terms.

1.6 QUALITY CONTROL

- A. Requirements of Division 07 roofing section for qualifications of roofing system and roofing insulation Installer; work of this section shall be performed by same Installer.
1. Where Project requirements include removal of asbestos-containing material, Installer must be legally qualified to perform the required work.
 2. Where Project requirements include work affecting existing roofing system to remain under warranty, Installer must be approved by warrantor of existing roofing system.
- B. Regulatory Requirements: Comply with governing EPA notification regulations. Comply with hauling and disposal regulations of authorities having jurisdiction.
- C. Reroofing Conference: Conduct conference at Project site.
1. Meet with COTR; and roofing Installer including project manager, superintendent, and foreman; and installers whose work interfaces with or affects reroofing.
 2. Review methods and procedures related to roofing system tear-off and replacement

1.7 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

- B. Manufacturer's Literature and Data:
 - 1. Recover boards.
- C. List of proposed infill materials.
- D. List of proposed temporary roofing materials.
- E. Fastener pull-out test report.
- F. Photographs or Videotape: Document existing conditions of adjacent construction including site improvements.
- G. Landfill Records: Indicate receipt and acceptance of hazardous wastes by a licensed landfill facility.
- H. Qualification Data: For Installer.
 - 1. Certificate indicating Installer is licensed to perform asbestos abatement.
 - 2. Certificate indicating Installer is approved by warrantor of existing roofing system.

1.8 PROJECT CONDITIONS

- A. VA will occupy portions of building below reroofing area. Conduct reroofing so VA's operations will not be disrupted.
 - 1. Coordinate work activities daily with the VA COTR.
 - 2. Provide the VA COTR with not less than 72 hours' notice of activities that may affect VA's operations.
- B. Protect building and landscaping from damage.
- C. Maintain access to existing walkways and adjacent occupied facilities.
- D. Weather Limitations: Proceed with reroofing preparation only when weather conditions permit Work to proceed without water entering existing roofing system or building.
- E. Hazardous Materials: Contractor may encounter hazardous materials such as asbestos-containing materials.
 - 1. Do not disturb materials suspected of containing hazardous materials. Notify the VA COTR. Hazardous materials shall be tested by Contractor and abated upon VA direction.
- F. Hazardous Materials: A report on the presence of hazardous materials is available to Contractor for review and use.
 - 1. Examine report to become aware of locations where hazardous materials are present, or are suspected to exist.

1.9 WARRANTY

- A. Existing Warranties: Remove, replace, patch, and repair materials and surfaces affected by reroofing, by methods and with materials acceptable to warrantor.

1. Notify warrantor of existing roofing system before proceeding, and upon completion of reroofing.
2. Obtain documentation verifying that existing roofing system has been inspected by warrantor and warranty remains in effect. Submit documentation at Project closeout.

PART 2 - PRODUCTS

2.1 INFILL MATERIALS

- A. Use infill materials matching existing membrane roofing system materials.

2.2 TEMPORARY ROOFING MATERIALS

- A. Design of temporary roofing and selection of materials are responsibilities of Contractor.

2.3 RECOVER BOARDS

- A. Insulation Serving as Recover Board: Requirements are specified in Section 07 22 00 ROOF AND DECK INSULATION.
- B. Fasteners: Factory-coated steel fasteners, No. 12 or 14, and metal or plastic plates listed in FM Approval's "RoofNav."

2.4 AUXILIARY REROOFING MATERIALS

- A. General: Auxiliary reroofing preparation materials recommended by roofing system manufacturer and compatible with components of existing and new membrane roofing system.
- B. Base Sheet Fasteners: Capped head, factory-coated steel fasteners, listed in FM Approval's "RoofNav."
- C. Metal Flashing Sheet: Metal flashing sheet is specified in Section 07 60 00 FLASHING AND SHEET METAL.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Protect existing membrane roofing system that is indicated not to be reroofed.
 1. Limit traffic and material storage to areas of existing roofing membrane that have been protected.
 2. Maintain temporary protection and leave in place until replacement roofing has been completed. Remove temporary protection on completion of reroofing.
- B. Coordinate with VA COTR to shut down air-intake equipment in the vicinity of the Work. Cover air-intake louvers before proceeding with reroofing work that could affect indoor air quality or activate smoke detectors in the ductwork.

1. Comply with VA's requirements for maintaining fire watch when temporarily disabling smoke detectors.
- C. During removal operations, have sufficient and suitable materials on-site to facilitate rapid installation of temporary protection in the event of unexpected rain.
- D. Maintain roof drains in functioning condition to ensure roof drainage at end of each workday. Prevent debris from entering or blocking roof drains and conductors. Use roof-drain plugs specifically designed for this purpose. Remove roof-drain plugs at end of each workday, when no work is taking place, or when rain is forecast.
 1. If roof drains are temporarily blocked or unserviceable due to roofing system removal or partial installation of new membrane roofing system, provide alternative drainage method to remove water and eliminate ponding.
 2. Do not permit water to enter into or under existing membrane roofing system components that are to remain.
- E. Verify that rooftop utilities and service piping have been shut off before beginning the Work.

3.2 ROOF TEAR-OFF

- A. General: Notify the VA each day of extent of roof tear-off proposed for that day and obtain authorization to proceed.
- B. Remove aggregate ballast from roofing membrane.
- C. Remove loose aggregate from aggregate-surfaced built-up bituminous roofing using a power broom.
- D. Remove pavers and accessories from roofing membrane. Store and protect pavers and accessories for reuse. Discard cracked pavers.
- E. Roof Tear-Off: Remove existing roofing membrane and other membrane roofing system components down to the deck.

Remove cover boards, roof insulation, or substrate boards.

 1. Dry bitumen and felts that are firmly bonded to concrete decks may remain. Remove wet or unadhered bitumen and felts.
 2. Comply with FM Approvals requirements for removal of excess asphalt from steel decks.
 3. Remove fasteners from deck or cut fasteners off slightly above deck surface and apply recover board prior to installing roof membrane.
- G. Partial Roof Tear-Off: Where indicated, remove existing roofing membrane and other membrane roofing system components down to the deck.
 1. Remove, cover boards, roof insulation, or substrate boards.

2. Dry bitumen and felts that are firmly bonded to concrete decks may remain. Remove wet or unadhered bitumen and felts.
3. Comply with FM Approvals requirements for removal of excess asphalt from steel decks.
4. Remove fasteners from deck or cut fasteners off slightly above deck surface and apply recover board prior to installing roof membrane.

3.3 DECK PREPARATION

- A. Inspect deck after tear-off or partial tear-off of membrane roofing system.
- B. Verify that concrete substrate is visibly dry and free of moisture. Test for capillary moisture by plastic sheet method according to ASTM D 4263. Do not proceed with roofing work if moisture condenses under the plastic sheet.
- C. If deck surface is not suitable for receiving new roofing or if structural integrity of deck is suspect, immediately notify the COTR. Do not proceed with installation until directed by the COTR.

3.4 INFILL MATERIALS INSTALLATION

- A. Immediately after removal of selected portions of existing membrane roofing system, and inspection and repair, if needed, of deck, fill in the tear-off areas to match existing membrane roofing system construction.
 1. Installation of infill materials is specified in Section 07 22 00, ROOF AND DECK INSULATION.
 2. Install new roofing membrane patch over roof infill area. If new roofing membrane is installed the same day tear-off is made, roofing membrane patch is not required.

3.5 TEMPORARY ROOFING MEMBRANE

- A. Install approved temporary roofing membrane over area to be reroofed.
- B. Remove temporary roofing membrane before installing new roofing membrane.
- C. Prepare the temporary roof to receive new roofing membrane according to approved temporary roofing membrane proposal. Restore temporary roofing membrane to watertight condition and sloping to roof drains. Obtain approval for temporary roof substrate from roofing membrane manufacturer and COTR before installing new roof.

3.6 EXISTING BASE FLASHINGS

- A. Remove existing base flashings around parapets, curbs, walls, and penetrations.

1. Clean substrates of contaminants such as asphalt, sheet materials, dirt, and debris.

B. Do not damage metal counter flashings that are to remain. Replace metal counter flashings damaged during removal with counter flashings specified in Section 07 60 00 FLASHING AND SHEET METAL.

3.7 FASTENER PULL-OUT TESTING

A. Retain independent testing and inspecting agency to conduct fastener pull-out tests according to SPRI FX-1, and submit test report to the COTR before installing new membrane roofing system.

1. Obtain COTR's approval to proceed with specified fastening pattern. The VA may furnish revised fastening pattern commensurate with pull-out test results.

3.8 RECOVER BOARD INSTALLATION

A. Install recover boards over, roof insulation with long joints in continuous straight lines and end joints staggered between rows. Loosely butt recover boards together and fasten to deck.

1. Fasten recover boards to resist wind-uplift pressure at corners, perimeter, and field of roof specified in Section 07 22 00, ROOF AND DECK INSULATION.

2. Install additional fasteners near board corners and edges as necessary to conform boards to substrate and to adjacent boards.

3.9 DISPOSAL

A. Collect demolished materials and place in containers. Promptly dispose of demolished materials. Do not allow demolished materials to accumulate on-site.

1. Storage or sale of demolished items or materials on-site is not permitted.

B. Transport and legally dispose of demolished materials off VA's property.

END OF SECTION

**SECTION 07 12 00
BUILT-UP BITUMINOUS WATERPROOFING**

PART 1 - GENERAL**1.1 DESCRIPTION:**

- A. This section specifies impervious built-up membranes of bituminous materials used for waterproofing.
- B. This section is part of a two section specification consisting of; Section 07 12 00 Built-up Bituminous Waterproofing and Section 07 13 14 Sheathing Membrane. Contractor shall use a combination of all two methods and products to provide a complete watertight building envelope and waterproofed openings. Typically, Bituminous Waterproofing applies to all exterior surfaces, and corners, and Sheathing Membrane applies to the entire building envelope and all exterior openings. This is a guideline only and the Contractor shall use the most appropriate method, as applicable, to achieve and guarantee a watertight installation.

1.2 RELATED WORK:

- A. Reglets: Section 07 60 00, FLASHING AND SHEET METAL.
- B. Wood Nailers: Section 06 10 00, ROUGH CARPENTRY.
- C. Cement Topping: Section 03 30 00, CAST-IN-PLACE CONCRETE.
- D. Sheathing: Section 09 29 00, GYPSUM BOARD.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data: Fiberboard, asphalt primer, felts and fabrics (each type to be used)
- C. Certificates: Indicating materials conform to contract specifications.

1.4 PRODUCT DELIVERY, STORAGE AND HANDLING:

- A. Deliver materials to job in manufacturer's original unopened containers with brand name marked thereon.
- B. Before proceeding with work, protect surfaces from excessive changes in temperature and protect piping, conduits and installed equipment and materials.

1.5 WARRANTY

- A. Waterproofing is subject to the terms of Article titled "Warranty of Construction", FAR Clause 52.246-21, except that warranty period is extended to two (2) years.

1.6 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
- C208-95 (R2001).....Cellulosic Fiber Insulating Board
 - D41-94 (2000).....Asphalt Primer Used in Roofing, Dampproofing, and Waterproofing
 - D43-00.....Coal Tar Primer used in Roofing, Dampproofing, and Waterproofing
 - D173-03.....Bitumen-Saturated Cotton Fabrics used in Roofing and Waterproofing
 - D226-97.....Asphalt-Saturated Organic Roofing Felt Used in Roofing and Waterproofing
 - D227-03.....Coal-Tar-Saturated Organic Roofing Felt Used in Roofing and Waterproofing
 - D449-03.....Asphalt Used in Dampproofing and Waterproofing
 - D450-96(R2006).....Coal Tar Pitch Used in Roofing, Dampproofing, and Waterproofing
 - D1327-04.....Bitumen-Saturated Woven Burlap Fabrics Used in Roofing and Waterproofing
 - D1668-97(R2006).....Glass Fabrics (Woven and Treated) for Roofing and Waterproofing
 - D2178-04.....Asphalt Glass Felt Used in Roofing and Waterproofing
 - D4022-07.....Coal Tar Roof Cement
 - D4586-07.....Asphalt Roof Cement, Asbestos-Free

PART 2 - PRODUCTS:**2.1 BITUMEN:**

- A. Asphalt: ASTM D449, Type I, for exterior work below grade, Type III for work above grade, where asphalt will be exposed to sunlight.
- B. Coal-Tar: ASTM D450, Type II.

2.2 FELTS AND FABRICS (FOR USE WITH ASPHALT):

- A. Cotton Fabric Asphalt-Saturated: ASTM D173.
- B. Organic Felt Asphalt-Saturated: ASTM D226, Type I.
- C. Glass Mat (Fabric) Asphalt-impregnated: ASTM D2178, Type IV.

2.3 FELTS AND FABRICS (FOR USE WITH COAL-TAR):

- A. Cotton Fabric Coal-Tar Saturated: ASTM D173.
- B. Organic Felt Coal-Tar Saturated: ASTM D227.

C. Burlap (Fabric) Coal-Tar Saturated: ASTM D1327.

D. Glass Fabric, Coal-Tar Treated: ASTM D1668.

2.4 PRIMER:

A. Use ASTM D41 for asphalt products.

B. Use ASTM D43 for coal-tar products.

2.5 FIBERBOARD:

ASTM C208, Type V, Class C, 13 mm (1/2-inch) thick.

2.6 CEMENT:

A. ASTM D4022 with coal tar products.

B. ASTM D4586 with asphalt products.

PART 3 - EXECUTION:

3.1 PREPARATION:

A. Do not apply waterproofing when ambient temperature is 4.4°C (40°F) or lower.

B. Cleaning and Filling:

1. Before applying waterproofing materials, clean surfaces smooth, firm and dry.

2. Remove high spots, depressions, loose and foreign particles; and fill all voids, joints and cracks with Portland cement mortar.

3. Surface shall be approved by COTR before waterproofing is started.

3.2 GENERAL:

A. Ventilation: Provide adequate ventilation for waterproofing installed in enclosed spaces.

B. Compatibility of Materials: Use coal-tar pitch with coal-tar-saturated felts and fabric. Use asphalt with asphalt-saturated felts and fabrics.

C. Temperature of Bitumen: Heat bitumen to flow freely when applied, but not above 190°C (375°F) for coal-tar, and not above 230°C (450°F) for asphalt.

D. Rate of Application: Apply primers at the rate of 0.4 L/m² (one gallon per 100 square feet) over concrete and parging. Apply coal-tar at the rate of 1.9 kg/m² (40 pounds per 100 square feet) and asphalt at the rate of 1.5 kg/m² (30 pounds per 100 square feet), for each mopping.

E. Number of Plies:

1. Membrane waterproofing shall consist of four plies of felt or fabric.

2. Install membrane by lapping each ply approximately three-quarters over the preceding ply.

3. Use appropriate width starting strips of felt or fabric at the starting line to provide four plies at the edge.

3.3 APPLICATION

A. Exterior Vertical Surfaces:

1. Start each ply at the bottom, placed vertically, in hot bitumen and complete prior to applying the next ply.
2. Overlap plies downward.
3. Lap each ply 100 mm (4 inches) at the end. Stagger end laps not less than 450 mm (18 inches) in relation to preceding layer.
4. Bitumen shall be applied to exterior vertical surfaces with cotton roller mops or other approved application devices.
5. Waterproofing membranes shall be installed vertically, shingle fashion, in the manner specified herein.
6. The membrane shall extend 50 mm (2 inches) from the outer edge of footing, across the top of the footing, and up foundation wall to approximately 100 mm (4 inches) below the finished grade.
7. Tops of the membranes shall be nailed to treated wood nailers set flush with the face of the wall and covered with two piles of fabric reinforcement. Nailing shall be 200 mm (8 inches) on centers on a line 38 mm (1-1/2 inches) below the top of the membranes.

B. Fabric Membrane Reinforcement:

1. Provide fabric membranes to reinforce felts at intersections.
2. Reinforcement shall consist of two plies of fabric membrane cemented in place and to each other with roofing cement not less than 2 mm (1/16 inch) thick for each coating.
3. At the intersection of slabs and vertical surfaces, extend the first ply at least 150 mm (6 inches) on the slab and 100 mm (4 inches) up the vertical surface.
4. At Intersections of two vertical surfaces, extend the first ply at least 250 mm (10 inches) on each side of the intersection.
5. The second ply shall lap the first by not less than 50 mm (two inches).

C. Flashing Flanges:

1. Prime flashing flanges of the sleeves of pipe and ducts penetrating the waterproofing membrane.
2. Allow primer to dry and strip flanges in with two fabric membrane collars cemented in place and to each other with bituminous plastic cement. The collars shall extend 100 mm and 150 mm (four and six inches), respectively, beyond the edge of the flanges, cover the flanges, and fit tight against the sleeve.

3. Waterproofing connecting with work exposed to the weather shall extend back of same, or be counter-flashed to form a watertight connection.

D. Clamping Devices:

At floor drains and elsewhere as indicated, extend membrane into clamping device set in heavy coating of bituminous roof cement and clamp securely.

E. Reglets:

1. Where indicated, install continuous reglets as specified in Section, 07 60 00, FLASHING AND SHEET METAL, to receive the exposed edges of membrane waterproofing.
2. After placement of waterproofing, completely fill reglets with bitumen.

F. Wood Nailers:

1. Where indicated, upper edges of membrane waterproofing shall be nailed to wood nailers and covered with two plies of fabric reinforcement.
2. Wood nailers are specified in Section 06 10 00, ROUGH CARPENTRY.

3.4 PROTECTIVE COVERING:

A. Fiberboard Protection of Waterproofing on Walls:

1. Install 13 mm (1/2-inch) thick fiberboard for protection of exterior membrane waterproofing walls and footings below grade.
2. Fiberboard shall extend full height of backfill.
3. Mop a coat of hot pitch or asphalt over membrane sufficient for installation of one piece of fiberboard and embed board therein.
4. Assure overall contact on vertical surfaces by use of a wooden mallet.
5. Repeat the operation in adjoining areas until protection is complete.
6. Adjoining boards shall have edges in moderate contact.
7. After protection boards are in place, mop exposed surfaces with hot pitch or asphalt, and fill joints.

B. Horizontal Surfaces: As soon as the application has thoroughly dried, apply protective cement topping specified under Section 03 30 00, CAST-IN-PLACE CONCRETE.

3.5 INSPECTION:

Do not cover waterproofed surfaces by other materials or backfill until the work is approved by COTR.

VA ROSEBURG

CORRECT SPD AND SURGICAL DEFICIENCIES

- - - E N D - - -

**SECTION 07 13 00
SHEET WATERPROOFING**

PART 1 - GENERAL**1.1 DESCRIPTION:**

This section specifies sheet waterproofing materials used for shower pan waterproofing in personnel showers.

1.2 QUALITY CONTROL:

Approval by the COTR is required of products of proposed manufacturers.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Sheet waterproofing.
 - 2. Printed installation instructions.
- C. Certificates:
 - 1. Sheet waterproofing manufacturer's approval of adhesive used.
 - 2. Waterproofing tests report indicating that water test as specified has been made for each shower area and that each area was found to be watertight.
- D. Samples:
 - 1. Sheet waterproofing, 150 mm (6 inches) square.
 - 2. Waterproofed building paper, 150 mm² (6 inches square).
 - 3. Adhesive, 0.24 L (1/2 pint).

1.4 PRODUCT DELIVERY, STORAGE AND HANDLING:

- A. Deliver materials to job in manufacturer's original unopened containers with brand name marked thereon.
- B. Unload and store so as to prevent injury to materials.
- C. Do not store material in areas where temperature is lower than 10°C (50°F), or where prolonged temperature is above 32°C (90°F).

1.5 WARRANTY

Shower pan waterproofing is subject to the terms of Article titled "Warranty of Construction", FAR clause 52.246-21, except that warranty period is extended to two years.

1.6 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced by basic designation only.
- B. Federal Specification (Fed. Spec.):

UU-B-790A INT AMD.....Building Paper, Vegetable Fiber: (Kraft,
Waterproof, Water Repellent ad Fire Resistant)

PART 2 - PRODUCTS

2.1 SHOWER PAN WATERPROOFING SHEET:

- A. Rubber type sheet formed of non-reinforced, homogeneous, impermeable, sheeting compound reduced to thermoplastic state, resistant to fungus, mildew and bacteria, not less than 1.5 mm (60 mils) thick.
- B. Asphaltic sheet formed with a laminated asphalt construction consisting of eight plies of Kraft paper bonded and saturated by seven layers of asphalt, reinforced with three layers of glass fibers and faced with polyethylene sheet; total weight 1.9 kg/m² (0.40 pounds per square foot).

2.2 ADHESIVES:

- A. As furnished by the manufacturer of the sheet waterproofing.
- B. Compatible with adjacent materials where contact occurs.

2.3 WATERPROOFED BUILDING PAPER:

Fed. Spec. UU-B-790, Type I, Grade C.

2.4 CONCRETE PATCHING COMPOUND:

- A. Portland cement base, acrylic polymer compound, manufactured specifically for resurfacing and leveling concrete floors.
- B. Have not less than the following physical properties:
 - 1. Compressive strength - 25 mPa (3500 psi).
 - 2. Tensile strength - 7 mPa (1000 psi).
 - 3. Flexural strength - 7 mPa (1000 psi).
 - 4. Density - 1.9.
- C. Capable of being applied in layers up to 50 mm (two inches) thick, being brought to a feather edge, and being troweled to a smooth finish.
- D. Ready for use in 48 hours after application.

PART 3 - EXECUTION

3.1 PREPARATION:

- A. Before installing shower pan waterproofing, adjoining surfaces shall be clean, smooth, firm and dry.
- B. Concrete surfaces shall be cured a minimum of seven days and be free from release agents, concrete curing agents, and other contaminants.
- C. Remove all high spots and loose and foreign particles and fill all voids, depressions joints and cracks with concrete patching compound.
- D. Ensure vertical surfaces have a continuous supportive back substrate for waterproofing.

3.2 INSTALLATION:

- A. Coat entire surfaces to receive shower pan waterproofing with adhesive spread at rate of 1 L/m² (one gallon per 40 square feet).
- B. Butt joints and cover with a strip of the waterproofing sheeting material eight inches in width and seal with adhesive.
- C. Carry sheeting up vertical surfaces not less than 4 inches above surface of shower floor. Carry over tops of curbs.
- D. Roll entire horizontal surfaces with 23 to 45 kg (50 to 100 pounds) roller and roll corners and vertical sections with a rubber roller to insure solid anchorage.
- E. Make cut out for floor drains and fit to drain for watertight assembly, coordinating with drain installation.

3.3 PROTECTION:

- A. When finish floor will not be immediately installed, protect waterproofing pan. Protect shower drains by installing temporary metal cap.
- B. Cover with 2 inches of sand or waterproofed building paper.
- C. Maintain protection until finished floor is placed.

3.4 WATER TEST:

- A. Test in presence of COTR for leaks before permanent finish is applied over shower pan waterproofing.
- B. Seal floor drain watertight and fill waterproofing pan with water to within approximately 25 mm (1 inch) of top of its vertical surfaces.
- C. When leakage occurs, repair waterproofing and repeat testing until no leakage occurs.
- D. Submit certificate to COTR of test results.

- - - E N D - - -

SECTION 07 13 14
SHEATHING MEMBRANE

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Sheathing membrane for installation over sheathing.
- B. This section is part of a two section specification consisting of;
Section 07 12 00 Built-up Bituminous Waterproofing and Section 07 13 14 Sheathing Membrane. Contractor shall use a combination of all two methods and products to provide a complete watertight building envelope and waterproofed openings. Typically, Bituminous Waterproofing applies to all exterior surfaces, and corners, and Sheathing Membrane applies to the entire building envelope and all exterior openings. This is a guideline only and the Contractor shall use the most appropriate method, as applicable, to achieve and guarantee a watertight installation.

1.2 REFERENCES

- A. ASTM D 1777 - Standard Test Method for Thickness of Textile Materials; 1996 (Reapproved 2002).
- B. ASTM D 3786 - Standard Test Method for Hydraulic Bursting Strength of Knitted Goods and Nonwoven Fabrics--Diaphragm Bursting Strength Tester Method; 1987.
- C. ASTM D 4533 - Standard Test Method for Trapezoid Tearing Strength of Geotextiles; 2004.
- D. ASTM D 4632 - Standard Test Method for Grab Breaking Load and Elongation of Geotextiles; 1991 (Reapproved 2003).
- E. ASTM D 5261 - Standard Test Method for Measuring Mass per Unit Area of Geotextiles; 1992 (Reapproved 2003).
- F. ASTM E 84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2005.
- G. ASTM E 96/E 96M - Standard Test Methods for Water Vapor Transmission of Materials; 2005.
- H. TAPPI T 460 - Air Resistance of Paper; Textile Association of the Pulp and Paper Industries; 2002.
- I. ASTM D 226 - Asphalt saturated organic felt.

1.3 WORK INCLUDED

- A. Provide building paper underlayment and flashing, with related concealed metal flashings and accessories as required for complete watertight installation.

- B. Provide self-adhering polymer modified bituminous sheet flashing system with low VOC primer and accessories as required for complete watertight seal at window penetrations, door penetrations, and other penetrations through building paper.

1.4 SYSTEM DESCRIPTION

- A. System: Intent is to provide all water barrier membranes, commonly called building paper, special sheet flashing systems at window penetrations, door penetrations, and other penetrations through building paper, and related concealed flashings.
- B. Special Coordination: Provide coordination of work of this section with installation of flashings for window and door openings, window and door assemblies, and finishes applied over building paper systems.
 - 1. It shall be Contractor's responsibility to coordinate work with Contract Documents to produce permanently waterproof building with systems designed to be fitted together and to function as a whole assembly.

1.5 QUALITY ASSURANCE

- A. Qualification of Installer: Minimum five year's successful experience in projects of similar scope including application of self adhering polymer modified bitumen sheet flashing system.
- B. Inspection Modified Bituminous Sheet Flashing System: Manufacturer's representative shall inspect work of Project on regular basis and provide certification waterproofing has been installed in accordance with manufacturer's recommendations.
- C. COTR shall review installation; do not cover building paper or sheet flashing until approved by the COTR.

1.6 WARRANTY

- A. Provide for correcting failure of building paper and sheet flashing underlayment systems to resist penetration of water.
- B. Repair building paper and sheet flashing underlayment systems and pay for or replace damaged materials or surfaces.
- C. Warranty Period: Two years.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Building Paper:
 - 1. Roofing and Siding Underlay: Un-perforated asphalt saturated organic felt, conforming to ASTM D226, Type I, commonly referred to as No. 15.

- a) Acceptable Manufacturers:
 - (1) Superior Metal Products.
 - (2) G.S. Roofing Products.
 - (3) Sika Corporation.
 - (4) Vapro Shield.
- 2. Fasteners: Type as recommended by system manufacturer or as required by applicable codes; minimum hot dipped galvanized.
- B. Membrane Flashing - Self Adhering Flashing use at window and door openings as indicated in Drawings.
 - 1. Fortifiber
 - a) Moistop E-Z Seal 35 mil
 - 2. W.R. Grace Construction Products
 - a) Vycor Plus 12-inch width;
 - 3. Vapro Shield
 - a) Vapro Flashing Sheets.
 - b) Vapro flashing factory formed corner.
- C. Waterproofing Membrane - Self Adhering Polymer Modified Bituminous Sheet Flashing Membrane: Conform with ASTM D1970. For use under decks and as required in Drawings.
 - 1. Type: Grace Construction Products, Vapro Shield, or approved equal.
 - a) Bituthene 4000, Primers and Edge Sealers: Types as recommended by system manufacturer for specific applications and as required to achieve complete watertight installation; including:
 - b) Bituthene Mastic
 - c) Bituthene Liquid Membrane
 - d) Protective Underlayment - Protection Board
- D. Concealed Metal Flashings Integral with Building Paper: Minimum 24 gage thick steel with minimum 0.90 oz/ft² galvanized coating; ASTM A361; provide 24 gage galvanized steel at heads of penetrations through siding as specified in Part 3.
 - 1. Fasteners: Standard round wire type of hot dipped galvanized steel; minimum 19/64" head diameter and 0.104" shank diameter; minimum 7/8" long.
 - 2. Window Sill Flashing: Metal Paw Flashin (ASTM E547) (AAM 502-90), Vapro Sill Saver, or approved equal.
- E. Plastic Cement: Cutback asphaltic type with mineral fiber components, for sealing and coating flashings in buildings; free of toxic solvents and free of asbestos.

1. Capable of setting within 24 hours at temperatures of approximately 75 degrees F and 50% R.H
- F. Lap Cement: Fibrated cutback asphaltic type, for use as adhesive in cold application of asphalt roofing or underlayment; free of toxic solvents and free of asbestos.
- G. Bituminous Paint: Acid and alkali resistant type; black color.
- H. Joint Sealers Integral with Building Paper: One part polyurethane or bitumen modified polyurethane, gun grade; types suitable for applications indicated.

2.2 CONCEALED METAL FLASHING FABRICATION

- A. Fabricate metal flashings as recommended by Sheet Metal and Air Conditioning Contractors National Association (SMACNA) "Sheet Metal Manual".
- B. Form flashings to drain water to exterior at roofing and siding construction for penetrations, sill and header flashings.
- C. Form sections square, true and accurate to size, in maximum possible lengths and free from distortion and other defects detrimental to appearance or performance.
- D. Hem exposed edges of metal flashings minimum 1/4" on underside.
- E. Apply bituminous paint on concealed surfaces of metal flashings.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Install building paper over surfaces which are dry, free of ridges, warps and voids which could damage paper.
- B. Coordinate installation with installation of components and items projecting through building paper.

3.2 CONCEALED METAL FLASHINGS INSTALLATION

- A. Install flashings as recommended by Sheet Metal and Air Conditioning Contractors National Association (SMACNA) "Sheet Metal Manual".
- B. Weatherlap joints minimum 4" and seal with plastic cement; secure in place with nails.
- C. Fastenings: Concealed in completed installation.

3.3 TYPICAL UNDERLAYMENT INSTALLATION

- A. Install building paper in accordance with recommendations of building paper manufacturer and of manufacturer's of products to cover building paper; comply with applicable code requirements.
 1. Layers: Provide two layers of building paper underlayment, weatherlapped for roofs and exterior cement plaster walls as

follows:

- a) Roofs: Provide two layers of building paper underlayment.
- b) Walls: Provide two layer of building paper underlayment, typical.
- 2. Secure underlayment in place, stagger joints between layers; lap ends minimum 6"; stagger end joints. Do not use double layer rolls of material.
- 3. Apply layer of membrane flashing sheet material extending minimum 18" from penetrations.
- B. Apply lap cement at rate of approximately 1-1/4 gallons per square on underlayment starter strip.
 - 1. Weatherlap items projecting through building paper and seal with plastic cement.
- C. Wall membrane installation. Provide polyurethane joint sealant where wall membrane abutts windows, doors, vents etc... If 2 layers are specified, provide joint sealants for both layers.

3.4 FIELD TESTING FOR WATER LEAKS IN FRAMED WALLS

- A. Field test waterproofing elements in frame buildings prior to application of siding materials over building paper and sheet flashing underlayments and prior to installation of wall and ceiling finishes on interior.
 - 1. Testing is not required for roofing building paper underlayments.
- B. Perform field testing of waterproofing elements in walls after inspections are completed.
- C. Test Procedures: Perform on exterior wall sections on which complete waterproofing systems are in place and over which no wall finishing systems are in place, and no interior walls and ceilings are in place.
 - 1. Each test shall include minimum three wall openings; exterior wall surfaces shall total minimum 300 square feet, and shall include minimum 20 lineal feet of wall sills.
- D. Procedures:
 - 1. Water testing shall be by hand held spray nozzle or gun able to produce spray pattern of 12" in width from distance of 18", with 3/4" garden hose; water to be supplied through variable pressure gage at gun intake at 30 to 35 psi pressure.
 - 2. Unless otherwise directed by COTR, gun shall be held 12" to 18" from wall and perpendicular to wall.
 - 3. Starting at lowest point in test area, move gun slowly back and

forth across approximately 5 foot sections of wall test area;
overlap spray pattern approximately 50% with each strike.

4. Move upward to above windows and doors.
5. Follow spray pattern with pass over all joints of wall barrier membrane system and of membrane to frames.
6. Move sideways to next 5 foot section, then upward to next floor level.
7. Prior to testing walls and openings above decks, water test joist/wall connections below decks; use upward spray from distance of approximately 24"; pass across under deck and back twice to simulate upward wind pattern.
8. Following completion of pattern spraying, rewet test area at 15 minute intervals, spraying from distance of 6 to 10 feet; keep wall wet for minimum 3 hours.
9. Throughout spraying period maintain constant inspection of walls from inside building; provide sufficient illumination throughout test area using adjustable lights to allow thorough inspection of interior surfaces for leaks.
 - a) Reinspect inside wall of test area at fifteen minute intervals for three hours.
10. Unless severe leakage occurs, continue spraying until full test area has been covered.
 - a) Record location and rate of all leaks, if any, for future analysis.
 - b) Report leaks observed within window and door assemblies separately; leaks within window and door assemblies shall not be used as evidence of failure of water testing of test area for water leaks in framed walls.

E. Evaluation of Test Findings:

1. If no leakage occurs within test area, test area waterproofing systems shall be judged acceptable.
2. If water leakage occurs, carefully remove layers of wall barrier membrane in vicinity of leak to expose specific leak source.
3. Determine and document sources and causes of water penetration.
4. If leak causes indicate deviation from Contract Documents and approved methods of waterproofing framed walls, adjust to bring into compliance.

F. Repair and Retesting:

1. Remove non-conforming waterproofing materials in area of defect.
2. Reconstruct waterproofing system for test area in conformance with Contract Documents and other requirements.
3. Repair procedures shall not involve replacement with non-approved methods.
4. Conduct tests on reconstructed areas in accordance with test procedures specified to confirm leak source has been eliminated.
5. If leak problems have not been resolved, report problem, with documentation, to the COTR.

END OF SECTION

**SECTION 07 21 13
THERMAL INSULATION**

PART 1 - GENERAL**1.1 DESCRIPTION:**

- A. This section specifies thermal and acoustical insulation for buildings.
- B. Acoustical insulation is identified by thickness and words "Acoustical Insulation".

1.2 RELATED WORK

- A. Insulation in connection with roofing and waterproofing: Section 07 22 00, ROOF AND DECK INSULATION.
- B. Safing insulation: Section 07 84 00, FIRESTOPPING.
- C. Framing: Sections: 05 40 00, COLD-FORMED METAL FRAMING and Section 09 22 16, NON-STRUCTURAL METAL FRAMING.
- D. Concrete-filled metal decks: Section 05 36 00, COMPOSITE METAL DECKING.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Insulation, each type used
 - 2. Adhesive, each type used.
 - 3. Tape
- C. Certificates: Stating the type, thickness and "R" value (thermal resistance) of the insulation to be installed.

1.4 STORAGE AND HANDLING:

- A. Store insulation materials in weathertight enclosure.
- B. Protect insulation from damage from handling, weather and construction operations before, during, and after installation.

1.5 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - C270-08.....Mortar for Unit Masonry
 - C516-08.....Vermiculite Loose Fill Thermal Insulation
 - C549-06.....Perlite Loose Fill Insulation
 - C552-07.....Cellular Glass Thermal Insulation.
 - C553-08.....Mineral Fiber Blanket Thermal Insulation for
Commercial and Industrial Applications
 - C578-08.....Rigid, Cellular Polystyrene Thermal Insulation

C591-08.....Unfaced Preformed Rigid Cellular
Polyisocynurate Thermal Insulation

C612-04.....Mineral Fiber Block and Board Thermal
Insulation

C665-06.....Mineral Fiber Blanket Thermal Insulation for
Light Frame Construction and Manufactured
Housing

C728-05.....Perlite Thermal Insulation Board

C954-07.....Steel Drill Screws for the Application of
Gypsum Panel Products or Metal Plaster Base to
Steel Studs From 0.033 (0.84 mm) inch to 0.112
inch (2.84 mm) in thickness

C1002-07.....Steel Self-Piercing Tapping Screws for the
Application of Gypsum Panel Products or Metal
Plaster Bases to Wood Studs or Steel Studs

D312-00(R2006).....Asphalt Used in Roofing

E84-08.....Surface Burning Characteristics of Building
Materials

F1667-05.....Driven Fasteners: Nails, Spikes and Staples.

PART 2 - PRODUCTS

2.1 INSULATION - GENERAL:

- A. Where thermal resistance ("R" value) is specified or shown for insulation, the thickness shown on the drawings is nominal. Use only insulation with actual thickness that is not less than that required to provide the thermal resistance specified.
- B. Where "R" value is not specified for insulation, use the thickness shown on the drawings.
- C. Where more than one type of insulation is specified, the type of insulation for each use is optional, except use only one type of insulation in any particular area.
- D. Insulation Products shall comply with following minimum content standards for recovered materials:

Material Type	Percent by Weight
Perlite composite board	23 percent post consumer recovered paper
Polyisocyanurate/polyurethane	
Rigid foam	9 percent recovered material
Foam-in-place	5 percent recovered material
Glass fiber reinforced	6 percent recovered material
Phenolic rigid foam	5 percent recovered material
Rock wool material	75 percent recovered material

The minimum-content standards are based on the weight (not the volume) of the material in the insulating core only.

2.2 EXTERIOR FRAMING OR FURRING INSULATION:

- A. Batt or Blanket: Optional.
- B. Mineral Fiber: ASTM C665, Type II, Class C, Category I where framing is faced with gypsum board.
- C. Mineral Fiber: ASTM C665, Type III, Class A where framing is not faced with gypsum board.

2.3 ACOUSTICAL INSULATION:

- A. Mineral Fiber Batt or Blankets: ASTM C665. Maximum flame spread of 25 and smoke development of 450 when tested in accordance with ASTM E84.
- B. Thickness as shown; of widths and lengths to fit tight against framing.

2.4 RIGID FOAM INSULATION:

- A. At bottom of slabs, and where shown.
- B. Expand Polystyrene (EPS): ASTM D6817.
- C. Produce rigid blocks with load bearing capacity of no less than 1050 IBS per square foot.
- D. Manufacturer Products: AFM Corporation, GeoFoam EPS 22 or approved equal.

2.5 FASTENERS:

- A. Staples or Nails: ASTM F1667, zinc-coated, size and type best suited for purpose.
- B. Screws: ASTM C954 or C1002, size and length best suited for purpose with washer not less than 50 mm (two inches) in diameter.
- C. Impaling Pins: Steel pins with head not less than 50 mm (two inches) in diameter with adhesive for anchorage to substrate. Provide impaling pins of length to extend beyond insulation and retain cap washer when washer is placed on the pin.

2.6 ADHESIVE:

- A. As recommended by the manufacturer of the insulation.
- B. Asphalt: ASTM D312, Type III or IV.
- C. Mortar: ASTM C270, Type 0.

2.7 TAPE:

- A. Pressure sensitive adhesive on one face.
- B. Perm rating of not more than 0.50.

PART 3 - EXECUTION**3.1 INSTALLATION - GENERAL**

- A. Install insulation with the vapor barrier facing the heated side, unless specified otherwise.
- B. Install rigid insulating units with joints close and flush, in regular courses and with cross joints broken.
- C. Install batt or blanket insulation with tight joints and filling framing void completely. Seal cuts, tears, and unlapped joints with tape.
- D. Fit insulation tight against adjoining construction and penetrations, unless specified otherwise.

3.2 EXTERIOR FRAMING OR FURRING BLANKET INSULATION:

- A. Pack insulation around door frames and windows and in building expansion joints, door soffits and other voids. Pack behind outlets around pipes, ducts, and services encased in walls. Open voids are not permitted. Hold insulation in place with pressure sensitive tape.
- B. Lap vapor retarder flanges together over face of framing for continuous surface. Seal all penetrations through the insulation.
- C. Fasten blanket insulation between metal studs or framing and exterior wall furring by continuous pressure sensitive tape along flanged edges.
- D. Ceiling Insulation and Soffit Insulation:
 - 1. At metal framing or ceilings suspension systems, install blanket insulation above suspended ceilings or metal framing at right angles to the main runners or framing. Tape insulation tightly together so no gaps occur and metal framing members are covered by insulation.
 - 2. In areas where suspended ceilings adjoin areas without suspended ceilings, install either blanket, batt, or mineral fiberboard extending from the suspended ceiling to underside of deck or slab above. Secure in place to prevent collapse or separation of hung blanket, batt, or board insulation and maintain in vertical position. Secure blanket or batt with continuous cleats to structure above.

3.3 RIGID FOAM INSULATION

- A. On the interior face of concrete walls and below concrete slabs where shown.
- B. Bond to solid surfaces with adhesive as recommended by insulation manufacturer.
- C. Overlap joints on layered installations to completely fill voids.
- D. Prepare top layer to receive concrete slab.

3.4 ACOUSTICAL INSULATION:

- A. Fasten blanket insulation between metal studs and wall furring with continuous pressure sensitive tape along edges or adhesive.
- B. Pack insulation around door frames and windows and in cracks, expansion joints, control joints, door soffits and other voids. Pack behind outlets, around pipes, ducts, and services encased in wall or partition. Hold insulation in place with pressure sensitive tape or adhesive.
- C. Do not compress insulation below required thickness except where embedded items prevent required thickness.
- D. Where acoustical insulation is installed above suspended ceilings install blanket at right angles to the main runners or framing. Extend insulation over wall insulation systems not extending to structure above.
- E. Where semirigid insulation is used which is not full thickness of cavity, adhere to one side of cavity maintaining continuity of insulation and covering penetrations or embedments in insulation.

- - - E N D - - -

**SECTION 07 22 00
ROOF AND DECK INSULATION**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Roof and deck insulation, vapor retarder, and cover board on new construction ready to receive roofing or waterproofing membrane.
- B. Repairs and alteration work to existing roof insulation.

1.2 RELATED WORK

- A. Wood cants, blocking, and edge strips: Section 06 10 00, ROUGH CARPENTRY.
- B. Concrete-filled Metal Deck: Section 05 36 00, COMPOSITE METAL DECKING.
- C. Perimeter, rigid, and batt or blanket insulation not part of roofing system: Section 07 21 13, THERMAL INSULATION.
- D. Sheet metal components and wind uplift requirements for roof-edge design: Section 07 60 00, FLASHING AND SHEET METAL.
- E. Penetrations through roof deck: Section 07 84 00, FIRESTOPPING.

1.3 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.
- B. American Society of Heating, Refrigeration and Air Conditioning (ASHRAE):
 - 90.1-07.....Energy Standard for Buildings Except Low-Rise Residential Buildings
- C. ASTM International (ASTM):
 - C208-08.....Cellulosic Fiber Insulating Board
 - C552-07.....Cellular Glass Thermal Insulation
 - C726-05.....Mineral Fiber Roof Insulation Board
 - C728-05.....Perlite Thermal Insulation Board
 - C1177/C1177M-08.....Standard Specification for Glass Mat Gypsum Substrate for Use as Sheathing
 - C1278/C1278M-07.....Standard Specification for Fiber-Reinforced Gypsum Panel
 - C1289-10.....Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board

- C1396/C1396M-09.....Standard Specification for Gypsum Board
- D41-05.....Asphalt Primer Used in Roofing, Dampproofing,
and Waterproofing
- D312-06.....Asphalt Used in Roofing
- D1970-09.....Standard Specification for Self-Adhering
Polymer Modified Bituminous Sheet Materials
Used as Steep Roofing Underlayment for Ice Dam
Protection
- D2178-04.....Asphalt Glass Felt Used in Roofing and
Waterproofing
- D2822-05.....Asphalt Roof Cement
- D4586-07.....Standard Specification for Asphalt Roof Cement,
Asbestos-Free
- E84-09.....Standard Test Method for Surface Burning
Characteristics of Building Material
- F1667-05.....Driven Fasteners: Nails, Spikes, and Staples
- D. FM Approvals: RoofNav Approved Roofing Assemblies and Products.
- 4450-89.....Approved Standard for Class 1 Insulated Steel
Deck Roofs
- 4470-10.....Approved Standard for Class 1 Roof Coverings
- 1-28-09.....Loss Prevention Data Sheet: Design Wind Loads.
- 1-29-09.....Loss Prevention Data Sheet: Above-Deck Roof
Components
- 1-49-09.....Loss Prevention Data Sheet: Perimeter Flashing
- E. National Roofing Contractors Association: Roofing and Waterproofing
Manual
- F. U.S. Department of Agriculture (USDA): USDA BioPreferred Catalog,
www.biopreferred.gov
- G. Underwriters Laboratories, Inc. (UL): Fire Resistance Directory (2009)
- H. U.S. Department of Commerce National Institute of Standards and
Technology (NIST):
- DOC PS 1-09.....U.S. Product Standard for Construction and
Industrial Plywood
- DOC PS 2-04.....Performance Standard for Wood-Based Structural-
Use Panels.

1.4 PERFORMANCE REQUIREMENTS

- A. Thermal Performance: Provide roof insulation meeting minimum overall
average R-value of 33, with minimum R-value at any location of 10.

- B. FM Approvals: Provide roof insulation complying with requirements in FM Approvals 4450 and 4470 as part of specified roofing system, listed in FM Approvals "RoofNav" as part of roofing system meeting Fire/Windstorm Classification in Division 07 roofing section.

1.5 QUALITY CONTROL

- A. Requirements of Division 07 roofing section for qualifications of roofing system insulation Installer; Work of this Section shall be performed by same Installer.
- B. Requirements of Division 07 roofing section for inspection of Work of this Section and qualifications of Inspector.
- C. Unless specified otherwise, comply with the recommendations of the NRCA "Roofing and Waterproofing Manual" applicable to insulation for storage, handling, and application.
- D. Requirements of roofing system uplift pressure design for specified roofing system.
- E. Requirements of applicable FM Approval for specified roofing system insulation attachment.
- F. Bio-Based Materials: Where applicable, provide products designated by USDA and meeting or exceeding USDA recommendations for bio-based content, and products meeting Rapidly Renewable Materials and certified sustainable wood content definitions; refer to www.biopreferred.gov.

1.6 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Product Data:
 - 1. Asphalt and adhesive materials, each type.
 - 2. Roofing cement, each type.
 - 3. Roof insulation, each type.
 - 4. Cover board, each type.
 - 5. Fastening requirements.
 - 6. Insulation span data for flutes of metal decks.
- C. Federal Sustainable Design Submittals:
 - 1. Product Data: For adhesives and sealants used inside the weatherproofing system, documentation including printed statement of VOC content.
 - 2. Product Data: For products having recycled content, documentation indicating percentages by weight of postconsumer and preconsumer

- recycled content. Include statement indicating cost for each product having recycled content.
3. Product Data for Federally-Mandated Bio-Based Materials: For roof materials, indicating USDA designation and compliance with definitions for bio-based products, Rapidly Renewable Materials, and certified sustainable wood content.
- D. Shop Drawings: Include plans, sections, details, and attachments.
1. Nailers, cants, and terminations.
 2. Layout of insulation showing slopes, tapers, penetration, and edge conditions.
- E. Samples:
1. Roof insulation, each type.
 2. Nails and fasteners, each type.
- F. Certificates:
1. Indicating type, thermal conductance, and minimum and average thickness of insulation.
 2. Indicating materials and method of application of insulation system meet the requirements of FM Approvals for specified roofing system.
- G. Laboratory Test Reports: Thermal values of insulation products.
- H. Layout of tapered roof system showing units required.
- I. Documentation of supervisors' and inspectors' qualifications.

1.7 DELIVERY, STORAGE AND MARKING

- A. Comply with the recommendations of the NRCA "Roofing and Waterproofing Manual" applicable to built-up roofing for storage, handling and installation requirements.

1.8 QUALITY ASSURANCE:

- A. Roof insulation on combustible or steel decks shall have a flame spread rating not greater than 75 and a smoke developed rating not greater than 150, exclusive of covering, when tested in accordance with ASTM E84, or shall have successfully passed FM Approvals 4450.
1. Insulation bearing the UL label and listed in the UL Building Materials Directory as meeting the flame spread and smoke developed ratings will be accepted in-lieu-of copies of test reports.
 2. Compliance with flame spread and smoke developed ratings will not be required when insulation has been tested as part of a roof construction assembly of the particular type used for this project and the construction is listed as fire-classified in the UL Building

Materials Directory or listed as Class I roof deck construction in the FM Approvals "RoofNav."

3. Insulation tested as part of a roof construction assembly shall bear UL or FM labels attesting to the ratings specified herein.

PART 2 - PRODUCTS

2.1 ADHESIVE MATERIALS

- A. Adhesive Materials, General: Adhesive and sealant materials recommended by roofing system manufacturer for intended use, identical to materials utilized in approved listed roofing system, and compatible with roofing membrane.
 1. Liquid-type adhesive materials shall comply with VOC limits of authorities having jurisdiction.
 2. Adhesives and sealants that are not on the exterior side of weather barrier shall comply with the following limits for VOC content when calculated according to 40 CFR 59, Subpart D (EPA Method 24):
 - a. Plastic Foam Adhesives: 50 g/L.
 - b. Multipurpose Construction Adhesives: 70 g/L.
 - c. Fiberglass Adhesives: 80 g/L.
 - d. Contact Adhesives: 80 g/L.
 - e. Other Adhesives: 250 g/L.
 - f. Nonmembrane Roof Sealants: 300 g/L.
 - g. Sealant Primers for Nonporous Substrates: 250 g/L.
 - h. Sealant Primers for Porous Substrates: 775 g/L.
- B. Primer: ASTM D41.
- C. Asphalt: ASTM D312, Type III or IV for vapor retarders and insulation.
- D. Modified Asphaltic Insulation Adhesive: Insulation manufacturer's recommended modified asphaltic, asbestos-free, cold-applied adhesive formulated to attach roof insulation to substrate or to another insulation layer.
- E. Bead-Applied Urethane Insulation Adhesive: Insulation manufacturer's recommended bead-applied, low-rise, one- or multicomponent urethane adhesive formulated to attach roof insulation to substrate or to another insulation layer.
- F. Full-Spread Applied Urethane Insulation Adhesive: Insulation manufacturer's recommended spray-applied, low-rise, two-component urethane adhesive formulated to attach roof insulation to substrate or to another insulation layer.

- G. Roof Cement: Asbestos free, ASTM D2822, Type I or Type II, ; or, D4586, Type I or Type II.

2.2 ROOF AND DECK INSULATION

- A. Roof and Deck Insulation, General: Preformed roof insulation boards approved by roofing manufacturer and listed as component of FM Approvals-approved roofing system.
- B. Polyisocyanurate Board Insulation: ASTM C1289, Type II, Class 1, Grade 2, felt or glass-fiber mat facer on both major surfaces.
- C. Cellular Glass Board Insulation: ASTM C552, Type IV, kraft-paper sheet faced.
- D. Perlite Board Insulation: ASTM C728, expanded perlite, cellulosic fibers, binders, and waterproofing agents with top surface seal coated.
- E. Cellulosic Fiber Board Insulation: ASTM C208, Type II, Grade 2 for single-ply roofing.
- F. Tapered Roof Insulation System:
1. Fabricate of mineral fiberboard, polyisocyanurate, perlite board, or cellular glass. Use only one insulation material for tapered sections. Use only factory-tapered insulation.
 2. Cut to provide high and low points with crickets and slopes as shown.
 3. Minimum thickness of tapered sections; 38 mm (1-1/2 inch).
 4. Minimum slope 1:48 (1/4 inch per 12 inches).
- G. Composite Nail Base Insulated Roof Sheathing:
1. Oriented-Strand-Board-Surfaced, Polyisocyanurate-Foam Sheathing: polyisocyanurate thermal insulation ASTM C1289, Type V, insulation thickness as indicated, with oriented strand board laminated to top surface.
 2. Oriented Strand Board: NBS DOC PS 1, Exposure 1, 11 mm (7/16 inch) thick.
 3. Bottom surface faced with felt facers.

2.3 INSULATION ACCESSORIES

- A. Glass (Felt): ASTM D2178, Type VI, heavy duty ply sheet.
- B. Cants and Tapered Edge Strips:
1. Insulation Cant Strips: ASTM C208, Type II, Grade 1, cellulosic-fiber insulation board.
 2. Tapered Edge Strips: 1:12 (one inch per foot), from 0 mm (0 inches), 300 mm to 450 mm (12 inches to 18 inches) wide.

- a. Cellulosic Fiberboard: ASTM C208.
 - b. Mineral Fiberboard: ASTM C726.
 - c. Perlite Board: ASTM C728.
- C. Vapor Retarder:
- 1. Glass-Fiber Felts: ASTM D2178, Type IV, asphalt impregnated.
 - 2. Self-Adhering Sheet Vapor Retarder: ASTM D1970, minimum of 1.0-mm- (40-mil-) thick, polyethylene film laminated to layer of rubberized asphalt adhesive, or 0.76- to 1.0-mm- (30- to 40-mil-) thick, polyethylene film laminated to layer of butyl rubber adhesive; maximum permeance rating of 6 ng/Pa x s x sq. m (0.1 perm).
- D. Cover Board:
- 1. Glass-mat, water-resistant gypsum substrate, ASTM C1177/C1177M, 16 mm (5/8 inch) thick, factory primed.
 - 2. Cellulosic-fiber insulation board, ASTM C208, Type II, Grade 2, 13 mm (1/2 inch) thick.
 - 3. Oriented Strand Board, DOC PS 2, Exposure 1, 11 mm (7/16 inch) thick.

2.4 FASTENERS

- A. Fasteners: Factory-coated steel fasteners and metal or plastic plates complying with FM Approvals 4470, designed for fastening substrate board to roof deck.
- B. Staples and Nails: ASTM F1667. Type as designated for item anchored and for substrate.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Comply with requirements of Division 07 roofing section.
- B. Examine roof deck surface to identify any voids, gaps, or bumps in deck that would not be suitable for insulation work.

3.2 PREPARATION

- A. Comply with requirements of Division 07 roofing section.
- B. Apply concrete patching compound throughout roof deck as required to fill any voids, gaps, and to achieve a smooth even surface suitable for insulation work.
- C. grind concrete bumps as required to achieve smooth even surface suitable for insulation work.

- D. Apply fire stopping systems at all deck penetrations per Section 07 84 00, FIRESTOPPING.

3.3 VAPOR RETARDER INSTALLATION

A. General:

1. Install continuous vapor retarder on roof decks where indicated.
2. At vertical surfaces, turn up vapor retarder to top of insulation or base flashing.
3. At all pipes, walls, and similar penetrations through vapor retarder, seal openings with roof cement to prevent moisture entry from below.
4. Seal penetrations with roof cement.

B. Cast in Place Concrete Decks, Except Insulating Concrete:

1. Prime deck as specified.
2. Apply two plies of asphalt saturated felt mopped down to deck.

C. Steel Deck:

1. Material and method of application of roofing systems used on metal decks shall meet the requirements of FM Approvals for Class I-A Insulated Steel Roof Deck.
2. Attach substrate board and subsequent components to meet the requirements of FM Approval's "RoofNav" listing for specified system meeting Fire/Windstorm Classification indicated in Division 07 roofing section.
3. Locate the long dimension edge joints to have solid bearing on top of decking ribs; do not cantilever over rib openings or flutes.

3.4 RIGID INSULATION INSTALLATION

A. Insulation Installation, General:

1. Install roof insulation in accordance with roofing system manufacturer's written instructions.
2. Install roof insulation in accordance with requirements of FM Approval's Listing for specified roofing system.
3. Base Sheet: Where required by roofing system, install one lapped base sheet specified in Division 07 roofing section by mechanically fastening to roofing substrate prior to installation of insulation.
4. Cant Strips: Install preformed insulation cant strips at junctures of roofing system with vertical construction.
5. Use same insulation as existing for roof repair and alterations unless specified otherwise.

B. Insulation Thickness:

1. Thickness of roof insulation shown on drawings is nominal. Actual thickness shall provide the average thermal resistance "R" value of not less than that specified in Performance Requirements Article.
2. Insulation on Metal Decks: Provide minimum thickness of insulation for metal decks recommended by the insulation manufacturer to span rib opening (flute size) of metal deck used. Support edges of insulation on metal deck ribs.
3. When thickness of insulation to be used is more or less than that shown on the drawings, make adjustments in the alignment and location of roof drains, flashing, gravel stops, fascias and similar items at no additional cost to the Government.
4. Where tapered insulation is used, the thickness of the insulation at high points and roof edges shall be as shown on the drawings; the thickness at the low point (drains) shall be not less than 38 mm (1-1/2 inches).
5. Use not less than two layers of insulation when insulation is 68 mm (2.7 inch) or more in thickness unless specified otherwise. Stagger joints minimum 150 mm (6 inches).

C. Lay insulating units with close joints, in regular courses and with cross joints broken. When laid in more than one layer, break joints of succeeding layers of roof insulation with those in preceding layer.

D. Lay units with long dimension perpendicular to the rolled (longitudinal) direction of the roofing felt.

E. Seal all cut edges at penetrations and at edges against blocking with bitumen or roof cement.

F. Cut to fit tight against blocking or penetrations.

G. Cover all insulation installed on the same day; comply with temporary protection requirements of Division 07 roofing section.

H. Installation Method:

1. Adhered Insulation:

- a. Prime substrate as required.
- b. Set each layer of insulation firmly in solid mopping of hot asphalt.
- c. Set each layer of insulation firmly in ribbons of bead-applied insulation adhesive.
- d. Set each layer of insulation firmly in uniform application of full-spread insulation adhesive.

2. Mechanically Fastened and Adhered Insulation:
 - a. Fasten first layer of insulation according to "Mechanically Fastened Insulation" requirements.
 - b. Fasten each subsequent layer of insulation according to "Adhered Insulation" requirements.
3. Cover Board: Install cover boards over insulation with long joints in continuous straight lines with staggered end joints. Offset cover board joints from insulation joints minimum 150 mm (6 inches). Fasten cover boards according to "Adhered Insulation" requirements.

- - - E N D - - -

SECTION 07 45 00**EXTERIOR ALUMINUM FACED COMPOSITE PANELS****PART 1: GENERAL****1.01 SCOPE**

- A. The extent of panel system work is indicated on the drawings and in these specifications.
- B. Panel system requirements include the following components:
 - a. Aluminum faced composite panels with mounting system. Panel mounting system including anchorages, shims, furring, fasteners, gaskets and sealants, related flashing adapters, and masking (as required) for a complete installation.
 - b. Parapet coping, soffits, sills, border, and filler items indicated as integral components of the panel system or as designed.

1.02 RELATED WORK

- A. Structural Steel: Section 05 12 00, STRUCTURAL STEEL FRAMING.
- B. Metal Stud Walls: Section 05 40 00, COLD-FORMED METAL FRAMING.
- C. Insulation: Section 07 21 13, THERMAL INSULATION.
- D. Metal flashing and counter flashing: Section 07 60 00, FLASHING AND SHEET METAL.
- E. Caulking and sealants: Section 07 92 00, JOINT SEALANTS.
- F. Sheathing: Section 09 29 00, GYPSUM BOARD.
- G. Waterproofing: Section 07 12 00, BUILT-UP BITUMINOUS WATERPROOFING and Section 07 13 14, SHEATHING MEMBRANE.
- H. Anchoring: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.03 QUALITY ASSURANCE

- A. Composite Panel Manufacturer shall have a minimum of 5 years experience in the manufacturing of this product.
- B. Composite Panel Manufacturer shall be solely responsible for panel manufacture and application of the finish.
- C. Fabricator/Installer shall have a minimum 5 years experience of metal panel work similar in scope and size to this project.
- D. Conduct field measurements prior to shop fabrication. Coordinate fabrication schedule with construction progress to avoid delay of work. Field fabrication may be allowed to ensure proper fit. Field fabrication shall be kept to an absolute minimum with the majority of the fabrication being done under controlled shop conditions.

- E. Provide shop drawings showing joint details for a structurally sound wall panel system that allows no uncontrolled water penetration on the inside face of the panel system as determined by ASTM E 331.
- F. Maximum deviation from vertical and horizontal alignment of erected panels: 6mm (1/4") in 6m (20') non-accumulative.
- G. Provide all components of the exterior panel system including, but not limited to attachment to sub-construction, panel to panel joinery, panel to dissimilar material joinery, and joint seal associated with the panel system.

1.04 REFERENCES

- A. Aluminum association:
 - 1. AA-M12C22A41: Anodized - Clear Coating
 - 2. AA-M12C22A44: Anodized - Color Coating
- B. American architectural manufacturers association:
 - 1. AAMA 508-05: Voluntary Test Method and Specification for Pressure Equalized Rain Screen Wall Cladding Systems
- C. American society for testing and materials:
 - 1. E 330 Structural Performance of Exterior Windows, Curtain Walls, and Doors Under the Influence of Wind Loads
 - 2. E 283 Rate of Leakage through Exterior Windows, Curtain Walls, and Doors
 - 3. D 1781 Climbing Drum Peel Test for Adhesives
 - 4. E 84 Surface Burning Characteristics of Building Materials
 - 5. D 1929 Standard Test for Ignition Properties of Plastics
 - 6. D 3363 Method for Film Hardness by Pencil Test
 - 7. D 2794 Resistance of Organic Coatings to the Effects of Rapid Deformation (Impact)
 - 8. D 3359 Methods for Measuring Adhesion by Tape Test
 - 9. D 2247 Practice for Testing Water Resistance of Coatings in 100% Relative Humidity
 - 10. B 117 Method of Salt Spray (Fog) Testing
 - 11. D 2244 Calculation of Color Differences from Instrumentally Measured Color Coordinates
 - 12. D 4214 Evaluating the Degree of Chalking of Exterior Paint Films
 - 13. D 822 Practice for Operating Light and Water Exposure Apparatus (Carbon-Arc Type) for Testing Paint, Varnish, Lacquer, and Related Products

14. D 1308 Effect of Household Chemicals on Clear and Pigmented Organic Finishes

D. International conference of building officials:

15. NFPA 285 Intermediate Scale Multi Story Test

1.05 SUBMITTALS

A. Submittals shall be in conformance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SUBMITTALS.

B. Samples:

1. Panel System Assembly: Two samples of each type of assembly. 304mm (12") x 304mm (12") minimum.
2. Two samples of each color or finish selected, 76mm (3") x 102mm (4") minimum.

C. Shop drawings:

Submit shop drawings showing project layout and elevations; fastening and anchoring methods; detail and location of joints, sealants, and gaskets, including joints necessary to accommodate thermal movement; trim; flashing; and accessories.

D. Affidavit certifying material meets requirements specified.

E. Two copies of manufacturer's literature for panel material.

F. Code compliance:

Documents showing product compliance with the national and local building code, including, but not be limited to, appropriate Evaluation Reports and/or test reports supporting the use of the product.

1.06 DELIVERY, STORAGE AND HANDLING

A. Protect finish and edges in accordance with panel manufacturer's recommendations.

B. Store material in accordance with panel manufacturer's recommendations.

1.07 WARRANTY

A. Exterior panel system is subject to the terms of Article titled "Warranty of Construction", FAR Clause 52.246-21, except that warranty period is extended to ten (10) years.

PART 2: PRODUCTS

2.01 PANELS

A. Composite panels:

1. ALUCOBOND Plus material manufactured by 3A Composites USA, Inc. 208 West 5th Street Benton, KY 42025 (800-626-3365 or 270-527-4200) or approved equal.

B. Thickness: 4MM (0.157")

C. Product performance:

1. Bond Integrity

When tested for bond integrity, in accordance with ASTM D 1781 (simulating resistance to panel delamination), there shall be no adhesive failure of the bond a) between the core and the skin nor b) cohesive failure of the core itself below the following values:

Peel Strength: 100 N·mm/mm (22.5 in lb/in) as manufactured
100 N·mm/mm (22.5 in lb/in) after 21 days soaking
in water at 70°F (21°C)

2. Fire Performance:

ASTM E 84 Max. Flame Spread 25, Max. Smoke Developed 450
NFPA 285 Panels shall meet requirements of the
Intermediate Scale Multi Story Test

D. Finishes:

A. Coil coated Fluoro Ethylene - Alkyl Vinyl Ether (FEVE) resin in conformance with the following general requirements of AAMA 2605.

a. Color: Bone White-30.

b. Coating Thickness:

a. Colors: 1.0 mil (±0.2 mil)

c. Hardness: ASTM D 3363; HB minimum using Eagle Turquoise Pencil.

d. Impact:

a. Test method: ASTM D 2794; Gardner Variable Impact Tester with 5/8" (15.9mm) mandrel.

b. Coating shall withstand reverse impact of 1.5 in·lb per mil substrate thickness (0.681 m·kg per mm substrate).

c. Coating shall adhere tightly to metal when subjected to #600 Scotch Tape pick-off test. Slight minute cracking permissible. No removal of film to substrate.

e. Adhesion:

a. Test Method: ASTM D 3359.

b. Coating shall not pick off when subjected to a grid of 11 cuts x 11 cuts, 1/16" apart, and taped with #600 Scotch Tape.

f. Humidity Resistance

- a. Test Method: ASTM D 2247.
- b. No formation of blisters when subjected to condensing water fog at 100% relative humidity and 100°F (37.8°C) for 4000 hours.
- g. Salt Spray Resistance
 - a. Test Method: ASTM B 117; Expose coating system to 4000 hours, using 5% NaCl solution.
 - b. Corrosion creepage from scribe line: 1/16" max. (1.6mm).
 - c. Minimum blister rating of 8 within the test specimen field.
- h. Weather Exposure
 - a. Outdoor:
 - 1. Ten-year exposure at 45° angle facing south Florida exposure.
 - 2. Maximum color change of 5 Delta E units as calculated in accordance with ASTM D 2244.
 - 3. Maximum chalk rating of 8 in accordance with ASTM D 4214.
 - 4. No checking, crazing, adhesion loss.
- i. Chemical Resistance:
 - a. ASTM D 1308 utilizing 10% Muriatic Acid for an exposure time of 15 minutes. No loss of film adhesion or visual change when viewed by the unaided eye.
 - b. ASTM D 1308 utilizing 20% Sulfuric Acid for an exposure time of 18 hours. No loss of film adhesion or visual change when viewed by the unaided eye.
 - c. AAMA 2605 utilizing 70% reagent grade Nitric Acid vapor for an exposure time of 30 minutes. Maximum color change of 5 Delta E units as calculated in accordance with ASTM D 2244.

2.02 PANEL FABRICATION

A. Composition:

Two sheets of aluminum sandwiching a solid core of extruded thermoplastic material formed in a continuous process with no glues or adhesives between dissimilar materials. The core material shall be free of voids and/or air spaces and not contain foamed insulation material. Products laminated sheet by sheet in a batch process using glues or adhesives between materials shall not be acceptable.

B. Aluminum face sheets:

Thickness: 0.5mm (0.0197") (nominal)
Alloy: AA3000 Series (Painted material)

C. Panel weight:

4mm (0.157"): 7.57 kg/m² (1.55 lb/ft²)

D. Tolerances

1. Panel Bow: Maximum 0.8% of any 1828mm (72") panel dimension.
2. Panel Dimensions: Field fabrication shall be allowed where necessary, but shall be kept to an absolute minimum. All fabrication shall be done under controlled shop conditions when possible.
3. Panel lines, breaks, and angles shall be sharp, true, and surfaces free from warp and buckle.
4. Maximum deviation from panel flatness shall be 1/8" (3.2mm) in 5'0" (1.52m) on panel in any direction for assembled units. (Non-accumulative - No Oil Canning)

E. System characteristics

1. System must not have any visible fasteners, telegraphing or fastening on the panel faces or any other compromise of a neat and flat appearance.
2. System shall comply with the applicable provisions of the "Metal Curtain Wall, Window, Storefront, and Entrance Guide Specifications Manual" by AAMA and ANSI/AAMA 302.9 requirements for aluminum windows.
3. Fabricate panel system to dimension, size, and profile indicated on the drawings based on a design temperature of 70°F (21°C).
4. Fabricate panel system so that no restraints can be placed on the panel, which might result in compressive skin stresses. The installation detailing shall be such that the panels remain flat regardless of temperature change and at all times remain air and water tight.
5. The finish side of the panel shall have a removable plastic masking applied prior to fabrication, which shall remain on the panel during fabrication, shipping, and erection to protect the surface from damage.

F. System type

1. Rout and Return Wet:
System must provide a wet seal (caulked) reveal joint as detailed on drawings. The sealant type shall be as specified in

Section 07 92 00, JOINT SEALANTS, and with foamed type backer rod as indicated on architectural drawings.

G. System performance

A. Composite panels shall be capable of withstanding building movements and weather exposures based on the following test standards.

a. Wind Load:

1. Panels shall be designed to withstand the Design Wind Load based upon the local building code, but in no case less than 20 lb/ft^2 (959 N/m^2) and 30 lb/ft^2 (1438 N/m^2) on parapet and corner panels. Wind load testing shall be conducted in accordance with ASTM E 330 to obtain the following results.
2. Normal to the plane of the wall between supports, deflection of the secured perimeter-framing members shall not exceed $L/175$ or $3/4"$ (19mm), whichever is less.
3. Normal to the plane of the wall, the maximum panel deflection shall not exceed $L/60$ of the full span.
4. Maximum anchor deflection shall not exceed $1/16"$ (1.6mm).
5. At 1-1/2 times design pressure, permanent deflections of framing members shall not exceed $L/100$ of span length and components shall not experience failure or gross permanent distortion. At connection points of framing members to anchors, permanent set shall not exceed $1/16"$ (1.6mm).

b. Air/Water System Test:

1. Air Infiltration - When tested in accordance with ASTM E 283, air infiltration at 1.57 lb/ft^2 (75 Pa) must not exceed $0.06 \text{ ft}^3/\text{min. per ft}^2$ of wall area ($305 \text{ cm}^3/\text{s per m}^2$ of wall area).
2. Water Infiltration - Water infiltration is defined as uncontrolled water leakage through the exterior face of the assembly. No water infiltration shall occur in any system under a differential static pressure of 6.24 lb/ft^2 (300 Pa) after 15 minutes of exposure in accordance with ASTM E 331.

2.03 ACCESSORIES

- A. Extrusions, formed members, sheet, and plate shall conform with ASTM B 209 and the recommendations of the manufacturer.
- B. Panel stiffeners, if required, shall be structurally fastened or restrained at the ends and shall be secured to the rear face of the composite panel with silicone of sufficient size and strength to maintain panel flatness. Stiffener material and/or finish shall be compatible with the silicone.
- C. Sealants and gaskets within the panel system shall be as per manufacturer's standards to meet performance requirements.
- D. Fabricate flashing materials from 0.030" (0.76mm) minimum thickness aluminum sheet painted to match the adjacent panel system where exposed. Provide a lap strap under the flashing at abutted conditions and seal lapped surfaces with a full bed of non-hardening sealant.
- E. Fasteners (concealed non-corrosive): Fasteners as recommended by panel manufacturer. Do not expose fasteners except where unavoidable and then match finish of adjoining metal.

PART 3: EXECUTION

3.01 INSPECTION

- A. Surfaces to receive panels shall be even, smooth, sound, clean, dry and free from defects detrimental to work. Notify contractor in writing of conditions detrimental to proper and timely completion of the work. Do not proceed with erection until unsatisfactory conditions have been corrected.
- B. Surfaces to receive panels shall be structurally sound.

3.02 INSTALLATION

- A. Erect panels plumb, level, and true.
- B. Attachment system shall allow for the free and noiseless vertical and horizontal thermal movement due to expansion and contraction for a material temperature range of -20°F to +180°F (-29°C to +82°C). Buckling of panels, opening of joints, undue stress on fasteners, failure of sealants or any other detrimental effects due to thermal movement will not be permitted.

Fabrication, assembly, and erection procedure shall account for the ambient temperature at the time of the respective operation.
- C. Panels shall be erected in accordance with an approved set of shop drawings.

- D. Anchor panels securely per engineering recommendations and in accordance with approved shop drawings to allow for necessary thermal movement and structural support.
- E. Conform to panel fabricator's instructions for installation of concealed fasteners.
- F. Do not install component parts that are observed to be defective, including warped, bowed, dented, abraded, and broken members.
- G. Do not cut, trim, weld, or braze component parts during erection in a manner which would damage the finish, decrease strength, or result in visual imperfection or a failure in performance. Return component parts which require alteration to shop for refabrication, if possible, or for replacement with new parts.
- H. Separate dissimilar metals and use gasketed fasteners where needed to eliminate the possibility of corrosive or electrolytic action between metals.

3.03 ADJUSTING AND CLEANING

- A. Remove and replace panels damaged beyond repair as a direct result of the panel installation.
- B. Repair panels with minor damage.
- C. Remove masking (if used) as soon as possible after installation.
- D. Protect panels until project completion.
- E. Make sure weep holes and drainage channels are unobstructed and free of dirt and sealants.
- F. Provide final cleaning per panel manufacturer's recommendation. .

- - - E N D - - -

SECTION 07 53 23
ETHYLENE-PROPYLENE-DIENE-MONOMER ROOFING

PART 1 GENERAL**1.1 DESCRIPTION**

- A. Ethylene Propylene Diene Monomer (EPDM) sheet roofing adhered to roof deck.
- B. Fire rated roof system.

1.2 RELATED WORK

- A. Treated wood framing, blocking, and nailers: Section 06 10 00, ROUGH CARPENTRY.
- B. Roof Insulation: Section 07 22 00, ROOF AND DECK INSULATION.
- C. Metal cap flashings, copings, fascias, and expansion joints: Section 07 60 00, FLASHING AND SHEET METAL, and Section 07 72 00, ROOF ACCESSORIES.
- D. Roof hatches, equipment supports, and dome type skylights: Section 07 72 00, ROOF ACCESSORIES.
- E. Mechanical equipment supports: Section 23 34 00, HVAC FANS and Section 23 31 00, HVAC DUCTS AND CASINGS, Section 23 37 00, AIR OUTLETS AND INLETS.

1.3 QUALITY ASSURANCE

- A. Approved applicator by the membrane roofing system manufacturer, and certified by the manufacturer as having the necessary expertise to install the specific system.
- B. Pre-Roofing Meeting:
 - 1. Upon completion of roof deck installation and prior to any roofing application, hold a pre-roofing meeting arranged by the Contractor and attended by the Roofing Inspector, Material Manufacturers Technical Representative, Roofing Applicator, Contractor, and COTR.
 - 2. Discuss specific expectations and responsibilities, construction procedures, specification requirements, application, environmental conditions, job and surface readiness, material storage, and protection.
 - 3. Inspect roof deck at this time to:
 - a. Verify that work of other trades which penetrates roof deck is completed.
 - b. Determine adequacy of deck anchorage, presence of foreign material, moisture and unlevel surfaces, or other conditions that would prevent application of roofing system from commencing or cause a roof failure.
 - c. Examine samples and installation instructions of manufacturer.

d. Perform pull out test of fasteners (See paragraph 3.2).

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Applicators approval certification by manufacturer.
- C. Shop Drawings:
 - 1. Sheet membrane layout.
 - 2. Fastener pattern, layout, and spacing requirements.
 - 3. Termination details.
- D. Manufacturers installation instructions revised for project.
- E. Samples:
 - 1. Sheet membrane: One 150 mm (6 inch) square piece.
 - 2. Sheet flashing: One 150 mm (6 inch) square piece.
 - 3. Fasteners: Two, each type.
 - 4. Splice or Welded seam: Two 300 mm (12 inch) square samples of splice or welded seams to represent quality of field splice or welded seams.

1.5 DELIVERY, STORAGE AND HANDLING

- A. Deliver, store, and handle materials as specified by manufacturer.
- B. Store volatile materials separate from other materials with separation to prevent fire from damaging the work, or other materials.

1.6 WARRANTY

Roofing work subject to the terms of the Article "Warranty of Construction", FAR clause 52.246-21, except extend the warranty period to twenty (20) years.

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - A167-99 (R2004).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip
 - B209-07.....Aluminum and Aluminum-Alloy Sheet and Plate
 - D751-06.....Coated Fabrics
 - D2103-05.....Polyethylene Film and Sheeting
 - D2240-05.....Rubber Property - Durometer Hardness
 - D3884-07.....Abrasive Resistance of Textile Fabrics (Rotary Platform, Double-Head Method)
 - D4637-04.....EPDM Sheet Used in Single-Ply Roof Membrane
 - D4586-07.....Asphalt Roof Cement, Asbestos Free
 - E96-05.....Water Vapor Transmission of Materials

E108-07.....Fire Tests of Roof Coverings

G21-96 (R2002).....Resistance of Synthetic Polymeric Materials to
Fungi

C. National Roofing Contractors Association (NRCA):

Fifth Edition - 05.....The NRCA Roofing and Waterproofing Manual.

D. Federal Specifications (Fed. Spec.)

FF-S-107C(2).....Screws, Tapping and Drive

FF-S-111D(1).....Screw, Wood

UU-B-790A.....Building Paper, Vegetable Fiber (Kraft,
Waterproofed, Water Repellent and Fire
Resistant)

E. Factory Mutual Engineering and Research Corporation (FM):

Annual Issue.....Approval Guide Building Materials

F. Underwriters Laboratories, Inc (UL):

Annual Issue.....Building Materials Directory

Annual Issue.....Fire Resistance Directory

G. Warnock Hersey (WH):

Annual Issue.....Certification Listings

PART 2 - PRODUCTS

2.1 EPDM SHEET ROOFING

A. Conform to ASTM D4637, Type I, Grade 1, white color.

B. Additional Properties:

PROPERTY	TEST METHOD	REQUIREMENT
Shore A Hardness	ASTM D2240	55 to 75 Durometer
Water Vapor Permeance	ASTM E96	Minimum 0.14 perms Water Method
Fungi Resistance	ASTM G21	After 21 days, no sustained growth or discoloration.
Fire Resistance	ASTM E108 Class A	No Combustion Beyond Flame/Heat Source

C. Thickness:

1. Use 90 mil 2.184 mm (0.086-inch) thick sheet for adhered system.

D. Pipe Boots:

1. Molded EPDM designed for flashing of round penetrations, 200 mm (8
inch) minimum height.

2. Color same as roof membrane.

2.2 EPDM FLASHING SHEET

A. Conform to ASTM D4637, Type I, Grade 1, Class U, unreinforced, color,
same as roof membrane modified as specified for flashing.

- B. Self curing EPDM flashing, adaptable to irregular shapes and surfaces.
- C. Minimum thickness 1.5 mm (0.060-inch).

2.3 MISCELLANEOUS ROOFING MEMBRANE MATERIALS

- A. Sheet roofing manufacturers specified products.
- B. Splice Adhesive: For roofing and flashing sheet.
- C. Lap Sealant: Liquid EPDM rubber for roofing sheet exposed lap edge.
- D. Bonding Adhesives: Neoprene, compatible with roofing membrane, flashing membrane, insulation, metals, concrete, and masonry for bonding roofing and flashing sheet to substrate. As specified by roof membrane manufacturer.
- E. Fastener Sealer: One part elastomeric adhesive sealant.
- F. Temporary Closure Sealers (Night Sealant): Polyurethane two part sealer.
- G. Primers, Splice Tapes, t-Joint Covers, Cleaners, and Butyl Rubber Seals: As specified by roof membrane manufacturer.
- H. Asphalt Roof Cement: ASTM D4586.
- I. Splice tape: EPDM strip 3-inch wide at splice and 6-inch wide at flashings.

2.4 FASTENERS

- A. Fasteners and washers required for securing sheet roofing to deck:
 - 1. Steel stress plate washers as required by sheet roofing manufacturer:
 - a. Coated against corrosion.
 - b. Separate or attached to fastener.
 - c. Approximately 50 mm (2 inch) diameter or 40 mm x 65 mm (1-1/2 by 2-1/2 inches) rectangular plate with rounded corners, minimum thickness 0.6 mm (0.023-inch).
 - 2. Fastening strip or batten strip for securing roof membrane to deck:
 - a. Stainless steel strip: ASTM A167 type 302 or 304, minimum 0.5 mm (0.018-inch) thick.
 - b. Aluminum strip: ASTM B209, minimum 2.4 mm (0.094-inch) thick.
 - c. Rounded corners on strips.
 - d. Form strips 38 mm (1-1/2 inches) wide, 3000 mm (10 feet) maximum length with 6 mm x 10 mm (1/4 by 3/8 inch) punched slotted holes at 100 mm (4 inch) centers; centered on width of strip. Punch holes 2 mm (1/16 inch) larger than fastener shank when shank is larger than 5 mm (3/16 inch).
 - 3. Steel Deck or Framed Parapets: Screws; Fed Spec FF-S-107, hardened nylon screw or steel screw coated to resist corrosion, self drilling, anti-backout thread design. Minimum pullout resistance of 135 Kg (300 pounds), minimum thread penetration of 13 mm (1/2 inch).

4. Gypsum, Insulating Concrete, and Structural Cement Fiber Decks:
Diverging or hooking point fastener, anti-spin fitting; or specifically designed for anchorage to deck as recommended by roofing membrane manufacturer, coated to resist corrosion, minimum pullout resistance of 200 Kg (450 pounds).
5. Concrete and Masonry Wall Surfaces:
 - a. Nail penetration 13 mm (1/2 inch).
6. Wood:
 - a. Screws; Fed. Spec. FF-S-111, Type I, Style 2.5, coated to resist corrosion, length to provide 19 mm (3/4 inch) minimum penetration.
 - b. Nails: Barbed shank, galvanized.
7. Washers: Neoprene backed metal washer 28 mm (1-1/8 inch) minimum diameter.
8. To Sheet Metal: Self tapping screw; Fed. Spec. FF-S-107, 2 mm (No. 14), sheet metal screw, minimum thread penetration of 6 mm (1/4 inch); stainless steel.
- B. Pipe Compression Clamp or Drawband:
 1. Stainless steel or cadmium plated steel drawband.
 2. Worm drive clamp device.
- C. Surface mounted base flashing clamp strip:
 1. Stainless steel strip, ASTM A167, type 302 or 304, dead soft temper, minimum 0.5 mm (0.018-inch) thick.
 2. Aluminum strip: ASTM B209 24 mm (.094-inch) thick.
 3. For exposed location, form strips with 6 mm (1/4 inch) wide top edge bent out 45 degrees (for sealant) from 40 mm (1-1/2 inch) wide material; 2400 mm (8 feet) maximum length with slotted 6 mm x 10 mm (1/4 by 3/8-inch) holes punched at 200 mm (8 inch) centers, centered between bend and bottom edges.
 4. For locations covered by cap flashings, form strips 30 mm (1-1/4 inch) wide, 2400 mm (8 feet) maximum length with slotted holes 6 mm x 10 mm (1/4 by 3/8 inch) punched at 200 mm (8 inch) centers, centered on strip width.

2.5 VAPOR RETARDER OR SEPARATION SHEETS

- A. Polyethylene film: ASTM D2103, 0.2 mm (6 mils) thick.
- B. Building Paper: Fed. Spec. UU-B-790.
 1. Water vapor resistance: Type I, Grade A, Style 4, reinforced.
 2. Water vapor permeable: Type I, Grade D, Style 4, reinforced.

2.6 FLEXIBLE TUBING

- A. Closed cell neoprene, butyl polyethylene, vinyl, or polyethylene tube or rod.

- B. Diameter approximately 1-1/2 times joint width.

2.7 WALKWAY PADS

- A. Rubber walkway pad approximately 450 mm x 450 mm (30 by 30 inches) square or manufacturers standard size with rounded corners.
- B. Approximately 13 mm (1/2 inch) thick.
- C. Ultraviolet light stabilized.

PART 3 - EXECUTION

3.1 GENERAL

- A. Do not apply if deck will be used for subsequent work platform, storage of materials, or staging or scaffolding will be erected thereon unless protection provided to distribute loads less than one-half compression resistance of roofing system materials.
 - 1. Curbs, blocking, edge strips, and other components to which roofing and base flashing is attached in place ready to receive insulation and, roofing.
 - 2. Coordinate roof operation with sheet metal work and roof insulation work so that insulation and flashing are installed concurrently to permit continuous roofing operations.
 - 3. Complete installation of flashing, insulation, and roofing in the same day except for the area where temporary protection is required when work is stopped.
- B. Phased construction is not permitted. The complete installation of roofing system is required in the same day except for area where temporary protection is required when work is stopped. Complete installation includes pavers and ballast for ballasted systems.
- C. Dry out surfaces, including the flutes of metal deck, that become wet from any cause during progress of the work before roofing work is resumed.
- D. Apply materials only to dry substrates.
- E. Except for temporary protection specified, do not apply materials during damp or rainy weather, during excessive wind conditions, nor while moisture (dew, snow, fog, ice, or frost) is present in any amount in or on the materials.
 - 1. Do not apply materials to substrate having temperature of 4°C (40 degrees F) or less, or when materials applied with the roof require higher application temperature.
 - 2. Do not apply materials when the temperature is below 4°C (40 degrees F).
- F. Temporary Protection:

1. Install temporary protection consisting of a temporary seal and water cut-offs at the end of each day's work and when work is halted for an indefinite period or work is stopped when precipitation is imminent.
2. Temporarily seal exposed surfaces of insulation within the roofing membrane.
3. Do not leave insulation surfaces or edges exposed.
4. Use polyethylene film or building paper to separate roof sheet from bituminous materials.
5. Apply the temporary seal and water cut off by extending the roof membrane beyond the insulation and securely embedding the edge of the roof membrane in 6 mm (1/4 inch) thick by 50 mm (2 inches) wide strip of temporary closure sealant (night sealant) and weight edge with sandbags, to prevent displacement; space sandbags not over 2400 mm (8 foot) centers. Check daily to insure temporary seal remains watertight. Reseal open areas and weight down.
6. Before the work resumes, cut off and discard portions of the roof membrane in contact with roof cement or bituminous materials.
 - a. Cut not less than 150 mm (6 inches) back from bituminous coated edges or surfaces.
 - b. Remove temporary polyethylene film or building paper.
7. Remove and discard sandbags contaminated with bituminous products.
8. For roof areas that are to remain intact and that are subject to foot traffic and damage, provide temporary wood walkways with notches in sleepers to permit free drainage.
9. Provide 2 mm (6 mil) polyethylene sheeting or building paper cover over roofing membrane under temporary wood walkways and adjacent areas. Round all edges and corners of wood bearing on roof surface.

3.2 PREPARATION

- A. Test pull out resistance of fasteners in deck in the presence of the COTR before starting roofing work. Tests are not required for wood.
 1. Test applicable fastener type in applicable deck.
 2. Install fasteners through a sample of the insulation, if any is to be used, into the structural deck.
 3. Test the pull out resistance with a pull out tester.
 4. Test one fastener in each deck level and one for every 230 m² (2500 square feet) of deck type and level.
 5. Test at locations designated by COTR.
 6. Do not proceed with the roofing work if the pull out resistance of the fasteners is less than specified.
 7. Test results:

- a. Repeat tests using other type fasteners or use additional fasteners to stay within the pullout load resistance criteria.
- b. Patch cementitious deck to repair areas of fastener tests holes.
- B. Remove dirt, debris, and surface moisture. Cover or fill voids greater than 6 mm (1/4 inch) wide to provide solid support for roof membrane.
- C. Install separation sheet over bituminous material on deck surface lapping edges and ends 150 mm (6 inches) or as recommended by roof membrane manufacturer.
 1. Do not install of separation sheet beyond what can be covered by roofing membrane each day.
 2. Use polyethylene, or building paper, that will be compatible with seaming method.
 3. Insure separation sheet completely isolates bituminous materials from EPDM roofing membrane.
 4. Turn up at penetrations, or other surfaces where bituminous materials occur, to cover bituminous product.
 5. Turn down over edges of blocking at perimeters to cover blocking.

3.3 INSTALLATION OF ROOFING AND FLASHING

- A. Do not allow the membrane to come in contact with surfaces contaminated with asphalt, coal tar, oil, grease, or other substances which are not compatible with EPDM roofing membrane.
- B. If possible, install the membrane so the sheets run perpendicular to the long dimension of the insulation boards.
- C. If possible, start at the low point of the roof and work towards the high point. Lap the sheets so the flow of water is not against the edges of the sheet. Start at high point of metal decks without insulation. Coordinate with roof insulation installation.
- D. Position the membrane so it is free of buckles and wrinkles.
- E. Roll sheet out on deck; inspect for defects as sheet is being rolled out and remove defective areas:
 1. Allow 30 minutes for relaxing before proceeding.
 2. Lap edges and ends of sheets 75 mm (3 inches) or more as recommended by the manufacturer. Clean lap surfaces as specified by manufacturer.
 3. Adhesively splice laps. Apply pressure as required. Seam strength of laps as required by ASTM D4637.
 4. Check seams to ensure continuous adhesion and correct defects.
 5. Finish edges of laps with a continuous beveled bead of lap sealant to sheet edges to provide smooth transition as specified by manufacturer.
 6. Finish seams as the membrane is being installed (same day).

7. Anchor perimeter to deck or wall as specified.

F. Membrane Perimeter Anchorage:

1. Install batten strip or steel stress plate with fasteners at the perimeter of each roof level, curb flashing, expansion joints and similar penetrations as indicated in accordance with membrane manufacturer's instructions on top of roof membrane to wall or deck.
2. Mechanically fastened as follows:
 - a. Top of mechanical fastener set flush with top surface of the nailing strip or stress plate.
 - b. Space mechanical fasteners a maximum 300 mm (12 inches) on center.
 - c. Start 25 mm (1 inch) from the end of the nailing strip when used.
 - d. When strip is cut round edge and corners before installing.
 - e. Set fasteners in lap sealant and cover fastener head with fastener sealer including batten strip or stress plate.
 - f. Stop fastening strip where the use of the nailing strip interferes with the flow of the surface water, separate by a 150 mm (6 inch) space, then start again.
 - g. After mechanically fastening cover and seal with a 225 mm (9 inch) wide strip of flashing sheet. Use splice adhesive on all laps and finish edge with sealant as specified.
 - h. At fascia-cants turn the membrane down over the front edge of the blocking, cant, or the nailer to below blocking. Secure the membrane to the vertical portion of the nailer; with fasteners spaced not over 150 mm (6 inches) on centers.
 - i. At parapet walls intersecting building walls and curbs, secure the membrane to the structural deck with fasteners 150 mm (6 inches) on center or as shown in NRCA manual (Fifth Edition)

G. Adhered System:

1. Apply bonding adhesive in quantities required by roof membrane manufacturer.
2. Fold sheet back on itself, clean and coat the bottom side of the membrane and the top of the deck with adhesive. Do not coat the lap joint area.
3. After adhesive has set according to adhesive manufacturer's application instruction, roll the membrane into the adhesive in manner that minimizes voids and wrinkles.
4. Repeat for other half of sheet. Cut voids and wrinkles to lay flat and clean for repair patch over cut area.

H. Install flashings as the membrane is being installed (same day). If the flashing cannot be completely installed in one day, complete the

installation until the flashing is in a watertight condition and provide temporary covers or seals.

I. Flashing Roof Drains:

1. Install roof drain flashing as recommended by the membrane manufacturer, generally as follows:
 - a. Coordinate to set the metal drain flashing in asphalt roof cement, holding cement back from the edge of the metal flange.
 - b. Do not allow the roof cement to come in contact with the EPDM roof membrane.
 - c. Adhere the EPDM roof membrane to the metal flashing with the membrane manufacturer's recommended bonding adhesive.
2. Turn down the metal drain flashing and EPDM roof membrane into the drain body and install clamping ring and stainer.

J. Installing EPDM Base Flashing and Pipe Flashing:

1. Install EPDM flashing membranes to pipes, walls or curbs to a height not less than 200 mm (8 inches) above roof surfaces and 100 mm (4 inches) on roof membranes. Install in accordance with NRCA manual:
 - a. Adhere flashing to pipe, wall or curb with bonding adhesive.
 - b. Form inside and outside corners of EPDM flashing membrane in accordance with NRCA manual (Fifth Edition). Form pipe flashing in accordance with NRCA manual (Fifth Edition).
 - c. Lap ends not less than 100 mm (4 inches).
 - d. Adhesively splice flashing membranes together and flashing membranes to roof membranes. Finish exposed edges with sealant as specified.
2. Anchor top of flashing to walls or curbs with fasteners spaced not over 150 mm (6 inches) on center. Use surface mounted fastening strip with sealant on ducts. Use pipe clamps on pipes or other round penetrations.
3. Apply sealant to top edge of flashing.

K. Installing Building Expansion Joints:

1. Install base flashing on curbs as specified.
2. Coordinate installation with metal expansion joint cover or roof expansion joint system.

L. Repairs to membrane and flashings:

1. Remove sections of EPDM sheet roofing or flashing that is creased wrinkled or fishmouthed.
2. Cover removed areas, cuts and damaged areas with a patch extending 100 mm (4 inches) beyond damaged, cut, or removed area. Adhesively

splice to roof membrane or flashing. Finish edge of lap with sealant as specified.

3.4 WALKWAY PADS

- A. Clean membrane where pads are applied.
- B. Adhere pads to membrane with splicing cement.
- C. Allow not less than 1 inch break between pads and 2 inch maximum break.

3.5 FIELD QUALITY CONTROL

- A. Examine and probe splices or seams in the membrane and flashing in the presence of the COTR and Membrane Manufacturer's Inspector.
- B. Probe the edges of splices or welded seams with a blunt tipped instrument. Use sufficient hand pressure to detect marginal bonds, voids, skips, and fishmouths.
- C. Cut 100 mm (4 inch) wide by 300 mm (12 inch) long samples through the seams where directed by the COTR.
 - 1. Cut one sample for every 450 m (1500 linear feet) of seams.
 - 2. Cut the samples perpendicular to the longitudinal direction of the seams.
 - 3. Failure of the samples to maintain the standard of quality within a reasonable tolerance of the approved samples will be cause for rejection of the work.
- D. Repair areas of splices or welded seams where samples have been taken or marginal bond voids or skips occur.
- E. Repair fishmouths and wrinkles by cutting to lay flat and installing patch over cut area extending 100 mm (4 inches) beyond cut.

3.7 TEMPORARY ROOF

- A. Install temporary roof when sequences of work or weather does not permit installation of a completed permanent roof system or roof would be subject to phasing of roof work, construction traffic, scaffolds, and work over roof area.
- B. Use of 1.15 mm (0.045-inch) thick non-reinforced EPDM membrane or other temporary membrane as approved.
- C. Install not less than 6 mm (1/4 inch) thick plywood underlayment over steel decks before installing temporary roof.
- D. Secure membrane to deck with mechanical fasteners or temporary ballast not exceeding deck dead load capacity.
- E. Repair cuts, tears, and punctures with patches to keep system watertight.
- F. Install permanent roof system within one year.

- - - E N D - - -

**SECTION 07 60 00
FLASHING AND SHEET METAL**

PART 1 - GENERAL**1.1 DESCRIPTION**

Formed sheet metal work for wall and roof flashing, copings, roof edge metal, fasciae, drainage specialties, and formed expansion joint covers are specified in this section.

1.2 RELATED WORK

- A. Manufactured flashing, copings, roof edge metal, and fasciae: Section 07 71 00 ROOF SPECIALTIES.
- B. Flashing components of factory finished roofing and wall systems: Division 07 roofing and wall system sections.
- C. Joint Sealants: Section 07 92 00, JOINT SEALANTS.
- D. Color of factory coated exterior architectural metal and anodized aluminum items: Section 09 06 00, SCHEDULE FOR FINISHES.
- E. Integral flashing components of manufactured roof specialties and accessories or equipment: Section 07 71 00, ROOF SPECIALTIES, Section 07 72 00, ROOF ACCESSORIES, Division 22, PLUMBING sections and Division 23 HVAC sections.
- F. Paint materials and application: Section 09 91 00, PAINTING.
- G. Penetrations through fire rated construction: Section 07 84 00, FIRESTOPPING.

1.3 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.
- B. Aluminum Association (AA):
 - AA-C22A41.....Aluminum Chemically etched medium matte, with clear anodic coating, Class I Architectural, 0.7-mil thick
 - AA-C22A42.....Chemically etched medium matte, with integrally colored anodic coating, Class I Architectural, 0.7 mils thick

- AA-C22A44.....Chemically etched medium matte with
electrolytically deposited metallic compound,
integrally colored coating Class I
Architectural, 0.7-mil thick finish
- C. American National Standards Institute/Single-Ply Roofing Institute
(ANSI/SPRI):
- ANSI/SPRI ES-1-03.....Wind Design Standard for Edge Systems Used with
Low Slope Roofing Systems
- D. American Architectural Manufacturers Association (AAMA):
- AAMA 620.....Voluntary Specification for High Performance
Organic Coatings on Coil Coated Architectural
Aluminum
- AAMA 621.....Voluntary Specification for High Performance
Organic Coatings on Coil Coated Architectural
Hot Dipped Galvanized (HDG) and Zinc-Aluminum
Coated Steel Substrates
- E. ASTM International (ASTM):
- A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel
Steel Plate, Sheet, and Strip
- A653/A653M-09.....Steel Sheet Zinc-Coated (Galvanized) or Zinc
Alloy Coated (Galvanized) by the Hot- Dip
Process
- B32-08.....Solder Metal
- B209-07.....Aluminum and Aluminum-Alloy Sheet and Plate
- B370-09.....Copper Sheet and Strip for Building
Construction
- D173-03.....Bitumen-Saturated Cotton Fabrics Used in
Roofing and Waterproofing
- D412-06.....Vulcanized Rubber and Thermoplastic Elastomers-
Tension
- D1187-97(R2002).....Asphalt Base Emulsions for Use as Protective
Coatings for Metal
- D1784-08.....Rigid Poly (Vinyl Chloride) (PVC) Compounds and
Chlorinated Poly (Vinyl Chloride) (CPVC)
Compounds
- D3656-07.....Insect Screening and Louver Cloth Woven from
Vinyl-Coated Glass Yarns
- D4586-07.....Asphalt Roof Cement, Asbestos Free

- F. Sheet Metal and Air Conditioning Contractors National Association (SMACNA): Architectural Sheet Metal Manual.
- G. National Association of Architectural Metal Manufacturers (NAAMM): AMP 500-06.....Metal Finishes Manual
- H. Federal Specification (Fed. Spec):
 - A-A-1925A.....Shield, Expansion; (Nail Anchors)
 - UU-B-790A.....Building Paper, Vegetable Fiber
- I. International Code Commission (ICC): International Building Code, Current Edition

1.4 PERFORMANCE REQUIREMENTS

- A. Wind Uplift Forces: Resist the following forces per FM Approvals 1-49:
 - 1. Wind Zone 3: 2.20 to 4.98 kPa (46 to 104 lbf/sq. ft.): 9.96-kPa (208-lbf/sq. ft.) perimeter uplift force, 14.94-kPa (312-lbf/sq. ft.) corner uplift force, and 4.98-kPa (104-lbf/sq. ft.) outward force.
- B. Wind Design Standard: Fabricate and install copings tested per ANSI/SPRI ES-1 to resist design pressure of 75 mph wind.

1.5 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: For all specified items, including:
 - 1. Flashings
 - 2. Copings
 - 3. Gutter and Conductors
 - 4. Expansion joints
 - 5. Fascia-cant
- C. Manufacturer's Literature and Data: For all specified items, including:
 - 1. Two-piece counterflashing
 - 2. Thru wall flashing
 - 3. Expansion joint cover, each type
 - 4. Nonreinforced, elastomeric sheeting
- D. Certificates: Indicating compliance with specified finishing requirements, from applicator and contractor.

PART 2 - PRODUCTS**2.1 FLASHING AND SHEET METAL MATERIALS**

- A. Stainless Steel: ASTM A167, Type 302B, dead soft temper.
- B. Aluminum Sheet: ASTM B209, alloy 3003-H14 except alloy used for color anodized aluminum shall be as required to produce specified color. Alloy required to produce specified color shall have the same structural properties as alloy 3003-H14.
- C. Nonreinforced, Elastomeric Sheet: Elastomeric substances reduced to thermoplastic state and extruded into continuous homogenous sheet (0.056 inch) thick. Sheet shall have not less than 7 MPa (1,000 psi) tensile strength and not more than seven percent tension-set at 50 percent elongation when tested in accordance with ASTM D412. Sheet shall show no cracking or flaking when bent through 180 degrees over a 1 mm (1/32 inch) diameter mandrel and then bent at same point over same size mandrel in opposite direction through 360 degrees at temperature of -30°C (-20 °F).

2.2 FLASHING ACCESSORIES

- A. Solder: ASTM B32; flux type and alloy composition as required for use with metals to be soldered.
- B. Rosin Paper: Fed-Spec. UU-B-790, Type I, Grade D, Style 1b, Rosin-sized sheathing paper, weighing approximately 3 Kg/10 m² (6 lbs/100 sf).
- C. Bituminous Paint: ASTM D1187, Type I.
- D. Fasteners:
 - 1. Use stainless steel for stainless steel and aluminum alloy.
 - 2. Nails:
 - a. Minimum diameter for aluminum nails 3 mm (0.105 inch).
 - b. Minimum diameter for stainless steel nails: 2 mm (0.095 inch) and annular threaded.
 - c. Length to provide not less than 22 mm (7/8 inch) penetration into anchorage.
 - 3. Rivets: Not less than 3 mm (1/8 inch) diameter.
 - 4. Expansion Shields: Fed Spec A-A-1925A.
- E. Sealant: As specified in Section 07 92 00, JOINT SEALANTS for exterior locations.
- F. Insect Screening: ASTM D3656, 18 by 18 regular mesh.
- G. Roof Cement: ASTM D4586.

2.3 SHEET METAL THICKNESS

- A. Except as otherwise shown or specified use thickness or weight of sheet metal as follows:
- B. Concealed Locations (Built into Construction):
 - 1. Stainless steel: 0.25 mm (0.010 inch) thick.
- C. Exposed Locations:
 - 1. Stainless steel: 0.4 mm (0.015 inch).
- D. Thickness of aluminum is specified with each item.

2.4 FABRICATION, GENERAL

- A. Jointing:
 - 1. In general, stainless steel except expansion and contraction joints, shall be locked and soldered.
 - 2. Jointing of stainless steel over 0.45 mm (0.018 inch) thick shall be done by lapping, riveting and soldering.
 - 3. Joints shall conform to following requirements:
 - a. Flat-lock joints shall finish not less than 19 mm (3/4 inch) wide.
 - b. Lap joints subject to stress shall finish not less than 25 mm (one inch) wide and shall be soldered and riveted.
 - c. Unsoldered lap joints shall finish not less than 100 mm (4 inches) wide.
 - 4. Flat and lap joints shall be made in direction of flow.
 - 5. Edges of nonreinforced elastomeric sheeting shall be jointed by lapping not less than 100 mm (4 inches) in the direction of flow and cementing with asphalt roof cement or sealant as required by the manufacturer's printed instructions.
 - 6. Soldering:
 - a. Pre tin both mating surfaces with solder for a width not less than 38 mm (1 1/2 inches) of stainless steel.
 - b. Treat in accordance with metal producers recommendations other sheet metal required to be soldered.
 - c. Completely remove acid and flux after soldering is completed.
- B. Expansion and Contraction Joints:
 - 1. Fabricate in accordance with the Architectural Sheet Metal Manual recommendations for expansion and contraction of sheet metal work in continuous runs.
 - 2. Space joints as shown or as specified.

3. Space expansion and contraction joints for stainless steel at intervals not exceeding 7200 mm (24 feet).
4. Space expansion and contraction joints for aluminum at intervals not exceeding 5400 mm (18 feet), except do not exceed 3000 mm (10 feet) for gravel stops and fascia-cant systems.
5. Fabricate slip-type or loose locked joints and fill with sealant unless otherwise specified.
6. Fabricate joint covers of same thickness material as sheet metal served.

C. Cleats:

1. Fabricate cleats to secure flashings and sheet metal work over 300 mm (12 inches) wide and where specified.
2. Provide cleats for maximum spacing of 300 mm (12 inch) centers unless specified otherwise.
3. Form cleats of same metal and weights or thickness as the sheet metal being installed unless specified otherwise.
4. Fabricate cleats from 50 mm (2 inch) wide strip. Form end with not less than 19 mm (3/4 inch) wide loose lock to item for anchorage. Form other end of length to receive nails free of item to be anchored and end edge to be folded over and cover nail heads.

D. Edge Strips or Continuous Cleats:

1. Fabricate continuous edge strips where shown and specified to secure loose edges of the sheet metal work.
2. Except as otherwise specified, fabricate edge strips or minimum 0.6 mm (0.024 inch) thick stainless steel or 1.25 mm (0.050 inch) thick aluminum.
3. Use material compatible with sheet metal to be secured by the edge strip.
4. Fabricate in 3000 mm (10 feet) maximum lengths with not less than 19 mm (3/4 inch) loose lock into metal secured by edge strip.
5. Fabricate Strips for fascia anchorage to extend below the supporting wood construction to form a drip and to allow the flashing to be hooked over the lower edge at least 19 mm (3/4-inch).
6. Fabricate anchor edge maximum width of 75 mm (3 inches) or of sufficient width to provide adequate bearing area to insure a rigid installation using 0.8 mm (0.031 inch) thick stainless steel or 1.6 mm (0.0625 inch) thick aluminum.

E. Drips:

1. Form drips at lower edge of sheet metal counter-flashings (cap flashings), fascias, gravel stops, wall copings, by folding edge back 13 mm (1/2 inch) and bending out 45 degrees from vertical to carry water away from the wall.
2. Form drip to provide hook to engage cleat or edge strip for fastening for not less than 19 mm (3/4 inch) loose lock where shown.

F. Edges:

1. Edges of flashings concealed in masonry joints opposite drain side shall be turned up 6 mm (1/4 inch) to form dam, unless otherwise specified or shown otherwise.
2. Finish exposed edges of flashing with a 6 mm (1/4 inch) hem formed by folding edge of flashing back on itself when not hooked to edge strip or cleat. Use 6 mm (1/4 inch) minimum penetration beyond wall face with drip for through-wall flashing exposed edge.
3. All metal roof edges shall meet requirements of IBC, current edition.

G. Metal Options:

1. Where options are permitted for different metals use only one metal throughout.
2. Stainless steel may be used in concealed locations for fasteners of other metals exposed to view.

2.5 FINISHES

- A. Use same finish on adjacent metal or components and exposed metal surfaces unless specified or shown otherwise.
- B. In accordance with NAAMM Metal Finishes Manual AMP 500, unless otherwise specified.
- C. Finish exposed metal surfaces as follows, unless specified otherwise:
 1. Stainless Steel: Finish No. 2B or 2D.
 2. Aluminum:
 - a. Colored Finish: AA-C22A42 (anodized) or AA-C22A44 (electrolytically deposited metallic compound) medium matte, integrally colored coating, Class 1 Architectural, 18 mm (0.7 mils) thick. Dyes will not be accepted.

2.6 THROUGH-WALL FLASHINGS

- A. Form through-wall flashing to provide a mechanical bond or key against lateral movement in all directions. Install a sheet having 2 mm (1/16 inch) deep transverse channels spaced four to every 25 mm (one inch),

or ribbed diagonal pattern, or having other deformation unless specified otherwise.

1. Fabricate in not less than 2400 mm (8 feet) lengths; 3000 mm (10 feet) maximum lengths.

2. Fabricate so keying nests at overlaps.

B. Window/Louver Sill Flashing and Lintel Flashing:

1. Use either stainless steel, or nonreinforced elastomeric sheeting.

2. Fabricate flashing at ends with folded corners to turn up 5 mm (3/16 inch) in first vertical masonry joint beyond masonry opening.

3. Turn up back edge as shown.

4. Form exposed portion with drip as specified or receiver.

C. Door Sill Flashing:

1. Where concealed, use 0.5 mm (0.018 inch) thick stainless steel.

2. Where shown on drawings as combined counter flashing under threshold, sill plate, door sill, or where subject to foot traffic, use 0.6 mm (0.024 inch) stainless steel.

3. Fabricate flashing at ends to turn up 5 mm (3/16 inch) in first vertical masonry joint beyond masonry opening with folded corners.

2.7 BASE FLASHING

A. Use metal base flashing at vertical surfaces intersecting built-up roofing without cant strips or where shown.

1. Use stainless steel, thickness specified unless specified otherwise.

2. When flashing is over 250 mm (10 inches) in vertical height or horizontal width use 0.5 mm (0.018 inch) stainless steel.

3. Use stainless steel at aluminum roof curbs where flashing contacts the aluminum.

4. Use stainless steel at pipe flashings.

B. Fabricate metal base flashing up vertical surfaces not less than 200 mm (8 inch) nor more than 400 mm (16 inch).

C. Fabricate roof flange not less than 100 mm (4 inches) wide unless shown otherwise. When base flashing length exceeds 2400 mm (8 feet) form flange edge with 13 mm (1/2 inch) hem to receive cleats.

D. Form base flashing bent from strip except pipe flashing. Fabricate ends for riveted soldered lap seam joints. Fabricate expansion joint ends as specified.

E. Pipe Flashing: (Other than engine exhaust or flue stack)

1. Fabricate roof flange not less than 100 mm (4 inches) beyond sleeve on all sides.
2. Extend sleeve up and around pipe and flange out at bottom not less than 13 mm (1/2 inch) and solder to flange and sleeve seam to make watertight.
3. At low pipes 200 mm (8 inch) to 450 mm (18 inch) above roof:
 - a. Form top of sleeve to turn down into the pipe at least 25 mm (one inch).
 - b. Allow for loose fit around and into the pipe.
4. At high pipes and pipes with goosenecks or other obstructions which would prevent turning the flashing down into the pipe:
 - a. Extend sleeve up not less than 300 mm (12 inch) above roofing.
 - b. Allow for loose fit around pipe.

2.8 COUNTERFLASHING (CAP FLASHING OR HOODS)

- A. Stainless steel, unless specified otherwise.
- B. Fabricate to lap base flashing a minimum of 100 mm (4 inches) with drip:
 1. Form lock seams for outside corners. Allow for lap joints at ends and inside corners.
 2. In general, form flashing in lengths not less than 2400 mm (8 feet) and not more than 3000 mm (10 feet).
 3. Two-piece, lock in type flashing may be used in-lieu-of one piece counter-flashing.
 4. Manufactured assemblies may be used.
 5. Where counterflashing is installed at new work use an integral flange at the top designed to be extended into the masonry joint or reglet in concrete.
 6. Where counterflashing is installed at existing work use surface applied type, formed to provide a space for the application of sealant at the top edge.
- C. One-piece Counterflashing:
 1. Back edge turned up and fabricate to lock into reglet in concrete.
 2. Upper edge formed to extend full depth of masonry unit in mortar joint with back edge turned up 6 mm (1/4 inch).
- D. Two-Piece Counterflashing:

1. Receiver to extend into masonry wall depth of masonry unit with back edge turned up 6 mm (1/4 inch) and exposed edge designed to receive and lock counterflashing upper edge when inserted.
 2. Counterflashing upper edge designed to snap lock into receiver.
- E. Surface Mounted Counterflashing; one or two piece:
1. Use at existing or new surfaces where flashing can not be inserted in vertical surface.
 2. One piece fabricate upper edge folded double for 65 mm (2 1/2 inches) with top 19 mm (3/4 inch) bent out to form "V" joint sealant pocket with vertical surface. Perforate flat double area against vertical surface with horizontally slotted fastener holes at 400 mm (16 inch) centers between end holes. Option: One piece surface mounted counter-flashing (cap flashing) may be used. Fabricate as detailed on Plate 51 of SMACNA Architectural Sheet Metal Manual.
 3. Two pieces: Fabricate upper edge to lock into surface mounted receiver. Fabricate receiver joint sealant pocket on upper edge and lower edge to receive counterflashing, with slotted fastener holes at 400 mm (16 inch) centers between upper and lower edge.
- F. Pipe Counterflashing:
1. Form flashing for water-tight umbrella with upper portion against pipe to receive a draw band and upper edge to form a "V" joint sealant receiver approximately 19 mm (3/4 inch) deep.
 2. Fabricate 100 mm (4 inch) over lap at end.
 3. Fabricate draw band of same metal as counter flashing. Use 0.33 mm (0.013 inch) thick stainless steel.
 4. Use stainless steel bolt on draw band tightening assembly.
 5. Vent pipe counter flashing may be fabricated to omit draw band and turn down 25 mm (one inch) inside vent pipe.
- G. Where vented edge decks intersect vertical surfaces, form in one piece, shape to slope down to a point level with and in front of edge-set notched plank; then, down vertically, overlapping base flashing.

2.9 REGLETS

- A. Fabricate reglets of one of the following materials:
1. Stainless steel, not less than 0.3 mm (0.012 inch) thick.
 2. Plastic coated extruded aluminum, not less than 1.4 mm (0.055 inch) thick prefilled with butyl rubber sealer and complete with plastic wedges inserted at 1000 mm (40 inches) on centers.

- B. Fill open-type reglets with fiberboard or other suitable separator, to prevent crushing of the slot during installation.
- C. Bend edges of reglets for setting into concrete to an angle of not less than 45 degrees, and make wide enough to provide firm anchorage in the concrete.
- D. Fabricate reglets for building into horizontal masonry mortar joints not less than 19 mm (3/4 inch) deep, nor more than 25 mm (one inch) deep.
- E. Fabricate mitered corners, fittings, and special shapes as may be required by details.
- F. Reglets for concrete may be formed to receive flashing and have a 10 mm (3/8 inch), 45 degree snap lock.

2.10 INSULATED EXPANSION JOINT COVERS

- A. Either type optional, use only one type throughout.
- B. Types:
 - 1. Construct of two preformed, stainless steel strips, not less than 0.4 mm (0.015 inch) thick, mechanically and adhesively bonded to both sides of a 2 mm (1/16 inch) thick neoprene or butyl sheet, or to a 0.4 mm (32 mil) thick reinforced chlorinated polyethylene sheet. Adhesively attach a 10 mm (3/8 inch) thick sheet of closed cell, neoprene foam insulation, to the underside of the neoprene, butyl, or chlorinated polyethylene sheet.
 - 2. Constructed of a 2 mm (1/16 inch) thick vinyl sheet, flanged at both sides with stainless steel strips not less than 0.4 mm (0.015 inch) thick. Vinyl sheet locked and encased by the stainless steel strip and prepunched for nailing. A 10 mm (3/8 inch) thick closed cell polyvinyl chloride foam insulating strip shall be heat laminated to the underside of the vinyl sheet between the stainless steel strips.
- C. Expansion joint covers shall have factory fabricated mitered corners, crossing tees, and other necessary accessories. Furnish in the longest available lengths.
- D. Metal flange of sufficient width to extend over the top of the curb and down curb sides 50 mm (2 inches) with hemmed edge for lock to edge strip.

2.11 ENGINE EXHAUST PIPE OR FLUE OR STACK FLASHING

- A. Flashing at penetrations through roofing shall consist of a metal collar, sheet metal flashing sleeve and hood.

- B. Fabricate collar with roof flange of 1.2 mm (0.047 inch) minimum thick black iron or galvanized steel sheet.
 - 1. Fabricate inside diameter of collar 100 mm (4 inches) larger than the outside diameter of the item penetration the roofing.
 - 2. Extend collar height from structural roof deck to not less than 350 mm (14 inches) above roof surface.
 - 3. Fabricate collar roof flange not less than 100 mm (4 inches) wide.
 - 4. Option: Collar may be of steel tubing 3 mm (0.125 inch) minimum wall thickness, with not less than four, 50 mm x 100 mm x 3 mm (2 inch by 4 inch by 0.125 inch) thick tabs bottom edge evenly spaced around tube in lieu of continuous roof flange. Full butt weld joints of collar.
- C. Fabricate sleeve base flashing with roof flange of stainless steel.
 - 1. Fabricate sleeve roof flange not less than 100 mm (4 inches) wide.
 - 2. Extend sleeve around collar up to top of collar.
 - 3. Flange bottom of sleeve out not less than 13 mm (1/24 inch) and soldered to 100 mm (4 inch) wide flange to make watertight.
 - 4. Fabricate interior diameter 50 mm (2 inch) greater than collar.
- D. Fabricate hood counter flashing from same material and thickness as sleeve.
 - 1. Fabricate the same as pipe counter flashing except allow not less than 100 mm (4 inch) lap below top of sleeve and to form vent space minimum of 100 mm (4 inch) wide.
 - 2. Hem bottom edge of hood 13 mm (1/2 inch).
 - 3. Provide a 50 mm (2 inch) deep drawband.
- E. Fabricate insect screen closure between sleeve and hood. Secure screen to sleeve with sheet metal screws.

2.12 SCUPPERS

- A. Fabricate scuppers with minimum of 100 mm (4 inch) wide flange.
- B. Provide flange at top on through wall scupper to extend to top of base flashing.
- C. Fabricate exterior wall side to project not less than 13 mm (1/2 inch) beyond face of wall with drip at bottom outlet edge.
- D. Fabricate not less than 100 mm (4 inch) wide flange to lap behind gravel stop fascia.
- E. Fabricate exterior wall flange for through wall scupper not less than 25 mm (one inch) wide on top and sides with edges hemmed.

- F. Fabricate gravel stop bar of 25 mm x 25 mm (one by one inch) angle strip soldered to bottom of scupper.
- G. Fabricate scupper not less than 200 mm (8 inch) wide and not less than 125 mm (5 inch) high for through wall scupper.
- H. Solder joints watertight.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General:

1. Install flashing and sheet metal items as shown in Sheet Metal and Air Conditioning Contractors National Association, Inc., publication, ARCHITECTURAL SHEET METAL MANUAL, except as otherwise shown or specified.
2. Apply Sealant as specified in Section 07 92 00, JOINT SEALANTS.
3. Apply sheet metal and other flashing material to surfaces which are smooth, sound, clean, dry and free from defects that might affect the application.
4. Remove projections which would puncture the materials and fill holes and depressions with material compatible with the substrate. Cover holes or cracks in wood wider than 6 mm (1/4 inch) with sheet metal compatible with the roofing and flashing material used.
5. Coordinate with masonry work for the application of a skim coat of mortar to surfaces of unit masonry to receive flashing material before the application of flashing.
6. Apply a layer of 7 Kg (15 pound) saturated felt followed by a layer of rosin paper to wood surfaces to be covered with copper. Lap each ply 50 mm (2 inch) with the slope and nail with large headed copper nails.
7. Confine direct nailing of sheet metal to strips 300 mm (12 inch) or less wide. Nail flashing along one edge only. Space nail not over 100 mm (4 inches) on center unless specified otherwise.
8. Install bolts, rivets, and screws where indicated, specified, or required in accordance with the SMACNA Sheet Metal Manual. Space rivets at 75 mm (3 inch) on centers in two rows in a staggered position. Use neoprene washers under fastener heads when fastener head is exposed.

9. Coordinate with roofing work for the installation of metal base flashings and other metal items having roof flanges for anchorage and watertight installation.
10. Nail continuous cleats on 75 mm (3 inch) on centers in two rows in a staggered position.
11. Nail individual cleats with two nails and bend end tab over nail heads. Lock other end of cleat into hemmed edge.
12. Install flashings in conjunction with other trades so that flashings are inserted in other materials and joined together to provide a water tight installation.
13. Where required to prevent galvanic action between dissimilar metal isolate the contact areas of dissimilar metal with sheet lead, waterproof building paper, or a coat of bituminous paint.
14. Isolate aluminum in contact with dissimilar metals others than stainless steel, white bronze or other metal compatible with aluminum by:
 - a. Paint dissimilar metal with a prime coat of zinc-chromate or other suitable primer, followed by two coats of aluminum paint.
 - b. Paint dissimilar metal with a coat of bituminous paint.
 - c. Apply an approved caulking material between aluminum and dissimilar metal.
15. Paint aluminum in contact with or built into mortar, concrete, plaster, or other masonry materials with a coat of bituminous paint.
16. Paint aluminum in contact with absorptive materials that may become repeatedly wet with two coats of bituminous paint or two coats of aluminum paint.

3.2 THROUGH-WALL FLASHING

A. General:

1. Install continuous through-wall flashing between top of concrete foundation walls and bottom of masonry building walls; at top of concrete floors; under masonry, concrete, or stone copings and elsewhere as shown.
2. Where exposed portions are used as a counterflashings, lap base flashings at least 100 mm (4 inches) and use thickness of metal as specified for exposed locations.
3. Exposed edge of flashing may be formed as a receiver for two piece counter flashing as specified.

4. Terminate exterior edge beyond face of wall approximately 6 mm (1/4 inch) with drip edge where not part of counter flashing.
 5. Turn back edge up 6 mm (1/4 inch) unless noted otherwise where flashing terminates in mortar joint or hollow masonry unit joint.
 6. Terminate interior raised edge in masonry backup unit approximately 38 mm (1 1/2 inch) into unit unless shown otherwise.
 7. Under copings terminate both edges beyond face of wall approximately 6 mm (1/4 inch) with drip edge.
 8. Lap end joints at least two corrugations, but not less than 100 mm (4 inches). Seal laps with sealant.
 9. Where dowels, reinforcing bars and fastening devices penetrate flashing, seal penetration with sealing compound. Sealing compound is specified in Section 07 92 00, JOINT SEALANTS.
 10. Coordinate with other work to set in a bed of mortar above and below flashing so that total thickness of the two layers of mortar and flashing are same as regular mortar joint.
 11. Where ends of flashing terminate turn ends up 25 mm (1 inch) and fold corners to form dam extending to wall face in vertical mortar or veneer joint.
 12. Turn flashing up not less than 200 mm (8 inch) between masonry or behind exterior veneer.
 13. When flashing terminates in reglet extend flashing full depth into reglet and secure with lead or plastic wedges spaced 150 mm (6 inch) on center.
 14. Continue flashing around columns:
 - a. Where flashing cannot be inserted in column reglet hold flashing vertical leg against column.
 - b. Counterflash top edge with 75 mm (3 inch) wide strip of saturated cotton unless shown otherwise. Secure cotton strip with roof cement to column. Lap base flashing with cotton strip 38 mm (1 1/2 inch).
- B. Flashing at Veneer Walls:
1. Install near line of finish floors over shelf angles or where shown.
 2. Turn up against sheathing.
 3. At stud framing, hem top edge 19 mm (3/4 inch) and secure to each stud with stainless steel fasteners through sheathing.
 4. At concrete backing, extend flashing into reglet as specified.

5. Coordinate with installation of waterproofing or asphalt felt for lap over top of flashing.

C. Lintel Flashing when not part of shelf angle flashing:

1. Install flashing full length of lintel to nearest vertical joint in masonry over veneer.
2. Turn ends up 25 mm (one inch) and fold corners to form dam and extend end to face of wall.
3. Turn back edge up to top of lintel; terminate back edge as specified for back-up wall.

D. Window Sill Flashing:

1. Install flashing to extend not less than 100 mm (4 inch) beyond ends of sill into vertical joint of masonry or veneer.
2. Turn back edge up to terminate under window frame.
3. Turn ends up 25 mm (one inch) and fold corners to form dam and extend to face of wall.

E. Door Sill Flashing:

1. Install flashing under bottom of plate sills of doors over curbs opening onto roofs. Extend flashing out to form counter flashing or receiver for counter flashing over base flashing. Set in sealant.
2. Extend sill flashing 200 mm (8 inch) beyond jamb opening. Turn ends up one inch in vertical masonry joint, extend end to face of wall. Join to counter flashing for water tight joint.
3. Where doors thresholds cover over waterproof membranes install sill flashing over water proof membrane under thresholds. Extend beyond opening to cover exposed portion of waterproof membrane and not less than 150 mm (6 inch) beyond door jamb opening at ends. Turn up approximately 6 mm (1/4 inch) under threshold.

3.3 BASE FLASHING

A. Install where roof membrane type base flashing is not used and where shown.

1. Install flashing at intersections of roofs with vertical surfaces or at penetrations through roofs, to provide watertight construction.
2. Install metal flashings and accessories having flanges extending out on top of the built-up roofing before final bituminous coat and roof aggregate is applied.
3. Set flanges in heavy trowel coat of roof cement and nail through flanges into wood nailers over bituminous roofing.

4. Secure flange by nailing through roofing into wood blocking with nails spaced 75 mm (3 inch) on centers or, when flange over 100 mm (4 inch) wide terminate in a 13 mm (1/2 inch) folded edge anchored with cleats spaced 200 mm (8 inch) on center. Secure one end of cleat over nail heads. Lock other end into the seam.
- B. For long runs of base flashings install in lengths of not less than 2400 mm (8 feet) nor more than 3000 mm (ten feet). Install a 75 mm (3 inch) wide slip type, loose lock expansion joint filled with sealant in joints of base flashing sections over 2400 mm (8 feet) in length. Lock and solder corner joints at corners.
- C. Extend base flashing up under counter flashing of roof specialties and accessories or equipment not less than 75 mm (3 inch).

3.4 COUNTERFLASHING (CAP FLASHING OR HOODS)

- A. General:
 1. Install counterflashing over and in conjunction with installation of base flashings, except as otherwise specified or shown.
 2. Install counterflashing to lap base flashings not less than 100 mm (4 inch).
 3. Install upper edge or top of counterflashing not less than 225 mm (9 inch) above top of the roofing.
 4. Lap joints not less than 100 mm (4 inch). Stagger joints with relation to metal base flashing joints.
 5. Use surface applied counterflashing on existing surfaces and new work where not possible to integrate into item.
 6. When fastening to concrete or masonry, use screws driven in expansion shields set in concrete or masonry. Use screws to wood and sheet metal. Set fasteners in mortar joints of masonry work.
- B. One Piece Counterflashing:
 1. Where flashing is installed at new masonry, coordinate to insure proper height, embed in mortar, and end lap.
 2. Where flashing is installed in reglet in concrete insert upper edge into reglet. Hold flashing in place with lead wedges spaced not more than 200 mm (8 inch) apart. Fill joint with sealant.
 3. Where flashing is surface mounted on flat surfaces.
 - a. When top edge is double folded anchor flat portion below sealant "V" joint with fasteners spaced not over 400 mm (16 inch) on center:

- 1) Locate fasteners in masonry mortar joints.
- 2) Use screws to sheet metal or wood.
- b. Fill joint at top with sealant.
4. Where flashing or hood is mounted on pipe.
 - a. Secure with draw band tight against pipe.
 - b. Set hood and secure to pipe with a one by 25 mm x 3 mm (1 x 1/8 inch) bolt on stainless steel draw band type clamp, or a stainless worm gear type clamp.
 - c. Completely fill joint at top with sealant.
- C. Two-Piece Counterflashing:
 1. Where receiver is installed at new masonry coordinate to insure proper height, embed in mortar, and lap.
 2. Surface applied type receiver:
 - a. Secure to face construction in accordance, with manufacturers instructions.
 - b. Completely fill space at the top edge of receiver with sealant.
 3. Insert counter flashing in receiver in accordance with fabricator or manufacturer's instructions and to fit tight against base flashing.
- D. Where vented edge occur install so lower edge of counterflashing is against base flashing.
- E. When counter flashing is a component of other flashing install as shown.

3.5 REGLETS

- A. Install reglets in a manner to provide a watertight installation.
- B. Locate reglets not less than 225 mm (9 inch) nor more than 400 mm (16 inch) above roofing, and not less than 125 mm (5 inch) nor more than 325 mm (13 inch) above cant strip.
- C. Butt and align end joints of each section of reglet and securely hold in position until concrete or mortar are hardened:
 1. Coordinate reglets for anchorage into concrete with formwork construction.
 2. Coordinate reglets for masonry to locate horizontally into mortar joints.

3.6 COPINGS

- A. General:

1. On walls topped with a wood plank, install a continuous edge strip on the front and rear edge of the plank. Lock the coping to the edge strip with a 19 mm (3/4 inch) loose lock seam.
2. Where shown turn down roof side of coping and extend down over base flashing as specified for counter-flashing. Secure counter-flashing to lock strip in coping at continuous cleat.
3. Install ends adjoining existing construction so as to form space for installation of sealants. Sealant is specified in Section 07 92 00, JOINT SEALANTS.

B. Aluminum Coping:

1. Install with 6 mm (1/4 inch) joint between ends of coping sections.
2. Install joint covers, centered at each joint, and securely lock in place.
3. Join ends of sheets by a 19 mm (3/4 inch) sealant joint, except at intervals of 9600 mm (32 feet), provide a 38 mm (1 1/2 inch) loose locked expansion joint filled with sealant or mastic.
4. At straight runs between 7200 mm (24 feet) and 19200 mm (64 feet) locate expansion joint at center.
5. At straight runs that exceed 9600 mm (32 feet) and form the leg of a corner locate the expansion joint not more than 4800 mm (16 feet) from the corner.

3.7 EXPANSION JOINT COVERS, INSULATED

- A. Install insulated expansion joint covers at locations shown on curbs not less than 200 mm (8 inch) high above roof surface.
- B. Install continuous edge strips of same metal as expansion joint flange, nailed at not less than 75 mm (3 inch) centers.
- C. Install insulated expansion joint covers in accordance with manufacturer's directions locking edges to edge strips.

3.8 ENGINE EXHAUST PIPE OR STACK FLASHING

- A. Set collar where shown and secure roof tabs or flange of collar to structural deck with 13 mm (1/2 inch) diameter bolts.
- B. Set flange of sleeve base flashing not less than 100 mm (4 inch) beyond collar on all sides as specified for base flashing.
- C. Install hood to above the top of the sleeve 50 mm (2 inch) and to extend from sleeve same distance as space between collar and sleeve beyond edge not sleeve:

1. Install insect screen to fit between bottom edge of hood and side of sleeve.
2. Set collar of hood in high temperature sealant and secure with one by 3 mm (1/8 inch) bolt on stainless steel draw band type, or stainless steel worm gear type clamp. Install sealant at top of head.

- - - E N D - - -

**SECTION 07 71 00
ROOF SPECIALTIES**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies roof hatches; equipment supports; and gravity ventilators.

1.2 RELATED WORK

- A. Color and texture of finish: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Sealant material and installation: Section 07 92 00, JOINT SEALANTS.
- C. General insulation: Section 07 21 13, THERMAL INSULATION.
- D. Rigid insulations for roofing: Section 07 22 00, ROOF AND DECK INSULATION
- E. Anchoring and bracing equipment supports: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.3 QUALITY CONTROL

- A. All roof accessories shall be the products of manufacturers regularly engaged in producing the kinds of products specified.
- B. Each accessory type shall be the same and be made by the same manufacturer.
- C. Each accessory shall be completely assembled to the greatest extent possible before delivery to the site.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples: Representative sample panel of color anodized aluminum not less than 100 mm X 100 mm (four by four inches), except extrusions shall be a width not less than section to be used. Sample shall show coating with integral color and texture and shall include manufacturer's identifying label.
- C. Shop Drawings: Each item specified showing design, details of construction, installation and fastenings.
- D. Manufacturer's Literature and Data: Each item specified.
- E. Certificates: Stating that aluminum has been given specified thickness of anodizing.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extend referenced. The publications are referenced in the text by the basic designation only.
- B. Federal Specifications (Fed. Spec.):

- RR-G-1602D.....Grating, Metal, Other Than Bar Type (Floor,
Except for Naval Vessels)
- C. American Society for Testing and Material (ASTM):
- A653/A653M-02.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-
Iron Alloy-Coated (Galvannealed) By the Hot-Dip
Process
- B209/209M-02.....Aluminum and Aluminum Alloy-Sheet and Plate
- B221/221M-02.....Aluminum-Alloy Extruded Bars, Rods, Wire,
Shapes, and Tubes
- C612-00.....Mineral Fiber Block and Board Thermal Insulation
- D1187-97.....Asphalt-Base Emulsions for Use as Protective
Coatings for Metal
- D. National Association of Architectural Metal Manufacturers (NAAMM):
- AMP 500 Series.....Metal Finishes Manual
- E. American Architectural Manufacturers Association (AAMA):
- 605-98.....High Performance Organic Coatings on
Architectural Extrusions and Panels.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Aluminum, Extruded: ASTM B221/B221M.
- B. Aluminum Sheet: ASTM B209/B209M.
- C. Galvanized Sheet Steel: ASTM A526/A526M; G-90 coating.

2.2 ROOF HATCH (SCUTTLE)

- A. Fabricate from aluminum with mill finish.
- B. Curb and Cover:
1. Exterior facing: Minimum 2.3 mm (0.09 inch) thick sheet aluminum.
 2. Interior facing: Minimum 1 mm (0.04 inch) thick sheet aluminum.
 3. Minimum of 25 mm (one inch) thick mineral fiber insulation between facings of cover and over exterior face of curb.
 4. Form exterior curb facing with an integral three inch wide roof flange and cap flashing minimum 2.3 mm (0.09 inch) thick sheet aluminum.
 5. Make curb 450 mm (18 inches).
 6. Form cover to lap curb and cap flashing.
 7. Size opening as shown.
- C. Hardware:
1. Provide spring snap latch with inside and outside operating handles and padlock hasp on inside. Provide two snap latches when hinge side is over 2100 mm (7 feet) long.
 2. Provide pintle hinges.

3. Provide automatic hold open and operating arm with enclosed torsion or compression spring lifting mechanism.
4. Covers shall automatically lock in the open position at not less than 70 degrees.
5. Provide weatherstripping at cover closure.
6. Galvanize all hardware items.

D. Assembly:

1. Completely shop assemble roof scuttle.
2. Fully weld all joints exposed to the weather and built into the roofing.
3. Finish weld smooth where exposed.
4. Operation with minimum force to open and close.

2.3 EQUIPMENT SUPPORTS

- A. Fabricate equipment supports from 1.3 mm (0.0516 inch) thick galvanized steel.
- B. Form exterior curb with integral base, and deck closures for curbs installed on steel decking.
- C. Use galvanized steel liners for curbs having inside dimension over 305 mm (12 inches).
- D. Fabricate curb with a minimum height of 200 mm (8 inches) above roof surface.
- E. Attach preservative treated wood nailers to top of curb. Use 50 mm (2 inch) by 50 mm (2 inch) minimum nominal size on curb with openings and 50 mm (2 inch) thick, width of curb up to 300 mm (12 inches) on equipment support curbs.
- F. Make size of supports suit size of equipment furnished, with height as shown on drawings, but not less than 200 mm (8 inches) above roof surface.

2.4 LOW SILHOUETTE GRAVITY VENTILATORS

- A. Fabricate base of 1 mm (0.04 inch) thick aluminum, and vent of 0.8 mm (0.032 inch) thick aluminum. Height not to exceed 300 mm (12 inches) above top of roof curb. Design ventilators to withstand 137 Km (85 miles) per hour wind velocity. Provide ventilators with a removable 18 by 18 mesh aluminum wire cloth insect screen.
- B. Construct damper of the same material as the ventilator and design to completely close opening or remain wide open. Hold damper in closed position by a brass chain and catch. Extend chains 300 mm (12 inches) below and engage catch when damper is closed.

2.5 FINISH

- A. In accordance with NAAMM Amp 500 Series.

- B. Aluminum, Mill Finish: AA-MIX, as fabricated.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install roof specialties where shown.
- B. Secure with fasteners in accordance with manufacture's printed installation instructions and approved shop drawings unless shown otherwise.
- C. Coordinate to install insulation where shown; see Section 07 21 13, THERMAL INSULATION and Section 07 22 00, ROOF AND DECK INSULATION.
- D. Comply with section 07 92 00, JOINT SEALANTS to install sealants where manufactures installation instructions require sealant.
- E. Coordinate with roofing work for installation of items in sequence to prevent water infiltration.
 - b. After completion of base flashing bend down cap flashing flange and secure to blocking with screws.
 - c. Install expansion joint cover with 6 mm (1/4 inch) wide space at end joints and tension bars at 600 mm (24 inches) on center.
 - d. Install cover plates with formed aluminum flashing concealed and centered on joint. Flashing to lap cover not less than 100 mm (4 inches).
- F. Equipment Supports: Do not anchor to insulating concrete or metal deck. Anchor only to building structure as per manufacturers recommendations.

3.2 PROTECTION OF ALUMINUM

- A. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces of the dissimilar material with two coats of asphalt coating (complete coverage), or by separating the contact surfaces with a preformed neoprene tape having pressure sensitive adhesive coating on side.
- B. Paint aluminum in contact with wood, concrete and masonry, or other absorptive materials, that may become repeatedly wet, with two coats of asphalt coating.

3.3 ADJUSTING

- A. Adjust roof hatch hardware to operate freely and so that cover will operate without binding, close tightly at perimeter, and latch securely.

3.4 PROTECTION

- A. Protect roof accessories from damage during installation and after completion of the work from subsequent construction.

- - - E N D - - -

**SECTION 07 72 00
ROOF ACCESSORIES**

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies copings, and expansion joints.

1.2 RELATED WORK

- A. Color and texture of finish: Section 09 06 00, SCHEDULE FOR FINISHES
- B. Sealant material and installation: Section 07 92 00, JOINT SEALANTS.
- C. General insulation: Section 07 21 13, THERMAL INSULATION
- D. Rigid insulations for roofing: Section 07 22 00, ROOF AND DECK INSULATION.
- E. Parapet: Section 07 45 00, EXTERIOR ALUMINUM FACED COMPOSITE PANELS.

1.3 QUALITY CONTROL

- A. All roof accessories shall be the products of manufacturers regularly engaged in producing the kinds of products specified.
- B. Each accessory type shall be the same and be made by the same manufacturer.
- C. Each accessory shall be completely assembled to the greatest extent possible before delivery to the site.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples: Representative sample panel of color anodized aluminum not less than 100 mm X 100 mm (four by four inches), except extrusions shall be a width not less than section to be used. Sample shall show coating with integral color and texture and shall include manufacturer's identifying label.
- C. Shop Drawings: Each item specified showing design, details of construction, installation and fastenings.
- D. Manufacturer's Literature and Data: Each item specified.
- E. Certificates: Stating that aluminum has been given specified thickness of anodizing.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extend referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Material (ASTM):
B209/209M-07.....Aluminum and Aluminum Alloy-Sheet and Plate

B221/221M-07.....Aluminum-Alloy Extruded Bars, Rods, Wire,
Shapes, and Tubes

C612-04.....Mineral Fiber Block and Board Thermal Insulation

D1187-97 (R2002).....Asphalt-Base Emulsions for Use as Protective
Coatings for Metal

C. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-505-88.....Metal Finishes Manual

D. American Architectural Manufacturers Association (AAMA):
605-98.....High Performance Organic Coatings on
Architectural Extrusions and Panels.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Aluminum, Extruded: ASTM B221/B221M.
- B. Aluminum Sheet: ASTM B209/B209M.
- C. Galvanized Sheet Steel: ASTM A526/A526M; G-90 coating.
- D. Insulation: ASTM C612, Class 1 or 2.
- E. Asphalt Coating: ASTM D 1187, Type I, quick setting.

2.2 COPINGS

- A. Fabricate of aluminum not less than 3.2-mm (0.125 inch) thick; or 0.5 mm (0.018 inch thick stainless steel).
- B. Turn outer edges down each face of wall as shown.
- C. Maximum lengths of 3000 mm (10 feet).
- D. Shop fabricate external and internal corners as one piece assemblies with not less than 300 mm (12 inch) leg lengths.
- E. Copings shall be Category 5 FM rated.
- F. Provide 100 mm (four inch) wide 0.8 mm (0.032 inch) thick watertight joint covers.
- G. Provide anchor gutter bar of 0.8 mm (0.032 inch) thick with anchor holes formed for underside of joint.
- H. Provide concealed guttered splice plate of 0.8 mm (0.032 inch) thick with butyl or other resilient seal strips anchored to splice plate for underside of joint. Use galvanized steel anchor plate providing compression spring anchoring of coping cover.
- I. Finish: Anodized as specified.

2.3 EXTRUDED ALUMINUM ROOF EXPANSION JOINT COVERS

- A. Fabricate in 3000 mm (10 foot) lengths with fastener openings slotting for expansion not over 600 mm (24 inch) centers.
- B. Provide four-way expansion, for joint widths shown.
- C. Mill finish on aluminum.

- D. Form waterstop or moisture seals of continuous sheets of neoprene, not less than 0.8 mm (0.032 inch) thick.
- E. Fabricate corners as one piece assembly with mitered and welded joint and least dimension legs not less than 300 mm (12 inches) long.
- F. Factory fabricate end caps and transitions to insure waterproof assembly.
- G. Three piece assembly:
 - 1. Roof expansion joint cover system consists of an extruded aluminum cover, extruded frame or curb vertical section, galvanized steel cant, and aluminum compression clamp counter flashing, complete with moisture seals. Form cover and vertical section from extruded aluminum, 2 mm (0.080 inch) minimum thickness with spring stainless steel tension or pivot bar.
 - 2. Form cant from galvanized steel not less than 0.8 (0.029 inch) thick formed to profile shown.
 - 3. Form splice plates of not less than 0.8 mm (0.032 inch) thick aluminum sheet.
 - 4. Form counter flashing member of 1.3 mm (0.050 inch) thick sheet aluminum, secured with screws to the top edge of the vertical section and providing compression clamp over base flashing.
 - 5. Provide compression gasket separating cover from curb bearing.
- H. Two piece assembly:
 - 1. Roof expansion joint system consists of an extruded aluminum cover combination extruded aluminum frame or curb with integral adjustable counter flashing flange, and moisture seals.
 - 2. Form cover from extruded aluminum 2 mm (0.078 inch) minimum thickness.
 - 3. Form cover anchor system of stainless steel pivot bar.
 - 4. Form frame assembly of not less than 2 mm (0.076 inch) aluminum except for flashing portion.
 - 5. Provide compression gasket separating cover from curb at bearing.

2.4 FINISH

- A. In accordance with NAAMM Amp 500-505.
- B. Aluminum Colored Finish: AA-C22A42 (anodized or AA0C22A44 (electrolytically deposited metallic compound) medium matte, integrally colored coating, Class 1, Architectural, 0.7 mils thick. Dyes will not be accepted.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install roof accessories where shown.

- B. Secure with fasteners in accordance with manufacture's printed installation instructions and approved shop drawings unless shown otherwise.
- C. Coordinate to install insulation where shown; see Section 07 21 13, THERMAL INSULATION and Section 07 22 00, ROOF AND DECK INSULATION.
- D. Comply with section 07 92 00, JOINT SEALANTS to install sealants where manufactures installation instructions require sealant.
- E. Coordinate with roofing work for installation of items in sequence to prevent water infiltration.
- F. Aluminum Coping:
 - 1. Install sections of coping with approximately 6 mm (1/4-inch) space between ends of sections.
 - 2. Center joint gutter bar and covers at joints and securely lock in place.
 - 3. When snap-on system is used insure front and back edges are locked in place.
- G. Expansion Joint Covers:
 - 1. Install to terminate base flashing 200 mm (8 inches) above roof.
 - 2. Install moisture seals to drain water to outlets that do not permit water to enter buildings construction.
 - 3. Use stainless steel screws when exposed.
 - 4. Three piece assembly:
 - a. Install curb section with screws to wood blocking, allowing 6 mm (1/4 inch) at butt joints between sections with splice plate at joint.
 - b. Install cant to wood blocking by nailing along horizontal flange every 150 mm (6 inches), with galvanized roofing nails 25 mm (one inch) long.
 - c. After completion of base flashing install cap flashing and compression clamp and fasten to the curb or metal cant with stainless steel self-tapping screws with neoprene washers under head spaced approximately 450 mm (18 inches) on center.
 - d. Install expansion joint cover with a 6 mm (1/4 inch) wide end joints.
 - e. Install over end joint a cover plate complete with concealed aluminum flashing, centered under each joint. Fabricate flashing to lap cover not less than four inches.
 - 5. Two piece assembly:
 - a. Install curb section with screws allowing 6 mm (1/4 inch) space at end joints with splice plate at joint.

- b. After completion of base flashing bend down cap flashing flange and secure to blocking with screws.
- c. Install expansion joint cover with 6 mm (1/4 inch) wide space at end joints and tension bars at 600 mm (24 inches) on center.
- d. Install cover plates with formed aluminum flashing concealed and centered on joint. Flashing to lap cover not less than 100 mm (4 inches).

3.2 PROTECTION OF ALUMINUM

- A. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces of the dissimilar material with two coats of asphalt coating (complete coverage), or by separating the contact surfaces with a preformed neoprene tape having pressure sensitive adhesive coating on side.
- B. Paint aluminum in contact with wood, concrete and masonry, or other absorptive materials, that may become repeatedly wet, with two coats of asphalt coating.

3.3 ADJUSTING

Adjust expansion joints to close tightly and be watertight; insuring maximum allowance for building movement.

3.4 PROTECTION

Protect roof accessories from damage during installation and after completion of the work from subsequent construction.

- - - E N D - - -

**SECTION 07 81 00
APPLIED FIREPROOFING**

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies mineral fiber and cementitious coverings to provide fire resistance to interior structural steel members shown.

1.2 RELATED WORK

A. Firestopping: Section 07 84 00, FIRESTOPPING.

1.2 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Manufacturer's complete and detailed application instructions and specifications.
2. Manufacturer's repair and patching instructions.

C. Certificates:

1. Certificate from testing laboratory attesting fireproofing material and application method meet the specified fire ratings.
 - a. List thickness and density of material required to meet fire ratings.
 - b. Accompanied by complete test report and test record.
2. Manufacturer's certificate indicating sprayed-on fireproofing material supplied under the Contract is same within manufacturing tolerance as fireproofing material tested.

D. Miscellaneous:

1. Manufacturer's written approval of surfaces to receive sprayed-on fireproofing.
2. Manufacturer's written approval of completed installation.
3. Manufacturer's written approval of the applicators of fireproofing material.

1.3 PRODUCT DELIVERY, STORAGE AND HANDLING

- A. Deliver to job-site in sealed containers marked and labeled to show manufacturer's name and brand and certification of compliance with the specified requirements.
- B. Remove damaged containers from the site.
- C. Store the materials off the ground, under cover, away from damp surfaces.
- D. Keep dry until ready for use.

- E. Remove materials that have been exposed to water before installation from the site.

1.4 QUALITY CONTROL

- A. Test for fire endurance in accordance with ASTM E119, for fire rating specified, in a nationally recognized laboratory.
- B. Manufacturer's inspection and approval of surfaces to receive fireproofing as specified under paragraph Examination.
- C. Manufacturer's approval of fireproofing applications.
- D. Manufacturer's approval of completed installation.
- E. Manufacturer's representative shall observe and advise at the commencement of application, and shall visit the site as required thereafter for the purpose of ascertaining proper application.
- F. Pre-Application Test Area.
 - 1. Apply a test area consisting of a typical overhead fireproofing installation, including not less than 4.5 m (15 feet) of beam and deck.
 - a. Apply to one column.
 - b. Apply for the hourly ratings used.
 - 2. Install in location selected by the COTR, for approval by the representative of the fireproofing material manufacturer and by the Government.
 - 3. Perform Bond test on painted steel in accordance with ASTM E736.
 - 4. Do not proceed in other areas until installation of test area has been completed and approved.
 - 5. Keep approved installation area open for observation as criteria for sprayed-on fireproofing.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - C841-03.....Installation of Interior Lathing and Furring
 - C847-06.....Metal Lath
 - E84-08.....Surface Burning Characteristics of Building Materials
 - E119-08.....Fire Tests of Building Construction and Materials

- E605-93 (R2006).....Thickness and Density of Sprayed Fire-Resistive Materials Applied to Structural Members
- E736-00.....Cohesion/Adhesion of Sprayed Fire-Resistive Materials Applied to Structural Members
- E759-92 (R2005).....The Effect of Deflection on Sprayed Fire-Resistive Material Applied to Structural Members
- E760-92 (R2005).....Impact on Bonding of Sprayed Fire-Resistive Material Applied to Structural Members
- E761-92 (R2005).....Compressive Strength of Fire-Resistive Material Applied to Structural Members
- E859-93 (R2006).....Air Erosion of Sprayed Fire-Resistive Materials Applied to Structural Members
- E937-93 (R2005).....Corrosion of Steel by Sprayed Fire-Resistive Material Applied to Structural Members
- E1042-02.....Acoustically, Absorptive Materials Applied by Trowel or Spray.
- G21-96 (R2002).....Determining Resistance of Synthetic Polymeric Materials to Fungi
- C. Underwriters Laboratories, Inc. (UL):
Fire Resistance Directory...Latest Edition including Supplements
- D. Warnock Hersey (WH):
Certification Listings..Latest Edition
- E. Factory Mutual System (FM):
Approval Guide.....Latest Edition including Supplements

PART 2 - PRODUCTS

2.1 SPRAYED-ON FIREPROOFING

- A. ASTM E1042, Class (a), Category A.
1. Type I, factory mixed cementitious materials with approved aggregate.
 2. Type II, factory mixed mineral fiber with integral inorganic binders minimum 240 kg/m³ (15 lb/ft³) density per ASTM E605 test unless specified otherwise. Use in areas that are completely encased.
- B. Materials containing asbestos are not permitted.
- C. Fireproofing characteristics when applied in the thickness and density required to achieve the fire-rating specified.

	Characteristic	Test	Results
--	----------------	------	---------

1.	Deflection	ASTM E759	No cracking, spalling, or delamination when backing to which it is applied has a deflection up to 1/120 in 3m (10 ft.)
2.	Corrosion-Resistance	ASTM E937	No promotion of corrosion of steel.
3.	Bond Impact	ASTM E760	No cracking, spalling, or delamination.
4.	Cohesion/Adhesion (Bond Strength)	ASTM E736	Minimum cohesive/adhesive strength of 9.57 kPa (200 lbf/ft ²) for protected areas. 19.15 kPa (400 lbf/ft ²) for exposed areas.
5.	Air Erosion	ASTM E859	Maximum gain weight of the collecting filter 0.27gm/m ² (0.025 gm/ft ²).
6.	Compressive Strength	ASTM E761	Minimum compressive strength 36 kPa (5 lbf/in ²).
7.	Surface Burning Characteristics with adhesive and sealer to be used	ASTM E84	Flame spread 25 or less smoke developed 50 or less
8.	Fungi Resistance	ASTM G21	Resistance to mold growth when inoculated with aspergillus niger (28 days for general application)

2.2 ADHESIVE

- A. Bonding adhesive for Type II (fibrous) materials as recommended and supplied by the fireproofing material manufacturer.
- B. Adhesive may be an integral part of the material or applied separately to surface receiving fireproofing material.

2.3 SEALER

- A. Sealer for Type II (fibrous) material as recommended and supplied by the fireproofing material manufacturer.
- B. Surface burning characteristics as specified for fireproofing material.
- C. Fungus resistant.
- D. Sealer may be an integral part of the material or applied separately to the exposed surface. When applied separately use contrasting color pigmented sealer, white preferred.

2.4 WATER

- A. Clean, fresh, and free from organic and mineral impurities.
- B. pH of 6.9 to 7.1.

2.5 MECHANICAL BOND MATERIAL

- A. Expanded Metal Lath: ASTM C847, minimum weight of 0.92 kg/m² (1.7 pounds per square yard).
- B. Fasteners: ASTM C841.

PART 3 - EXECUTION**3.1 EXAMINATION**

- A. Verify surfaces to receive fireproofing are clean and free of dust, soot, oil, grease, water soluble materials or any foreign substance which would prevent adhesion of the fireproofing material.
- B. Verify hangers, inserts and clips are installed before the application of fireproofing material.
- C. Verify ductwork, piping, and other obstructing material and equipment is not installed that will interfere with fireproofing installation.
- D. Verify concrete work on steel decking and concrete encased steel is completed.
- E. Verify temperature and enclosure conditions are required by fireproofing material manufacturer.

3.2 APPLICATION

- A. Do not start application until written approval has been obtained from manufacturer of fireproofing materials that surfaces have been inspected by the manufacturer or his representative, and are suitable to receive sprayed-on fireproofing.
- B. Coordinate application of fireproofing material with other trades.
- C. Application of Metal Lath:
 - 1. Apply to beam and columns having painted surfaces which fail ASTM E736 Bond Test requirements in pre-application test area.
 - 2. Apply to beam flanges 300 mm (12-inches) or more in width.
 - 3. Apply to column flanges 400 mm (16-inches) or more in width.
 - 4. Apply to beam or column web 400 mm (16-inches) or more in depth.
 - 5. Tack weld or mechanically fasten on maximum of 300 mm (12-inch) center.
 - 6. See design criteria section of the approved assemblies used.
 - 7. Lap and tie lath member in accordance with ASTM C841.
- D. Mix and apply in accordance with manufacturer's instructions.
 - 1. Mechanically control material and water ratios.
 - 2. Apply adhesive and sealer, when not an integral part of the materials, in accordance with the manufacturer's instructions.

3. Apply to density and thickness indicated in UL Fire Resistance Directory, FM Approval Guide, or WH Certification Listings unless specified otherwise. Test in accordance with ASTM E119.
4. Minimum applied dry density per cubic meter (cubic foot) for the underside of the walk on deck (interstitial) hung purl in or beam and steel deck, columns in interstitial spaces and mechanical equipment rooms shall be as follows:
 - a. Type I - 240 kg/m³ (15 lb/ft³).
 - b. Type II - 350 kg/m³ (22 lb/ft³).
- E. Application shall be completed in one area, inspected and approved by COTR before removal of application equipment and proceeding with further work.

3.3 FIELD TESTS

- A. Tests of applied material will be performed by VA retained Testing Laboratory. See Section 01 45 29, TESTING LABORATORY SERVICES.
- B. COTR will select area to be tested in specific bays on each floor using a geometric grid pattern.
- C. Test for thickness and density in accordance with ASTM E605. Areas showing thickness less than that required as a result of fire endurance test will be rejected.
- D. Areas showing less than required fireproofing characteristics will be rejected on the following field tests.
 1. Test for cohesion/adhesion: ASTM E736.
 2. Test for bond impact strength: ASTM E760.

3.3 PATCHING AND REPAIRING

- A. Inspect after mechanical, electrical and other trades have completed work in contact with fireproofing material, but before sprayed material is covered by subsequent construction.
- B. Perform corrective measures in accordance with fireproofing material Manufacturer's recommendations.
 1. Respray areas requiring additional fireproofing material to provide the required thickness, and replace dislodged or removed material.
 2. Spray material for patching by machine directly on point to be patched, or into a container and then hand apply.
 3. Hand mixing of material is not permitted.
- C. Repair:
 1. Respray all test and rejected areas.

2. Patch fireproofing material which is removed or disturbed after approval.

D. Perform final inspection of sprayed areas after patching and repair.

3.5 SCHEDULE

- A. Apply fireproofing material in new interior structural steel members (columns and beams) and on underside of existing interior steel floor and roof decks where shown, except on following surfaces:
 1. Areas used as air handling plenums.
 2. Steel to be encased in concrete or designated to receive other type of fireproofing.
- B. Type I & Type II on existing roof deck at vacant elevator shaft and beams and columns supporting 2nd Floor:
 1. Three hour fire rating.
- C. Type I & Type II on beams and columns supporting roof:
 1. Two hour fire rating.

- - - E N D - - -

SECTION 07 84 00**FIRESTOPPING****PART 1 GENERAL****1.1 DESCRIPTION SUMMARY**

- A. Provide firestop systems consisting of a material, or combination of materials installed to retain the integrity of fire-rated construction by maintaining an effective barrier against the spread of flame, smoke, and/or hot gases through penetrations, blank openings, construction joints, or at perimeter fire containment in or adjacent to fire-rated barriers in accordance with the requirements of the Building Code for this project. Work included labeling all firestopping installations, fire walls, smoke walls and generating record of products or systems installed.
- B. Firestop systems shall be used in locations including, but not limited to, the following:
 - 1. Penetrations through fire-resistance-rated floor and roof assemblies requiring protected openings including both empty openings and openings that contain penetrations.
 - 2. Penetrations through fire-resistance-rated wall assemblies including both empty openings and openings that contain penetrations.
 - 3. Membrane penetrations in fire-resistance-rated wall assemblies where items penetrate one side of the barrier.
 - 4. Joints in fire-resistance-rated assemblies to allow independent movement.
 - 5. Perimeter Fire Barrier System between a rated floor/roof and an exterior wall assembly.
 - 6. Joints, through penetrations and membrane penetrations in Smoke Barriers and Smoke Partitions.

1.2 RELATED WORK

- A. Examine Contract Documents for requirements that affect Work of this Section. Other Specification Sections that may relate directly to Work of this Section include, but are not limited to:
 - 1. Division 3
 - a. Section 03 30 53, CAST-IN-PLACE CONCRETE
 - 2. Division 5
 - a. 05 12 00, STRUCTURAL STEEL FRAMING
 - b. 05 12 50, BUCKLING RESTRAINED BRACES
 - c. 05 36 00, COMPOSITE METAL DECKING
 - d. 05 40 00, COLD-FORMED METAL FRAMING
 - e. 05 50 00, METAL FABRICATIONS

- f. 05 51 00, METAL STAIRS
- 3. Division 6
 - a. 06 10 00, ROUGH CARPENTRY
 - b. 06 16 63, CEMENTITIOUS SHEATHING
- 4. Division 7
 - a. 07 01 50.19, PREPARATION FOR RE-ROOFING
 - b. 07 21 13, THERMAL INSULATION
 - c. 07 22 00, ROOF AND DECK INSULATION
 - d. 07 53 23, ETHYLENE-PROPYLENE-DIENE-MONOMER ROOFING
 - e. 07 60 00, FLASHING AND SHEET METAL
 - f. 07 81 00, APPLIED FIREPROOFING
 - g. 07 92 00, JOINT SEALANTS
 - h. 07 95 13, EXPANSION JOINT COVER ASSEMBLIES
- 5. Division 8
 - a. 08 11 13, HOLLOW METAL DOOR AND FRAMES
 - b. 08 31 13, ACCESS DOORS AND FRAMES
- 6. Division 9
 - c. 09 22 16, NON-STRUCTURAL METAL FRAMING
 - d. 09 29 00, GYPSUM BOARD
- 7. Division 21
 - a. 21 13 13, WET-PIPE SPRINKLER SYSTEM
- 8. Division 22
 - a. 22 05 11, COMMON WORK RESULTS FOR PLUMBING
 - b. 22 11 00, FACILITY WATER DISTRIBUTION
 - c. 22 13 00, FACILITY SANITARY AND VENT PIPING
 - d. 22 14 00, FACILITY STORM DRAINAGE
 - e. 22 63 00, GAS SYSTEMS FOR LABORATORIES
- 9. Division 23
 - a. 23 05 11, COMMON WORK RESULTS FOR HVAC
 - b. 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC
 - c. 23 21 13, HYDRONIC PIPING
 - d. 23 22 13, HYDRONIC PUMPS
 - e. 23 31 00, HVAC DUCTS AND CASINGS
 - f. 23 37 00, AIR OUTLETS AND INLETS
- 10. Division 26
 - a. 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS
- 11. Division 27
 - a. 27 10 00, STRUCTURED CABLING
- 12. Division 28
 - a. 28 13 00, ACCESS CONTROL SYSTEM

b. 28 31 00, FIRE ALARM SYSTEM

1.3 REFERENCES

- A. Comply with applicable requirements of the following standards. Where these standards conflict with other specified requirements, the most restrictive requirement shall govern.
1. American Society for Testing and Materials (ASTM).
 - a) E 84 Test Method for Surface Burning Characteristics of Building Materials
 - b) E 119 Test Method for Fire Tests of Building Construction and Materials
 - c) E 814 Fire Tests of Through-Penetration Fire Stops
 2. National Fire Protection Association (NFPA):
 - a) NFPA 70 - National Electric Code
 - b) NFPA 101 - Life Safety Code
 - c) NFPA 221 - Fire Walls and Fire Barriers (preliminary to be released)
 - d) NFPA 251 - Fire Tests of Building Construction and Materials
 3. Underwriters Laboratories, Inc. (UL):
 - a) UL Qualified Firestop Contractor Program
 - b) UL 263 Fire Tests of Building Construction and Materials
 - c) UL 723 Surface Burning Characteristics of Building Materials
 - d) UL 1479 Fire-Tests of Through-Penetration Fire Stops
 4. Firestop Contractors International Association
 - a) FM 4991, Standard for Approval of Firestop Contractors

1.4 SYSTEM PERFORMANCE REQUIREMENTS

- A. Penetrations: Provide and install firestopping systems that are produced to resist the spread of fire, and the passage of smoke and other gases according to requirements indicated, including but not limited to the following:
1. Firestop all penetrations passing through fire resistance rated wall and floor assemblies and other locations as indicated on the drawings.
 2. Provide and install complete penetration firestopping systems that have been tested and approved by third party testing agency.
 3. F - Rated Through-Penetration Firestop Systems: Provide through-penetration firestop systems with F ratings, as determined per ASTM E 814, but not less than one hour or the fire-resistance rating of the construction being penetrated.
 4. T - Rated Through-Penetration Firestop Systems: Provide firestop systems with T ratings, in addition to F ratings, as determined per ASTM E 814, where indicated by Code.
 5. L - Rated Through-Penetration Firestop Systems: Provide firestop systems with L ratings, in addition to F and T ratings, as determined per UL 1479, where indicated by Code.

6. W - Rated Through-Penetration Firestop Systems: Provide firestop systems with W Water Resistance ratings, in addition to F, T and L ratings, as determined per UL 1479, in wet areas.
- B. Fire-Resistive Joints: Provide joint systems with fire-resistance ratings indicated, as determined per UL 2079, but not less than the fire-resistance rating of the construction in which the joint occurs.
- C. Perimeter Fire Containment Systems: Provide interior perimeter joint systems with fire-resistance ratings indicated, as determined per ASTM E 2307, but not less than the fire-resistance rating of the floor construction.
- D. For firestopping exposed to view, traffic, moisture, and physical damage, provides appropriate firestop systems for these conditions.
- E. Where there is no specific third party tested and classified firestop system available for a particular firestop configuration, the firestopping contractor shall obtain from the firestop manufacturer, an Engineering Judgment (EJ) or Equivalent Fire Resistance Rated Assembly (EFFRA) for submittal.

1.5 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, shop drawings, product data, and samples.
- B. Submit Manufacturers Product Data Sheets for each type of product selected. Certify that Firestop Material shall be asbestos free and complies with local regulations.
 1. Certification by firestopping manufacturer, that products supplied comply with local regulations controlling use of volatile organic compounds (VOC's) and are nontoxic to building occupants.
- C. Submit system design listings, including illustrations from a qualified testing and inspection agency that is applicable to each firestop configuration.
- D. Submit system design listings, including illustrations from a qualified testing and inspection agency that is applicable to each firestop configuration
 1. Where there is no specific third party tested and classified Firestop System available for particular firestop configuration, the firestopping contractor shall obtain from the firestop manufacturer an Engineering Judgment (EJ) or Equivalent Fire Resistance Rated Assembly (EFRRRA) for submittal

1.6 QUALITY ASSURANCE

- A. Fire-Test-Response Characteristics: Provide firestopping System Design Listing by a testing and inspection agency in accordance with the appropriate ASTM Standard(s) per article 1.04. A qualified testing and inspection agency may be UL, FM Research, Intertek Testing Services, Omega Point Laboratories (OPL)

or another agency performing testing and follow-up inspection services for firestop materials that is acceptable to the authority having jurisdiction.

B. Contractor Qualifications: Acceptable installer firms shall be:

1. FM Approved in accordance with FM Standard 4991.
2. UL Qualified Firestop Contractor.

C. Single Source Responsibility: Obtain firestop systems for each kind of penetration and construction condition indicated from a single primary firestop systems manufacturer.

1. Materials of different manufacture than allowed by the tested and listed system shall not be intermixed in the same firestop system or opening.
2. Tested and listed firestop systems are to be used before an manufacturer produced Engineering Judgment (EJ) or Equivalent Fire Resistance Rated Assembly (EFRRA) is installed

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Deliver firestopping products to project site in original, unopened containers or packages with intact and legible manufacturers' labels identifying product and manufacturer.
- B. Ensure that manufacturers products are not diluted mixed or otherwise altered unless permitted by the manufactures directions.
- C. Store and handle firestopping materials in accordance with manufacturers written instructions. Product and equipment staging and storage must be approved by the COTR.

1.8 PROJECT CONDITIONS

- A. Environmental Conditions: Install firestopping in accordance with manufacturers written instructions.
- B. Ventilation: Ventilate per firestopping manufacturers' instructions or Material Safety Data Sheet (MSDS)

1.9 SEQUENCING AND SCHEDULING

- A. Project coordination is essential to inform and educate all the parties involved with the firestopping process of their role and how they can affect firestopping on the project. A pre-construction meeting shall be scheduled and required for all parties involved prior to the start of construction.
- B. Do not conceal firestopping installations until Owner's inspection agency or the Authorities Having Jurisdiction have examined each installation.

1.10 ENVIRONMENTAL REGULATIONS

- A. All materials shall be asbestos free and comply with local VOC Regulations.
- B. If required, hazardous disposal of firestop materials shall be strictly observed as noted on the individual MSDS.

- C. Bulk storage shall be preapproved and in locations as to not present a hazard to the environment or risk to occupants.

PART 2 PRODUCTS

2.1 FIRESTOPPING, GENERAL

- A. Systems listed by approved testing agencies, as identified in part 1, may be used, providing they conform to the construction type, penetrant type, annular space requirements and fire rating involved in each separate instance.
- B. Firestop products produced by:
 - 1. 3M Fire Protection Products
 - 2. HILTI, Inc.
 - 3. Specified Technologies, Inc.
 - 4. Thermafiber, LLC

2.2 PENETRATION AND WALL LABELS

- A. All labels shall be 100% water proof.
- B. Labels shall be created using Gerber Series 250C - Controltac w Comply™ Pressure Sensitive Vinyl (PSV) or equivalent.
- C. Labels shall be sized and formatted according to the drawings and sample provided.

PART 3 EXECUTION

3.1 GENERAL

- A. No penetrations shall be left without firestopping beyond the end of each work day unless otherwise authorized by the Facility Safety Officer or COTR.

3.2 EXAMINATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements for opening configurations, penetrating items, substrates, and other conditions affecting performance of firestopping. Notify the responsible party or parties of any unsatisfactory conditions. Do not proceed with installation until unsatisfactory conditions have been corrected.

3.3 PREPARATION

- A. Priming: Prime substrates where recommended by firestopping manufacturer using that manufacturer's recommended products and methods. Confine primers to areas of bond. Do not allow spillage and migration onto exposed surfaces.
- B. Masking Tape: Mask work areas to prevent firestopping from contacting adjoining surfaces that will remain exposed upon completion of Work. Remove tape as soon as it is possible to do so without disturbing the firestopping seal with substrates.
- C. Verify that system components are clean, dry, and ready for installation.
- D. Verify that field dimensions are as shown on the Drawings and as recommended by the manufacturer.

3.4 INSTALLING PENETRATION FIRESTOPS

- A. General: Comply with the "System Performance Requirements" article in Part 1 and the through-penetration firestop manufacturer's installation instructions and drawings pertaining to products and applications indicated.
 - 1. Coordinate with other trades to assure that all pipes, conduit, cable, and other items, which penetrate fire rated construction, have been permanently installed prior to installation of firestop assemblies.
 - 2. Schedule the work to assure that partitions and all other construction that conceals penetrations are not erected prior to the installation of firestop and smoke seals.
- B. Install forming/damming materials and other accessories in accordance with manufacturers written instructions.
- C. Install fill materials for through-penetration firestop systems by proven techniques to produce the following results:
 - 1. Completely fill voids and cavities formed by openings, forming materials, accessories, and penetrating items.
 - 2. Install materials so they contact and adhere to substrates formed by openings and penetrating items.
 - 3. For fill materials that will remain exposed after completing Work, finish to produce smooth, uniform surfaces.

3.5 INSTALLING FIRESTOP JOINT SYSTEMS

- A. General: Comply with the "System Performance Requirements" article in Part 1 and with the firestop manufacturer's installation instructions and drawings pertaining to products and applications indicated.
 - 1. Install joint fillers to provide support of firestop materials during application and at the position required to produce the cross-sectional shapes and depths of installed firestop material relative to joint widths that allow optimum sealant movement capability and develop fire-resistance rating required.
- B. Install systems by proven techniques that result in firestop materials:
 - 1. Directly contacting and fully wetting joint substrates.
 - 2. Completely filling recesses provided for each joint configuration,
 - 3. Providing uniform, cross-sectional shapes and depths relative to joint width that optimize movement capability.
- C. Tool non-sag firestop materials immediately after their application and prior to the time skinning or begins. Form smooth, uniform beads of configuration indicated or required to:
 - 1. Produce fire-resistance rating
 - 2. To eliminate air pockets

3. To ensure contact and adhesion with sides of joint.

3.6 LABELING

- A. Each penetration shall be labeled with a label indication the Firestop System Identification Number (FSIN) and year installation was accomplished.
- B. Date labels shall be placed no further than 1 inch from the FSIN.
- C. Fire and smoke walls shall be labeled according to their rating. Labels shall be placed between 3 inches to 18 inches above suspended ceilings and at intervals of no more than 20 feet. Labels shall place above all doors within the barrier wall.
- D. See plans for graphic design of labels and additional requirements.

3.7 FIELD QUALITY CONTROL

- A. Inspection: The VA may require an independent inspection agency, employed and paid by the VA, to examine penetration firestopping in accordance with ASTM E - 2174, "Standard Practice for On-Site Inspection of Installed Fire Stops and ASTM E-2393, "Standard Practice for On-Site Inspection of Installed Fire Stop Joint Systems. Inspection agency to examine firestopping and will determine, in general, that firestopping has been installed in compliance with requirements of tested and listed firestop system, and installation process conforms to FM 4991 - Standard for Approval of Firestop Contractors or UL Qualified Firestop Contractor Program.
- B. The inspector shall advise the contractor of any deficiencies noted within one (1) working day.
- C. Where deficiencies are found, repair or replace the firestopping so that it complies with requirements of tested and listed system design.

3.8 CLEAN-UP AND SPECIAL WORKING CONDITIONS

- A. Firestop Material: Clean off excess fill materials and sealants adjacent to openings and joints as work progresses. Use methods and cleaning materials approved by manufacturers of firestopping products and or assemblies in which openings and joints occur.
- B. Protect firestopping during and after curing period from contact with contaminating substances and other construction activities.

3.9 WARRANTY

- A. Firestopping work subject to the terms of the Article "Warranty of Construction", FAR clause 52.246-21, except extend the warranty period to five years.

---END OF SECTION---

**SECTION 07 92 00
JOINT SEALANTS**

PART 1 - GENERAL**1.1 DESCRIPTION:**

Section covers all sealant and caulking materials and their application, wherever required for complete installation of building materials or systems.

1.2 RELATED WORK:

- A. Firestopping penetrations: Section 07 84 00, FIRESTOPPING.
- B. Glazing: Section 08 80 00, GLAZING.
- C. Sound rated gypsum partitions/sound sealants: Section 09 29 00, GYPSUM BOARD.
- D. Mechanical Work: Section 21 05 11, COMMON WORK RESULTS FOR FIRE SUPPRESSION, Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, and Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.3 QUALITY CONTROL:

- A. Installer Qualifications: An experienced installer who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance.
- B. Source Limitations: Obtain each type of joint sealant through one source from a single manufacturer.
- C. Product Testing: Obtain test results from a qualified testing agency based on testing current sealant formulations within a 12-month period.
 - 1. Testing Agency Qualifications: An independent testing agency qualified according to ASTM C1021.
 - 2. Test elastomeric joint sealants for compliance with requirements specified by reference to ASTM C920, and where applicable, to other standard test methods.
 - 3. Test other joint sealants for compliance with requirements indicated by referencing standard specifications and test methods.
- D. Preconstruction Field-Adhesion Testing: Before installing elastomeric sealants, field test their adhesion to joint substrates in accordance with sealant manufacturer's recommendations:
 - 1. Conduct field tests for each application indicated below:
 - a. Each type of elastomeric sealant and joint substrate indicated.

- b. Each type of non-elastomeric sealant and joint substrate indicated.
- 2. Notify COTR seven days in advance of dates and times when test joints will be erected.
- 3. Arrange for tests to take place with joint sealant manufacturer's technical representative present.
- E. VOC: Acrylic latex and Silicon sealants shall have less than 50g/l VOC content.

1.4 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's installation instructions for each product used.
- C. Cured samples of exposed sealants for each color where required to match adjacent material.
- D. Manufacturer's Literature and Data:
 - 1. Caulking compound
 - 2. Primers
 - 3. Sealing compound, each type, including compatibility when different sealants are in contact with each other.

1.5 PROJECT CONDITIONS:

- A. Environmental Limitations:
 - 1. Do not proceed with installation of joint sealants under following conditions:
 - a. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 4.4 °C (40 °F).
 - b. When joint substrates are wet.
- B. Joint-Width Conditions:
 - 1. Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.
- C. Joint-Substrate Conditions:
 - 1. Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

1.6 DELIVERY, HANDLING, AND STORAGE:

- A. Deliver materials in manufacturers' original unopened containers, with brand names, date of manufacture, shelf life, and material designation clearly marked thereon.
- B. Carefully handle and store to prevent inclusion of foreign materials.
- C. Do not subject to sustained temperatures exceeding 32° C (90° F) or less than 5° C (40° F).

1.7 DEFINITIONS:

- A. Definitions of terms in accordance with ASTM C717 and as specified.
- B. Back-up Rod: A type of sealant backing.
- C. Bond Breakers: A type of sealant backing.
- D. Filler: A sealant backing used behind a back-up rod.

1.8 WARRANTY:

- A. Warranty exterior sealing against leaks, adhesion, and cohesive failure, and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be extended to two years.
- B. General Warranty: Special warranty specified in this Article shall not deprive Government of other rights Government may have under other provisions of Contract Documents and shall be in addition to, and run concurrent with, other warranties made by Contractor under requirements of Contract Documents.

1.9 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - C509-06.....Elastomeric Cellular Preformed Gasket and Sealing Material.
 - C612-10.....Mineral Fiber Block and Board Thermal Insulation.
 - C717-10.....Standard Terminology of Building Seals and Sealants.
 - C834-10.....Latex Sealants.
 - C919-08.....Use of Sealants in Acoustical Applications.
 - C920-10.....Elastomeric Joint Sealants.
 - C1021-08.....Laboratories Engaged in Testing of Building Sealants.
 - C1193-09.....Standard Guide for Use of Joint Sealants.

C1330-02 (R2007).....Cylindrical Sealant Backing for Use with Cold
Liquid Applied Sealants.

D1056-07.....Specification for Flexible Cellular Materials—
Sponge or Expanded Rubber.

E84-09.....Surface Burning Characteristics of Building
Materials.

C. Sealant, Waterproofing and Restoration Institute (SWRI).
The Professionals' Guide

PART 2 - PRODUCTS

2.1 SEALANTS:

A. S-1:

1. ASTM C920, polyurethane or polysulfide.
2. Type M.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 20-40

B. S-6:

1. ASTM C920, silicone, neutral cure.
2. Type S.
3. Class: Joint movement range of plus 100 percent to minus 50 percent.
4. Grade NS.
5. Shore A hardness of 15-20.
6. Minimum elongation of 1200 percent.

C. S-7:

1. ASTM C920, silicone, neutral cure.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-30.
6. Structural glazing application.

D. S-9:

1. ASTM C920 silicone.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-30.
6. Non-yellowing, mildew resistant.

E. S-11:

1. ASTM C920 polyurethane.
2. Type M/S.
3. Class 25.
4. Grade P/NS.
5. Shore A hardness of 35 to 50.

2.2 CAULKING COMPOUND:

- A. C-1: ASTM C834, acrylic latex.
- B. C-2: One component acoustical caulking, non drying, non hardening, synthetic rubber.

2.3 COLOR:

- A. Sealants used with exposed masonry shall match color of mortar joints.
- B. Sealants used with unpainted concrete shall match color of adjacent concrete.
- C. Color of sealants for other locations shall be light gray or aluminum, unless specified otherwise.
- D. Caulking shall be light gray or white, unless specified otherwise.

2.4 JOINT SEALANT BACKING:

- A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.
- B. Cylindrical Sealant Backings: ASTM C1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:
 1. Type C: Closed-cell material with a surface skin.
- C. Elastomeric Tubing Sealant Backings: Neoprene, butyl, EPDM, or silicone tubing complying with ASTM D1056, nonabsorbent to water and gas, and capable of remaining resilient at temperatures down to minus 32° C (minus 26° F). Provide products with low compression set and of size and shape to provide a secondary seal, to control sealant depth, and otherwise contribute to optimum sealant performance.
- D. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

2.5 FILLER:

- A. Mineral fiber board: ASTM C612, Class 1.
- B. Thickness same as joint width.
- C. Depth to fill void completely behind back-up rod.

2.6 PRIMER:

- A. As recommended by manufacturer of caulking or sealant material.
- B. Stain free type.

2.7 CLEANERS-NON POUROUS SURFACES:

Chemical cleaners acceptable to manufacturer of sealants and sealant backing material, free of oily residues and other substances capable of staining or harming joint substrates and adjacent non-porous surfaces and formulated to promote adhesion of sealant and substrates.

PART 3 - EXECUTION**3.1 INSPECTION:**

- A. Inspect substrate surface for bond breaker contamination and unsound materials at adherent faces of sealant.
- B. Coordinate for repair and resolution of unsound substrate materials.
- C. Inspect for uniform joint widths and that dimensions are within tolerance established by sealant manufacturer.

3.2 PREPARATIONS:

- A. Prepare joints in accordance with manufacturer's instructions and SWRI.
- B. Clean surfaces of joint to receive caulking or sealants leaving joint dry to the touch, free from frost, moisture, grease, oil, wax, lacquer paint, or other foreign matter that would tend to destroy or impair adhesion.
 - 1. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants.
 - 2. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include the following:
 - a. Concrete.
 - b. Masonry.
 - c. Unglazed surfaces of ceramic tile.
 - 3. Remove laitance and form-release agents from concrete.

4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants.
 - a. Metal.
 - b. Glass.
 - c. Porcelain enamel.
 - d. Glazed surfaces of ceramic tile.
- C. Do not cut or damage joint edges.
- D. Apply masking tape to face of surfaces adjacent to joints before applying primers, caulking, or sealing compounds.
 1. Do not leave gaps between ends of sealant backings.
 2. Do not stretch, twist, puncture, or tear sealant backings.
 3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.
- E. Apply primer to sides of joints wherever required by compound manufacturer's printed instructions.
 1. Apply primer prior to installation of back-up rod or bond breaker tape.
 2. Use brush or other approved means that will reach all parts of joints.
- F. Take all necessary steps to prevent three sided adhesion of sealants.

3.3 BACKING INSTALLATION:

- A. Install back-up material, to form joints enclosed on three sides as required for specified depth of sealant.
- B. Where deep joints occur, install filler to fill space behind the back-up rod and position the rod at proper depth.
- C. Cut fillers installed by others to proper depth for installation of back-up rod and sealants.
- D. Install back-up rod, without puncturing the material, to a uniform depth, within plus or minus 3 mm (1/8 inch) for sealant depths specified.
- E. Where space for back-up rod does not exist, install bond breaker tape strip at bottom (or back) of joint so sealant bonds only to two opposing surfaces.
- F. Take all necessary steps to prevent three sided adhesion of sealants.

3.4 SEALANT DEPTHS AND GEOMETRY:

- A. At widths up to 6 mm (1/4 inch), sealant depth equal to width.

- B. At widths over 6 mm (1/4 inch), sealant depth 1/2 of width up to 13 mm (1/2 inch) maximum depth at center of joint with sealant thickness at center of joint approximately 1/2 of depth at adhesion surface.

3.5 INSTALLATION:

A. General:

1. Apply sealants and caulking only when ambient temperature is between 5° C and 38° C (40° and 100° F).
2. Do not use polysulfide base sealants where sealant may be exposed to fumes from bituminous materials, or where water vapor in continuous contact with cementitious materials may be present.
3. Do not use sealant type listed by manufacture as not suitable for use in locations specified.
4. Apply caulking and sealing compound in accordance with manufacturer's printed instructions.
5. Avoid dropping or smearing compound on adjacent surfaces.
6. Fill joints solidly with compound and finish compound smooth.
7. Tool joints to concave surface unless shown or specified otherwise.
8. Finish paving or floor joints flush unless joint is otherwise detailed.
9. Apply compounds with nozzle size to fit joint width.
10. Test sealants for compatibility with each other and substrate. Use only compatible sealant.

- B. For application of sealants, follow requirements of ASTM C1193 unless specified otherwise.

- C. Where gypsum board partitions are of sound rated, fire rated, or smoke barrier construction, follow requirements of ASTM C919 only to seal all cut-outs and intersections with the adjoining construction unless specified otherwise.

1. Apply a 6 mm (1/4 inch) minimum bead of sealant each side of runners (tracks), including those used at partition intersections with dissimilar wall construction.
2. Coordinate with application of gypsum board to install sealant immediately prior to application of gypsum board.
3. Partition intersections: Seal edges of face layer of gypsum board abutting intersecting partitions, before taping and finishing or application of veneer plaster-joint reinforcing.

4. Openings: Apply a 6 mm (1/4 inch) bead of sealant around all cut-outs to seal openings of electrical boxes, ducts, pipes and similar penetrations. To seal electrical boxes, seal sides and backs.
5. Control Joints: Before control joints are installed, apply sealant in back of control joint to reduce flanking path for sound through control joint.

3.6 FIELD QUALITY CONTROL:

- A. Field-Adhesion Testing: Field-test joint-sealant adhesion to joint substrates as recommended by sealant manufacturer:
 1. Extent of Testing: Test completed elastomeric sealant joints as follows:
 - a. Perform 10 tests for first 300 m (1000 feet) of joint length for each type of elastomeric sealant and joint substrate.
 - b. Perform one test for each 300 m (1000 feet) of joint length thereafter or one test per each floor per elevation.
- B. Inspect joints for complete fill, for absence of voids, and for joint configuration complying with specified requirements. Record results in a field adhesion test log.
- C. Repair sealants pulled from test area by applying new sealants following same procedures used to originally seal joints. Ensure that original sealant surfaces are clean and new sealant contacts original sealant.
- D. Evaluation of Field-Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements, will be considered satisfactory. Remove sealants that fail to adhere to joint substrates during testing or to comply with other requirements. Retest failed applications until test results prove sealants comply with indicated requirements.

3.7 CLEANING:

- A. Fresh compound accidentally smeared on adjoining surfaces: Scrape off immediately and rub clean with a solvent as recommended by the caulking or sealant manufacturer.
- B. After filling and finishing joints, remove masking tape.
- C. Leave adjacent surfaces in a clean and unstained condition.

3.8 LOCATIONS:

- A. Exterior Building Joints, Horizontal and Vertical:
 1. Metal to Metal: Type S-1
 2. Metal to Masonry or Stone: Type S-1

3. Masonry to Masonry or Stone: Type S-1
4. Threshold Setting Bed: Type S-1
5. Wood to Masonry: Type S-1
- B. Metal Reglets and Flashings:
 1. Flashings to Wall: Type S-6
 2. Metal to Metal: Type S-6
- C. Sanitary Joints:
 1. Walls to Plumbing Fixtures: Type S-9
 2. Counter Tops to Walls: Type S-9
 3. Pipe Penetrations: Type S-9
- D. Horizontal Traffic Joints:
 1. Concrete Paving, Unit Pavers: Type S-11
- E. High Temperature Joints over 204 degrees C (400 degrees F):
 1. Exhaust Pipes, Flues, Breech Stacks: Type S-7
- F. Interior Caulking:
 1. Typical Narrow Joint 6 mm, (1/4 inch) or less at Walls and Adjacent Components: Types C-1 and C-2.
 2. Perimeter of Doors, Windows, Access Panels which Adjoin Concrete or Masonry Surfaces: Types C-1 and C-2.
 3. Joints at Masonry Walls and Columns, Piers, Concrete Walls or Exterior Walls: Types C-1 and C-2.
 4. Perimeter of Lead Faced Control Windows and Plaster or Gypsum Wallboard Walls: Types C-1 and C-2.
 5. Exposed Isolation Joints at Top of Full Height Walls: Types C-1 and C-2.
 6. Exposed Acoustical Joint at Sound Rated Partitions Type C-2.
 7. Concealed Acoustic Sealant Types C-1 and C-2.

- - - E N D - - -

**SECTION 07 95 13
EXPANSION JOINT COVER ASSEMBLIES**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Section specifies floor, wall and ceiling seismic and building expansion joint assemblies.
- B. Types of assemblies:
 - Metal Plate Cover
 - Elastomeric Joint Covers
 - Preformed Elastomeric Sealant Joint

1.2 RELATED WORK

- A. Sheet Metal Expansion Joint Seals: Section 07 60 00, FLASHING AND SHEET METAL.
- B. Roof Expansion Joint Cover Assemblies: Section 07 72 00, ROOF ACCESORIES.
- C. Color of Elastomer Inserts, Filler Strips, Exterior Wall Seals and Metal Finishes: Section 09 06 00, SCHEDULE FOR FINISHES
- D. Steel Plate Expansion Joint Covers: Section 05 50 00, METAL FABRICATIONS.
- E. Fire Rated Systems: Section 07 84 00, FIRESTOPPING.

1.3 QUALITY ASSURANCE

- A. Project Conditions:
 - 1. Check actual locations of walls and other construction, to which work must fit, by accurate field measurements before fabrication.
 - 2. Show recorded measurements on final shop drawings.
- B. Fire tests performed by Factory Mutual, Underwriters Laboratories, Inc., Warnock Hersey or other approved independent testing laboratory.

1.4 DELIVERY STORAGE AND HANDLING

- A. Take care in handling of materials so as not to injure finished surface and components.
- B. Store materials under cover in a dry and clean location off the ground.
- C. Remove materials which are damaged or otherwise not suitable for installation from job site and replace with acceptable materials.

1.5 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:

1. Submit copies of manufacturer's current literature and data for each item specified.
 2. Clearly indicate movement capability of cover assemblies and suitability of material used in exterior seals for ultraviolet exposure.
- C. Certificates: Material test reports from approved independent testing laboratory indicating and interpreting test results relative to compliance of fire-rated expansion joint assemblies with requirements specified.
- D. Shop Drawings:
1. Showing full extent of expansion joint cover assemblies; include large-scale details indicating profiles of each type of expansion joint cover assembly, splice joints between sections, joiners with other type assemblies, special end conditions, anchorages, fasteners, and relationship to adjoining work and finishes.
 2. Include description of materials and finishes and installation instructions.
- E. Samples:
1. Samples of each type and color of metal finish on metal of same thickness and alloy used in work.
 2. Samples of each type and color of flexible seal used in work.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed form part of this specification to extent referenced. Publications are referred to in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
- A36/A36M-05.....Structural Steel
- A167-99 (R2004).....Stainless and Heat-Resisting Chromium-Nickel
Steel Plate, Sheet, and Strip
- A283/A283M-03.....Low and Intermediate Tensile Strength Carbon
Steel Plates
- A786/A786M-05.....Rolled Steel Floor Plates
- B36/B36M-06.....Brass, Plate, Sheet, Strip, and Rolled Bar
- B121-01(R2006).....Leaded Brass Plate, Sheet, Strip and Rolled Bar
- B209M-06.....Aluminum and Aluminum-Alloy Sheet and Plate
(Metric)
- B221M-06.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Shapes, and Tubes (Metric)

- B455-05.....Copper-Zinc Lead Alloy (Leaded Brass) Extruded Shapes
- C864-05.....Dense Elastomeric Compression Seal Gaskets, Setting Blocks, and Spacers
- C920-05.....Elastomeric Joint Sealants
- D1187-97 (R2002).....Asphalt Base Emulsions for Use as Protective Coatings for Metal
- D2287-96 (R2001).....Non-rigid Vinyl Chloride Polymer and Copolymer Molding and Extrusion Compounds
- E119-07.....Fire Tests of Building Construction and Materials
- E814-06.....Fire Tests of Through-Penetration Fire Stops
- C. Federal Specifications (Fed. Spec):
- TT-P-645B.....Primer, Paint, Zinc-Molybdate, Alkyd Type
- D. The National Association of Architectural Metal Manufacturers (NAAMM):
- AMP 500 Series.....Metal Finishes Manual.
- E. National Fire Protection Association (NFPA):
- 251-05.....Tests of Fire Endurance of Building Construction and Materials
- F. Underwriters Laboratories Inc. (UL):
- 263-03.....Fire Tests of Building Construction and Materials

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Stainless Steel: ASTM A167, Type 302 or 304.
- B. Structural Steel Shapes: ASTM A36.
- C. Steel Plate: ASTM A283, Grade C.
- D. Rolled Steel Floor Plate: ASTM A786.
- E. Aluminum:
1. Extruded: ASTM B221, alloy 6063-T5.
 2. Plate and Sheet: ASTM B209, alloy 6061-T6.
- F. Bronze:
1. Extruded: ASTM B455.
 2. Plate: ASTM B121.
- G. Brass: ASTM B36.
- H. Elastomeric Sealant:
1. ASTM C920, polyurethane.
 2. Type.

3. Class 25.
 4. Grade P or NS.
 5. Shore A hardness 25, unless specified otherwise.
- I. Thermoplastic Rubber:
1. ASTM C864.
 2. Dense Neoprene or other material standard with expansion joint manufacturers having the same physical properties.
- J. Vinyl Invertor Sealant Waterstops: Manufacturers' standard shapes and grade.
- K. Fire Barrier:
1. Designed for indicated or required dynamic structural movement without material degradation or fatigue.
 2. Tested in maximum joint width condition as a component of an expansion joint cover assembly in accordance with UL 263 NFPA 251, or ASTM E119 and E814, including hose steam test at full-rated period.
- L. Zinc-Molybdate Primer: Fed. Spec. TT-P-645.
- M. Accessories:
1. Manufacturer's standard anchors, fasteners, set screws, spaces, flexible secondary water stops or seals and filler materials, drain tubes, adhesive and other accessories as indicated or required for complete installations.
 2. Compatible with materials in contact.
 3. Water stops.

2.2 FABRICATION

- A. General:
1. Use ceiling and wall expansion joint cover assemblies of same design as floor to wall and floor to floor expansion joint cover assemblies. Unless shown otherwise.
 2. Provide expansion joint cover assemblies of design, basic profile, materials and operation indicated required to accommodate joint size variations in adjacent surfaces, and as required for anticipated structural movement.
 3. Deliver to job site ready for use and fabricated in as large sections and assemblies as practical. Assemblies identical to submitted and reviewed shop drawings, samples and certificates.

4. Furnish units in longest practicable lengths to minimize number of end joints. Provide mitered corners where joint changes directions or abuts other materials.
5. Include closure materials and transition pieces, tee-joints, corners, curbs, cross-connections and other assemblies.
6. Fire Performance Characteristics:
 - a. Provide expansion joint cover assemblies identical to those of assemblies whose fire resistance has been determined per ASTM E119 and E814, NFPA 251, or UL 263 including hose stream test at full-rated period.
 - b. Fire rating: Not less than rating of adjacent floor or wall construction.
7. Fire Barrier Systems:
 - a. Material to carry label of approved independent testing laboratory, and be subject to follow-up system for quality assurance.
 - b. Include thermal insulation where necessary, in accordance with above tests, with factory cut miters and transitions.
 - c. For joint widths up to and including 150 mm (six inches), supply barrier in lengths up to 15000 mm (50 feet) to eliminate field splicing.
 - d. For joint widths of seven inches and wider, supply barrier 3000 mm (10-foot) modules with overlapping ends for field splicing.
 - e. For joints within enclosed spaces such as chase walls, include 1 mm (0.032-inch) thick galvanized steel cover where conventional expansion joint cover is not used.
8. Seal Strip factory - formed and bonded to metal frames and anchor members.
9. Compression Seals: Prefabricate from thermoplastic rubber or dense neoprene to sizes and approximate profiles shown.
- B. Floor-to-Floor Metal Plate Joints:
 1. Frames on each side of joint designed to support cover plate of design shown.
 - a. Continuous frame designed to finish flush with adjacent floor of profile indicated with seating surface and raised floor rim to accommodate flooring.
 - b. Provide concealed bolt and steel anchors for embedment in concrete.

- c. Designed for filler materials between raised rim of frame and edge of cover plate where shown.
- d. Frame and cover plates of some metal where exposed.
 - 1) Design cover plates to support 180 Kg (400 lbs) per 0.3 square meters (1-square foot).
 - 2) Cover plates free of rattle due to traffic.
 - 3) No gaps or budes occur on filler material during design movement of joint.
 - 4) Provide manufacturer's continuous standard flexible vinyl water stop under floor joint cover assemblies.
- C. Floor-to-Wall Metal Plate Joints:
 - 1. Provide one frame on floor side of joint only. Provide wall side frame where required by manufacturer's design.
 - 2. Angle Cover Plates: Provide angle cover plates for joints to wall with countersunk flat-head exposed fasteners for securing to wall unless shown otherwise.
 - 3. Space fasteners as recommended by manufacturer.
 - 4. Match cover of adjacent floor to floor cover.
- D. Interior Wall Joint Cover Assemblies:
 - 1. Surface Mounted Metal Cover Plates:
 - a. Concealed frame for fastening to wall on one sides of joint.
 - b. Extend cover to lap each side of joint and to permit free movement on one side.
 - c. Provide concealed attachment of cover t frame cover in close contact with adjacent finish wall surfaces.
 - d. Use angle cover plates at intersection of walls.
 - e. Use smooth surface cover plates matching floor plates.
 - f. Use expansion fire inserts in fire rated walls, rated same as hour rating of wall.
- E. Exterior Wall Joint Assemblies:
 - 1. Variable movement with seal designed to prevent water and air infiltration.
 - 2. Use vinyl seal strip as secondary seal behind primary seal.
 - 3. Cover Plate Assemblies:
 - a. Surface mounted cover plate.
 - b. Concealed frame for fastening to wall on one side of joint.
 - c. Extend cover to lap each side of joint and to permit free movement on one side.

- d. Provide concealed attachment of cover to frame for cover with cover in close contact with adjacent finish surfaces.
- e. Use angle cover plate of intersection of walls.
- 4. Extruded thermoplastic rubber joint assemblies.
 - a. Aluminum frames both sides of joint.
 - 1) Designed to receive flexible rubber primary seal on exposed face after installation of frame.
 - 2) Designed to receive continuous secondary vinyl sheet seal.
 - 3) Anchor spaced at ends and not over 600 mm (24-inches).
 - b. Variable movement extruded rubber primary seal designed to remain in aluminum frame, throughout movement of joint.
 - 1) Seismic seal minimum 3 mm (0.125-inch) thick with multi-movement grooves designed for plus or minus 100 percent movement of joint width.
 - c. Provide factory heat welded transitions where directional changes occur to ensure a watertight system.
 - d. Provide pantographic wind load supports, maximum 2400 mm (8 feet) on center to support seal systems of 300 mm (12-inches) and wider.
- F. Ceiling and Soffit Assemblies:
 - 1. Variable movement vinyl insert in metal frame on both sides of joint.
 - 2. Designed for flush mounting with no exposed fasteners.
 - 3. Vinyl insert locked into metal frame.
 - 4. Vinyl and metal finish as specified in section 09 06 00, SCHEDULE FOR FINISHES.
 - 5. Vinyl insert semi rigid either flush face or accordion shape as showed to span joint width without sagging.
- G. Preformed Sealant Joint: Factory installed elastomeric sealant between extruded aluminum angle frame both sides.
 - 1. Elastomeric Sealant: Two part polyurethane sealant with movement capability of +/- 25% of joint width per ASTM-C-920, Type M, Grade P, Class 25, Shore A hardness of 25+/-5.
 - a. Color:
 - 2. Frame: Extruded Aluminum: Clear anodized.
 - 3. Anticipated movement: (+/-50%).

2.3 METAL FINISHES

A. General:

1. Apply finishes in factory after products are fabricated.
2. Protect finishes on exposed surfaces with protective covering before shipment.

B. Aluminum Finishes:

1. Finish letters and numbers for anodized aluminum are in accordance with the NAAMM AMP 501, Aluminum Association's Designation System).
 - a. Clear anodized finish: AA-C22A41 Chemically etched medium matte, clear anodic coating, Class I Architectural, 0.7 - mil thick.
2. Factory-Primed Concealed Surface: NAAMM AMP 505 Protect concealed aluminum surfaces that will be in contact with plaster, concrete or masonry surfaces when installed by applying a shop coat of zinc-molybdate primer to contact surfaces. Provide minimum dry film thickness of 2.0 mils.

C. Stainless Steel: NAAMM AMP 503, finish No. 2B.

D. Carbon Steel: NAAMM AMP 504, Galvanized 690.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Manufacturer's representative shall make a thorough examination of surfaces receiving work of this section.
- B. Before starting installation, notify prime contractor of defects which would affect satisfactory completion of work.

3.2 PREPARATION

- A. Verify measurements and dimensions at job site and cooperate in coordination and scheduling of work with work of related trades.
- B. Give particular attention to installation of items embedded in concrete and masonry so as not to delay job progress.
- C. Provide templates to related trade for location of support and anchorage items.

3.3 INSTALLATION

- A. Install in accordance with manufacturers installation instructions unless specified otherwise.
- B. Provide anchorage devices and fasteners for securing expansion joint assemblies to in-place construction including threaded fasteners with drilled-in fasteners for masonry and concrete where anchoring members are not embedded in concrete. Provide metal fasteners of type and size to suit type of construction indicated and provide for secure attachment of expansion joint cover assemblies.

- C. Perform cutting, drilling and fitting required for installation of expansion joint cover assemblies.
- D. Install joint cover assemblies in true alignment and proper relationship to expansion joint opening and adjoining finished surfaces measured from established lines and levels.
- E. Allow for thermal expansion and contraction of metal to avoid buckling.
- F. Set floor covers at elevations flush with adjacent finished floor materials unless shown otherwise.
- G. Material and method of grouting floor frames set in prepared recesses in accordance with manufacturer's instructions.
- H. Locate wall, ceiling and soffit covers in continuous contact with adjacent surfaces. Securely attach in place with required accessories.
- I. Locate anchors at interval recommended by manufacturer, but not less than 75 mm (3-inches) from each ends, and, not more than 600 mm (24-inches) on centers.
- J. Maintain continuity of expansion joint cover assemblies with end joints held to a minimum and metal members aligned mechanically using splice joints.
- K. Cut and fit ends to produce joints that will accommodate thermal expansion and contraction of metal to avoid buckling of frames or plates.
- L. Flush Metal Cover Plates:
 - 1. Secure flexible filler between frames so that it will compress and expand.
 - 2. Adhere flexible filler materials to frames with adhesive or pressure-sensitive tape as recommended by manufacturer.
- M. Waterstops:
 - 1. Install in conjunction with floor joints and where shown, run continuously to prevent water damage to finish spaces.
 - 2. Provide seal with frame to prevent water leakage.
 - 3. Provide outlet tubes from waterstops to drain to prevent damage to finish spaces.
- N. Fire Barriers:
 - 1. Install in compliance with tested assembly.
 - 2. Install in floors and in fire rated walls.
 - 3. Use fire barrier sealant or caulk supplied with system.
- O. Sealants:
 - Install to prevent water and air infiltration.

P. Vertical Exterior Extruded Thermoplastic Rubber.

1. Install side frames mounted on sealant or butyl caulk tape with appropriate anchors 600 mm (24 inches) on center complete with independent continuous PVC back seal.
2. Install primary seals retained in extruded aluminum side frames.

Q. Installation of Extruded Thermoplastic Rubber or Seals:

1. For straight sections, provide preformed seals in continuous lengths.
2. Vulcanize or heat-seal field splice joints to provide watertight joints using manufacturer's recommended procedures.

R. Installation of Preformed Elastomeric Sealant Joint:

1. Locate joint directly over joints in wall or floor substrates.
2. Full length shall be fastened to substrate using a construction adhesive.
3. Install flush or slightly below finish material.

3.4 PROTECTION

- A. Take proper precautions to protect the expansion joint covers from damage after they are in place.
- B. Cover floor joints with plywood where wheel traffic occurs.

- - - E N D - - -

**SECTION 08 11 13
HOLLOW METAL DOORS AND FRAMES**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies steel doors, steel frames and related components.
- B. Terms relating to steel doors and frames as defined in ANSI A123.1 and as specified.

1.2 RELATED WORK

- A. Frames fabricated of structural steel: Section 05 50 00, METAL FABRICATIONS.
- B. Door Hardware: Section 08 71 00, DOOR HARDWARE.
- C. Glazing: Section 08 80 00, GLAZING.
- D. Package transfer boxes: Section 11 17 36, PACKAGE TRANSFER UNITS.
- E. Special Doors: Section 08 17 10, INTEGRATED DOOR ASSEMBLIES.
- F. Wood Doors: Section 08 14 00, INTERIOR WOOD DOORS.
- G. Metal Louvers: Section 08 90 00, LOUVERS AND VENTS.
- H. Joints in Fire rated assemblies: Section 07 84 00, FIRESTOPPING.
- I. Card Readers: Section 28 13 00, ACCESS CONTROL SYSTEMS.

1.3 TESTING

An independent testing laboratory shall perform testing.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturers Literature and Data:
 - 1. Fire rated doors and frames, showing conformance with NFPA 80 and Underwriters Laboratory, Inc., or Intertek Testing Services or Factory Mutual fire rating requirements.
 - 2. Sound rated doors, including test report from Testing Laboratory.

1.5 SHIPMENT

- A. Prior to shipment label each door and frame to show location, size, door swing and other pertinent information.
- B. Fasten temporary steel spreaders across the bottom of each door frame.

1.6 STORAGE AND HANDLING

- A. Store doors and frames at the site under cover.
- B. Protect from rust and damage during storage and erection until completion.

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. Federal Specifications (Fed. Spec.):
L-S-125B.....Screening, Insect, Nonmetallic
- C. Door and Hardware Institute (DHI):
A115 Series.....Steel Door and Frame Preparation for Hardware,
Series A115.1 through A115.17 (Dates Vary)
- D. Steel Door Institute (SDI):
113-01.....Thermal Transmittance of Steel Door and Frame
Assemblies
128-1997.....Acoustical Performance for Steel Door and Frame
Assemblies
A250.8-03.....Standard Steel Doors and Frames
- E. American Society for Testing and Materials (ASTM):
A167-99(R2004).....Stainless and Heat-Resisting Chromium-Nickel
Steel Plate, Sheet, and Strip
A568/568-M-07.....Steel, Sheet, Carbon, and High-Strength, Low-
alloy, Hot-Rolled and Cold-Rolled
A1008-08.....Steel, sheet, Cold-Rolled, Carbon, Structural,
High Strength Low Alloy and High Strength Low
Alloy with Improved Formability
B209/209M-07.....Aluminum and Aluminum-Alloy Sheet and Plate
B221/221M-08.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Profiles and Tubes
D1621-04.....Compressive Properties of Rigid Cellular
Plastics
D3656-07.....Insect Screening and Louver Cloth Woven from
Vinyl Coated Glass Yarns
E90-04.....Laboratory Measurement of Airborne Sound
Transmission Loss of Building Partitions
- F. The National Association Architectural Metal Manufacturers (NAAMM):
Metal Finishes Manual (1988 Edition)
- G. National Fire Protection Association (NFPA):
80-09.....Fire Doors and Fire Windows
- H. Underwriters Laboratories, Inc. (UL):
Fire Resistance Directory

- I. Intertek Testing Services (ITS):
Certifications Listings...Latest Edition
- J. Factory Mutual System (FM):
Approval Guide

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Stainless Steel: ASTM A167, Type 302 or 304; finish, NAAMM Number 4.
- B. Sheet Steel: ASTM A1008, cold-rolled for panels (face sheets) of doors.
- C. Anchors, Fastenings and Accessories: Fastenings anchors, clips connecting members and sleeves from zinc coated steel.
- D. Aluminum Sheet: ASTM B209/209M.
- E. Aluminum, Extruded: ASTM B221/221M.
- F. Prime Paint: Paint that meets or exceeds the requirements of A250.8.

2.2 FABRICATION GENERAL

- A. GENERAL:
 - 1. Follow SDI A250.8 for fabrication of standard steel doors, except as specified otherwise. Doors to receive hardware specified in Section 08 71 00, DOOR HARDWARE. Tolerances as per SDI A250.8. Thickness, 44 mm (1-3/4 inches), unless otherwise shown.
 - 2. Close top edge of exterior doors flush and seal to prevent water intrusion.
 - 3. When vertical steel stiffeners are used for core construction, fill spaces between stiffeners with mineral fiber insulation.
- B. Heavy Duty Doors: SDI A250.8, Level 2, Model 2 of size and design shown. Core construction types a, d, or f, for interior doors, and, types b, c, e, or f, for exterior doors.
- C. Smoke Doors:
 - 1. Close top and vertical edges flush.
 - 2. Provide seamless vertical edges.
 - 3. Apply Steel astragal to the meeting style at the active leaf of pair of doors or double egress doors.
 - 4. Provide clearance at head, jamb and sill as specified in NFPA 80.
- D. Fire Rated Doors (Labeled):
 - 1. Conform to NFPA 80 when tested by Underwriters Laboratories, Inc., Inchcape Testing Services, or Factory Mutual for the class of door or door opening shown.

2. Fire rated labels of metal, with raised or incised markings of approving laboratory shall be permanently attached to doors.
3. Close top and vertical edges of doors flush. Vertical edges shall be seamless. Apply steel astragal to the meeting stile of the active leaf of pairs of fire rated doors, except where vertical rod exit devices are specified for both leaves swinging in the same direction.

E. Custom Metal Hollow Doors:

1. Provide custom hollow metal doors where nonstandard steel doors are indicated. At the Contractor's option, custom hollow metal doors may be provided in lieu of standard steel doors. Door size(s), design, materials, construction, gages and finish shall be as specified for of standard steel doors.

2.3 METAL FRAMES

A. General:

1. SDI A250.8, 1.3 mm (0.053 inch) thick sheet steel, types and styles as shown or scheduled.
2. Frames for exterior doors: Fabricate from 1.7 mm (0.067 inch) thick galvanized steel conforming to ASTM A525.
3. Frames for labeled fire rated doors.
 - a. Comply with NFPA 80. Test by Underwriters Laboratories, Inc., Inchcape Testing Services, or Factory Mutual.
 - b. Fire rated labels of approving laboratory permanently attached to frames as evidence of conformance with these requirements. Provide labels of metal or engraved stamp, with raised or incised markings.
4. Frames for doors specified to have automatic door operators: minimum 1.7 mm (0.067 inch) thick.
5. Knocked-down frames are not acceptable.

B. Reinforcement and Covers:

1. SDI A250.8 for, minimum thickness of steel reinforcement welded to back of frames.
2. Provide mortar guards securely fastened to back of hardware reinforcements except on lead-lined frames.
3. Where concealed door closers are installed within the head of the door frames, prepare frames for closers and provide 1 mm (0.042 inch) thick steel removable stop sections for access to concealed

face plates and control valves, except when cover plates are furnished with closer.

C. Terminated Stops: SDI A250.8.

D. Glazed Openings:

- a. Integral stop on exterior, corridor, or secure side of door.
- b. Design rabbet width and depth to receive glazing material or panel shown or specified.

E. Frame Anchors:

1. Floor anchors:

- a. Where floor fills occur, provide extension type floor anchors to compensate for depth of fill.
- b. At bottom of jamb use 1.3 mm (0.053 inch) thick steel clip angles welded to jamb and drilled to receive two 6 mm (1/4 inch) floor bolts. Use 50 mm x 50 mm (2 inch by 2 inch) 9 mm by (3/8 inch) clip angle for lead lined frames, drilled for 9 mm (3/8 inch) floor bolts.
- c. Where mullions occur, provide 2.3 mm (0.093 inch) thick steel channel anchors, drilled for two 6 mm (1/4 inch) floor bolts and frame anchor screws.
- d. Where sill sections occur, provide continuous 1 mm (0.042 inch) thick steel rough bucks drilled for 6 mm (1/4 inch) floor bolts and frame anchor screws. Space floor bolts at 50 mm (24 inches) on center.

2. Jamb anchors:

- a. Locate anchors on jambs near top and bottom of each frame, and at intermediate points not over 600 mm (24 inches) apart, except for fire rated frames space anchors as required by labeling authority.
- b. Form jamb anchors of not less than 1 mm (0.042 inch) thick steel unless otherwise specified.
- c. Anchors set in masonry: Use adjustable anchors designed for friction fit against the frame and for extension into the masonry not less than 250 mm (10 inches). Use one of following type:
 - 1) Wire loop type of 5 mm (3/16 inch) diameter wire.
 - 2) T-shape or strap and stirrup type of corrugated or perforated sheet steel.

- d. Anchors for stud partitions: Either weld to frame or use lock-in snap-in type. Provide tabs for securing anchor to the sides of the studs.
- e. Anchors for frames set in prepared openings:
 - 1) Steel pipe spacers with 6 mm (1/4 inch) inside diameter welded to plate reinforcing at jamb stops or hat shaped formed strap spacers, 50 mm (2 inches) wide, welded to jamb near stop.
 - 2) Drill jamb stop and strap spacers for 6 mm (1/4 inch) flat head bolts to pass thru frame and spacers.
 - 3) Two piece frames: Subframe or rough buck drilled for 6 mm (1/4 inch) bolts.
- f. Modify frame anchors to fit special frame and wall construction and provide special anchors where shown or required.

2.4 SHOP PAINTING

SDI A250.8.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Plumb, align and brace frames securely until permanent anchors are set.
 - 1. Use triangular bracing near each corner on both sides of frames with temporary wood spreaders at midpoint.
 - 2. Use wood spreaders at bottom of frame if the shipping spreader is removed.
 - 3. Protect frame from accidental abuse.
 - 4. Where construction will permit concealment, leave the shipping spreaders in place after installation, otherwise remove the spreaders after the frames are set and anchored.
 - 5. Remove wood spreaders and braces only after the walls are built and jamb anchors are secured.
- B. Floor Anchors:
 - 1. Anchor the bottom of door frames to floor with two 6 mm (1/4 inch) diameter expansion bolts. Use 9 mm (3/8 inch) bolts on lead lined frames.
 - 2. Power actuated drive pins may be used to secure frame anchors to concrete floors.
- C. Jamb Anchors:
 - 1. Anchors in masonry walls: Embed anchors in mortar. Fill space between frame and masonry wall with grout or mortar as walls are built.

2. Coat frame back with a bituminous coating prior to lining of grout filling in masonry walls.
 3. Secure anchors to sides of studs with two fasteners through anchor tabs. Use steel drill screws to steel studs.
 4. Frames set in prepared openings of masonry or concrete: Expansion bolt to wall with 6 mm (1/4 inch) expansion bolts through spacers. Where subframes or rough bucks are used, 6 mm (1/4 inch) expansion bolts on 600 mm (24 inch) centers or power activated drive pins 600 mm (24 inches) on centers. Secure two piece frames to subframe or rough buck with machine screws on both faces.
- D. Install anchors for labeled fire rated doors to provide rating as required.

3.2 INSTALLATION OF DOORS AND APPLICATION OF HARDWARE

- A. Install doors and hardware as specified in Section 08 17 10, INTEGRATED DOOR ASSEMBLIES, Section 08 14 00, WOOD DOORS and Section 08 71 00, DOOR HARDWARE.

- - - E N D - - -

**SECTION 08 14 00
INTERIOR WOOD DOORS**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies interior flush doors with prefinish, prefit option.
- B. Section includes fire rated doors, and smoke doors.

1.2 RELATED WORK

- A. Metal door frames: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES.
- B. Door hardware including hardware location (height): Section 08 71 00, DOOR HARDWARE.
- C. Installation of doors and hardware: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, or Section 08 71 00, DOOR HARDWARE.
- D. Glazing: Section 08 80 00, GLAZING.
- E. Finish: Section 09 06 00, SCHEDULE FOR FINISHES.
- F. Auto Door Operator: Section 08 71 13, AUTOMATIC DOOR OPERATORS.
- G. Card Readers: Section 28 13 00, ACCESS CONTROL SYSTEMS.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
 - 1. Corner section of flush veneered door 300 mm (12 inches) square, showing details of construction, labeled to show grade and type number and conformance to specified standard.
- C. Shop Drawings:
 - 1. Show every door in project and schedule location in building.
 - 2. Indicate type, grade, finish and size; include detail of glazing, sound gasketing, and pertinent details.
 - 3. Provide information concerning specific requirements not included in the manufacturer's literature and data submittal.
- D. Manufacturer's Literature and Data:
 - 1. Labeled fire rated doors showing conformance with NFPA 80.
- E. Laboratory Test Reports:
 - 1. Screw holding capacity test report in accordance with WDMA T.M.10.
 - 2. Split resistance test report in accordance with WDMA T.M.5.
 - 3. Cycle/Slam test report in accordance with WDMA T.M.7.
 - 4. Hinge-Loading test report in accordance with WDMA T.M.8.

1.4 WARRANTY

A. Doors are subject to terms of Article titled "Warranty of Construction", FAR clause 52.246-21, except that warranty shall be as follows:

1. For interior doors, manufacturer's warranty for lifetime of original installation.

1.5 DELIVERY AND STORAGE

- A. Factory seal doors and accessories in minimum of 6 mill polyethylene bags or cardboard packages which shall remain unbroken during delivery and storage.
- B. Store in accordance with WDMA I.S.1-A, J-1 Job Site Information.
- C. Label package for door opening where used.

1.6 APPLICABLE PUBLICATIONS

Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. Window and Door Manufacturers Association (WDMA):

I.S.1-A-04.....Architectural Wood Flush Doors

I.S.4-07A.....Water-Repellent Preservative Non-Pressure
Treatment for Millwork

I.S.6A-01.....Architectural Wood Stile and Rail Doors

T.M.5-90.....Split Resistance Test Method

T.M.6-08.....Adhesive (Glue Bond) Durability Test Method

T.M.7-08.....Cycle-Slam Test Method

T.M.8-08.....Hinge Loading Test Method

T.M.10-08.....Screwholding Test Method

C. National Fire Protection Association (NFPA):

80-07.....Protection of Buildings from Exterior Fire

252-08.....Fire Tests of Door Assemblies

D. ASTM International (ASTM):

E90-04.....Laboratory Measurements of Airborne Sound
Transmission Loss

PART 2 - PRODUCTS**2.1 FLUSH DOORS**

A. General:

1. Meet requirements of WDMA I.S.1-A, Extra Heavy Duty.
2. Adhesive: Type II
3. Thickness: 45 mm (1-3/4 inches) unless otherwise shown or specified.

B. Face Veneer:

1. In accordance with WDMA I.S.1-A.
2. One species throughout the project unless scheduled or otherwise shown.
3. For transparent finishes: Premium Grade, Rotary Cut.
 - a. A grade face veneer standard optional.
 - b. AA grade face veneer
 - c. Match face veneers for doors for uniform effect of color and grain at joints.
 - d. Door edges shall be same species as door face veneer except maple may be used for stile face veneer on birch doors.
 - e. In existing buildings, where doors are required to have transparent finish, use wood species and grade of face veneers to match adjacent existing doors.
4. For painted finishes: Custom Grade, mill option close grained hardwood, premium or medium density overlay. Do not use Lauan.
5. Factory sand doors for finishing.

C. Wood for stops, louvers, muntins and moldings of flush doors required to have transparent finish:

1. Solid Wood of same species as face veneer, except maple may be used on birch doors.
2. Glazing:
 - a. On non-labeled doors use applied wood stops nailed tight on room side and attached on opposite side with flathead, countersunk wood screws, spaced approximately 125 mm (5 inches) on centers.
 - b. Use stainless steel or dull chrome plated brass screws for exterior doors.

D. Stiles and Rails:

1. Option for wood stiles and rails:
 - a. Composite material having screw withdrawal force greater than minimum performance level value when tested in accordance with WDMA T.M.10.
2. Provide adequate blocking for bottom of doors having mechanically operated door bottom seal meeting or exceeding the performance duty level per T.M.10 for horizontal door edge screw holding.

E. Fire rated wood doors:

1. Fire Performance Rating:
 - a. "B" label, 1-1/2 hours.

- b. "C" label, 3/4 hour.
- 2. Labels:
 - a. Doors shall conform to the requirements of ASTM E2074, or NFPA 252, and, carry an identifying label from a qualified testing and inspection agency for class of door or opening shown designating fire performance rating.
 - b. Metal labels with raised or incised markings.
- 3. Performance Criteria for Stiles of doors utilizing standard mortise leaf hinges:
 - a. Hinge Loading: WDMA T.M.8. Average of 10 test samples for Extra Heavy Duty doors.
 - b. Direct screw withdrawal: WDMA T.M.10 for Extra Heavy Duty doors. Average of 10 test samples using a steel, fully threaded #12 wood screw.
 - c. Cycle Slam: 1,000,000 cycles with no loose hinge screws or other visible signs of failure when tested in accordance with WDMA T.M.7.
- 4. Additional Hardware Reinforcement:
 - a. Provide fire rated doors with hardware reinforcement blocking.
 - b. Size of lock blocks as required to secure hardware specified.
 - c. Top, bottom and intermediate rail blocks shall measure not less than 125 mm (five inches) minimum by full core width.
 - d. Reinforcement blocking in compliance with manufacturer's labeling requirements.
 - e. Mineral material similar to core is not acceptable.
- 5. Other Core Components: Manufacturer's standard as allowed by the labeling requirements.
- 6. Provide steel frame approved for use in labeled doors for vision panels.
- 7. Provide steel astragal on pair of doors.
- F. Smoke Barrier Doors:
 - 1. For glazed openings use steel frames approved for use in labeled doors.
 - 2. Provide a steel astragal on one leaf of pairs of doors, including double egress doors.

2.2 PREFINISH, PREFIT OPTION

- A. Flush doors may be factory machined to receive hardware, bevels, undercuts, cutouts, accessories and fitting for frame.

- B. Factory fitting to conform to specification for shop and field fitting, including factory application of sealer to edge and routings.
- C. Flush doors to receive transparent finish (in addition to being prefit) shall be factory finished as follows:
 - 1. WDMA I.S.1-A Section F-3 specification for System TR-4, Conversion Varnish or System TR-5, Catalyzed Vinyl.
 - 2. Use stain when required to produce the finish specified in Section 09 06 00 SHEDULE FOR FINISHES.

2.3 IDENTIFICATION MARK:

- A. On top edge of door.
- B. Either a stamp, brand or other indelible mark, giving manufacturer's name, door's trade name, construction of door, code date of manufacture and quality.
- C. Accompanied by either of the following additional requirements:
 - 1. An identification mark or a separate certification including name of inspection organization.
 - 2. Identification of standards for door, including glue type.
 - 3. Identification of veneer and quality certification.
 - 4. Identification of preservative treatment for stile and rail doors.

2.4 SEALING:

Give top and bottom edge of doors two coats of catalyzed polyurethane or water resistant sealer before sealing in shipping containers.

PART 3 - EXECUTION

3.1 DOOR PREPARATION

- A. Field, shop or factory preparation: Do not violate the qualified testing and inspection agency label requirements for fire rated doors.
- B. Clearances between Doors and Frames and Floors:
 - 1. Maximum 3 mm (1/8 inch) clearance at the jambs, heads, and meeting stiles, and a 19 mm (3/4 inch) clearance at bottom, except as otherwise specified.
 - 2. Maximum clearance at bottom of doors to operating rooms, and doors designated to be fitted with mechanical seal: 10 mm (3/8 inch).
- C. Provide cutouts for special details required and specified.
- D. Rout doors for hardware using templates and location heights specified in Section, 08 71 00 DOOR HARDWARE.
- E. Fit doors to frame, bevel lock edge of doors 3 mm (1/8 inch) for each 50 mm (two inches) of door thickness, undercut where shown.

- F. Immediately after fitting and cutting of doors for hardware, seal cut edges of doors with two coats of water resistant sealer.
- G. Finish surfaces, including both faces, top and bottom and edges of the doors smooth to touch.
- H. Apply a steel astragal on the opposite side of active door on pairs of fire rated doors.
- I. Apply a steel astragal to meeting style of active leaf of pair of doors or double egress smoke doors.

3.2 INSTALLATION OF DOORS APPLICATION OF HARDWARE

Install doors and hardware as specified in this Section.

3.3 DOOR PROTECTION

- A. As door installation is completed, place polyethylene bag or cardboard shipping container over door and tape in place.
- B. Provide protective covering over knobs and handles in addition to covering door.
- C. Maintain covering in good condition until removal is approved by COTR.

- - - E N D - - -

**SECTION 08 17 10
INTEGRATED DOOR ASSEMBLIES**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Work in this section includes integrated door opening systems including metal frame, integrated doors, hanging device, latching mechanism and associated finish hardware, unless specified elsewhere.
- B. Smoke and draft control seals shall be included in this section, unless specifically listed elsewhere.
- C. All glass and glazing are not covered in this section.

1.2 RELATED WORK

- A. Blocking for Hardware: Section 06 10 00, ROUGH CARPENTRY.
- B. Key Cylinders: Section 08 71 00, DOOR HARDWARE
- C. Auto Door Operators: Section 08 71 13, AUTOMATIC DOOR OPERATORS.
- D. Painting: Section 09 91 00, PAINTING.
- E. Card Readers: Section 28 13 00, ACCESS CONTROL SYSTEMS.
- F. Electrical: Division 26, ELECTRICAL.
- G. Fire Detection: Section 28 31 00, FIRE ALARM SYSTEMS.

1.3 QUALITY ASSURANCE

- A. Hardware shall be installed by people knowledgeable and skilled in the application, installation and adjustment of commercial grade doors and door hardware. Doors and Frames must be installed plumb, square and level.
- B. Doors frames must be properly prepared and reinforced to install hardware per the manufacturer's template and installation instructions. Install door frames in accordance with ANSI/SDI A250.11 - "Recommended Erection Instructions for Steel Frames."
- C. Contractor shall provide and furnish screws, bolts, expansions shields or other fasteners to facilitate the proper installation of products, not furnished as part of the Integrated Door Assembly.

1.4 WARRANTY

- A. Provide manufacturer's standard five-year limited warranty against defects in material and workmanship unless noted otherwise.
 - 1. Door Closers: 10 years
 - 2. Steel Pinned Continuous Hinges: 10 years

1.5 SUBMITTALS

- A. Submit shop drawings with proposed Integrated Door Assembly system, product and hardware options, in a timely manor to obtain the approval

from the COTR in time to meet construction schedule of other trades.

- B. Provide for each door an frame location; frame type, profile, and installation details, items of finish hardware accessories, finishes, degree of opening and electrical rough-in requirements. Submit required templates to door and frame manufacturers to enable proper and accurate sizing and locations of hardware.
- C. Samples: Provide physical samples as required by Section 01 33 23.
- D. Provide Owner Manual, instruction sheets and installation.

1.6 DELIVERY, STORAGE AND HANDLING

- A. Integrated Door Assembly systems shall be delivered to the general contractor at the job site complete with necessary screws, miscellaneous parts, instructions, and installation templates. Each package shall be legibly and properly labeled to correspond to the approved door schedule.
- B. Deliver Integrated Door Assembly system to project site. Contractor will jointly check in hardware with representatives of the supplier to verify shipment is correct and / or note and rectify discrepancies promptly.
- C. Furnish door assemblies with flush operating hardware flush with door skin, using protective wrappings and protective spacers between projecting hardware. Maintain and protect door assemblies using cardboard spacers and protective edge guards along the door edges, to reduce exposure to marring or damage during storage.
- D. Store door assemblies in a dry and secure area. Storage area shall be void of any excess humidity that can cause damage to the product.

1.7 INSTRUCTIONS

- A. Manufacturers' Catalog Number References: Where manufacturers' products are specified herein, products of other manufacturers which are considered equivalent to those specified may be used. Manufacturers whose products are specified are identified by abbreviations as follows:

Adams-Rite	Adams Rite Mfg. Co.	Pomona, CA
G.E. Security	GE Security, Inc.	Bradentown, FL
Pemko	Pemko Manufacturing Co.	Ventura, CA

1.8 APPLICABLE PUBLICATIONS

- A. The following references established standards for architectural hardware as specified in this section.
- B. American National Standards Institute (ANSI)

ICC/ANSI A117.1-2003.....Accessible and Usable Buildings and
Facilities

ANSI/BHMA A156.1-2006.....Butts and Hinges

ANSI/BHMA A156.3-2008.....Exit Devices

ANSI/BHMA A156.4-2008.....Door Controls - Closers

ANSI/BHMA A156.5-2001.....Auxiliary Locks and Associated Products

ANSI/BHMA A156.6-2005.....Architectural Door Trim

ANSI/BHMA A156.7-2009.....Template Hinge Dimensions

ANSI/BHMA A156.8-2005.....Door Controls - Overhead Holders

ANSI/BHMA A156.10-2005.....Power Operated Pedestrian Doors

ANSI/BHMA A156.13-2002.....Mortise Locks and Latches

ANSI/BHMA A156.15-2006.....Closer Holder Release Devices

ANSI/BHMA A156.16-2008.....Auxiliary Hardware

ANSI/BHMA A156.18-2006.....Materials and Finishes

ANSI/BHMA A156.19-2007.....Power Assist and Low Energy Power
Operated Doors

ANSI/BHMA A156.21-2009.....Thresholds

ANSI/BHMA A156.22-2005.....Door Gasketing Systems

ANSI/BHMA A156.23-2004.....Electromagnetic Locks

ANSI/BHMA A156.24-2003.....Delayed Egress Locking Systems

ANSI/BHMA A156.25-2007.....Electrified Locking Devices

ANSI/BHMA A156.26-2006.....Continuous Hinges

ANSI/BHMA A156.28-2007.....Master Keying Systems

ANSI/BHMA A156.29-2007.....Exit Locks and Alarms

ANSI/BHMA A156.30-2003.....High Security Cylinders

ANSI/BHMA A156.31-2007.....Electric Strikes and Frame Mounted
Actuators

ANSI/BHMA A156.32-2008.....Integrated Door Opening Assemblies

ANSI/SDI A250.4-2001.....Test Procedure and Acceptance Criteria
for Physical Evidence for Steel Doors,
Frames, Frame Anchors and Reinforcings

ANSI/SDI A250.8-2003.....Recommended Specifications for Standard
Steel Doors and Frames

ANSI/SDI A250.11-2001.....Recommended Erection Instructions for
Steel Frames

UL10C-2009.....Positive Pressure Fire Tests of Door
Assemblies

C. American Society for Testing and Materials (ASTM)

1. ASTM E2074 (2000): Standard Test Method for Fire Tests of Door Assemblies
 2. ASTM E2180 (2007): Standard Test Method for Determining the Activity of Incorporated Antimicrobial Agent(s) In Polymeric or Hydrophobic Materials
 3. ASTM F476 (2002): Standard Test Method for Security of Swinging Door Assemblies
- D. Door and Hardware Institute (DHI)
1. Recommended Locations for Builder's Hardware for Standard Doors and Frames (2004)
 2. Recommended Locations for Builder's Hardware for Custom Steel Doors and Frames (1996)
- E. Metal Door and Frame Associations
1. Hollow Metal Manufacturing Association (HMMA)
 - a. National Association of Architectural Metal Manufacturers (NAAMM)
 2. Steel Door Institute (SDI)
- F. Approved Testing Laboratories
1. Underwriter's Laboratories, Inc. (UL)
 - a. UL305 (2007): Panic Hardware
 - b. UL1784 (2004): Air Leakage Tests of Door Assemblies
 2. ITS / Intertek Testing Services / Warnock Hersey Inc.
- G. National Fire Protection Association (NFPA)
1. NFPA 70-2008: National Electrical Code
 2. NFPA 80-2010: Standard for Fire Doors and Other Opening Protectives
 3. NFPA 101-2009: Life Safety Code
 4. NFPA 105-2010: Standard for Installation of Smoke Door Assemblies and Other Opening Protectives
 5. NFPA 252-2008: Standard Methods of Fire Tests of Door Assemblies
- H. Building Codes [Applicable Building Code]
1. 2009 International Building Code
 2. All hardware shall comply with UFAS, (Uniform Federal Accessible Standards - 1998) unless specified otherwise

PART 2 - PRODUCTS

2.1 MATERIAL REQUIREMENTS

- A. Integrated Door Assembly requirements:
1. Integrated Door Opening Assemblies shall be 1-3/4" thick, with no seams or spot welds on door face and be of manufacturer's standard

construction: Door face skins to be minimum 16-gauge cold rolled steel. Door core construction to be Polystyrene. All doors shall be constructed with a U-Shaped, 16 gauge steel reinforcement channel, top and bottom, for the installation of door hardware accessories. All doors shall be supplied with an 18 gauge top cap.

2. Integrated Door Opening Assemblies shall provide a label for life safety or fire labels as required in door schedule.
3. Integral vision lite preparation, or field installed lite kit, as required.

B. Door Frame requirements:

1. Door Frames shall be 14-gauge ASTM A366, cold roll steel and shall comply to ANSI/SDI A250.8 Level A - Grade III and / or HMMA/NAAMM - 850-99.
2. Door frames shall be furnished with mitered corners, continuously welded, ground smooth on frame face.
3. Prepare frames with proper 14 gauge reinforcements for applied hardware. Provide 12 gauge reinforcements for continuous hinges.
4. Provide suitable adjustable type anchors, minimum 4 per jamb.

C. Integrated Hardware Requirements:

1. Provide a complete Integrated Door Assembly including the installation and adjustment of the latching mechanism within the door construction. The exit device shall be inset in door, clean and unobtrusive in design. The push bar shall be made of heavy duty aluminum extrusion, with satin stainless steel (BHMA 630) cladding. End caps shall be metal, plated satin nickel (BHMA 619). The Push and Pull devices shall be clean and unobtrusive in design. Lever handles shall be clean and unobtrusive in design with and shall match style of other hardware furnished on project. The hinges shall be continuous pin-and-barrel type of stainless steel material for both hinge leaves and pin.
 - a. At doors with plastic laminate faces, provide hinges with wrap-around hinge guards and provide stainless steel wrap-around edge guards at the leading edge of the door.

D. Performance Requirements:

1. Assembly performance test standards per ANSI/BHMA A156.32-2008:
Integrated Door Opening Assemblies
 - a. Grade 1: 1,000,000

2.2 FINISHES**A. Finish Symbols**

US	BHMA	DESCRIPTION OF FINISH
USP	600	Primed for field painting
US26D	626/652	Satin Chrome
US28	628	Satin Aluminum
US32	629	Bright Stainless
US32D	630	Satin Stainless
N/A	689	Aluminum Painted

B. Finish Requirements

1. Door Faces: Factory Pre-Finished
2. Frames: Factory Pre-Finished
3. Door Hardware:
 - a. Continuous Hinges: 630
 - b. Push Bar: 630 clad with 619 end caps
 - c. Lever Exit Device Trim: 630
 - d. Push/Pull Trim: 626
 - e. Door Closers: 689
 - f. Miscellaneous: To match other finishes
4. Anti-microbial Coating: All hand-operated hardware (levers, pulls, push bars, push plates, paddles, and panic bars) shall be provided with an anti-microbial/anti-fungal coating that has passed ASTM E2180 tests. Coating to consist of ionic silver (Ag+). Silver ions surround bacterial cells, inhibiting growth of bacteria, mold, and mildew by blockading food and respiration supplies.

PART 3 - EXECUTION**3.1 EXAMINATION**

- A. Contractor is responsible for notification of any wall conditions or building structure that would prevent proper execution of the installation of products produced in accordance with approved hardware schedule.
- B. Note short or damaged deliveries on the bill of lading at the time of delivery.
- C. The fire label is a manufacturer's certification only. Proper installation of products and proper wall construction are requirements to meet fire label.
- D. Verify that power supplies, as required, are available to power electrically operated devices.

- E. Do not fabricate any product until receipt of approved submittal drawings.
- F. Beginning of installation means acceptance of existing conditions.

3.2 INSTALLATION

- A. Mount furnished hardware accessories at heights indicated in "Recommended Locations or Builder's Hardware" for Standard Doors and Frames, Custom Steel Doors and Frames, established by the Door and Hardware Institute (DHI), except if otherwise indicated or to comply with requirements of governing regulations, or if otherwise directed by the architect.
- B. Install furnished hardware accessories in compliance with the manufacturer's instructions, templates and recommendations. Comply with specified degree of opening for doors with automatic operators, overhead door closers, etc. Securely fasten all furnished parts. Make sure all operating parts move freely and smoothly without binding, sticking and void of any excessive clearance.
- C. Coordinate installation and interface wiring with fire alarm and smoke detection systems.
- D. Remove or protect furnished hardware accessories, prior to any painting or finishing that is to be completed after the installation of the hardware accessories.

3.3 ADJUSTMENT AND CLEANING

- A. Adjust and check door assembly and each operating item of hardware to ensure correct operation and function. Units which cannot be adjusted to operate as intended for the application made shall be replaced.
- B. Final Adjustment: Wherever hardware installation is made more than a month prior to building acceptance or occupancy of a space or area, the installer shall return to the work during the week prior to acceptance or occupancy and make final check and adjustment of all hardware items. Hardware Accessories shall be cleaned as necessary to restore correct operation, function, and finish. Do not use cleaners that will harm finish.

3.4 PROTECTION

- A. Whenever furnished hardware accessories are located in areas where it may be subject to damage during construction by handling, cleaning, etc., (e.g. painting, cleaning of bricks) it shall be protected and/or removed from its location until the hazardous condition is terminated.

3.5 SCHEDULES:

- A. The following is a general listing of the Integrated Door Assembly requirements and is not intended for use as a final door submittal. Any items of hardware required by established standards or practices, or to meet federal building codes shall be furnished whether or not specifically called out in the following listed groups.
- B. Following sets of hardware correspond to hardware symbols shown on drawings. Only those hardware sets that are shown on drawings will be required. Disregard hardware sets listed in specifications but not shown on drawings.

HW-6D

Each [ADO] Integrated Door to Have:	RATED
1 Steel Frame	
1 Integrated Door w/Exit Device	Q2131 x TYPE 8 ELECTRIC DEVICE (E04) x F08 LEVER
1 Continuous Transfer Hinge	A51031B x 8-THRUWIRE TRANSFER x IN-HINGE ACCESS PANEL
1 Power Supply	BY EXIT DEVICE MFR. FOR E04 FUNCTION
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

EACH [ADO] INTEGRATED DOOR TO HAVE:

POWER TRANSFER SHARED BY ELECTRIC PANIC AND RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

KEY CYLINDER BY SECTION 08 71 00, DOOR HARDWARE.

AUTO DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

HW-8

Each [MHO] Pair Integrated Doors to Have:	RATED
1 Steel Frame	
1 Integrated Pair Doors w/Auto Flush Bolts & Push/Pull Trim	Q2241 x TYPE 25 LESS BOTTOM BOLT AUTO FLUSH BOLT (INACTIVE LEAF) x ACTIVE CONCEALED VERTICAL LATCH (ACTIVE LEAF)
2 Continuous Hinges	A51031B x WIDE THROW AS REQUIRED TO

	ACHIEVE FULL DOOR SWING
1 Coordinator	TYPE 21A
1 Self-Adhesive Astragal	R0Y_14
2 Closers	C02011 (PT4D, PT4H) x 180° SWING
2 Magnetic Holders	C00011 TRI-VOLTAGE
1 Set Self-Adhesive Seals	R0E154

POWER, WIRING, CONDUIT, AND FIRE ALARM CONNECTION BY DIVISION 26.

HW-12A

Each [MHO] Pair Integrated Doors to Have:	RATED
1 Steel Frame	
1 Integrated Pair Doors w/Exit Devices and Pull Trim	Q2231 x TYPE 8 EXIT DEVICES (F01 / ACTIVE FLUSH PULL PASSAGE TRIM)
2 Continuous Hinges	A51031B
1 Self-Adhesive Astragal	R0Y_14
2 Closers	C02011/C02021 (PT4D, PT4H)
2 Magnetic Holders	C00011 TRI-VOLTAGE
1 Set Self-Adhesive Seals	R0E154

POWER, WIRING, CONDUIT, AND FIRE ALARM CONNECTION BY DIVISION 26.

HW-12B

Each [ADO] Pair Integrated Doors to Have:	RATED
1 Steel Frame	
1 Integrated Pair Doors w/Elec Exit Devices	Q2231 x TYPE 8 (E04) ELECTRIC EXIT DEVICES (F01 / F08)
2 Continuous Transfer Hinges	A51031B x 8-THRUWIRE TRANSFER x IN-HINGE ACCESS PANEL
1 Power Supply	BY EXIT DEVICE MFR. FOR E04 FUNCTION
1 Self-Adhesive Astragal	R0Y_14
2 Armor Plates	J101 x 1.275 MM (0.050 INCH) THICKNESS
2 Floor Stops	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

POWER, WIRING, CONDUIT, AND FIRE ALARM CONNECTION BY DIVISION 26.

POWER TRANSFER SHARED BY ELECTRIC PANIC AND RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

KEY CYLINDER BY SECTION 08 71 00, DOOR HARDWARE.

AUTO DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

CARD READER BY DIVISION 28

*Door No. 1: Provide (2) Remote Strike Release buttons and wiring located where shown on electrical plans and mounted as directed by the COTR.

HW-12C

Each [ADO] Pair Integrated Double Egress Doors to Have:	RATED
1 Steel Frame	
1 Integrated Pair Doors w/Exit DEVICES	Q2331 x TYPE 8 EXIT DEVICES (F01)
2 Continuous Hinges	A51031B
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2 Closers	C02011/C02021 (PT4D, PT4H
2 Magnetic Holders	C00011 TRI-VOLTAGE
1 Set Self-Adhesive Seals	R0E154

POWER, WIRING, CONDUIT, AND FIRE ALARM CONNECTION BY DIVISION 26.

HW-12D

Each [ADO] Pair Integrated Double Egress Doors to Have:	RATED
1 Steel Frame	
1 Integrated Pair Doors w/Elec Exit Devices	Q2331 x TYPE 8 (E04) ELECTRIC EXIT DEVICES (F01)
2 Continuous Transfer Hinges	A51031B x 8-THRUWIRE TRANSFER x IN-HINGE ACCESS PANEL
1 Power Supply	BY EXIT DEVICE MFR. FOR E04 FUNCTION
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2 Armor Plates	J101 x 1.275 MM (0.050 INCH) THICKNESS
2 Floor Stops	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

POWER, WIRING, CONDUIT, AND FIRE ALARM CONNECTION BY DIVISION 26.

POWER TRANSFER SHARED BY ELECTRIC PANIC AND RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

AUTO DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

HW-SH-4

Each [AC, EL, REX, DPS]Integrated Door to Have:	RATED
1 Steel Frame	
1 Integrated Door w/Elec. Exit Device	Q2131 x TYPE 8 ELECTRIC DEVICE (E01, E05/E06-VERIFY)x F13 LEVER
1 Continuous Transfer Hinge	A51031B x 4-THRUWIRE TRANSFER x IN-HINGE ACCESS PANEL
1 Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1 Closer	C02021 (PT4D, PT4F, PT4H)
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154
1 Alarm Contact	1078-G (G.E. Security), or Equal

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.

CARD READER BY DIVISION 28.

KEY CYLINDER BY SECTION 08 71 00, DOOR HARDWARE.

HW-SH-4A

Each [ADO, AC, ELR, REX, DPS] Integrated Door to Have:	RATED
1 Steel Frame	
1 Integrated Door w/Elec Exit Device	Q2131 x TYPE 8 ELECTRIC DEVICE (E01, E04)x F13 LEVER
1 Continuous Transfer Hinge	A51031B x 12-THRUWIRE TRANSFER x IN-HINGE ACCESS PANEL
1 Power Supply	BY EXIT DEVICE MFR. FOR E04 FUNCTION
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154
1 Alarm Contact	1078-G (G.E. Security), or Equal

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.

AUTO DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

CARD READER BY DIVISION 28.

POWER TRANSFER SHARED BY ELECTRIC PANIC AND RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

KEY CYLINDER BY SECTION 08 71 00, DOOR HARDWARE.

HW-SH-10

Each [AC, EL, REX, DPS] Pair Integrated Doors to Have	RATED
1 Steel Frame	
1 Integrated Pair Doors w/Elec Exit Devices	Q2231 x TYPE 8 EXIT DEVICES (F01-E01 / F13-E01, E05/E06-VERIFY)
2 Continuous Transfer Hinges	A51031B x 4-THRUWIRE TRANSFER x IN- HINGE ACCESS PANEL
1 Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE
1 Self-Adhesive Astragal	R0Y_14
2 Closers	C02021 (PT4D, PT4F, PT4H)
2 Armor Plates	J101 x 1.275 MM (0.050 INCH) THICKNESS
2 Floor Stops	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

POWER, WIRING, AND CONDUIT BY DIVISION 26.

KEY CYLINDER BY SECTION 08 71 00, DOOR HARDWARE.

HW-SH-10A

Each [AC, ADO, EL, REX, DPS] Pair Integrated Doors to Have:	RATED
1 Steel Frame	
1 Integrated Pair Doors w/Elec. Exit Devices	Q2231 x TYPE 8 (E01, E04) ELECTRIC EXIT DEVICES (F01 / F08)
2 Continuous Transfer Hinges	A51031B x 12-THRUWIRE TRANSFER x IN- HINGE ACCESS PANEL
1 Power Supply	BY EXIT DEVICE MFR. FOR E04 FUNCTION
1 Self-Adhesive Astragal	R0Y_14

2	Armor Plates	J101 x 1.275 MM (0.050 INCH) THICKNESS
2	Floor Stops	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0E154

POWER, WIRING, CONDUIT, AND FIRE ALARM CONNECTION BY DIVISION 26.

POWER TRANSFER SHARED BY ELECTRIC PANIC AND RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

KEY CYLINDER BY SECTION 08 71 00, DOOR HARDWARE.

AUTO DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

HW-SH-12

Each [AC, ADO, EL, REX, DPS] Integrated Door to Have:	NON-RATED
1 Steel Frame	
1 Integrated Door w/Elec. Exit Device	Q2131 x TYPE 8 ELECTRIC DEVICE (E01, E04) x F03 OUTSIDE CYLINDER ONLY
1 Continuous Transfer Hinge	A51031B x 12-THRUWIRE TRANSFER x IN-HINGE ACCESS PANEL
1 Power Supply	BY EXIT DEVICE MFR. FOR E04 FUNCTION
1 Offset Pull	J402 x 1" (25mm) DIAMETER x 12" (305mm)CTC
1 Closer	C02021 (PT4D, PT4F, PT4H
1 Kick Plate	J102
1 Floor Stop	L02121 x 3 FASTENERS
1 Threshold	J35130 x SILICONE GASKET
1 Door Sweep	90100CNB (PEMKO), OR EQUAL
1 Set Frame Seals	2891AS X CSK SCREWS (PEMKO), OR EQUAL
1 Drip	R0Y976
1 Alarm Contact	1078-G (G.E. Security), or Equal

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.

CARD READER BY DIVISION 28.

KEY CYLINDER BY SECTION 08 71 00, DOOR HARDWARE.

- - - E N D - - -

**SECTION 08 31 13
ACCESS DOORS AND FRAMES**

PART 1 - GENERAL**1.1 DESCRIPTION:**

Section specifies access doors or panels.

1.2 RELATED WORK:

- A. Lock Cylinders: Section 08 71 00, DOOR HARDWARE.
- B. Locations of access doors for duct work cleanouts: Section 23 31 00, HVAC DUCTS AND CASINGS, and Section 23 37 00, AIR OUTLETS AND INLETS.
- C. Fire rated assemblies: Section 07 84 00, FIRESTOPPING.
- D. Bracing Ceiling Panels: Section 13 05 41, SEISMIC RESTRAINTS FOR NON-STRUCTURAL COMPONENTS.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Access doors, each type, showing construction, location and installation details.
- C. Manufacturer's Literature and Data: Access doors, each type.

1.4 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - A167-99(R-2004).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip
 - A1008-07.....Steel Sheet, Cold-Rolled, Carbon, Structural, High Strength Low-Alloy
- C. American Welding Society (AWS):
 - D1.3-98.....Structural Welding Code Sheet Steel
- D. National Fire Protection Association (NFPA):
 - 80-06.....Fire Doors and Windows
- E. The National Association of Architectural Metal Manufacturers (NAAMM):
 - AMP 500 Series.....Metal Finishes Manual
- F. Underwriters Laboratories, Inc. (UL):
 - Fire Resistance Directory

PART 2 - PRODUCTS**2.1 FABRICATION, GENERAL**

- A. Fabricate components to be straight, square, flat and in same plane where required.
 - 1. Slightly round exposed edges and without burrs, snags and sharp edges.
 - 2. Exposed welds continuous and ground smooth.
 - 3. Weld in accordance with AWS D1.3.
- B. Number of locks and non-continuous hinges as required to maintain alignment of panel with frame. For fire rated doors, use hinges and locks as required by fire test.
- C. Provide anchors or make provisions in frame for anchoring to adjacent construction. Provide size, number and location of anchors on four sides to secure access door in opening. Provide anchors as required by fire test.

2.2 ACCESS DOORS, FIRE RATED:

- A. Shall meet requirements for "B" label 1-1/2 hours with maximum temperature rise of 120 degree C (250 degrees F).
- B. Comply with NFPA 80 and have Underwriters Laboratories Inc., or other nationally recognized laboratory label for Class B opening.
- C. Door Panel: Form of 0.9 mm (0.0359 inch) thick, steel (stainless steel at ceramic tile and wet areas) sheet, insulated sandwich type construction.
- D. Frame: Form of 1.5 mm (0.0598 inch) thick steel sheet of depth and configuration to suit material and type of construction where installed. Provide frame flange at perimeter where installed in concrete masonry or gypsum board openings.
 - 1. Weld exposed joints in flange and grind smooth.
 - 2. Provide frame flange at perimeter where installed in concrete masonry or gypsum board.
 - 3. Provide expanded galvanized metal lath perimeter wings when installed in plaster except veneer plaster.
- E. Automatic Closing Device: Provide automatic closing device for door.
- F. Hinge: Continuous steel hinge with stainless steel pin.
- G. Lock:
 - 1. Self-latching, with provision for fitting flush a standard screw-in type lock cylinder. Lock cylinder specified in Section 08 71 00, DOOR HARDWARE.

2. Provide latch release device operable from inside of door. Mortise case in door.

2.3 ACCESS DOORS, FLUSH PANEL:

A. Door Panel:

1. Form of 1.9 mm (0.0747 inch) thick steel (1.5 mm (0.0598 inch) thick stainless steel at ceramic tile and wet areas) sheet.
2. Reinforce to maintain flat surface.

B. Frame:

1. Form of 1.5 mm (0.0598 inch) thick steel (stainless steel at ceramic tile and wet areas) sheet of depth and configuration to suit material and type of construction where installed.
2. Provide surface mounted units having frame flange at perimeter where installed in concrete, masonry, or gypsum board construction.
3. Weld exposed joints in flange and grind smooth.
4. Provide expanded galvanized metal lath perimeter wings when installed in plaster except veneer plaster.

C. Hinge:

1. Concealed spring hinge to allow panel to open 175 degrees.
2. Provide removable hinge pin to allow removal of panel from frame.

D. Lock:

1. Flush, screwdriver operated cam lock.

2.4 FINISH:

- A. Provide in accordance with NAAMM AMP 500 series on exposed surfaces.
- B. Steel Surfaces: Baked-on prime coat over a protective phosphate coating.
- C. Stainless Steel: No. 4 for exposed surfaces.

2.5 SIZE:

Minimum 600 mm (24 inches) square door unless otherwise shown or required to suit opening in suspension system of ceiling.

PART 3 - EXECUTION

3.1 LOCATION:

- A. Provide access panels or doors wherever any valves, traps, dampers, cleanouts, and other control items of mechanical, electrical and conveyor work are concealed in wall or partition, or are above ceiling of gypsum board or plaster.
- B. Use fire rated doors in fire rated partitions and ceilings.

- C. Use flush panels in partitions and gypsum board or plaster ceilings, except lay-in acoustical panel ceilings or upward access acoustical tile ceilings.

3.2 INSTALLATION, GENERAL:

- A. Install access doors in openings to have sides vertical in wall installations, and parallel to ceiling suspension grid or side walls when installed in ceiling.
- B. Set frames so that edge of frames without flanges will finish flush with surrounding finish surfaces.
- C. Set frames with flanges to overlap opening and so that face will be uniformly spaced from the finish surface.
- D. Set recessed panel access doors recessed so that face of surrounding materials will finish on the same plane, when finish in door is installed.

3.3 ANCHORAGE:

- A. Secure frames to adjacent construction using anchors attached to frames or by use of bolts or screws through the frame members.
- B. Type, size and number of anchoring device suitable for the material surrounding the opening, maintain alignment, and resist displacement during normal use of access door.
- C. Anchors for fire rated access doors shall meet requirements of applicable fire test.

3.4 ADJUSTMENT:

- A. Adjust hardware so that door panel will open freely.
- B. Adjust door when closed so door panel is centered in the frame.

- - - E N D - - -

**SECTION 08 51 13
ALUMINUM WINDOWS**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Aluminum windows of type and size shown, complete with hardware, related components and accessories.
- B. Types:
 - 1. Fixed

1.2 DEFINITIONS

- A. Accessories: Mullions, staff beads, casings, closures, trim, moldings, panning systems, clips anchors, fasteners, weather-stripping, and other necessary components required for fabrication and installation of window units.
- B. Uncontrolled Water: Water not drained to the exterior, or water appearing on the room side of the window.

1.3 RELATED WORK

- A. Steel subframes: Section 05 50 00, METAL FABRICATIONS.
- B. Glazing: Section 08 80 00, GLAZING.
- C. Color of finish: Section 09 06 00, SCHEDULE FOR FINISHES.
- D. Anchoring Windows: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENT FOR NON-STRUCTURAL COMPONENTS.

1.4 DELIVERY, STORAGE AND HANDLING

- A. Protect windows from damage during handling and construction operations before, during and after installation.
- B. Store windows under cover, setting upright.
- C. Do not stack windows flat.
- D. Do not lay building materials or equipment on windows.

1.5 QUALITY ASSURANCE

- A. Approval by contracting officer is required of products or service of proposed manufacturers and installers.
- B. Approval will be based on submission of certification by Contractor that:
 - 1. Manufacturer regularly and presently manufactures the specified windows as one of its principal products.
 - 2. Installer has technical qualifications, experience, trained personnel and facilities to install specified items.
- C. Provide each type of window produced from one source of manufacture.
- D. Quality Certified Labels or certificate:

1. Architectural Aluminum Manufacturers Association, "AAMA label" affixed to each window indicating compliance with specification.
2. Certificates in lieu of label with copy of recent test report (not more than 4 years old) from an independent testing laboratory and certificate signed by window manufacturer stating that windows provided comply with specified requirements and AAMA 101/I.S.2 for type of window specified.

1.6 SUBMITTAL

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
 1. Minimum of 1/2 full scale.
 2. Identifying parts of window units by name and kind of metal or material, show construction, trim, installation and anchorages.
 3. Include glazing details and standards for factory glazed units.
- C. Manufacturer's Literature and Data:

Window.
- D. Certificates:
 1. Certificates as specified in paragraph QUALITY ASSURANCE.
 2. Indicating manufacturers and installers qualifications.
 3. Manufacturer's Certification that windows delivered to project are identical to windows tested.
- E. Test Reports:

Copies of test reports as specified in paragraph QUALITY ASSURANCE.
- F. Samples: Provide 150 mm (six-inch) length samples showing finishes, specified.

1.7 WARRANTY

Warrant windows against malfunctions due to defects in thermal breaks, hardware, materials and workmanship, subject to the terms of Article "WARRANTY OF CONSTRUCTION", FAR clause 52.246-21, except provide 10 year warranty period.

1.8 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society of Heating, Refrigerating and Air Conditioning Engineers (ASHRAE)

90.1-07.....Energy Standard of Buildings

C. American Architectural Manufacturers Association (AAMA):

101/I.S.2/A440-08.....Windows, Doors, and Unit Skylights

505-09.....Dry Shrinkage and Composite Performance Thermal
Cycling Test Procedures2605-05.....Superior Performing Organic Coatings on
Architectural Aluminum Extrusions and PanelsTIR-A8-08.....Structural Performance of Poured and Debridged
Framing Systems

D. American Society for Testing and Materials (ASTM):

A653/A653M-09.....Steel Sheet, Zinc Coated (Galvanized), Zinc-
Iron Alloy-Coated (Galvannealed) by the Hot-dip
ProcessE 90-09.....Test Method for Laboratory Measurement of
Airborne Sound Transmission Loss of Building
Partitions

E. National Fenestration Rating Council (NFRC):

NFRC 100-10.....Determining Fenestration Product U-Factors

NFRC 200-10.....Determining Fenestration Product Solar Heat
Gain Coefficient and Visible Transmittance at
Normal Incidence

F. National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500-06.....Metal Finishes Manual

PART 2- PRODUCTS**2.1 MATERIALS**

A. Aluminum Extrusions; Sheet and Plate: AAMA 101/I.S.2.

B. Sheet Steel, Galvanized: ASTM A653; G90 galvanized coating.

C. Weather-strips: AAMA 101/I.S.2; except leaf type weather-stripping is
not permitted.D. Fasteners: AAMA 101/I.S.2. Screws, bolts, nuts, rivets and other
fastening devices to be non-magnetic stainless steel.1. Fasteners to be concealed when window is closed. Where wall
thickness is less than 3 mm (0.125 inch) thick, provide backup
plates or similar reinforcements for fasteners.2. Stainless steel self tapping screws may be used to secure Venetian
blind hanger clips, vent guide blocks, friction adjuster, and limit
opening device.

E. Weather-strips: AAMA 101/I.S.2.

2.2 THERMAL AND CONDENSATION PERFORMANCE

- A. Condensation Resistance Factor (CRF): Minimum CRF of C 50.
- B. Thermal Transmittance:
 - 1. Maximum U value class for insulating glass windows: 50 (U=0.50).
- C. Solar Heat Gain Coefficient (SHGC): SHGC shall comply with State or local energy code requirement.

2.3 FABRICATION

- A. Fabrication to exceed or meet requirements of Physical Load Tests, Air Infiltration Test, and Water Resistance Test of AAMA 101/I.S.2.
- B. Glazing:
 - 1. Factory or field glazing optional.
 - 2. Glaze in accordance with Section 08 80 00, GLAZING.
 - 3. Windows reglazable without dismantling sash framing.
 - 4. Design rabbet to suit glass thickness and glazing method specified.
 - 5. Glaze from interior except where not accessible.
 - 6. Provide removable fin type glazing beads.
- C. Trim:
 - 1. Trim includes casings, closures, and panning.
 - 2. Fabricate to shapes shown of aluminum not less than 1.6 mm (0.062 inch) thick
 - 3. Extruded or formed sections, straight, true, and smooth on exposed surfaces.
 - 4. Exposed external corners mitered and internal corners coped; fitted with hairline joints.
 - 5. Reinforce 1.6 mm (0.062 inch) thick members with not less than 3 mm (1/8-inch) thick aluminum.
 - 6. Except for strap anchors, provide reinforcing for fastening near ends and at intervals not more than 305 mm (12 inches) between ends.
 - 7. Design to allow unrestricted expansion and contraction of members and window frames.
 - 8. Secure to window frames with machine screws or expansion rivets.
 - 9. Exposed screws, fasteners or pop rivets are not acceptable on exterior of the casing or trim cover system.
- D. Thermal-Break Construction:
 - 1. Manufacturer's Standard.
 - 2. Low conductance thermal barrier.
 - 3. Capable of structurally holding sash in position and together.

4. All Thermal Break Assemblies (Pour & Debridge, Insulbar or others) shall be tested as per AAMA TIR A8 and AAMA 505 for Dry Shrinkage and Composite Performance.
5. Location of thermal barrier and design of window shall be such that, in closed position, outside air shall not come in direct contact with interior frame of the window.

E. Mullions: AAMA 101.

F. Subsills and Stools:

1. Fabricate to shapes shown of not less than 2 mm (0.080 inch) thick extruded aluminum.
2. One piece full length of opening with concealed anchors.
3. Sills turned up back edge not less than 6 mm (1/4 inch). Front edge provide with drip.
4. Sill back edge behind face of window frame. Do not extend to interior surface or bridge thermal breaks.
5. Do not perforate for anchorage, clip screws, or other requirements.

2.4 FIXED WINDOWS

- A. AMMA 101/I.S.2; Type F-AW65.
- B. AAMA certified product to the AAMA 101/I.S.2. - 97 standard.

2.5 FINISH

- A. In accordance with NAAMM AMP 500 series.
- B. Finish exposed aluminum surfaces as follows:
 1. Anodized Aluminum:
 - a. Finish in accordance with AMP 501 letters and numbers.
 - b. Colored anodized Finish: AA-C22A42 (anodized) or AA-C22A44 (electrolytically deposited metallic compound) medium matte, integrally colored coating, Class 1 Architectural, 0.7 mils thick.
 - 1) Dyes not accepted.
 - 2) Coated Aluminum:
 - 3) Variation of more than 50 percent of maximum shade range approved will not be accepted in a single window or in adjacent windows and mullions on a continuous series.
 - a) AMP 501 and 505.
 - b) Fluorocarbon Finish: AAMA 2605, superior performing organic coating.
 - c) Steel: AMP 504.
 - d) Stainless steel: AMP 503.

1. Concealed: 2B or 2D.
2. Exposed: No. 4 unless specified otherwise.

PART 3 - EXECUTION

3.1 PROTECTION (DISSIMILAR MATERIALS): AAMA 101/I.S.2.

3.2 INSTALLATION, GENERAL

- A. Install window units in accordance with manufacturer's specifications and recommendations for installation of window units, hardware, operators and other components of work.
- B. Where type, size or spacing of fastenings for securing window accessories or equipment to building construction is not shown or specified, use expansion or toggle bolts or screws, as best suited to construction material.
 1. Provide bolts or screws minimum 6 mm (1/4-inch) in diameter.
 2. Sized and spaced to resist the tensile and shear loads imposed.
 3. Do not use exposed fasteners on exterior, except when unavoidable for application of hardware.
 4. Provide non-magnetic stainless steel Phillips flat-head machine screws for exposed fasteners, where required, or special tamper-proof fasteners.
 5. Locate fasteners to not disturb the thermal break construction of windows.
- C. Set windows plumb, level, true, and in alignment; without warp or rack of frames or sash.
- D. Anchor windows on four sides with anchor clips or fin trim.
 1. Do not allow anchor clips to bridge thermal breaks.
 2. Use separate clips for each side of thermal breaks.
 3. Make connections to allow for thermal and other movements.
 4. Do not allow building load to bear on windows.
 5. Use manufacturer's standard clips at corners and not over 600 mm (24 inches) on center.
 6. Where fin trim anchorage is shown build into adjacent construction, anchoring at corners and not over 600 mm (24 inches) on center.
- E. Sills and Stools:
 1. Set in bed of mortar or other compound to fully support, true to line shown.
 2. Do not extend sill to inside window surface or past thermal break.
 3. Leave space for sealants at ends and to window frame unless shown otherwise.

3.3 MULLIONS CLOSURES, TRIM, AND PANNING

- A. Cut mullion full height of opening and anchor directly to window frame on each side.
- B. Closures, Trim, and Panning: External corners mitered and internal corners coped, fitted with hairline, tightly closed joints.
- C. Secure to concrete or solid masonry with expansion bolts, expansion rivets, split shank drive bolts, or powder actuated drive pins.
- D. Toggle bolt to hollow masonry units. Screwed to wood or metal.
- E. Fasten except for strap anchors, near ends and corners and at intervals not more than 300 mm (12 inches) between.
- F. Seal units following installation to provide weathertight system.

3.4 ADJUST AND CLEAN

- A. Adjust ventilating sash and hardware to provide tight fit at contact points, and at weather-stripping for smooth operation and weathertight closure.
- B. Clean aluminum surfaces promptly after installation of windows, exercising care to avoid damage to protective coatings and finishes.
- C. Remove excess glazing and sealant compounds, dirt, and other substances.
- D. Lubricate hardware and moving parts.
- E. Clean glass promptly after installation of windows. Remove glazing and sealant compound, dirt and other substances.
- F. Except when a window is being adjusted or tested, keep locked in the closed position during the progress of work on the project.

- - - E N D - - -

**SECTION 08 63 00
METAL-FRAMED SKYLIGHTS**

PART 1 - GENERAL**1.1 DESCRIPTION:**

Section specifies field erected aluminum framed skylights.

1.2 RELATED WORK:

- A. Field installed joint sealants in connection with metal framed skylights: Section 07 92 00, JOINT SEALANTS.
- B. Glazing: Section 08 80 00, GLAZING.
- C. Finish Color: Section 09 06 00, SCHEDULE FOR FINISHES.
- D. Anchoring: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.3 QUALITY ASSURANCE:**A. Qualifications:**

- 1. Approval is required of products or service of proposed manufacturer, suppliers and installers, and will be based upon submission by Contractor of certification that:
 - a. Manufacturers Qualifications: Manufacturer with five years continuous documented experience in design, fabrication, and installation of metal framed skylights of type and size required for that project.
 - b. Installer Qualifications: An experienced installer with five years continuous documented experience who has specialized in installing metal-framed skylights similar to those indicated for this Project and who is acceptable in writing to manufacturer.
 - c. Manufacturer's product submitted has been in satisfactory and efficient use on minimum of three installations similar and equivalent to this project for past three years.
 - d. Testing Agency Qualifications: ISO 9000 Refer to Performance Requirements and Field Quality Control articles for testing requirements.
 - e. Product Options: Information on Drawings and in Specifications establishes requirements for aesthetic effects and performance characteristics of metal-framed skylights. Aesthetic effects are indicated by dimensions, arrangements, alignment, and profiles of components and assemblies as they relate to sightlines, one another, and

adjoining construction. Performance characteristics are indicated by criteria subject to verification by one or more methods including preconstruction testing, field testing, or in-service performance:

1) Do not modify intended aesthetic effects. If modifications are proposed, submit comprehensive explanatory data for review.

f. Welding: Welding shall be performed by certified welders qualified in accordance with AWS D1.2, using procedures, materials and equipment of the type required for this work.

F. Pre-Installation Conference:

1. Prior to starting installation of skylight system schedule conference with Contracting Officer to ensure (1) a clear understanding of drawings and specifications; (2) onsite inspection and acceptance of structural and pertinent structural details relating to skylight system; and (3) coordination of work of various trades involved in providing related work. Conference shall be attended by Contractor; personnel directly responsible for installation of skylight system, flashing and sheet metal work. Conflicts shall be resolved and confirmed in writing.

1.4 SUBMITTALS:

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Product Data:

1. Manufacturers standard details and fabrication methods.
2. Data on finishing, components, and accessories.
3. Instructions: Submit detail specifications and instructions for installation, and adjustments.
4. Recommendations for maintenance and cleaning of exterior surfaces.

C. Shop Drawings: Show elevations of skylights at 1:50 (1/4 inch) scale, metal gages, details of construction, methods of anchorage, glazing details, and details of installation.

1.5 DELIVERY, STORAGE, AND HANDLING:

A. Refer to AAMA CW 10 for care and handling of architectural aluminum from shop to site.

- B. Inspect materials delivered to site for damage. Unload and store with minimum handling. Provide storage space in dry location with adequate ventilation, free from dust or water, and easily accessible for inspection and handling. Stack materials on non-absorptive strips or wood platforms. Do not cover frames with tarps, polyethylene film, or similar coverings. Protect finished surfaces during shipping and handling using manufacturer's standard method, except that no coatings or lacquers shall be applied to surfaces to which caulking and glazing compounds must adhere.

1.6 PROJECT CONDITIONS:

Field Measurements: Where metal-framed skylights are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication and indicate measurements on Shop Drawings. Coordinate fabrication schedule with construction progress to avoid delaying Work.

1.7 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referred to in text by basic designation only.
- B. American Architectural Manufacturers Association (AAMA):
- 501-05.....Methods of Test for Exterior Walls
 - 503-08.....Field Testing of Metal Storefronts,
Curtain walls and Sloped Glazing Systems
 - 2605-11.....Superior Performing Organic Coatings on
Architectural Aluminum Extrusions and
Panels
 - CW 10-04.....Curtain Wall Manual No. 10 Care and
Handling of Architectural Aluminum from
Shop to Site
 - CW 13-85.....Curtain Wall Manual #13 Structural
Sealant Glazing Systems
- C. American Society for Testing and Materials (ASTM):
- A36/A36M-08.....Carbon Structural Steel
 - A123/A123M-09.....Zinc (Hot-Dip Galvanized) Coatings on
Iron and Steel Products
 - A193/A193M-10.....Alloy-Steel and Stainless Steel Bolting
Materials for High Temperature Service

- A307-10.....Carbon Steel Bolts and Studs, 60,000 psi
Tensile Strength
- B209-07.....Aluminum and Aluminum-Alloy Sheet and
Plate
- B211/B211M-03.....Aluminum-Alloy Bar, Rod and Wire
- B221/B221M-08.....Aluminum and Aluminum-Alloy Extruded
Bars, Rods, Wire, Shapes, and Tubes
- B316/B316M-10.....Specification for Aluminum and Aluminum-
Alloy Rivet and Cold-Heading Wire and
Rods
- C864-05.....Dense Elastomeric Compression Seal
Gaskets, Setting Blocks and Spacers
- C920-11.....Elastomeric Joint Sealants
- E283-04.....Determining Rate of Air Leakage Through
Exterior Windows, Curtain Walls, and
Doors Under Specified Pressure
Differences Across the Specimen
- E330-02(R2010).....Structural Performance of Exterior
Windows, Curtain Walls and Doors by
Uniform Static Air Pressure Difference
- E331-00(R2009).....Water Penetration of Exterior Windows,
Curtain Walls, and Doors by Uniform
Static Air Pressure Difference
- E1105-00(R2008).....Field Determination of Water Penetration
of Installed Exterior Windows, Curtain
Walls, and Doors by Uniform or Cyclic
Static Air Pressure Differences
- D. American Welding Society (AWS):
- D1.2/D1.2M-08.....Structural Welding Code-Aluminum
- E. Glass Association of North America (GANA):
- 2010 Edition.....GANA Glazing Manual
- 2008 Edition.....GANA Sealant Manual
- 2009 Edition.....GANA Laminated Glazing Reference Manual
- 1999 Edition.....GANA Fully Tempered Heavy Glass Door and
Entrance Systems Design Guide.
- F. National Association of Architectural Metal Manufacturers
(NAAMM):
- AMP 500-06.....Metal Finishes Manual

G. International Organization for Standardization ISO:

ISO 9000.....International Quality Management System
Standards and Guidelines

1.9 WARRANTY

Warranty metal skylight against leaks, and structural failure, and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be extended to 5 years.

PART 2 - PRODUCTS**2.1 SYSTEM DESCRIPTION:**

A. Design Requirements:

1. System shall meet or exceed all performance requirements specified.
2. Extruded aluminum members with a system of alternate serrations for attachment of exterior caps and glass supports.
3. Integral guttering system within skylight framing members for positive drainage of condensation. Integral weeping system to drain to exterior.
4. Flush glazed exterior joints as indicated on contract drawings.
5. All structural silicone shall be factory applied.
6. Glazing Requirement: Refer to Section 08 80 00, GLAZING for glazing requirements.

B. Manufacturers Professional Engineer Qualifications: A

professional engineer who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing engineering services of kind indicated. Engineering services are defined as those performed for installations of skylights that are similar to those indicated for this Project in material, design, and extent.

C. Performance Requirements:

1. Structural Members: Of sizes to support design loads as indicated on structural Contract Drawings and as outlined below.
2. Deflection of framing member in a direction normal to plane of glass when subjected to a uniform load deflection test in accordance with ASTM E330, Procedure B, and per above specified structural design loads as indicated on structural

contract drawings, shall not exceed 1/175 nor 25 mm (1 inch) of its clear span for clear spans less than 6000 mm (20 feet) or 1/240 of clear spans greater than 6000 mm (20 feet).

3. Air Infiltration: When tested in accordance with ASTM E283, shall not exceed 0.03 L/S per sqm (0.06 cfm per square foot) of fixed skylight surface.
4. Water Penetration: No water shall penetrate when skylight is tested in accordance with ASTM E331 at a differential static pressure of 20 percent of inward acting design wind pressure, with a minimum of 300Pa (6.24 psf).

2.2 MATERIALS:

A. Framework:

1. Principle Supporting Members: 3 mm (0.125 inch) minimum thickness extruded aluminum, alloy 6063-T5, 6063-T6, or 6061-T6 per ASTM B221M. Profiles as indicated on Contract Drawings.
2. Snap-on Covers and Miscellaneous Non-supporting Trim: 1.5 mm (0.062 inch) minimum thickness extruded aluminum, alloy 6063-T5 per ASTM B221M.
3. Principle Formed Metal Members: 3 mm (0.125 inch) minimum thickness aluminum, alloy 5052, 5005, or 6061-T6 per ASTM B209M.
4. Internal Reinforcement: ASTM A36M, steel shapes as required for strength and mullion size limitations, hot-dip galvanized after fabrication in accordance with ASTM A123.

B. Glazing Strips: ASTM C864:

1. Glass and glazing material as specified in Section 08 80 00, GLAZING.
2. Extruded EDPM rubber designed to comply with the following specifications:
 - a. Hardness: 55+/-5 Durometer.
 - b. Tensile Strength: 12410 kPa (1800 psi) minimum.
 - c. Elongation: 500 percent minimum.
 - d. Color: Black
3. Heat Aging Characteristics:
 - a. 70 hours at 100 degrees C (212 degrees F).
 - b. Hardness Change: +5 Durometer.
 - c. Tensile Change: -10 percent

- d. Elongation Change: -20 percent
- 4. Weather resistance at 1 part ozone per million, 500 hours at 20% elongation: No cracks.
- 5. No visual checks, cracks or breaks after completion of tests.
- C. Setting Blocks:
 - 1. Extruded Type II silicone rubber designed to permit adhesion and comply with the following specifications; comply with ASTM C864:
 - a. Hardness: 80+/- Durometer
 - b. Color: Black
- D. Fasteners:
 - 1. For Exterior Cap Retainers: ASTM A193 B8 300 series stainless steel screws.
 - 2. For Framework Connections: ASTM B211M 2024-T4 aluminum, ASTM A193 B8 300 series stainless steel, and ASTM B316 aluminum rivets, as required by connection.
 - 3. For Anchoring Skylight to Support Structure: ASTM A307 zinc plated steel fasteners.
- E. Flashings: Comply with Section 07 60 00, FLASHING AND SHEET METAL.
- F. Glass:
 - 1. Refer to requirements of Section 08 80 00, GLAZING.
 - 2. Glass Sizes and Clearances:
 - a. Accommodate up to 25 mm (1 inch) glazing.
 - b. Sizes indicated are nominal. Verify actual sizes required by measuring frames. Coordinate dimensions for glass and glass holding members to meet applicable minimum clearances as recommended by glass manufacturer. Do not nip glass to remove flares or to reduce oversized dimensions. All cutting shall occur in factory.

2.3 FABRICATION

- A. Skylight components shall be of materials and thickness indicated or specified. Details indicated are representative of required design and profiles. Unless specifically indicated or specified otherwise, methods of fabrication and assembly shall be at discretion of manufacturer. Perform fitting and assembling of components in shop to maximum extent practicable. Anchorage

- devices shall permit adjustment in three directions. There shall be no exposed fasteners.
- B. Construct skylight(s) using a continuous aluminum curb with expansion joints as required.
 - C. Insofar as practicable, fit and assemble work in manufacturer's shop. Work that cannot be permanently assembled shall be shop assembled, marked and disassembled before shipment to job site.
 - D. Design rafter bars for snap-in type glazing strips.
 - E. Attach snap-on cap retainers using stainless steel fasteners into a system of alternate serrations, at a maximum spacing of 300 mm (12 inches) on center.
 - F. Design snap-on cap retainer fasteners to provide not more than 187 g/mm (10 pounds per linear inch) of compression on glazing strips and glass edge.
 - G. Use snap-on type caps to conceal snap-on cap retainer fasteners.
 - H. Where applicable, shop rivet or weld aluminum clips to framing members or field bolt at installation.
 - I. Set glass with exterior EDPM glazing strips.
 - J. Use silicone setting blocks to support glass and to provide edge clearances and glass bites as outlined below, in accordance with GANA recommendations:
 - 1. Set blocks not less than 150 mm (6 inches) from edge of glass for support of unit.
 - 2. Glass Bite: Not less than 13 mm (1/2 inch) nor more than 16 mm (5/8 inch) on any side of glass unit.
 - 3. Maintain 6 mm (1/4 inch) edge clearance between glass and adjacent metal framework.
 - 4. Use rubber spacers to maintain separation of glass and adjacent metal framework.
 - K. Locate weep holes in curb to positively drain condensation to exterior of skylight at each rafter connection.
 - L. Dissimilar Metals: Separate dissimilar metals with bituminous paint or other separator that will prevent galvanic action.
 - M. Fasteners: Conceal fasteners wherever possible. Countersink heads of exposed fasteners.

2.4 METAL FINISHES:

- A. As specified in Section 09 06 00, SCHEDULE FOR FINISHES.
- B. In accordance with NAAMM AMP 500-505 series.

C. Anodized Aluminum:

1. AA-C22A44 - Chemically etched medium matte with electrolytically deposited metallic compound, integrally colored coating Class 1 Architectural, 0.7-mil thick finish. Dyes will not be accepted:
 - a. Color: White to match existing skylight.

D. Sealants:

1. Non-structural Flush Glazed Joints and Weather Seal Joints: Silicone sealants applied in accordance with manufacturer's recommendations.

PART 3 - EXECUTION**3.1 EXAMINATION:**

Prior to installation of skylight system, examine structure and substrate to determine that they are properly prepared, sized and ready to receive skylight work included herein.

3.2 INSPECTION AND PREPARATION:

Contact between aluminum and dissimilar metals shall receive a protective coating of asphaltic paint for prevention of electrolytic action and corrosion.

3.3 INSTALLATION:

- A. Install skylight frame, glass and accessory items as needed in accordance with manufacturer's instructions.
- B. Install skylight system by factory trained mechanics.
- C. Erect system plumb and true in proper alignment and relation to established lines and grades as shown on approved shop drawings.
- D. Anchor skylight to structure in strict accordance with approved Shop Drawings.
- E. Use high-performance silicone sealants to seal horizontal joints between glass panels and silicone sealant to wet seal joints between snap-on cap retainers and glass.
- F. Apply sealing materials in strict accordance with sealant manufacturer's instructions. Before application, remove mortar dirt, dust, moisture and other foreign matter from surfaces it will contact. Mask adjoining surfaces to maintain a clean, neat appearance. Tool sealing compounds to fill joint and provide a smooth finish.

3.4 TOLERANCES:

- A. All parts of work, when completed, shall be within the following tolerances:
 - 1. Maximum variation from plane or location shown on approved shop drawings: 3 mm per 3600 mm (1/8 inch per 12 feet) of length, or 10 mm (3/8 inch) in total length.
 - 2. Maximum offset from true alignment between two members abutting end-to-end, edge-to-edge in line: .75 mm (1/32 inch).

3.5 FIELD QUALITY CONTROL:

- A. Testing Agency: Engage a qualified independent testing and inspecting agency to perform field quality-control tests and to prepare test reports.
- B. Sealant Adhesion Tests: Test installed sealant in a minimum of two areas and as follows:
 - 1. Test weather seal sealant as recommended in writing by sealant manufacturer.
- C. Water-Spray Test: Test skylights for compliance with requirements according to procedures in AAMA 501.
- D. Water Penetration: Test skylights for compliance with requirements according to AAMA 503, which requires testing according to ASTM E1105: Uniform Static-Air-Pressure Difference: 20 percent of positive design wind load, but not less than 300 Pa (6.24 lbf/sq. ft.).
- E. Repair or replace Work that does not meet requirements or that is damaged by testing; repair or replace to comply with specifications.

3.6 CLEANING:

- A. Install skylight frame and associated metal to avoid soiling or smudging finish.
- B. Clean metal surfaces promptly after installation, exercising care to avoid damage to coatings.
- C. Remove excess glazing and sealant compounds, dirt, and other substances.
- D. Follow recommendations of skylight manufacturer in selection of cleaning agents. Do not use cleaning agents containing ammonia or other compounds that might damage finished metal surfaces.

- E. Clean glass just prior to time of final acceptance of building, subsequent to completion of installation.

3.7 PROTECTION:

Protect finished surfaces from damage during erection, and after completion of work. Strippable plastic coatings on colored anodized finish are not acceptable.

- - - E N D - - -

**SECTION 08 71 00
DOOR HARDWARE**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Door hardware and related items necessary for complete installation and operation of doors.

1.2 RELATED WORK

- A. Caulking: Section 07 92 00 JOINT SEALANTS.
- B. Application of Hardware: Section 08 14 00, INTERIOR WOOD DOORS, Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, Section 08 71 13, AUTOMATIC DOOR OPERATORS.
- C. Finishes: Section 09 06 00, SCHEDULE FOR FINISHES.
- D. Painting: Section 09 91 00, PAINTING.
- E. Electrical: Division 26, ELECTRICAL.
- F. Special Doors: Section 08 17 13, INTEGRATED DOOR ASSEMBLIES.
- G. Card Readers: Section 28 13 00, ACCESS CONTROL SYSTEMS.

1.3 GENERAL

- A. All hardware shall comply with UFAS, (Uniform Federal Accessible Standards) unless specified otherwise.
- B. Provide rated door hardware assemblies where required by most current version of the International Building Code (IBC).
- C. Hardware for Labeled Fire Doors and Exit Doors: Conform to requirements of NFPA 80 for labeled fire doors and to NFPA 101 for exit doors, as well as to other requirements specified. Provide hardware listed by UL, except where heavier materials, large size, or better grades are specified herein under paragraph HARDWARE SETS. In lieu of UL labeling and listing, test reports from a nationally recognized testing agency may be submitted showing that hardware has been tested in accordance with UL test methods and that it conforms to NFPA requirements.
- D. Hardware for application on metal and wood doors and frames shall be made to standard templates. Furnish templates to the fabricator of these items in sufficient time so as not to delay the construction.
- E. The following items shall be of the same manufacturer, if possible, except as otherwise specified:
 - 1. Mortise locksets.
 - 2. Hinges for hollow metal and wood doors.
 - 3. Surface applied overhead door closers.
 - 4. Exit devices.

5. Floor closers.

1.4 WARRANTY

A. Automatic door operators shall be subject to the terms of FAR Clause 52.24-21, except that the Warranty period shall be two years in lieu of one year for all items except as noted below:

1. Locks, latchsets, and panic hardware: 5 years.
2. Door closers and continuous hinges: 10 years.

1.5 MAINTENANCE MANUALS

A. In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on all door hardware.

1.6 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. Submit 6 copies of the schedule per Section 01 33 23 plus 2 copies to the VAMC Locksmith (VISN Locksmith if the VAMC does not have a locksmith).

B. Hardware Schedule: Prepare and submit hardware schedule in the following form:

Hardware Item	Quantity	Size	Reference Publication Type No.	Finish	Mfr. Name and Catalog No.	Key Control Symbols	UL Mark (if fire rated and listed)	ANSI/BHMA Finish Designation

C. Samples and Manufacturers' Literature:

1. Samples: All hardware items (proposed for the project) that have not been previously approved by Builders Hardware Manufacturers Association shall be submitted for approval. Tag and mark all items with manufacturer's name, catalog number and project number.
2. Samples are not required for hardware listed in the specifications by manufacturer's catalog number, if the contractor proposes to use the manufacturer's product specified.

D. Certificate of Compliance and Test Reports: Submit certificates that hardware conforms to the requirements specified herein. Certificates shall be accompanied by copies of reports as referenced. The testing

shall have been conducted either in the manufacturer's plant and certified by an independent testing laboratory or conducted in an independent laboratory, within four years of submittal of reports for approval.

1.7 DELIVERY AND MARKING

- A. Deliver items of hardware to job site in their original containers, complete with necessary appurtenances including screws, keys, and instructions. Tag one of each different item of hardware and deliver to COTR for reference purposes. Tag shall identify items by Project Specification number and manufacturer's catalog number. These items shall remain on file in COTR's office until all other similar items have been installed in project, at which time the COTR will deliver items on file to Contractor for installation in predetermined locations on the project.

1.8 PREINSTALLATION MEETING

- A. Convene a preinstallation meeting between COTR and contractor, not less than 30 days before start of installation of door hardware to review the following:
1. Inspection of door hardware.
 2. Job and surface readiness.
 3. Coordination with other work.
 4. Protection of hardware surfaces.
 5. Substrate surface protection.
 6. Installation.
 7. Adjusting.
 8. Repair.
 9. Field quality control.
 10. Cleaning.

1.9 INSTRUCTIONS

- A. Hardware Set Symbols on Drawings: Except for protective plates, door stops, mates, thresholds and the like specified herein, hardware requirements for each door are indicated on drawings by symbols. Symbols for hardware sets consist of letters (e.g., "HW") followed by a number. Each number designates a set of hardware items applicable to a door type.
- B. Manufacturers' Catalog Number References: Where manufacturers' products are specified herein, products of other manufacturers which are considered equivalent to those specified may be used. Manufacturers

whose products are specified are identified by abbreviations as follows:

Adams-Rite	Adams Rite Mfg. Co.	Pomona, CA
Best	Best Access Systems	Indianapolis, IN
Don-Jo	Don-Jo Manufacturing	Sterling, MA
G.E. Security	GE Security, Inc.	Bradentown, FL
Markar	Markar Architectural Products	Pomona, CA
Pemko	Pemko Manufacturing Co.	Ventura, CA
Rixson	Rixson	Franklin Park, IL
Rockwood	Rockwood Manufacturing Co.	Rockwood, PA
Securitron	Securitron Magnalock Corp.	Sparks, NV
Southern Folger	Southern Folger Detention Equipment Co.	San Antonio, TX
Stanley	The Stanley Works	New Britain, CT
Tice	Tice Industries	Portland, OR
Trimco	Triangle Brass Mfg. Co.	Los Angeles, CA
Zero	Zero Weather Stripping Co.	New York, NY

C. Keying: All cylinders shall be keyed into existing Grand Master Key System. Provide removable core cylinders that are removable only with a special key or tool without disassembly of knob or lockset. Cylinders shall be 7 pin type. Keying information shall be furnished at a later date by the COTR.

1.10 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. In text, hardware items are referred to by series, types, etc., listed in such specifications and standards, except as otherwise specified.

B. American Society for Testing and Materials (ASTM):

F883-04.....Padlocks

E2180-07.....Standard Test Method for Determining the
Activity of Incorporated Antimicrobial Agent(s)
In Polymeric or Hydrophobic Materials

C. American National Standards Institute/Builders Hardware Manufacturers Association (ANSI/BHMA):

A156.1-06.....Butts and Hinges

- A156.2-03.....Bored and Pre-assembled Locks and Latches
- A156.3-08.....Exit Devices, Coordinators, and Auto Flush Bolts
- A156.4-08.....Door Controls (Closers)
- A156.5-01.....Auxiliary Locks and Associated Products
- A156.6-05.....Architectural Door Trim
- A156.8-05.....Door Controls-Overhead Stops and Holders
- A156.12-05Interconnected Locks and Latches
- A156.13-05.....Mortise Locks and Latches Series 1000
- A156.14-07Sliding and Folding Door Hardware
- A156.15-06.....Release Devices-Closer Holder, Electromagnetic and Electromechanical
- A156.16-08.....Auxiliary Hardware
- A156.17-04Self-Closing Hinges and Pivots
- A156.18-06.....Materials and Finishes
- A156.20-06Strap and Tee Hinges, and Hasps
- A156.21-09.....Thresholds
- A156.22-05.....Door Gasketing and Edge Seal Systems
- A156.23-04.....Electromagnetic Locks
- A156.24-03.....Delayed Egress Locking Systems
- A156.25-07Electrified Locking Devices
- A156.26-06.....Continuous Hinges
- A156.28-07Master Keying Systems
- A156.29-07Exit Locks and Alarms
- A156.30-03High Security Cylinders
- A156.31-07Electric Strikes and Frame Mounted Actuators
- A250.8-03.....Standard Steel Doors and Frames
- D. National Fire Protection Association (NFPA):
 - 80-10.....Fire Doors and Fire Windows
 - 101-09.....Life Safety Code
- E. Underwriters Laboratories, Inc. (UL):
 - Building Materials Directory (2008)

PART 2 - PRODUCTS

2.1 BUTT HINGES

- A. ANSI A156.1. Provide only three-knuckle hinges, except five-knuckle where the required hinge type is not available in a three-knuckle version (e.g., some types of swing-clear hinges). The following types

of butt hinges shall be used for the types of doors listed, except where otherwise specified:

1. Exterior Doors: Type A2112/A5112 for doors 900 mm (3 feet) wide or less and Type A2111/A5111 for doors over 900 mm (3 feet) wide. Hinges for exterior outswing doors shall have non-removable pins. Hinges for exterior fire-rated doors shall be of stainless steel material.
2. Interior Doors: Type A8112/A5112 for doors 900 mm (3 feet) wide or less and Type A8111/A5111 for doors over 900 mm (3 feet) wide. Hinges for doors exposed to high humidity areas (shower rooms, toilet rooms, kitchens, janitor rooms, etc. shall be of stainless steel material.

B. Provide quantity and size of hinges per door leaf as follows:

1. Doors up to 1210 mm (4 feet) high: 2 hinges.
2. Doors 1210 mm (4 feet) to 2260 mm (7 feet 5 inches) high: 3 hinges minimum.
3. Doors greater than 2260 mm (7 feet 5 inches) high: 4 hinges.
4. Doors up to 900 mm (3 feet) wide, standard weight: 114 mm x 114 mm (4-1/2 inches x 4-1/2 inches) hinges.
5. Doors over 900 mm (3 feet) to 1065 mm (3 feet 6 inches) wide, standard weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
6. Doors over 1065 mm (3 feet 6 inches) to 1210 mm (4 feet), heavy weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
7. Provide heavy-weight hinges where specified.
8. At doors weighing 330 kg (150 lbs.) or more, furnish 127 mm (5 inch) high hinges.

C. See Articles "MISCELLANEOUS HARDWARE" and "HARDWARE SETS" for pivots and hinges other than butts specified above and continuous hinges specified below.

2.2 CONTINUOUS HINGES

A. ANSI/BHMA A156.26, Grade 1-600.

1. Listed under Category N in BHMA's "Certified Product Directory."

B. General: Minimum 0.120-inch- (3.0-mm-) thick, hinge leaves with minimum overall width of 4 inches (102 mm); fabricated to full height of door and frame and to template screw locations; with components finished after milling and drilling are complete

C. Continuous, Barrel-Type Hinges: Hinge with knuckles formed around a Teflon-coated 6.35mm (0.25-inch) minimum diameter pin that extends entire length of hinge.

1. Base Metal for Exterior Hinges: Stainless steel.
2. Base Metal for Interior Hinges: Stainless steel.
3. Base Metal for Hinges for Fire-Rated Assemblies: Stainless steel.
4. Provide with non-removable pin (hospital tip option) at lockable outswing doors.
5. Where required to clear adjacent casing, trim, and wall conditions and allow full door swing, provide wide throw hinges of minimum width required.
6. Provide with manufacturer's cut-outs for separate mortised power transfers and/or mortised automatic door bottoms where they occur.
7. Where thru-wire power transfers are integral to the hinge, provide hinge with easily removable portion to allow easy access to wiring connections.
8. Where models are specified that provide an integral wrap-around edge guard for the hinge edge of the door, provide manufacturer's adjustable threaded stud and machine screw mechanism to allow the door to be adjusted within the wrap-around edge guard.

2.3 DOOR CLOSING DEVICES

- A. Closing devices shall be products of one manufacturer for each type specified.

2.4 OVERHEAD CLOSERS

- A. Conform to ANSI A156.4, Grade 1.
- B. Closers shall conform to the following:
1. The closer shall have minimum 50 percent adjustable closing force over minimum value for that closer and have adjustable hydraulic back check effective between 60 degrees and 85 degrees of door opening.
 2. Where specified, closer shall have hold-open feature.
 3. Size Requirements: Provide multi-size closers, sizes 1 through 6, except where multi-size closer is not available for the required application.
 4. Material of closer body shall be forged or cast.
 5. Arm and brackets for closers shall be steel, malleable iron or high strength ductile cast iron.

6. Where closers are exposed to the exterior or are mounted in rooms that experience high humidity, provide closer body and arm assembly of stainless steel material.
7. Closers shall have full size metal cover; plastic covers will not be accepted.
8. Closers shall have adjustable hydraulic back-check, separate valves for closing and latching speed, adjustable back-check positioning valve, and adjustable delayed action valve.
9. Provide closers with any accessories required for the mounting application, including (but not limited to) drop plates, special soffit plates, spacers for heavy-duty parallel arm fifth screws, bull-nose or other regular arm brackets, longer or shorter arm assemblies, and special factory templating. Provide special arms, drop plates, and templating as needed to allow mounting at doors with overhead stops and/or holders.
10. Closer arms or backcheck valve shall not be used to stop the door from overswing, except in applications where a separate wall, floor, or overhead stop cannot be used.
11. Provide parallel arm closers with heavy duty rigid arm.
12. Where closers are to be installed on the push side of the door, provide parallel arm type except where conditions require use of top jamb arm.
13. Provide all surface closers with the same body attachment screw pattern for ease of replacement and maintenance.
14. All closers shall have a 1 ½" (38mm) minimum piston diameter.

2.5 DOOR STOPS

- A. Conform to ANSI A156.16.
- B. Provide door stops wherever an opened door or any item of hardware thereon would strike a wall, column, equipment or other parts of building construction. For concrete, masonry or quarry tile construction, use lead expansion shields for mounting door stops.
- C. Where cylindrical locks with turn pieces or pushbuttons occur, equip wall bumpers Type L02251 (rubber pads having concave face) to receive turn piece or button.
- D. Provide floor stops (Type L02141 or L02161 in office areas; Type L02121 x 3 screws into floor elsewhere. Wall bumpers, where used, must be installed to impact the trim or the door within the leading half of its

- width. Floor stops, where used, must be installed within 4-inches of the wall face and impact the door within the leading half of its width.
- E. Where drywall partitions occur, use floor stops, Type L02141 or L02161 in office areas, Type L02121 elsewhere.
 - F. Provide stop Type L02011, as applicable for exterior doors. At outswing doors where stop can be installed in concrete, provide stop mated to concrete anchor set in 76mm (3-inch) core-drilled hole and filled with quick-setting cement.
 - G. Omit stops where floor mounted door holders are required and where automatic operated doors occur. Omit floor mounted door stops at corridors and provide wall mounted instead where required.
 - H. Provide appropriate roller bumper for each set of doors (except where closet doors occur) where two doors would interfere with each other in swinging.
 - I. Provide appropriate door mounted stop on doors in individual toilets where floor or wall mounted stops cannot be used.
 - J. Provide overhead surface applied stop Type C02541, ANSI A156.8 on patient toilet doors in bedrooms where toilet door could come in contact with the bedroom door.
 - K. Provide door stops on doors where combination closer magnetic holders are specified, except where wall stops cannot be used or where floor stops cannot be installed within 4-inches of the wall.
 - L. Where the specified wall or floor stop cannot be used, provide concealed overhead stops (surface-mounted where concealed cannot be used).

2.6 OVERHEAD DOOR STOPS AND HOLDERS

- A. Conform to ANSI Standard A156.8. Overhead holders shall be of sizes recommended by holder manufacturer for each width of door. Set overhead holders for 110 degree opening, unless limited by building construction or equipment. Provide Grade 1 overhead concealed slide type: stop-only at rated doors and security doors, hold-open type with exposed hold-open on/off control at all other doors requiring overhead door stops.

2.7 LOCKS AND LATCHES

- A. Conform to ANSI A156.2. Locks and latches for doors 45 mm (1-3/4 inch) thick or over shall have beveled fronts. Lock cylinders shall have not less than seven pins. Cylinders for all locksets shall be removable core type. Cylinders shall be furnished with construction removable cores and construction master keys. Cylinder shall be removable by

special key or tool. Construct all cores so that they will be interchangeable into the core housings of all mortise locks, rim locks, cylindrical locks, and any other type lock included in the Great Grand Master Key System. Disassembly of lever or lockset shall not be required to remove core from lockset. All locksets or latches on double doors with fire label shall have latch bolt with 19 mm (3/4 inch) throw, unless shorter throw allowed by the door manufacturer's fire label. Provide temporary keying device or construction core of allow opening and closing during construction and prior to the installation of final cores.

- B. In addition to above requirements, locks and latches shall comply with following requirements:
1. Mortise Lock and Latch Sets: Conform to ANSI/BHMA A156.13. Mortise locksets shall be series 1000, minimum Grade 2. All locksets and latchsets, except on designated doors in Psychiatric (Mental Health) areas, shall have lever handles fabricated from cast stainless steel. No substitute lever material shall be accepted. All locks and latchsets shall be furnished with 122.55 mm (4-7/8-inch) curved lip strike and wrought box. At outswing pairs with overlapping astragals, provide flat lip strip with 21mm (7/8-inch) lip-to-center dimension. Lock function F02 shall be furnished with emergency tools/keys for emergency entrance. All lock cases installed on lead lined doors shall be lead lined before applying final hardware finish. Furnish armored fronts for all mortise locks. Where mortise locks are installed in high-humidity locations or where exposed to the exterior on both sides of the opening, provide non-ferrous mortise lock case.
 2. Cylindrical Lock and Latch Sets: levers shall meet ADA (Americans with Disabilities Act) requirements. Cylindrical locksets shall be series 4000 Grade I. All locks and latchsets shall be furnished with 122.55 mm (4-7/8-inch) curved lip strike and wrought box. At outswing pairs with overlapping astragals, provide flat lip strip with 21mm (7/8-inch) lip-to-center dimension. Provide lever design to match existing lever design. Where two turn pieces are specified for lock F76, turn piece on inside knob shall lock and unlock inside knob, and turn piece on outside knob shall unlock outside knob when inside knob is in the locked position. (This function is intended to

allow emergency entry into these rooms without an emergency key or any special tool.)

3. Auxiliary locks shall be as specified under hardware sets and conform to ANSI A156.5.

2.8 ELECTROMAGNETIC LOCKS

- A. ANSI/BHMA A156.23; electrically powered, of strength and configuration indicated; with electromagnet attached to frame and armature plate attached to door. Listed under Category E in BHMA's "Certified Product Directory."

1. Type: Full exterior or full interior, as required by application indicated.
2. Strength Ranking: 1000 lbf (4448 N).
3. Inductive Kickback Peak Voltage: Not more than 0 V.
4. Residual Magnetism: Not more than 0 lbf (0 N) to separate door from magnet.

2.9 ELECTRIC STRIKES

- A. ANSI/ BHMA A156.31 Grade 1.
- B. General: Use fail-secure electric strikes at fire-rated doors.

2.10 KEYS

- A. Stamp all keys with change number and key set symbol. Furnish keys in quantities as follows:

Locks/Keys	Quantity
Cylinder locks	2 keys each
Cylinder lock change key blanks	100 each different key way
Master-keyed sets	6 keys each
Grand Master sets	6 keys each
Great Grand Master set	5 keys
Control key	2 keys

2.11 KEY CABINET

- A. ANSI Standard A156.5. Provide key cabinet made of cold rolled, 1.2 mm (0.0478 inch) thick furniture steel electro-welded. Doors shall have "no sag" continuous brass-pin piano type hinge and be equipped with chrome plated locking door handles, hook cam and mechanical pushbutton door lock. Key Cabinet and Key Control System shall accommodate all keys for this project plus 25 percent. Provide minimum number of

multiple cabinets where a single cabinet of largest size will not accommodate the required number of keys.

- B. Key tags shall consist of two sets: Permanent self-locking and loan key snaphook type with tag colors as follows: Red fiber marker of the permanent self-locking type approximately 32 mm (1-1/4 inch) in diameter engraved with the legend "FILE KEY MUST NOT BE LOANED." Also furnish for each hook a white cloverleaf key marker with snap-hooks engraved with the legend "LOAN KEY."
- C. The manufacturer of the lock cylinders and locks shall attach a key tag to keys of each lock cylinder and shall mark thereon the respective item number and key change number. Provide each group of keys in a key gathering envelope (supplied by Key Cabinet Manufacturer) in which the lock manufacturer shall include the following information: Item number, key change number and door number. The contractor shall furnish the Key Cabinet Manufacturer the hardware and keying schedules and change keys.
- D. The Key Cabinet Manufacturer shall set up a three-way cross index system, including master keys, listing the keys alphabetically, the hooks numerically and the key changes numerically on different colored index cards. Index cards shall be typewritten and inserted in a durable binder. Attach the keys to the two sets of numbered tags supplied with the cabinet. (The permanent tag and the loan key tag). Instruct the owner in proper use of the system. Install cabinet as directed by the COTR.

2.12 ARMOR PLATES, KICK PLATES, MOP PLATES AND DOOR EDGING

- A. Conform to ANSI Standard A156.6.
- B. Provide protective plates and door edging as specified below:
 - 1. Kick plates, mop plates and armor plates of metal, Type J100 series.
 - 2. Provide kick plates and mop plates where specified. Kick plates shall be 254 mm (10 inches) or 305 mm (12 inches) high. Mop plates shall be 152 mm (6 inches) high. Both kick and mop plates shall be minimum 1.27 mm (0.050 inches) thick. Provide kick and mop plates beveled on all 4 edges (B4E). On push side of doors where jamb stop extends to floor, make kick plates 38 mm (1-1/2 inches) less than width of door, except pairs of metal doors which shall have plates 25 mm (1 inch) less than width of each door. Extend all other kick and mop plates to within 6 mm (1/4 inch) of each edge of doors. Kick and mop plates shall butt astragals. For jamb stop requirements, see specification sections pertaining to door frames.

3. Kick plates and/or mop plates are not required on following door sides:
 - a. Armor plate side of doors;
 - b. Exterior side of exterior doors;
 - c. Closet side of closet doors;
 - d. Both sides of aluminum entrance doors.
4. Armor plates for doors are listed under Article "Hardware Sets".

Armor plates shall be thickness as noted in the hardware set, 875 mm (35 inches) high and 38 mm (1-1/2 inches) less than width of doors, except on pairs of metal doors. Provide armor plates beveled on all 4 edges (B4E). Plates on pairs of metal doors shall be 25 mm (1 inch) less than width of each door. Where top of intermediate rail of door is less than 875 mm (35 inches) from door bottom, extend armor plates to within 13 mm (1/2 inch) of top of intermediate rail. On doors equipped with panic devices, extend armor plates to within 13 mm (1/2 inch) of panic bolt push bar.
5. Where louver or grille occurs in lower portion of doors, substitute stretcher plate and kick plate in place of armor plate. Size of stretcher plate and kick plate shall be 254 mm (10 inches) high.
6. Provide stainless steel edge guards where so specified at wood doors. Provide mortised type instead of surface type except where door construction and/or ratings will not allow. Provide edge guards of bevel and thickness to match wood door. Provide edge guards with factory cut-outs for door hardware that must be installed through or extend through the edge guard. Provide full-height edge guards except where door rating does not allow; in such cases, provide edge guards to height of bottom of typical lockset armor front. Forward edge guards to wood door manufacturer for factory installation on doors.

2.13 EXIT DEVICES

- A. Conform to ANSI Standard A156.3. Exit devices shall be Grade 1; type and function are specified in hardware sets. Provide flush with finished floor strikes for vertical rod exit devices in interior of building. Trim shall have cast satin stainless steel lever handles of design similar to locksets, unless otherwise specified. Provide key cylinders for keyed operating trim and, where specified, cylinder dogging.

- B. Surface vertical rod panics shall only be provided less bottom rod; provide fire pins as required by exit device and door fire labels. Do not provide surface vertical rod panics at exterior doors.
- C. Concealed vertical rod panics shall be provided less bottom rod at interior doors, unless lockable or otherwise specified; provide fire pins as required by exit device and door fire labels. Where concealed vertical rod panics are specified at exterior doors, provide with both top and bottom rods.
- D. Where removable mullions are specified at pairs with rim panic devices, provide mullion with key-removable feature.
- E. At non-rated openings with panic hardware, provide panic hardware with key cylinder dogging feature.
- F. Exit devices for fire doors shall comply with Underwriters Laboratories, Inc., requirements for Fire Exit Hardware. Submit proof of compliance.

2.14 FLUSH BOLTS (LEVER EXTENSION)

- A. Conform to ANSI A156.16. Flush bolts shall be Type L24081 unless otherwise specified. Furnish proper dustproof strikes conforming to ANSI A156.16, for flush bolts required on lower part of doors.
- B. Lever extension manual flush bolts shall only be used at non-fire-rated pairs for rooms only accessed by maintenance personnel.
- C. Face plates for cylindrical strikes shall be rectangular and not less than 25 mm by 63 mm (1 inch by 2-1/2 inches).
- D. Friction-fit cylindrical dustproof strikes with circular face plate may be used only where metal thresholds occur.
- E. Provide extension rods for top bolt where door height exceeds 2184 mm (7 feet 2 inches).

2.15 FLUSH BOLTS (AUTOMATIC)

- A. Conform to ANSI A156.3. Dimension of flush bolts shall conform to ANSI A115. Bolts shall conform to Underwriters Laboratories, Inc., requirements for fire door hardware. Flush bolts shall automatically latch and unlatch. Furnish dustproof strikes conforming to ANSI A156.16 for bottom flushbolt. Face plates for dustproof strike shall be rectangular and not less than 38 mm by 90 mm (1-1/2 by 3-1/2 inches).
- B. At interior doors, provide auto flush bolts less bottom bolt, unless otherwise specified, except at wood pairs with fire-rating greater than 20 minutes; provide fire pins as required by auto flush bolt and door fire labels.

2.16 DOOR PULLS

- A. Conform to ANSI A156.6. Pull plate 90 mm by 350 mm (3-1/2 inches by 14 inches), unless otherwise specified. Cut plates of door pulls for cylinders, or turn pieces where required.

2.17 PUSH PLATES

- A. Conform to ANSI A156.6. Metal, Type J302, 200 mm (8 inches) wide by 350 mm (14 inches) high. Provide metal Type J300 plates 100 mm (4 inches wide by 350 mm (14 inches) high) where push plates are specified for doors with stiles less than 200 mm (8 inches) wide. Cut plates for cylinders, and turn pieces where required.

2.18 COMBINATION PUSH AND PULL PLATES

- A. Conform to ANSI 156.6. Type J303, stainless steel 3 mm (1/8 inch) thick, 80 mm (3-1/3 inches) wide by 800 mm (16 inches) high), top and bottom edges shall be rounded. Secure plates to wood doors with 38 mm (1-1/2 inch) long No. 12 wood screws. Cut plates for turn pieces, and cylinders where required. Pull shall be mounted down.

2.19 COORDINATORS

- A. Conform to ANSI A156.16. Coordinators, when specified for fire doors, shall comply with Underwriters Laboratories, Inc., requirements for fire door hardware. Coordinator may be omitted on exterior pairs of doors where either door will close independently regardless of the position of the other door. Coordinator may be omitted on interior pairs of non-labeled open where open back strike is used. Open back strike shall not be used on labeled doors. Paint coordinators to match door frames, unless coordinators are plated. Provide bar type coordinators, except where gravity coordinators are required at acoustic pairs. For bar type coordinators, provide filler bars for full width and, as required, brackets for push-side surface mounted closers, overhead stops, and vertical rod panic strikes.

2.20 THRESHOLDS

- A. Conform to ANSI A156.21, mill finish extruded aluminum, except as otherwise specified. In existing construction, thresholds shall be installed in a bed of sealant with ¼-20 stainless steel machine screws and expansion shields. In new construction, embed aluminum anchors coated with epoxy in concrete to secure thresholds. Furnish thresholds for the full width of the openings.
- B. At exterior doors and any interior doors exposed to moisture, provide threshold with non-slip abrasive finish.

- C. Provide with miter returns where threshold extends more than 12 mm (0.5 inch) from frame face.

2.21 AUTOMATIC DOOR BOTTOM SEAL AND RUBBER GASKET FOR LIGHT PROOF OR SOUND CONTROL DOORS

- A. Conform to ANSI A156.22. Provide mortise or under-door type, except where not practical. For mortise automatic door bottoms, provide type specific for door construction (wood or metal).

2.22 WEATHERSTRIPS (FOR EXTERIOR DOORS)

- A. Conform to ANSI A156.22. Air leakage shall not to exceed 0.50 CFM per foot of crack length ($0.000774\text{m}^3/\text{s/m}$).

2.23 MISCELLANEOUS HARDWARE

- A. Access Doors (including Sheet Metal, Screen and Woven Wire Mesh Types): Except for fire-rated doors and doors to Temperature Control Cabinets, equip each single or double metal access door with Lock Type E76213, conforming to ANSI A156.5. Key locks as directed. Ship lock prepaid to the door manufacturer. Hinges shall be provided by door manufacturer.
- B. Cylinders for Various Partitions and Doors: Key cylinders same as entrance doors of area in which partitions and door occur. Provide cylinders to operate locking devices where specified for following partitions and doors:
 - 1. Fire-rated access doors-Engineer's key set.
- C. Mutes: Conform to ANSI A156.16. Provide door mutes or door silencers Type L03011 or L03021, depending on frame material, of white or light gray color, on each steel or wood door frame, except at fire-rated frames, lead-lined frames and frames for sound-resistant, lightproof and electromagnetically shielded doors. Furnish 3 mutes for single doors and 2 mutes for each pair of doors, except double-acting doors. Provide 4 mutes or silencers for frames for each Dutch type door. Provide 2 mutes for each edge of sliding door which would contact door frame.

2.24 THERMOSTATIC TEMPERATURE CONTROL VALVE CABINETS

- A. Where lock is shown, equip each cabinet door (metal) with lock Type E06213, conforming to ANSI A156.5. Key locks in Key Sets approved by Contracting Officer. See mechanical drawings and specifications for location of cabinets.
- B. Cabinet manufacturer shall supply the hinges, bolts and pulls. Ship locks to cabinet manufacturer for installation.

2.25 FINISHES

- A. Exposed surfaces of hardware shall have ANSI A156.18, finishes as specified below. Finishes on all hinges, pivots, closers, thresholds, etc., shall be as specified below under "Miscellaneous Finishes." For field painting (final coat) of ferrous hardware, see Section 09 91 00, PAINTING.
- B. 630: All surfaces on exterior and interior of buildings, except where other finishes are specified.
- C. Miscellaneous Finishes:
1. Hinges --exterior doors: 630.
 2. Hinges --interior doors: 630.
 3. Pivots: Match door trim.
 4. Door Closers: Factory applied paint finish. Satin Aluminum color.
 5. Thresholds: Mill finish aluminum.
 6. Cover plates for floor hinges and pivots: 630.
 7. Other primed steel hardware: 600.
- D. Hardware Finishes for Existing Buildings: U.S. Standard finishes shall match finishes of hardware in (similar) existing spaces, except where otherwise specified.
- E. Special Finish: Exposed surfaces of hardware for dark bronze anodized aluminum doors shall have oxidized oil rubbed bronze finish (dark bronze) finish on door closers shall closely match doors.
- F. Anti-microbial Coating: All hand-operated hardware (levers, pulls, push bars, push plates, paddles, and panic bars) shall be provided with an anti-microbial/anti-fungal coating that has passed ASTM E2180 tests. Coating to consist of ionic silver (Ag+). Silver ions surround bacterial cells, inhibiting growth of bacteria, mold, and mildew by blockading food and respiration supplies.

2.26 BASE METALS

- A. Apply specified U.S. Standard finishes on different base metals as following:

Finish	Base Metal
652	Steel
626	Brass or bronze
630	Stainless steel

PART 3 - EXECUTION**3.1 HARDWARE HEIGHTS**

- A. For existing buildings locate hardware on doors at heights to match existing hardware (or as specified below if none exist). The Contractor shall visit the site, verify location of existing hardware and submit locations to VA COTR for approval.
- B. Hardware Heights from Finished Floor:
1. Exit devices centerline of strike (where applicable) 1024 mm (40-5/16 inches).
 2. Locksets and latch sets centerline of strike 1024 mm (40-5/16 inches).
 3. Deadlocks centerline of strike 1219 mm (48 inches).
 4. Hospital arm pull 1168 mm (46 inches) to centerline of bottom supporting bracket.
 5. Centerline of door pulls to be 1016 mm (40 inches).
 6. Push plates and push-pull shall be 1270 mm (50 inches) to top of plate.
 7. Push-pull latch to be 1024 mm (40-5/16 inches) to centerline of strike.
 8. Locate other hardware at standard commercial heights. Locate push and pull plates to prevent conflict with other hardware.

3.2 INSTALLATION

- A. Closer devices, including those with hold-open features, shall be equipped and mounted to provide maximum door opening permitted by building construction or equipment. Closers shall be mounted on side of door inside rooms, inside stairs, and away from corridors, except bathroom and anteroom doors which shall have closer installed parallel arm on exterior side of doors. At exterior doors, closers shall be mounted on interior side. Where closers are mounted on doors they shall be mounted with sex nuts and bolts; foot shall be fastened to frame with machine screws.

- B. Hinge Size Requirements:

Door Thickness	Door Width	Hinge Height
45 mm (1-3/4 inch)	900 mm (3 feet) and less	113 mm (4-1/2 inches)
45 mm (1-3/4 inch)	Over 900 mm (3 feet) but not more than 1200 mm (4 feet)	125 mm (5 inches)

35 mm (1-3/8 inch) (hollow core wood doors)	Not over 1200 mm (4 feet)	113 mm (4-1/2 inches)
---	---------------------------	-----------------------

- C. Hinge leaves shall be sufficiently wide to allow doors to swing clear of door frame trim and surrounding conditions.
- D. Where new hinges are specified for new doors in existing frames or existing doors in new frames, sizes of new hinges shall match sizes of existing hinges; or, contractor may reuse existing hinges provided hinges are restored to satisfactory operating condition as approved by COTR. Existing hinges shall not be reused on door openings having new doors and new frames. Coordinate preparation for hinge cut-outs and screw-hole locations on doors and frames.
- E. Hinges Required Per Door:

Doors 1500 mm (5 ft) or less in height	2 butts
Doors over 1500 mm (5 ft) high and not over 2280 mm (7 ft 6 in) high	3 butts
Doors over 2280 mm (7 feet 6 inches) high	4 butts
Dutch type doors	4 butts
Doors with spring hinges 1370 mm (4 feet 6 inches) high or less	2 butts
Doors with spring hinges over 1370 mm (4 feet 6 inches)	3 butts

- F. Fastenings: Suitable size and type and shall harmonize with hardware as to material and finish. Provide machine screws and lead expansion shields to secure hardware to concrete, ceramic or quarry floor tile, or solid masonry. Fiber or rawl plugs and adhesives are not permitted. All fastenings exposed to weather shall be of nonferrous metal.
- G. After locks have been installed; show in presence of COTR that keys operate their respective locks in accordance with keying requirements. (All keys, Master Key level and above shall be sent Registered Mail to the Medical Center Director along with the bitting list. Also a copy of the invoice shall be sent to the COTR for his records.) Installation of locks which do not meet specified keying requirements shall be considered sufficient justification for rejection and replacement of all locks installed on project.

3.3 FINAL INSPECTION

- A. Installer to provide letter to VA COTR that upon completion, installer has visited the Project and has accomplished the following:

1. Re-adjust hardware.
2. Evaluate maintenance procedures and recommend changes or additions, and instruct VA personnel.
3. Identify items that have deteriorated or failed.
4. Submit written report identifying problems.

3.4 DEMONSTRATION

- A. Demonstrate efficacy of mechanical hardware and electrical, and electronic hardware systems, including adjustment and maintenance procedures, to satisfaction of the COTR and VA Locksmith.

3.5 HARDWARE SETS

- A. Following sets of hardware correspond to hardware symbols shown on drawings. Only those hardware sets that are shown on drawings will be required. Disregard hardware sets listed in specifications but not shown on drawings.

ELECTRIC HARDWARE ABBREVIATIONS LEGEND:

ADO = Automatic Door Operator

EMCH = Electro-Mechanical Closer-Holder

MHO = Magnetic Hold-Open (wall- or floor-mounted)

INTERIOR SINGLE DOORS

HW-1

Each Door to Have:

NON-RATED

1	Continuous Hinge	A51031B
1	Push/Pull Plate Set	1894-4 x 1195-1 PULL (TRIMCO), OR EQUAL
1	Kick Plate	J102
1	Mop Plate (@ Inswing Doors)	J102
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Floor Stop	L02121 x 3 FASTENERS
3	Silencers	L03011

HW-1AEach Door to Have:RATED

Hinges	QUANTITY & TYPE AS REQUIRED
	X HOSPITAL TIPS @ INSWING DOORS
1 Latchset	F01
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
	x INSTALL OUTSIDE ROOM
1 Kick Plate	J102
1 Mop Plate (@ Inswing Doors)	J102
1 Floor Stop	L02121 x 3 FASTENERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
1 Set Seals	R3C164

HW-1BEach Door to Have:NON-RATED/RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL
	X SWING-CLEAR X ADJUSTA-SCREWS
1 Hospital Latch	F01 x PADDLES POINTING DOWN
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Overhead Stop	C01541-ADJUSTABLE
1 Set Seals	R3C164

NO CLOSER REQUIRED DUE TO EXEMPTION FOR PATIENT ROOM DOORS.

HW-1C

THIS SET NOT USED.

HW-1DEach Door to Have:NON-RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X SWING-CLEAR X ADJUSTA-SCREWS
1	Hospital Latch	F01 x PADDLES POINTING DOWN
1	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1	Mop Plate	J102
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Overhead Stop	C01541-ADJUSTABLE
3	Silencers	L03011

HW-1EEach Door to Have:RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X SWING-CLEAR X ADJUSTA-SCREWS
1	Hospital Latch	F01 x PADDLES POINTING DOWN
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Wall Stop (@ Inswing Doors)	L52101 CONVEX
1	Set Self-Adhesive Seals	R0E154

HW-1FEach Door to Have:NON-RATED

1	Continuous Hinge	A51031B
1	Latchset	F01
1	Kick Plate	J102
1	Wall Stop	L52101 CONVEX
3	Silencers	L03011

HW-1GEach Door to Have:NON-RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Latchset	F01
1 Kick Plate	J102
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Wall Stop	L52101 CONVEX
3 Silencers	L03011
1 Coat Hook	L03121

HW-1HEach Dwarf Door to Have:NON-RATED

1 Gate Spring Pivot Hinge	K13311
1 Secret Gate Latch	602 (ROCKWOOD), OR EQUAL
1 Wall Stop	L52101 CONVEX
2 Silencers	L03021

HW-1JEach [MHO] Door to Have:RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Latchset	F01
1 Closer	C02011/C02021 (PT4D, PT4H)
1 Heavy-Duty Armor Plate	J101 x 3.175 MM (0.125 INCH) THICKNESS
1 Lock Trim Protector Bar	R111LPB-630 (ROCKWOOD), OR EQUAL
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Magnetic Holder	C00011 TRI-VOLTAGE
1 Set Self-Adhesive Seals	R0E154

POWER, WIRING, CONDUIT, AND FIRE ALARM CONNECTION BY DIVISION 26.

HW-1KEach Door to Have:NON-RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Hospital Latch	F01 x PADDLES POINTING DOWN
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Overhead Stop	C01541-ADJUSTABLE
1	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Sets Self-Adhesive Seals	R0E154

HW-1LEach Door to Have:NON-RATED

1	Continuous Hinge	A51031B
1	Latchset	F01
1	Kick Plate	J102
1	Wall Stop	L52101 CONVEX
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Sets Self-Adhesive Seals	R0E154

HW-1MEach Door to Have:NON-RATED

1	Floor Closer	C06011 (PT8A, PT8J)
2	Push Plates	J304 8" x 16"
2	Kick Plates	J102
2	Edge Guard (@ Wood Doors)	J209M / J212 (VERIFY)
1	Overhead Stop	C01541-ADJUSTABLE

HW-1NEach Door to Have:NON-RATED

1	Continuous Hinge	A51031B
1	Push/Pull Plate Set	1894-4 x 1195-1 PULL (TRIMCO), OR EQUAL
1	Kick Plate	J102
1	Mop Plate (@ Inswing Doors)	J102
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Floor Stop	L02121 x 3 FASTENERS
3	Silencers	L03011

HW-1PEach Lead-Lined Door to Have:NON-RATED

1 Floor Closer	C6062 (PT8A, PT8G, PT8M)
2 Push Plates	J304 8" x 16"
2 Kick Plates	J102
2 Edge Guard (@ Wood Doors)	J209M / J212 (VERIFY)
1 Overhead Stop	C01541-ADJUSTABLE

HW-1QEach Door to Have:RATED/NON-RATED

1 Continuous Hinge	A51031B
1 Latchset	F01
1 Kick Plate	J102
1 Closer (@ rated doors)	C02011/C02021 (PT4D, PT4F, PT4H)
1 Wall Stop	L52101 CONVEX
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0E154

HW-1REach Door to Have:RATED/NON-RATED

1 Continuous Hinge	A51031B
1 Latchset	F01
1 Kick Plate	J102
1 Closer (@ rated doors)	C02011/C02021 (PT4D, PT4F, PT4H)
1 Wall Stop	L52101 CONVEX
1 Set Self-Adhesive Seals	R0E154
1 Set Auto Flush Bolts	TYPE 25 LESS BPTTOM BOLT

HW-2Each Door to Have:RATED/NON-RATED

	QUANTITY & TYPE AS REQUIRED
Hinges	
1 Keyed Privacy Indicator Lock	F13 x OCCUPANCY INDICATOR
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Kick Plate	J102
1 Mop Plate (@ Inswing Doors)	J102
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

STONE THRESHOLD BY OTHER TRADES.

HW-2AEach [ADO] Door to Have:RATED/NON-RATED

1 Continuous Transfer Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS x 8-THRUWIRE TRANSFER X IN-HINGE ACCESS PANEL
1 Keyed Privacy Indicator Lock	F13 x OCCUPANCY INDICATOR
1 Electric Strike	E59391 (FAIL-SECURE), 24VDC
1 Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1 Kick Plate	J102
1 Mop Plate (@ Inswing Doors)	J102
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 x 3 FASTENERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Set Self-Adhesive Seals	R0E154

AUTOMATIC DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

STONE THRESHOLD BY OTHER TRADES.

HW-2BEach Door to Have:NON-RATED

1	Center Pivot Set	C07042
1	Privacy Lock	F02-MOD x THUMBTURN BOTH SIDES X OCCUPANCY INDICATOR
1	Rescue Stop	ES-1 (STANLEY), OR EQUAL
1	Custom Rescue Strike	CUSTOM DOUBLE-LIPPED (TICE), OR EQUAL
1	Kick Plate	J102
1	Mop Plate (@ Inswing Doors)	J102
1	Wall Stop	L52101 CONVEX

STONE THRESHOLD BY OTHER TRADES.

HW-2CEach Door to Have:NON-RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Privacy Lock	F02-MOD X OCCUPANCY INDICATOR
1	Kick Plate	J102
1	Mop Plate (@ Inswing Doors)	J102
1	Wall Stop	L52101 CONVEX
3	Silencers	L03011

STONE THRESHOLD BY OTHER TRADES.

HW-2DEach Door to Have:RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Privacy Lock	F02-MOD X OCCUPANCY INDICATOR
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Kick Plate	J102
1	Mop Plate (@ Inswing Doors)	J102
1	Wall Stop	L52101 CONVEX
1	Set Self-Adhesive Seals	R0E154

STONE THRESHOLD BY OTHER TRADES.

HW-2EEach Door to Have:RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Hospital Privacy Latch	F02-MOD x TURNPIECE BOTH SIDES
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Mop Plate (@ Inswing Doors)	J102
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Overhead Stop	C01541-ADJUSTABLE
1 Set Self-Adhesive Seals	R0E154

STONE THRESHOLD BY OTHER TRADES.

HW-2FEach Door to Have:NON-RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Privacy Lock	F02-MOD X OCCUPANCY INDICATOR
1 Wall Stop	L52101 CONVEX
3 Silencers	L03011
1 Coat Hook	L03121

HW-2GEach Door to Have:RATED/NON-RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Keyed Privacy Indicator Lock	F13 x OCCUPANCY INDICATOR
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Kick Plate	J102
1 Mop Plate (@ Inswing Doors)	J102
1 Floor Stop	L02121 x 3 FASTENERS
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Set Self-Adhesive Seals	R0E154

STONE THRESHOLD BY OTHER TRADES.

HW-2HEach Door to Have:NON-RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Hospital Privacy Latch	F02-MOD x TURNPIECE BOTH SIDES X OCCUPANCY INDICATOR
1	Kick Plate	J102
1	Mop Plate (@ Inswing Doors)	J102
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Overhead Stop	C01541-ADJUSTABLE
3	Silencers	L03011
STONE THRESHOLD BY OTHER TRADES.		

HW-2JEach Door to Have:NON-RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Privacy Lock	F02-MOD X OCCUPANCY INDICATOR
1	Kick Plate	J102
1	Mop Plate (@ Inswing Doors)	J102
1	Wall Stop	L52101 CONVEX
1	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Set Self-Adhesive Seals	R0E154
STONE THRESHOLD BY OTHER TRADES.		

HW-2KEach Door to Have:NON-RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Hospital Privacy Latch	F02-MOD x TURNPIECE BOTH SIDES X OCCUPANCY INDICATOR
1	Kick Plate	J102
1	Mop Plate (@ Inswing Doors)	J102
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Overhead Stop	C01541-ADJUSTABLE
1	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Set Self-Adhesive Seals	R0E154

STONE THRESHOLD BY OTHER TRADES.

HW-3Each Door to Have:RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Office Lock	F04
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Kick Plate	J102
1	Floor Stop	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0E154

HW-3AEach Door to Have:NON-RATED

THIS SET NOT USED.

HW-3BEach Door to Have:NON-RATED/RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Office Lock	F04
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Floor Stop	L02121 x 3 FASTENERS
1 Door Viewer	L03221 - 190° (VIEW INTO CORRIDOR)
1 Set Self-Adhesive Seals	R0E154
OMIT VIEWER IF DOOR PROVIDED WITH VISION LITE.	
1 Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT

HW-3C

THIS SET NOT USED.

HW-3DEach Door to Have:RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Office Lock	F04
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Kick Plate	J102
1 Floor Stop	L02121 x 3 FASTENERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0E154

HW-3EEach Door to Have:NON-RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Office Lock	F04
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154
1 Coat Hook	L03121
OMIT COAT HOOK WHERE GLASS LITE PREVENTS INSTALLATION.	

HW-3FEach Door to Have:RATED/NON-RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Office Lock	F04
1	Closer	CO2011/CO2021 (PT4D, PT4F, PT4H) @ RATED DOOR
1	Kick Plate	J102
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Floor Stop	L02121 x 3 FASTENERS
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Sets Self-Adhesive Seals	R0E154

HW-3GEach Door to Have:NON-RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Office Lock	F04
1	Floor Stop	L02121 x 3 FASTENERS
1	Coat Hook	L03121
1	Door Viewer (Mental Health Only)	L03221 - 190° (VIEW INTO CORRIDOR)
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Sets Self-Adhesive Seals	R0E154

OMIT VIEWER IF DOOR PROVIDED WITH VISION LITE.

OMIT COAT HOOK WHERE GLASS LITE PREVENTS INSTALLATION.

HW-3HEach Door to Have:RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Office Lock	F04
1 Closer	CO2011/CO2021 (PT4D, PT4F, PT4H)
1 Kick Plate	J102
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 x 3 FASTENERS
1 Sets Self-Adhesive Seals	R0E154

HW-3JEach Door to Have:NON-RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Office Lock	F04
1 Kick Plate	J102
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 x 3 FASTENERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
1 Set Sound/Light Seals	R0C266
1 Z-Bracket (as required for parallel arm closer)	770SPB (ZERO), OR EQUAL

HW-4Each Door to Have:NON-RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Classroom Lock	F08
1 Overhead Stop	C04541
3 Silencers	L03011

HW-4AEach [ADO] Door to Have:RATED

1	Continuous Transfer Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS x 4-THRUWIRE TRANSFER X IN-HINGE ACCESS PANEL
1	Classroom Lock	F08
1	Electric Strike	E59311 (FAIL-SECURE), 24VDC
1	Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1	Kick Plate	J102
1	Mop Plate (@ Inswing Doors)	J102 @ TOILET ROOMS ONLY
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Floor Stop	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0E154

AUTOMATIC DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

POWER TRANSFER FOR RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

HW-4BEach Door to Have:NON-RATED/RATED

1 Continuous Hinge	A51031B
1 Public Restroom Lock	F09
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Closer	CO2051/CO2061 (PT4D, PT4H)
1 Kick Plate	J102
1 Mop Plate (@ Inswing Doors)	J102
1 Floor Stop (@ Outswing Doors)	L02121 x 3 FASTENERS
1 Wall Stop (@ Inswing Doors)	L52101 CONVEX
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0E154

PROVIDE NON-HOLD-OPEN CLOSER AT TOILET ROOMS.

STONE THRESHOLD BY OTHER TRADES.

HW-4CEach Door to Have:RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Hospital Utility Lock	F09 x PADDLES POINTING DOWN
1 Key Cylinder	TYPE AS REQUIRED
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Overhead Stop	C01541-ADJUSTABLE
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
1 Set Seals	R3C164

HW-4DEach Door to Have:RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Classroom Lock	F08
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1	Mop Plate (@ Inswing Doors)	J102
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Floor Stop (@ Outswing Doors)	L02121 x 3 FASTENERS
1	Wall Stop (@ Inswing Doors)	L52101 CONVEX
1	Set Self-Adhesive Seals	R0E154

HW-4EEach Door to Have:NON-RATED/RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Utility Lock	F09
1	Closer (@ rated doors)	C02011/C02021 (PT4D, PT4F, PT4H)
1	Closer (@ non-rated doors)	C02051/C02061 (PT4D, PT4F)
1	Kick Plate	J102
1	Floor Stop	L02121 x 3 FASTENERS
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Sets Self-Adhesive Seals	R0E154

HW-4FEach Door to Have:RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Utility Lock	F09
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Floor Stop (@ Outswing Doors)	L02121 x 3 FASTENERS
1	Wall Stop (@ Inswing Doors)	L52101 CONVEX
1	Set Self-Adhesive Seals	R0E154

HW-4GEach Door to Have:RATED/NON-RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Utility Lock	F09
1	Closer (@ Rated Doors)	C02011/C02021 (PT4D, PT4F, PT4H)
1	Kick Plate	J102
1	Floor Stop	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0E154
1	Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT

HW-4HEach [MHO] Door to Have:RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Classroom Lock	F08
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Kick Plate	J102
1	Magnetic Holder	C00011 TRI-VOLTAGE
1	Set Self-Adhesive Seals	R0E154

POWER, WIRING, CONDUIT, AND FIRE ALARM CONNECTION BY DIVISION 26.

HW-4JEach Door to Have:RATED/NON-RATED

	QUANTITY & TYPE AS REQUIRED
Hinges	
1 Utility Lock	F09
1 Closer (@ Rated Doors)	C02011/C02021 (PT4D, PT4F, PT4H)
1 Kick Plate	J102
1 Floor Stop	L02121 x 3 FASTENERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0E154

HW-4KEach Door to Have:NON-RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Utility Lock	F09
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

HW-4LEach Door to Have:NON-RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Classroom Lock	F08
1 Kick Plate	J102
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 x 3 FASTENERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
1 Set Sound/Light Seals	R0C266
1 Z-Bracket (as required for parallel arm closer)	770SPB (ZERO), OR EQUAL

HW-4MEach Door to Have:NON-RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Classroom Hospital Lock	F08 x PADDLES POINTING DOWN
1 Heavy-Duty Armor Plate	J101 x 3.175 MM (0.125 INCH) THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

HW-4NEach Door to Have:RATED/NON-RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Utility Lock	F09
1 Closer (@ rated doors)	C02011/C02021 (PT4D, PT4F, PT4H)
1 Kick Plate	J102
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 x 3 FASTENERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0E154

HW-4PEach Door to Have:NON-RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Classroom Hospital Lock	F08 x PADDLES POINTING DOWN
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Overhead Stop	C01541-ADJUSTABLE
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0E154

HW-4QEach Door to Have:NON-RATED

1 Pivot Set	C07162 x 454KG (1000 LBS) WEIGHT CAPACITY
1 Intermediate Pivot	C07311
1 Utility Hospital Lock	F09 x LEAD-LINED x PADDLES POINTING DOWN
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
2 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Overhead Stop	C01541-ADJUSTABLE
1 Set Self-Adhesive Seal	R0E154

HW-4REach [ADO] Door to Have:RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS x 4-THRUWIRE TRANSFER X IN-HINGE ACCESS PANEL
1	Classroom Lock	F08
1	Electric Strike	E59311 (FAIL-SECURE), 24VDC
1	Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1	Kick Plate	J102
1	Mop Plate (@ Inswing Doors)	J102 @ TOILET ROOMS ONLY
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Floor Stop	L02121 x 3 FASTENERS
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Set Self-Adhesive Seals	R0E154

AT TOILET ROOMS, OMIT METAL THRESHOLD; STONE THRESHOLD BY OTHER TRADES.
AUTOMATIC DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

POWER TRANSFER FOR RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

HW-4SEach Door to Have:NON-RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Classroom Lock	F08
1	Heavy-Duty Armor Plate	J101 x 3.175 MM (0.125 INCH) THICKNESS
1	Lock Trim Protector Bar	R111LPB-630 (ROCKWOOD), OR EQUAL
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Floor Stop	L02121 x 3 FASTENERS
1	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Sets Self-Adhesive Seals	R0E154

HW-4TEach Door to Have:NON-RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Classroom Hospital Lock	F08 x PADDLES POINTING DOWN
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Overhead Stop	C01541-ADJUSTABLE
1 Set Self-Adhesive Seals	R0E154

HW-4UEach Door to Have:NON-RATED/RATED

1 Continuous Hinge	A51031B
1 Public Restroom Lock	F09
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Closer	CO2051/CO2061 (PT4D, PT4H)
1 Kick Plate	J102
1 Mop Plate (@ Inswing Doors)	J102
1 Floor Stop (@ Outswing Doors)	L02121 x 3 FASTENERS
1 Wall Stop (@ Inswing Doors)	L52101 CONVEX
1 Set Self-Adhesive Seals	R0E154

PROVIDE NON-HOLD-OPEN CLOSER AT TOILET ROOMS.

STONE THRESHOLD BY OTHER TRADES.

HW-4VEach Lead-Lined Door to Have:NON-RATED

1	Pivot Set	C07162 x 454KG (1000 LBS) WEIGHT CAPACITY
1	Intermediate Pivot	CO7311
1	Utility Hospital Lock	F09 x LEAD-LINED x PADDLES POINTING DOWN
1	Closer	CO2011/CO2021 (PT4D, PT4F, PT4H) x METAL LEAD-LINED COVER
1	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
2	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Overhead Holder-Stop	C01541-ADJUSTABLE
1	Set Self-Adhesive Seal	R0E154

HW-4XEach [ADO] Lead-Lined Door to Have:NON-RATED

1	Pivot Set	C07162 x 454KG (1000 LBS) WEIGHT CAPACITY
1	Intermediate Transfer Pivot	CO7311 x 4 WIRE TRANSFER
1	Utility Hospital Lock	F09 x LEAD-LINED x PADDLES POINTING DOWN
1	Electric Unlatch Strike	MUNL (SECURITRON), OR EQUAL
1	Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
2	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Overhead Stop	C01541-ADJUSTABLE
1	Set Self-Adhesive Seal	R0E154

POWER TRANSFER PIVOT IS FOR RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

AUTO DOOR OPERATORS AND CONTROLS BY SECTION 08 71 13.

HW-4YEach [ADO] Door to Have:NON-RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS x 4-THRUWIRE TRANSFER X IN-HINGE ACCESS PANEL
1	Utility Hospital Lock	F09 x PADDLES POINTING DOWN
1	Electric Unlatch Strike	MUNL (SECURITRON), OR EQUAL
1	Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Overhead Stop	C01541-ADJUSTABLE
1	Set Self-Adhesive Seals	R0E154

POWER TRANSFER PIVOT IS FOR RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

AUTOMATIC DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

HW-5Each Door to Have:RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Storeroom Lock	F07
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Kick Plate	J102 (@ STORAGE, EVM, & HAC ROOMS ONLY)
1	Floor Stop	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0E154

HW-5A

THIS SET NOT USED.

HW-5BEach Door to Have:RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Storeroom Lock	F07
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

HW-5C

THIS SET NOT USED.

HW-5DEach Door to Have:NON-RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Storeroom Lock	F07
1 Kick Plate	J102 (@ STORAGE, EVM, & HAC ROOMS ONLY)
1 Floor Stop (@ Inswing Doors)	L02121 x 3 FASTENERS
1 Wall Stop (@ Outswing Doors)	L52101 CONVEX
3 Silencers	L03011

HW-5EEach Door to Have:NON-RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Storeroom Lock	F13-MOD x RIGID OUTSIDE LEVER x KEY RETRACTS DEADBOLT AND LATCHBOLT
1 Armor Plate	J101 x 3.125 MM (0.125 INCH) THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

HW-5FEach Door to Have:RATED/NON-RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Storeroom Lock	F07
1 Closer (@ Rated Doors)	C02011/C02021 (PT4D, PF4F, PT4H)
1 Heavy-Duty Armor Plate	J101 x 3.175 MM (0.125 INCH) THICKNESS
1 Lock Trim Protector Bar	R111LPB-630 (ROCKWOOD), OR EQUAL
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154
1 Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT

HW-5GEach Door to Have:NON-RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Storeroom Lock	F07
1 Kick Plate	J102
1 Floor Stop	L02121 x 3 FASTENERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0E154

HW-5HEach Dutch Door to Have:NON-RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Dutch Door Bolt	L04161-4" @ Top Leaf
1 Storeroom Lock	F07 @ Bottom Leaf
1 Kick Plate	J102
1 Floor Stop	L02121 x 3 FASTENERS @ Bottom Leaf
1 Wall Stop	L01201 @ Top Leaf
1 Set Self-Adhesive Seals	R0E154

HW-5JEach Door to Have:RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Storeroom Lock	F07
1 Closer	C02011/C02021 (PT4D, PF4F, PT4H)
1 Kick Plate	J102
1 Floor Stop	L02121 x 3 FASTENERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0E154

HW-5KEach Door to Have:RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Storeroom Lock	F07
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 x 3 FASTENERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0E154

HW-5LEach Door to Have:NON-RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Security Storeroom Lock	F13-MOD x RIGID OUTSIDE LEVER x KEY RETRACTS DEADBOLT AND LATCHBOLT
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

HW-6Each Door to Have:RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Exit Device	TYPE 1 F13 LEVER
1 Key Cylinder	TYPE AS REQUIRED
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

HW-6AEach Door to Have:RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X HOSPITAL TIP X ADJUSTA-SCREWS
1 Exit Device	TYPE 1 F08 LEVER
1 Key Cylinder	TYPE AS REQUIRED
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Kick Plate	J102
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

HW-6BEach [MHO] Door to Have:RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Exit Device	TYPE 1 F08 LEVER
1	Key Cylinder	TYPE AS REQUIRED
1	Closer	C02011/C02021 (PT4D, PT4H)
1	Kick Plate	J102
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Magnetic Holder	C00011 TRI-VOLTAGE
1	Set Self-Adhesive Seals	R0E154

POWER, WIRING, CONDUIT, AND FIRE ALARM CONNECTION BY DIVISION 26.

HW-6CEach Door to Have:NON-RATED/RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Exit Device	TYPE 1 F08 LEVER
1	Key Cylinder	TYPE AS REQUIRED
1	Closer	C02021 (PT4D, PT4F, PT4H)
1	Kick Plate	J102
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Floor Stop	L02121 x 3 FASTENERS
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Sets Self-Adhesive Seals	R0E154

HW-6DEach [ADO] Integrated Door to Have:RATED

1	Key Cylinder	TYPE AS REQUIRED
---	--------------	------------------

ALL HARDWARE BY SECTION 08 17 10, INTEGRATED DOOR ASSEMBLIES
AUTO DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR
OPERATORS.

HW-6EEach Door to Have:NON-RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Exit Device	TYPE 1 F08 LEVER
1 Key Cylinder	TYPE AS REQUIRED
1 Kick Plate	J102
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

HW-6FEach [ADO] Door to Have:NON-RATED/RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS x 8-THRUWIRE TRANSFER X IN-HINGE ACCESS PANELS
1 Elec. Exit Device	TYPE 1 F08 LEVER (E04)
1 Key Cylinder	TYPE AS REQUIRED
1 Power Supply	BY EXIT DEVICE MFR. FOR E04 FUNCTION
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

POWER TRANSFER **SHARED BY ELECTRIC PANIC AND** RE-ACTIVATION SENSOR WIRING
(RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).
AUTO DOOR OPERATORS AND CONTROLS BY SECTION 08 71 13.

HW-6GEach Door to Have:NON-RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Exit Device	TYPE 1 F13 LEVER
1 Key Cylinder	TYPE AS REQUIRED
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Floor Stop	L02121 x 3 FASTENERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0E154

HW-7Each Motorized Roll-up Door to Have:NON-RATED

1 Key Cylinder (for keyswitch) TYPE AS REQUIRED
BALANCE OF HARDWARE BY SECTION 08 33 00, COILING DOORS AND GRILLES

HW-7AEach Special Door to Have:NON-RATED

1 Padlock TYPE AS REQUIRED PER 08 71 00 2.29.
BALANCE OF HARDWARE BY DOOR MANUFACTURER.

HW-7BEach RF Shielded Door to Have:NON-RATED

1 Key Cylinder TYPE AS REQUIRED
BALANCE OF HARDWARE BY SECTION 13 49 00.

INTERIOR PAIRS OF DOORSHW-8Each [MHO] Pair Integrated Doors to Have:RATED

ALL HARDWARE BY SECTION 08 17 10, INTEGRATED DOOR ASSEMBLIES

HW-8AEach Aluminum Storefront Pair to Have:NON-RATED

2	Floor Closers	C06041 (PT8A, PT8F, PT8G, PT8J, PT8M)
2	Intermediate Pivots	C07321
2	Push/Pull Bar Sets	J505 - 305 MM (12 INCH) CENTER-TO-CENTER PULL
2	Overhead Stops	C01541-ADJUSTABLE

HW-8BEach Pair to Have:NON-RATED

2	Continuous Hinge	A51031B
2	Push Plate	J304 8" x 16"
2	Hospital Grip	J401
2	Kick Plate	J102
2	Mop Plate (@ Inswing Doors)	J102
2	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
2	Floor Stop	L02121 x 3 FASTENERS
2	Silencers	L03011

HW-8CEach Double-Acting Pair to Have:NON-RATED

2	Double-Acting Floor Closers	C06011 (PT8A, PT8G, PT8J, PT8M)
4	Push Plates	J304 8" x 16"
4	Heavy-Duty Armor Plates	J101 x 3.175 MM (0.125 INCH) THICKNESS
4	Edge Guard (@ Wood Doors)	J209P / J212 (VERIFY)
2	Overhead Holders	C01511-ADJUSTABLE

HW-8DEach [ADO] Aluminum Storefront Pair to Have:NON-RATED

2	Pivot Sets	C07162
2	Intermediate Transfer Pivots	C07321 x 4-WIRES
2	Intermediate Pivots	C07321
2	Push/Pull Bar Sets	J505 - 305 MM (12 INCH) CENTER-TO-CENTER PULL
2	Overhead Stops	C01541-ADJUSTABLE

AUTO DOOR OPERATORS, CONTROLS, AND REACTIVATION SENSORS BY SECTION 08 71 13.11.

POWER TRANSFERS FOR RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.

HW-8EEach [ADO] Pair to Have:NON-RATED

2	Continuous Hinges	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS x 4-THRUWIRE TRANSFERS X IN-HINGE ACCESS PANEL
2	Push Plate	J304 8" x 16"
2	Hospital Grip	J401
2	Kick Plate	J102
2	Mop Plate (@ Inswing Doors)	J102
2	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2	Floor Stop	L02121 x 3 FASTENERS
2	Silencers	L03011

AUTOMATIC DOOR OPERATORS AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

POWER TRANSFERS FOR RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

HW-8FEach [ADO] Pair to Have:NON-RATED

2	Continuous Hinges	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS x 4-THRUWIRE TRANSFERS X IN-HINGE ACCESS PANEL
2	Push Plate	J304 8" x 16"
2	Hospital Grip	J401
2	Kick Plate	J102
2	Mop Plate (@ Inswing Doors)	J102
2	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2	Floor Stop	L02121 x 3 FASTENERS
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
2	Auto Door Bottoms	R0Y346 - HEAVY DUTY
2	Set Self-Adhesive Seals	R0E154

AUTOMATIC DOOR OPERATORS AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

POWER TRANSFERS FOR RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

HW-9

THIS HARDWARE SET LEFT INTENTIONALLY BLANK AT THIS TIME.

HW-10Each Pair to Have:RATED

2	Continuous Hinges	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT
1	Classroom Lock	F08
1	Coordinator	TYPE 21A
1	Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2	Closers	C02011/C02021 (PT4D, PT4F, PT4H)
2	Heavy-Duty Armor Plates	J101 x 3.175 MM (0.125 INCH) THICKNESS
1	Lock Trim Protector Bar	R111LPB-630 (ROCKWOOD), OR EQUAL
2	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2	Floor Stops	L02121 x 3 FASTENERS
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
2	Auto Door Bottoms	R0Y346 - HEAVY DUTY
2	Set Self-Adhesive Seals	R0E154

INSTALL LOCK TRIM PROTECTOR BAR ON PUSH SIDE OF ACTIVE LEAF TO PROTECT
LEVER TRIM.

HW-10AEach [ADO] Pair to Have:NON-RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS x 8-THRUWIRE TRANSFER X IN-HINGE ACCESS PANEL
1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS X 4-THRUWIRE TRANSFER X IN-HINGE ACCESS PANEL
1 Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT
1 Classroom Lock	F08
1 Electric Unlatch Strike	MUNL (FAIL-SAFE), 24VDC (SECURITRON), OR EQUAL
1 Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1 Coordinator	TYPE 21A
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2 Armor Plates	J101 x 1.275 MM (0.050 INCH) THICKNESS
2 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2 Floor Stops	L02121 x 3 FASTENERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
2 Auto Door Bottoms	R0Y346 - HEAVY DUTY
2 Set Self-Adhesive Seals	R0E154

AUTOMATIC DOOR OPERATORS AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

POWER TRANSFER **SHARED BY ELECTRIC STRIKE AND** RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

*Doors 24 and 28: Provide Card Reader per Division 28.

HW-10BEach Pair to Have:NON-RATED/RATED

2	Continuous Hinges	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT
1	Classroom Hospital Lock	F08 x PADDLES POINTING DOWN
1	Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
1	Closers (@ rated doors)	C02011/C02021 (PT4D, PT4F, PT4H)
2	Heavy-Duty Armor Plates	J101 x 3.175 MM (0.125 INCH) THICKNESS
1	Lock Trim Protector Bar	R111LPB-630 (ROCKWOOD), OR EQUAL
2	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2	Floor Stops	L02121 x 3 FASTENERS

INSTALL LOCK TRIM PROTECTOR BAR ON PUSH SIDE OF ACTIVE LEAF TO PROTECT
LEVER TRIM.

HW-10CEach Pair to Have:NON-RATED

2	Continuous Hinges	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT
1	Utility Lock	F09
1	Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2	Kick Plates	J102
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2	Floor Stops	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0E154

HW-10DEach Pair to Have:NON-RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT
1 Classroom Lock	F08
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2 Kick Plates	J102
2 Floor Stops	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

HW-10EEach Lead Lined Pair to Have:NON-RATED

2 Pivot Sets	C07162 x 454KG (1000 LBS) WEIGHT CAPACITY
2 Intermediate Pivots	C07311
1 Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT x LEAD-LINED
1 Classroom Lock	F08 x LEAD-LINED x PADDLES POINTING DOWN
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS X LEAD-LINED
2 Armor Plates	J101 x 1.275 MM (0.050 INCH) THICKNESS
4 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2 Floor Stops	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

HW-10FEach Pair to Have:NON-RATED

2	Continuous Hinges	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT
1	Classroom Hospital Lock	F08 x PADDLES POINTING DOWN
1	Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2	Heavy-Duty Armor Plates	J101 x 3.175 MM (0.125 INCH) THICKNESS
1	Lock Trim Protector Bar	R111LPB-630 (ROCKWOOD), OR EQUAL
2	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2	Floor Stops	L02121 x 3 FASTENERS
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
2	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Sets Self-Adhesive Seals	R0E154

INSTALL LOCK TRIM PROTECTOR BAR ON PUSH SIDE OF ACTIVE LEAF TO PROTECT
LEVER TRIM.

HW-10GEach Pair to Have:NON-RATED

2	Continuous Hinges	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT
1	Classroom Lock	F08
1	Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2	Heavy-Duty Armor Plates	J101 x 3.175 MM (0.125 INCH) THICKNESS
1	Lock Trim Protector Bar	R111LPB-630 (ROCKWOOD), OR EQUAL
2	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2	Floor Stops	L02121 x 3 FASTENERS
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
2	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Sets Self-Adhesive Seals	R0E154

INSTALL LOCK TRIM PROTECTOR BAR ON PUSH SIDE OF ACTIVE LEAF TO PROTECT
LEVER TRIM.

HW-10HEach [ADO] Lead-Lined Pair to Have:RATED/NON-RATED

2	Bottom Pivots	C07162 LESS TOP PIVOT x 454KG (1000 LBS) WEIGHT CAPACITY
1	Intermediate Pivot	C07311 (MIDDLE OF ACTIVE LEAF)
1	Intermediate Transfer Pivot	CO7311 x 4 WIRE TRANSFER (MIDDLE OF INACTIVE LEAF)
2	Intermediate Transfer Pivot	CO7311 x 4 WIRE TRANSFER (NEAR TOP OF EACH LEAF)
1	Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT X LEAD-LINED
1	Hospital Utility Lock	F09 x PADDLES POINTING DOWN X LEAD-LINED
1	Electric Unlatch Strike	MUNL (FAIL-SECURE), 24VDC (SECURITRON), OR EQUAL (LEAD-LINED)
1	Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1	Coordinator	TYPE 21A
1	Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS X LEAD-LINED
2	Armor Plates	J101 x 1.275 MM (0.050 INCH) THICKNESS
4	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2	Overhead Stops	C01541-ADJUSTABLE
1	Set Self-Adhesive Seals	R0E154

AUTOMATIC DOOR OPERATORS AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

POWER TRANSFER PIVOTS NEAR TOP OF EACH DOOR FOR RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

HW-10JEach [ADO] Pair to Have:RATED/NON-RATED

1 Continuous Transfer Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS x 8-THRUWIRE TRANSFER X IN-HINGE ACCESS PANEL
1 Continuous Transfer Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS x 4-THRUWIRE TRANSFER X IN-HINGE ACCESS PANEL
1 Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT
1 Classroom Hospital Lock	F08 x PADDLES POINTING DOWN
1 Electric Unlatch Strike	*MUNL (FAIL-SECURE), 24VDC (SECURITRON), OR EQUAL
1 Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1 Coordinator	TYPE 21A
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2 Armor Plates	J101 x 1.275 MM (0.050 INCH) THICKNESS
2 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2 Overhead Stops	C01541-ADJUSTABLE
1 Set Self-Adhesive Seals	R0E154

AUTOMATIC DOOR OPERATORS AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

POWER TRANSFERS **SHARED BY ELECTRIC STRIKE AND** RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

*AT WOOD PAIRS RATED 45-MINUTES OR MORE, PROVIDE ELECTRIC STRIKE 310-2-3/4 (FOLGER ADAM OR EQUAL) IN LIEU OF SPECIFIC UNLATCH STRIKE.

PROVIDE CARD READER PER DIVISION 28.

HW-10KEach [ADO] Pair to Have:RATED/NON-RATED

1 Continuous Transfer Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS x 8-THRUWIRE TRANSFER X IN-HINGE ACCESS PANEL
1 Continuous Transfer Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS x 4-THRUWIRE TRANSFER X IN-HINGE ACCESS PANEL
1 Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT
1 Classroom Lock	F08
1 Electric Unlatch Strike	MUNL (FAIL-SECURE), 24VDC (SECURITRON), OR EQUAL
1 Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1 Coordinator	TYPE 21A
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2 Armor Plates	J101 x 1.275 MM (0.050 INCH) THICKNESS
2 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2 Floor Stops	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

AUTOMATIC DOOR OPERATORS AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

POWER TRANSFER **SHARED BY ELECTRIC STRIKE AND** RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

*AT WOOD PAIRS RATED 45-MINUTES OR MORE, PROVIDE ELECTRIC STRIKE 310-2-3/4 (FOLGER ADAM OR EQUAL) IN LIEU OF SPECIFIC UNLATCH STRIKE.

HW-10LEach Pair to Have:NON-RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT
1	Classroom Lock	F08
1	Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2	Kick Plates	J102
2	Floor Stops	L02121 x 3 FASTENERS
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
2	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Sets Self-Adhesive Seals	R0E154

HW-10MEach Pair to Have:NON-RATED

2	Continuous Hinges	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT
1	Utility Lock	F09
1	Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2	Kick Plates	J102
2	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2	Floor Stops	L02121 x 3 FASTENERS
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
2	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Sets Self-Adhesive Seals	R0E154

HW-11Each Pair to Have:RATED/NR

Hinges	QUANTITY & TYPE AS REQUIRED
1 Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT
1 Storeroom Lock	F07
1 Coordinator	TYPE 21A
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2 Closers	C02011/C02021 (PT4D, PT4F, PT4H)
2 Kick Plates	J102 (@ STORAGE ROOMS ONLY)
2 Floor Stops	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

HW-11AEach Pair to Have:NON-RATED

2 Continuous Hinges	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Set Auto Flush Bolts	TYPE 25
1 Security Storeroom Lock	F13-MOD x RIGID OUTSIDE LEVER x KEY RETRACTS DEADBOLT AND LATCHBOLT
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2 Armor Plates	J101 x 1.275 MM (0.050 INCH) THICKNESS
2 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2 Floor Stops	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

HW-11BEach Pair to Have:RATED

2 Continuous Hinges	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Set Auto Flush Bolts	TYPE 25
1 Storeroom Lock	F07
1 Coordinator	TYPE 21A
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2 Closers	C02011/C02021 (PT4D, PT4F, PT4H)
2 Armor Plates	J101 x 1.275 MM (0.050 INCH) THICKNESS
2 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2 Floor Stops	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

HW-11CEach Pair to Have:RATED/NR

Hinges	QUANTITY & TYPE AS REQUIRED
1 Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT
1 Storeroom Lock	F07
1 Coordinator	TYPE 21A
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2 Closers	C02011/C02021 (PT4D, PT4F, PT4H)
2 Kick Plates	J102 (@ STORAGE ROOMS ONLY)
2 Floor Stops	L02121 x 3 FASTENERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
2 Auto Door Bottoms	R0Y346 - HEAVY DUTY
2 Set Self-Adhesive Seals	R0E154

HW-12Each Pair to Have:RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Exit Device	TYPE 7 or 8 F01
1	Exit Device	TYPE 7 or 8 F08 LEVER
1	Key Cylinder	TYPE AS REQUIRED
1	Set Meeting Stile Astragals	R3E834
2	Closers	C02011/C02021 (PT4D, PT4F, PT4H)
2	Floor Stops	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0E154

HW-12AEach [MHO] Pair Integrated Doors to Have:RATED

ALL HARDWARE BY SECTION 08 17 10, INTEGRATED DOOR ASSEMBLIES

HW-12BEach [ADO] Pair Integrated Doors to Have:RATED

1 Key Cylinder TYPE AS REQUIRED
BALANCE OF HARDWARE BY SECTION 08 17 10, INTEGRATED DOOR ASSEMBLIES
AUTOMATIC DOOR OPERATORS AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

HW-12CEach [MHO] Pair Integrated Double Egress Doors to Have: RATED

ALL HARDWARE BY SECTION 08 17 10, INTEGRATED DOOR ASSEMBLIES

HW-12DEach [ADO] Pair Integrated Double Egress Doors to Have: RATED

ALL HARDWARE BY SECTION 08 17 10, INTEGRATED DOOR ASSEMBLIES
AUTOMATIC DOOR OPERATORS AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

HW-12EEach Pair to Have:RATED

2	Continuous Hinges	A51031B x INTEGRAL HINGE GUARD CHANNEL X HOSPITAL TIP X ADJUSTA-SCREWS
1	Exit Device	TYPE 7 or 8 F01
1	Exit Device	TYPE 7 or 8 F08 LEVER
1	Key Cylinder	TYPE AS REQUIRED
1	Set Meeting Stile Astragals	R3E834
2	Closers	C02011/C02021 (PT4D, PT4F, PT4H)
2	Kick Plates	J102
2	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2	Floor Stops	L02121 x 3 FASTENERS
2	Door Bottom	R0Y434 x NYLON BRUSH INSERT
2	Set Self-Adhesive Seals	R0E154

HW-12FEach Pair to Have:RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Exit Device	TYPE 7 or 8 F01
1	Exit Device	TYPE 7 or 8 F08 LEVER
1	Key Cylinder	TYPE AS REQUIRED
1	Set Meeting Stile Astragals	R3E834
2	Closers	C02021 (PT4D, PT4F, PT4H)
2	Floor Stops	L02121 x 3 FASTENERS
2	Door Bottom	R0Y434 x NYLON BRUSH INSERT
2	Sets Self-Adhesive Seals	R0E154

HW-12GEach Pair to Have:NON-RATED

2	Continuous Hinges	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Exit Device	TYPE 7 or 8 F01
1	Exit Device	TYPE 7 or 8 F08 LEVER
1	Key Cylinder	TYPE AS REQUIRED
1	Set Meeting Stile Astragals	R3E834
2	Closers	C02051/C02071 (PT4D, PT4H)
2	Kick Plates	J102
2	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2	Floor Stops	L02121 x 3 FASTENERS
2	Door Bottom	R0Y434 x NYLON BRUSH INSERT
2	Sets Self-Adhesive Seals	R0E154

HW-12HEach [ADO] Pair to Have:NON-RATED

2	Continuous Transfer Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS x 8-THRUWIRE TRANSFER X IN-HINGE ACCESS PANEL
1	Elec. Exit Device	TYPE 7 or 8 F01 (E04)
1	Elec. Exit Device	TYPE 7 or 8 F08 LEVER (E04)
1	Key Cylinder	TYPE AS REQUIRED
1	Power Supply	BY EXIT DEVICE MFR. FOR E04 FUNCTION
1	Set Meeting Stile Astragals	R3E834
2	Kick Plates	J102
2	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2	Floor Stops	L02121 x 3 FASTENERS
2	Door Bottom	R0Y434 x NYLON BRUSH INSERT
2	Sets Self-Adhesive Seals	R0E154

POWER TRANSFERS **SHARED BY ELECTRIC PANIC AND** RE-ACTIVATION SENSOR WIRING

(RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

AUTO DOOR OPERATORS AND CONTROLS BY SECTION 08 71 13.

HW-12JEach Pair to Have:RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Exit Device	TYPE 7 or 8 F01
1 Exit Device	TYPE 7 or 8 F13 LEVER
1 Key Cylinder	TYPE AS REQUIRED
1 Set Meeting Stile Astragals	R3E834
2 Closers	C02011/C02021 (PT4D, PT4F, PT4H)
2 Floor Stops	L02121 x 3 FASTENERS
2 Door Bottom	R0Y434 x NYLON BRUSH INSERT
2 Sets Self-Adhesive Seals	R0E154

HW-13Each [ADO] Bi-Parting Automatic Pair to Have:NON-RATED

ALL HARDWARE BY SECTION 08 42 29.

EXTERIOR SINGLE DOORSHW-E1Each Door to Have:NON-RATED

1 Continuous Hinge	A51031B
1 Entry Lock	F11
1 Latch Protector (outswing dr)	MLP-111 (DON-JO), OR EQUAL
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Kick Plate	J102
1 Floor Stop	1214CK x 1268CK (TRIMCO), OR EQUAL
1 Threshold (outswing door)	J35130 x SILICONE GASKET
1 Threshold (inswing door)	ALUMINUM, PER ARCHITECTURAL DETAIL
1 Door Sweep	90100CNB (PEMKO), OR EQUAL
1 Set Frame Seals	2891AS X CSK SCREWS (PEMKO), OR EQUAL
1 Drip	R0Y976

HW-E2Each Door to Have:NON-RATED

1 Continuous Hinge	A51031B
1 Classroom Lock	F05
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Kick Plate	J102
1 Floor Stop	1214CK x 1268CK (TRIMCO), OR EQUAL
1 Threshold (outswing door)	J35130 x SILICONE GASKET
1 Threshold (inswing door)	ALUMINUM, PER ARCHITECTURAL DETAIL
1 Door Sweep	90100CNB (PEMKO), OR EQUAL
1 Set Frame Seals	2891AS X CSK SCREWS (PEMKO), OR EQUAL
1 Drip	R0Y976

HW-E3Each Door to Have:NON-RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Storeroom Lock	F13-MOD x RIGID OUTSIDE LEVER x KEY RETRACTS DEADBOLT AND LATCHBOLT
1 Latch Protector (outswing dr)	MLP-111 (DON-JO), OR EQUAL
1 Closer	C02011/C02021 (PT4D, PT4H)
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Armor Plate	J101 x 3.125 MM (0.125 INCH) THICKNESS
1 Overhead Holder	C01511-ADJUSTABLE
1 Threshold (outswing door)	J35130 x SILICONE GASKET
1 Threshold (inswing door)	ALUMINUM, PER ARCHITECTURAL DETAIL
1 Door Sweep	90100CNB (PEMKO), OR EQUAL
1 Set Frame Seals	2891AS X CSK SCREWS (PEMKO), OR EQUAL
1 Drip	R0Y976

HW-E4Each Door to Have:NON-RATED

1	Continuous Hinge	A51031B
1	Anti-Vandal Pull	1097HASP (TRIMCO), OR EQUAL
1	Exit Device	TYPE 1 F03 LES TRIM
1	Key Cylinder	TYPE AS REQUIRED
1	Closer	C02011 (PT4D, PT4F, PT4H)
1	Kick Plate	J102
1	Floor Stop	1214CK x 1268CK (TRIMCO), OR EQUAL
1	Threshold	J35130 x SILICONE GASKET
1	Door Sweep	90100CNB (PEMKO), OR EQUAL
1	Set Frame Seals	2891AS X CSK SCREWS (PEMKO), OR EQUAL
1	Drip	R0Y976

HW-E5Each Roll-up Door to Have:NON-RATED

1	Padlock or 2 Cylinders	TYPE AS REQUIRED
---	------------------------	------------------

BALANCE OF HARDWARE BY SECTION 08 33 00, COILING DOORS AND GRILLES

EXTERIOR PAIRS OF DOORS

<u>Each Pair to Have:</u>		<u>HW-E6</u>	<u>NON-RATED</u>
2	Continuous Hinge	A51031B	
1	Set Auto Flush Bolts	TYPE 25	
1	Dust Proof Strike	L04021	
1	Entry Lock	F11	
1	Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS	
1	Coordinator	TYPE 21A	
2	Closer	C02011/C02021 (PT4D, PT4F, PT4H)	
2	Kick Plate	J102	
2	Floor Stop	1214CK x 1268CK (TRIMCO), OR EQUAL	
1	Threshold (outswing door)	J35130 x SILICONE GASKET	
1	Threshold (inswing door)	ALUMINUM, PER ARCHITECTURAL DETAIL	
2	Door Sweep	90100CNB (PEMKO), OR EQUAL	
1	Set Frame Seals	2891AS X CSK SCREWS (PEMKO), OR EQUAL	
1	Drip	R0Y976	

HW-E7Each Pair to Have:NON-RATED

2	Continuous Hinge	A51031B
1	Set Auto Flush Bolts	TYPE 25
1	Dust Proof Strike	L04021
1	Classroom Lock	F05
1	Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
1	Coordinator	TYPE 21A
2	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
2	Kick Plate	J102
2	Floor Stop	1214CK x 1268CK (TRIMCO), OR EQUAL
1	Threshold (outswing door)	J35130 x SILICONE GASKET
1	Threshold (inswing door)	ALUMINUM, PER ARCHITECTURAL DETAIL
2	Door Sweep	90100CNB (PEMKO), OR EQUAL
1	Set Frame Seals	2891AS X CSK SCREWS (PEMKO), OR EQUAL
1	Drip	R0Y976

HW-E8Each Pair to Have:NON-RATED

2 Continuous Hinge	A51031B
1 Set Auto Flush Bolts	TYPE 25
1 Dust Proof Strike	L04021
1 Storeroom Lock	F13-MOD x RIGID OUTSIDE LEVER x KEY RETRACTS DEADBOLT AND LATCHBOLT
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
1 Coordinator	TYPE 21A
2 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
2 Armor Plate	J101 x 3.125 MM (0.125 INCH) THICKNESS
2 Floor Stop	1214CK x 1268CK (TRIMCO), OR EQUAL
1 Threshold (outswing door)	J35130 x SILICONE GASKET
1 Threshold (inswing door)	ALUMINUM, PER ARCHITECTURAL DETAIL
2 Door Sweep	90100CNB (PEMKO), OR EQUAL
1 Set Frame Seals	2891AS X CSK SCREWS (PEMKO), OR EQUAL
1 Drip	R0Y976

HW-E9Each Door to Have:NON-RATED

2 Continuous Hinge	A51031B
2 Anti-Vandal Pull	1097HASP (-NC @ INACTIVE LEAF) (TRIMCO), OR EQUAL
1 Exit Device	TYPE 8 F01
1 Exit Device	TYPE 8 F12 LESS PULL
1 Key Cylinder	TYPE AS REQUIRED
1 Set Meeting Stile Astragals	R3E834
2 Closer	C02011 (PT4D, PT4F, PT4H)
2 Kick Plate	J102
2 Floor Stop	1214CK x 1268CK (TRIMCO), OR EQUAL
1 Threshold	J35130 x SILICONE GASKET
2 Door Sweep	90100CNB (PEMKO), OR EQUAL
1 Set Frame Seals	2891AS X CSK SCREWS (PEMKO), OR EQUAL
1 Drip	R0Y976

HW-E10

Each Sliding Door to Have:

NON-RATED

- | | | |
|---|--------------------------------|--|
| 1 | Set Track Hardware | TYPE REQUIRED FOR DOOR MATERIAL, WEIGHT,
AND MOUNTING DETAILS (COMPLETE WITH
TRACK, TRACK BRACKETS, HANGERS, GUIDES,
BUMPERS, AND INTERNAL TRACK STOPS) |
| 2 | Pulls | 1102T (TRIMCO), OR EQUAL |
| 1 | Padlock or Sliding Door Lock | TYPE AS REQUIRED (PADLOCK) OR MS1850SN-
450 (SLIDING DOOR LOCK) (ADAMS RITE, OR
EQUAL |
| 2 | Cylinder (for sliding dr lock) | TYPE AS REQUIRED |

EXTERIOR SINGLE GATES

HW-G1

Each Traffic Gate to Have:

NON-RATED

Spring Hinge TYPE REQUIRED X STAINLESS STEEL

BALANCE OF HARDWARE BY SECTION 32 31 33, CHAIN LINK FENCES AND GATES //

SECTION 32 31 19, DECORATIVE METAL FENCES AND GATES

HW-G2

Each Gate to Have:

NON-RATED

- | | | |
|---|------------------------|---|
| 2 | Weldable Gate Hinges | I-8513 X WELDED OR FASTENED X SHEAR HINGE
LEAVES TO FIT GATE MEMBERS (BROOKFIELD),
OR EQUAL |
| 1 | Weldable Lock Box | K-BXMOR X TYPE TO FIT LOCK BRAND/MODEL
(KEEDEX), OR EQUAL |
| 1 | Utility Lock | F09 X NON-FERROUS LOCK CASE |
| 1 | Stainless Steel Closer | C52011/C22021 (PT4D, PT4F, PT4H) |
| BALANCE OF HARDWARE BY SECTION 32 31 33, CHAIN LINK FENCES AND GATES // | | |
| SECTION 32 31 19, DECORATIVE METAL FENCES AND GATES | | |

HW-G3Each Gate to Have:NON-RATED

2 Weldable Gate Hinges I-8513 X WELDED OR FASTENED X SHEAR HINGE
LEAVES TO FIT GATE MEMBERS (BROOKFIELD),
OR EQUAL

1 Weldable Lock Box K-BXMOR X TYPE TO FIT LOCK BRAND/MODEL
(KEEDEX), OR EQUAL

1 Storeroom Lock F13-MOD x RIGID OUTSIDE LEVER x KEY
RETRACTS DEADBOLT AND LATCHBOLT

1 Stainless Steel Closer C52011/C22021 (PT4D, PT4F, PT4H)

BALANCE OF HARDWARE BY SECTION 32 31 33, CHAIN LINK FENCES AND GATES //

SECTION 32 31 19, DECORATIVE METAL FENCES AND GATES

HW-G4Each Gate to Have:NON-RATED

2 Weldable Gate Hinges I-8513 X WELDED OR FASTENED X SHEAR HINGE
LEAVES TO FIT GATE MEMBERS (BROOKFIELD),
OR EQUAL

1 Weldable Panic Box K-BXED X TYPE TO FIT LOCK BRAND/MODEL
(KEEDEX), OR EQUAL

1 Anti-Vandal Pull 1097HASP (TRIMCO), OR EQUAL

1 Rim Panic Device TYPE 1 F03 LESS TRIM

1 Cylinder TYPE AS REQUIRED

1 Stainless Steel Closer C52011/C22021 (PT4D, PT4F, PT4H)

BALANCE OF HARDWARE BY SECTION 32 31 33, CHAIN LINK FENCES AND GATES //

SECTION 32 31 19, DECORATIVE METAL FENCES AND GATES

HW-G5Each Rolling or Swing-Up Gate to Have:NON-RATED

1 Padlock or 2 Cylinders TYPE AS REQUIRED

BALANCE OF HARDWARE BY SECTION 32 31 33, CHAIN LINK FENCES AND GATES //

SECTION 32 31 19, DECORATIVE METAL FENCES AND GATES

EXTERIOR PAIRS OF GATES

HW-G6

Each Pair Traffic Gates to Have:

NON-RATED

Spring Hinge TYPE REQUIRED X STAINLESS STEEL
BALANCE OF HARDWARE BY SECTION 32 31 33, CHAIN LINK FENCES AND GATES //
SECTION 32 31 19, DECORATIVE METAL FENCES AND GATES

HW-G7

Each Pair Gates to Have:

NON-RATED

- | | | |
|---|--|---|
| 4 | Weldable Gate Hinges | I-8513 X WELDED OR FASTENED X SHEAR HINGE
LEAVES TO FIT GATE MEMBERS (BROOKFIELD),
OR EQUAL |
| 2 | Padlockable Cane Bolts
with Hold-up Springs | 524-P23 x P23SP x 524PL (1 STRIKE @
ACTIVE LEAF; 2 STRIKES AT INACTIVE LEAF)
(CROWN INDUSTRIAL), OR EQUAL |
| 2 | Padlocks | TYPE AS REQUIRED |
| 1 | Weldable Lock Box | K-BXMOR X TYPE TO FIT LOCK BRAND/MODEL X
K-BXSTR STRIKE BRACKET (KEEDEKX), OR
EQUAL |
| 1 | Utility Lock | F09 X NON-FERROUS LOCK CASE |
| 2 | Stainless Steel Closer | C52011/C22021 (PT4D, PT4F, PT4H) |
- BALANCE OF HARDWARE BY SECTION 32 31 33, CHAIN LINK FENCES AND GATES //
- SECTION 32 31 19, DECORATIVE METAL FENCES AND GATES.
- INSTALL CANE BOLTS ON PULL SIDE OF EACH LEAF. ACTIVE LEAF CANE BOLT TO HAVE STRIKE IN OPEN POSITION ONLY. INACTIVE LEAF CANE BOLT TO HAVE STRIKES IN BOTH OPEN AND CLOSED POSITIONS.

HW-G8Each Pair Gates to Have:NON-RATED

- | | | |
|---|--|---|
| 4 | Weldable Gate Hinges | I-8513 X WELDED OR FASTENED X SHEAR HINGE
LEAVES TO FIT GATE MEMBERS (BROOKFIELD),
OR EQUAL |
| 2 | Padlockable Cane Bolts
with Hold-up Springs | 524-P23 x P23SP x 524PL (1 STRIKE @
ACTIVE LEAF; 2 STRIKES AT INACTIVE LEAF)
(CROWN INDUSTRIAL), OR EQUAL |
| 2 | Padlocks | TYPE AS REQUIRED |
| 1 | Weldable Lock Box | K-BXMOR X TYPE TO FIT LOCK BRAND/MODEL X
K-BXSTR STRIKE BRACKET (KEEDEK), OR
EQUAL |
| 1 | Storeroom Lock | F13-MOD x RIGID OUTSIDE LEVER x KEY
RETRACTS DEADBOLT AND LATCHBOLT |
| 2 | Stainless Steel Closer | C52011/C22021 (PT4D, PT4F, PT4H) |
- BALANCE OF HARDWARE BY SECTION 32 31 33, CHAIN LINK FENCES AND GATES //
SECTION 32 31 19, DECORATIVE METAL FENCES AND GATES.
INSTALL CANE BOLTS ON PULL SIDE OF EACH LEAF. ACTIVE LEAF CANE BOLT TO
HAVE STRIKE IN OPEN POSITION ONLY. INACTIVE LEAF CANE BOLT TO HAVE
STRIKES IN BOTH OPEN AND CLOSED POSITIONS.

HW-G9Each Pair Gates to Have:NON-RATED

2	Weldable Gate Hinges	I-8513 X WELDED OR FASTENED X SHEAR HINGE LEAVES TO FIT GATE MEMBERS (BROOKFIELD), OR EQUAL
2	Weldable Panic Boxes	K-BXED X TYPE TO FIT LOCK BRAND/MODEL (KEEDEEX), OR EQUAL
1	Anti-Vandal Pull	1097HASP (-NC AT NON-KEYED PANIC) (TRIMCO), OR EQUAL
1	Rim Panic Device	TYPE 1 F01
1	Rim Panic Device	TYPE 1 F03 LESS TRIM
1	Cylinder	TYPE AS REQUIRED
2	Stainless Steel Closer	C52011/C22021 (PT4D, PT4F, PT4H)

BALANCE OF HARDWARE AND FIXED MULLION BY SECTION 32 31 33, CHAIN LINK
FENCES AND GATES // SECTION 32 31 19, DECORATIVE METAL FENCES AND GATES.

HW-G10Each Rolling or Swing-Up Gate to Have:NON-RATED

1	Padlock or 2 Cylinders	TYPE AS REQUIRED
---	------------------------	------------------

BALANCE OF HARDWARE BY SECTION 32 31 33, CHAIN LINK FENCES AND GATES //

SECTION 32 31 19, DECORATIVE METAL FENCES AND GATES

RESIDENTIAL UNIT SINGLE DOORSHW-R1Each Door to Have:NON-RATED/RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Guestroom Card Lock	BY OTHER SECTION.
1 Closer (@ Rated Doors)	C02011 (PT4D, PT4F PT4H)
1 Floor Stop	L02121 x 3 FASTENERS
2 Door Viewers	L03221 - 190°
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0E154

HW-R1AEach Door to Have:NON-RATED

1 Continuous Hinge	A51031B
1 Guestroom Card Lock	BY OTHER SECTION.
1 Latch Protector (@ O/S Drs)	MLP-111 (DON-JO), OR EQUAL
1 Closer	C02011/C02021 (PT4D, PT4F PT4H)
1 Kick Plate	J102
1 Floor Stop (@ I/S Doors)	L02121 x 3 FASTENERS
1 Overhead Stop (@ O/S Doors)	C01541-ADJUSTABLE
1 Threshold (outswing door)	J35130 x SILICONE GASKET
1 Threshold (inswing door)	ALUMINUM, PER ARCHITECTURAL DETAIL
1 Door Sweep	90100CNB (PEMKO), OR EQUAL
1 Set Frame Seals	2891AS X CSK SCREWS (PEMKO), OR EQUAL
1 Drip	R0Y976

HW-R2Each Door to Have:NON-RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Latchset	F75
1	Base Stop	L02031 x 3 FASTENERS
3	Silencers	L03011

HW-R2AEach Door to Have:NON-RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Push/Pull Plate Set	1894-4 x 1195-1 PULL (TRIMCO), OR EQUAL
1	Kick Plate	J102
1	Mop Plate (@ Inswing Doors)	J102
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Floor Stop	L02121 x 3 FASTENERS
3	Silencers	L03011

HW-R2BEach Door to Have:NON-RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Latchset	F75
1	Floor Stop	L02121 x 3 FASTENERS
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Sets Self-Adhesive Seals	R0E154

HW-R2CEach Door to Have:NON-RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Push/Pull Plate Set	1894-4 x 1195-1 PULL (TRIMCO), OR EQUAL
1 Kick Plate	J102
1 Mop Plate (@ Inswing Doors)	J102
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Floor Stop	L02121 x 3 FASTENERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0E154

HW-R3Each Door to Have:NON-RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Privacy	F76B
1 Base Stop	L02031 x 3 FASTENERS
1 Coat Hook	L03121
3 Silencers	L03011

HW-R3AEach Door to Have:NON-RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Privacy	F76B
1 Base Stop	L02031 x 3 FASTENERS
1 Coat Hook	L03121
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0E154

AT TOILET ROOMS, OMIT METAL THRESHOLD; STONE THRESHOLD BY OTHER TRADES.

HW-R4Each Door to Have:RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Classroom Lock	F84
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Base Stop	L02031 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0E154

HW-R5

THIS HARDWARE SET LEFT INTENTIONALLY BLANK AT THIS TIME.

RESIDENTIAL UNIT PAIRS OF DOORSHW-R6

THIS HARDWARE SET LEFT INTENTIONALLY BLANK AT THIS TIME.

HW-R7Each Pair to Have:NON-RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
2	Dummy Sets	93K02DT (BEST), OR EQUAL
2	Roller Latches	E09091 x MORTISE STRIKE
2	Base Stops	L02031 x 3 FASTENERS
2	Silencers	L03011

HW-R7AEach Door to Have:NON-RATED/RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT
1 Guestroom Card Lock	BY OTHER SECTION.
1 Coordinator	TYPE 21A
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2 Closer (@ Rated Doors)	C02011 (PT4D, PT4F PT4H)
2 Floor Stop	L02121 x 3 FASTENERS
2 Door Viewers	L03221 - 190°
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
2 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0E154

SECURITY HARDWARE ABBREVIATIONS LEGEND:

AC = Access Control Device (Card reader, biometric reader, keypad, etc.)
 ADO = Automatic Door Operator
 DEML = Delayed Egress Magnetic Lock
 DEPH = Delayed Egress Panic Exit Device
 DPS = Door Position Switch (Door or Alarm Contact)
 EL = Electric Lock or Electric Lever Exit Device
 PB = Push-button Combination Lock (stand-alone)
 RR = Remote Release Button
 ELR = Electric Latch Retraction Exit Device
 REX = Request-to-Exit Switch in Latching Device Inside Trim

INTERIOR SINGLE SECURITY DOORSHW-SH-1

THIS HARDWARE SET LEFT INTENTIONALLY BLANK AT THIS TIME.

HW-SH-2

Each Door to Have:

NON RATED

1	Continuous Hinge	FM-3500 X 83 1/8" X SEC. TORX (MARKAR), OR EQUAL
1	Pull	212C X SEC. TORX (SOUTHERN FOLGER), OR EQUAL
1	Lock	1080A-1 X HM MOUNT X SEC. TORX (SOUTHERN FOLGER), OR EQUAL
1	Strike/Keeper	4CL X SEC. TORX (SOUTHERN FOLGER), OR EQUAL
1	Overhead Stop	C01541-ADJUSTABLE X SEC. TORX
1	Door Position Switch	2757 X SEC. TORX (GE SECURITY), OR EQUAL

HW-SH-3Each [AC, EL, REX, DPS] Door to Have:RATED/NON-RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Transfer Hinge	4-WIRE TYPE AS REQUIRED
1 Electrified Lock	F07 (E01-REX, E06) 24VDC
1 Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Floor Stop	L02121 x 3 FASTENERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0E154
1 Alarm Contact	1078-G (G.E. SECURITY), OR EQUAL
120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.	
CARD READER BY DIVISION 28.	

HW-SH-3ATHIS SET NOT USED.

HW-SH-3BEach [PB] Door to Have:RATED

1	Continuous Hinge	A51031B
1	Push-button Combination Lock	N3 - A156.13 F07 G1 E06
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Kick Plate	J102
1	Mop Plate (@ Inswing Doors)	J102
1	Floor Stop	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0E154

HW-SH-3CEach [PB] Door to Have:NON-RATED/RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Push-button Combination Lock	N3 - A156.13 F07 G1 E06
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Floor Stop	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0E154

HW-SH-3DEach [AC, EL, REX, DPS] Door to Have:RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS X 4-THRUWIRE TRANSFER X IN-HINGE ACCESS PANEL
1	Electrified Lock	F07 (E01-REX, E06) 24VDC
1	Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Sets Self-Adhesive Seals	R0E154
1	Alarm Contact	1078-G (G.E. SECURITY), OR EQUAL

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.
CARD READER BY DIVISION 28.

HW-SH-3EEach [AC, EL, REX, DPS] Door to Have:RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Transfer Hinge	4-WIRE TYPE AS REQUIRED
1	Electrified Occupancy Indicator Lock	F13-MODIFIED (E01-REX, E06) 24VDC X OCCUPANCY INDICATOR X KEY RETRACTS LATCHBOLT AND DEADBOLT X INTERNAL DEADBOLT MONITOR SWITCH
1	Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Floor Stop	L02121 x 3 FASTENERS
1	Threshold	J32300 x 57 mm width (2-1/4 inches)
1	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Sets Self-Adhesive Seals	R0E154
1	Alarm Contact	1078-G (G.E. SECURITY), OR EQUAL

INTERNAL DEADBOLT MONITOR SWITCH SHUNTS ACCESS CONTROL DEVICE WHEN
DEADBOLT IS THROWN.

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.

CARD READER BY DIVISION 28.

HW-SH-3F

Each [AC, RR, EL, REX, DPS] Door to Have:

RATED

- | | | |
|---|---------------------------|--|
| 1 | Continuous Transfer Hinge | A51031B x INTEGRAL HINGE GUARD CHANNEL
X ADJUSTA-SCREWS x 4-THRUWIRE TRANSFER x
IN-HINGE ACCESS PANEL |
| 1 | Electrified Lock | F13-MOD x RIGID OUTSIDE LEVER X NO INSIDE
TURN X KEY RETRACTS LATCHBOLT AND
DEADBOLT(E01-REX, E06) 24VDC |
| 1 | Power Supply | REGULATED, FILTERED, 24VDC, AMPERAGE
AS REQUIRED |
| 1 | Closer | C02011/C02021 (PT4D, PT4F, PT4H) |
| 1 | Armor Plate | J101 x 1.275 MM (0.050 INCH) THICKNESS |
| 1 | Edge Guard (@ Wood Doors) | J208M / J211 (VERIFY), CUT: HARDWARE |
| 1 | Floor Stop | L02121 x 3 FASTENERS |
| 1 | Set Self-Adhesive Seals | R0E154 |
| 1 | Alarm Contact | 1078-G (G.E. SECURITY), OR EQUAL |

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.

CARD READER BY DIVISION 28.

HW-SH-3GEach [AC, RR, EL, REX, DPS] Door to Have:RATED

1	Continuous Transfer Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS x 4-THRUWIRE TRANSFER x IN-HINGE ACCESS PANEL
1	Electrified Lock	F13-MOD x RIGID OUTSIDE LEVER X NO INSIDE TURN X KEY RETRACTS LATCHBOLT AND DEADBOLT(E01-REX, E06) 24VDC
1	Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Floor Stop	L02121 x 3 FASTENERS
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1	Auto Door Bottom	R0Y346 - HEAVY DUTY
1	Set Self-Adhesive Seals	R0E154
1	Alarm Contact	1078-G (G.E. SECURITY), OR EQUAL

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.
CARD READER BY DIVISION 28.

HW-SH-3HEach [AC, EL, REX, DPS] Door to Have:NON-RATED/RATED

1	Continuous Transfer Hinge	A51031B x 4-THRUWIRE TRANSFER x IN-HINGE ACCESS PANEL
1	Electrified Lock	F13-MOD x RIGID OUTSIDE LEVER X KEY RETRACTS LATCHBOLT AND DEADBOLT(E01-REX, E06) 24VDC
1	Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1	Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1	Kick Plate	J102
1	Floor Stop	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0E154
1	Door Viewer	L03221 - 190°
1	Alarm Contact	1078-G (G.E. SECURITY), OR EQUAL

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.
CARD READER BY DIVISION 28.

HW-SH-4Each [AC, EL, REX, DPS] Integrated Door to Have:RATED

1	Key Cylinder	TYPE AS REQUIRED
---	--------------	------------------

BALANCE OF HARDWARE BY SECTION 08 17 10, INTEGRATED DOOR ASSEMBLIES

HW-SH-4AEach [ADO, AC, ELR, REX, DPS] Integrated Door to Have:RATED

1	Key Cylinder	TYPE AS REQUIRED
---	--------------	------------------

BALANCE OF HARDWARE BY SECTION 08 17 10, INTEGRATED DOOR ASSEMBLIES

HW-SH-4BEach [ADO, AC, EL, REX, DPS] Door to Have:RATED

- | | | |
|---|---------------------------|--|
| 1 | Continuous Transfer Hinge | A51031B x INTEGRAL HINGE GUARD CHANNEL
X ADJUSTA-SCREWS x 12-THRUWIRE
TRANSFER X IN-HINGE ACCESS PANEL |
| 1 | Electrified Exit Device | TYPE 1 (E01-REX, E04) F13 LEVER |
| 1 | Key Cylinder | TYPE AS REQUIRED |
| 1 | Power Supply | TYPE REQUIRED BY PANIC MANUFACTURER X ADO
BOARD |
| 1 | Armor Plate | J101 x 1.275 MM (0.050 INCH) THICKNESS |
| 1 | Edge Guard (@ Wood Doors) | J208M / J211 (VERIFY), CUT: HARDWARE |
| 1 | Floor Stop | L02121 x 3 FASTENERS |
| 1 | Set Self-Adhesive Seals | R0E154 |

POWER TRANSFER **SHARED BY ELECTRIC PANIC AND** RE-ACTIVATION SENSOR WIRING
(RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

AUTOMATIC DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR
OPERATORS.

HW-SH-5

THIS HARDWARE SET LEFT INTENTIONALLY BLANK AT THIS TIME.

HW-SH-6

THIS HARDWARE SET LEFT INTENTIONALLY BLANK AT THIS TIME.

INTERIOR PAIRS OF SECURITY DOORSHW-SH-7

THIS HARDWARE SET LEFT INTENTIONALLY BLANK AT THIS TIME.

HW-SH-8

THIS HARDWARE SET LEFT INTENTIONALLY BLANK AT THIS TIME.

HW-SH-9Each [AC, EL, REX, DPS] Pair to Have:RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Transfer Hinge	4-WIRE TYPE AS REQUIRED
1 Set Auto Flush Bolts	TYPE 25
1 Dust Proof Strike	L04021
1 Electrified Lock	F07 (E01-REX, E06) 24VDC
1 Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1 Coordinator	TYPE 21A
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2 Closers	C02011/C02021 (PT4D, PT4F, PT4H)
2 Kick Plates	J102 (@ STORAGE ROOMS ONLY)
2 Floor Stops	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154
2 Alarm Contacts	1078-G (G.E. SECURITY), OR EQUAL

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.
CARD READER BY DIVISION 28.

HW-SH-9AEach [PB] Pair to Have:RATED

2	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Set Auto Flush Bolts	TYPE 25
1	Dust Proof Strike	L04021
1	Push-button Combination Lock	N3 - A156.13 F07 G1 E06
1	Coordinator	TYPE 21A
1	Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2	Closers	C02011/C02021 (PT4D, PT4F, PT4H)
2	Armor Plates	J101 x 1.275 MM (0.050 INCH) THICKNESS
2	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2	Floor Stops	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0E154

HW-SH-10Each [AC, EL, REX, DPS] Pair Integrated Doors to Have:RATED

1 Key Cylinder TYPE AS REQUIRED
BALANCE OF HARDWARE BY SECTION 08 17 10, INTEGRATED DOOR ASSEMBLIES

HW-SH-10AEach [AC, ADO, EL, REX, DPS] Pair Integrated Doors to Have:RATED

1 Key Cylinder TYPE AS REQUIRED
BALANCE OF HARDWARE BY SECTION 08 17 10, INTEGRATED DOOR ASSEMBLIES.
AUTOMATIC DOOR OPERATORS AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR
OPERATORS.

EXTERIOR SINGLE SECURITY DOORSHW-SH-12Each [AC, ELR, REX, DPS] Integrated Door to Have:NON-RATED

1 Key Cylinder

TYPE AS REQUIRED

BALANCE OF HARDWARE BY SECTION 08 17 10, INTEGRATED DOOR ASSEMBLIES

MENTAL HEALTH AREASHW-MH1Each Door to Have:NON-RATED/RATED

1 Continuous Hinge

A51031B x INTEGRAL HINGE GUARD CHANNEL
X HOSPITAL TIP X ADJUSTA-SCREWS

1 Passage Latch

F01 x LESS TRIM

1 Set Anti-Ligature Trim

CH (Accurate Lock), or equal

1 Armor Plate

J101 x 1.275 MM (0.050 INCH) THICKNESS

1 Edge Guard (@ Wood Doors)

J208M / J211 (VERIFY), CUT: HARDWARE

1 Floor Stop

L02121 x 3 FASTENERS

1 Set Seals

R3C164

PROVIDE SECURITY FASTENERS FOR ALL HARDWARE ITEMS.

NO CLOSER REQUIRED DUE TO EXEMPTION FOR PATIENT ROOM DOORS.

HW-MH1AEach Door to Have:RATED

Hinges	QUANTITY & TYPE AS REQUIRED
	X HOSPITAL TIPS
1 Passage Latch	F01 x LESS TRIM
1 Set Anti-Ligature Trim	CH (Accurate Lock), or equal
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
	x INSTALL OUTSIDE ROOM
1 Kick Plate	J102
1 Mop Plate (@ Inswing Doors)	J102
1 Floor Stop	L02121 x 3 FASTENERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
1 Set Seals	R3C164

PROVIDE SECURITY FASTENERS FOR ALL HARDWARE ITEMS.

HW-MH1BEach Door to Have:RATED/NON-RATED

1 Continuous Hinge	A51031B x HOSPITAL TIP
1 Passage Latch	F01 x LESS TRIM
1 Set Anti-Ligature Trim	CH (Accurate Lock), or equal
1 Kick Plate	J102
1 Closer (@ rated doors)	C02011/C02021 (PT4D, PT4F, PT4H)
1 Wall Stop	L52101 CONVEX
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0E154

INSTALL CLOSER OUTSIDE ROOM.

PROVIDE SECURITY FASTENERS FOR ALL HARDWARE ITEMS.

HW-MH2Each Door to Have:NON-RATED

Hinges	QUANTITY & TYPE AS REQUIRED x HOSPITAL TIP
1 Keyed Privacy Lock	F12-MOD x TURNPIECE BOTH SIDES x LESS TRIM
1 Set Anti-Ligature Trim	CH (Accurate Lock), or equal
2 Anti-Ligature Thumbturns	ALT-ADA-D/P (VERIFY) (Accuate Lock), or equal
1 Kick Plate	J102
1 Mop Plate (@ Inswing Doors)	J102
1 Floor Stop	L02121 x 3 FASTENERS
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
1 Set Seals	R3C164

PROVIDE SECURITY FASTENERS FOR ALL HARDWARE ITEMS.

STONE THRESHOLD BY OTHER TRADES.

HW-MH2AEach Door to Have:RATED/NON-RATED

Hinges	QUANTITY & TYPE AS REQUIRED x HOSPITAL TIP
1 Keyed Privacy Indicator Lock	F13 x OCCUPANCY INDICATOR x LESS TRIM
1 Set Anti-Ligature Trim	CH (Accurate Lock), or equal
1 Anti-Ligature Thumbturn	ALT-ADA-D/P (VERIFY) (Accuate Lock), or equal
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Kick Plate	J102
1 Mop Plate (@ Inswing Doors)	J102
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

INSTALL CLOSER OUTSIDE ROOM

PROVIDE SECURITY FASTENERS FOR ALL HARDWARE ITEMS.

STONE THRESHOLD BY OTHER TRADES.

HW-MH3Each Door to Have:NON-RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X HOSPITAL TIP X ADJUSTA-SCREWS
1 Classroom Lock	F05 x LESS TRIM
1 Set Anti-Ligature Trim	CH (Accurate Lock), or equal
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Mop Plate	J102
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 x 3 FASTENERS
3 Silencers	L03011

PROVIDE SECURITY FASTENERS FOR ALL HARDWARE ITEMS.

HW-MH3AEach Door to Have:RATED

1 Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X HOSPITAL TIP X ADJUSTA-SCREWS
1 Classroom Lock	F05 x LESS TRIM
1 Set Anti-Ligature Trim	CH (Accurate Lock), or equal
1 Closer	C02011/C02021 (PT4D, PT4F, PT4H)
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

INSTALL CLOSER OUTSIDE ROOM.

PROVIDE SECURITY FASTENERS FOR ALL HARDWARE ITEMS.

HW-MH4Each [AC, RR, EL, REX, DPS] Door to Have:RATED

- | | | |
|---|---------------------------|---|
| 1 | Continuous Transfer Hinge | A51031B x INTEGRAL HINGE GUARD CHANNEL
X ADJUSTA-SCREWS x 4-THRUWIRE TRANSFER x
IN-HINGE ACCESS PANEL |
| 1 | Electrified Lock | F07 (E01-REX, E06) 24VDC x
LESS TRIM |
| 1 | Set Anti-Ligature Trim | CH (Accurate Lock), or equal |
| 1 | Power Supply | REGULATED, FILTERED, 24VDC, AMPERAGE
AS REQUIRED |
| 1 | Closer | C02011/C02021 (PT4D, PT4F, PT4H) |
| 1 | Kick Plate | J102 |
| 1 | Stretcher Plate | J102 |
| 1 | Edge Guard (@ Wood Doors) | J208M / J211 (VERIFY), CUT: HARDWARE |
| 1 | Floor Stop | L02121 x 3 FASTENERS |
| 1 | Door Viewer | L03221 - 190° (VIEW INTO WAITING ROOM) |
| 1 | Door Viewer | L03221 - 190° (VIEW INTO TREATMENT AREA) |
| 1 | Set Self-Adhesive Seals | R0E154 |
| 1 | Alarm Contact | 1078-G (G.E. SECURITY), OR EQUAL |

OMIT DOOR VIEWERS AT DOORS WITH VISION LITES.

INSTALL DOOR CLOSER ON WAITING ROOM SIDE.

PROVIDE SECURITY FASTENERS FOR ALL HARDWARE ITEMS.

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.

CARD READER BY DIVISION 28.

HW-MH4AEach Door to Have:RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X HOSPITAL TIP X ADJUSTA-SCREWS
1	Lock	F08 x LESS TRIM
1	Set Anti-Ligature Trim	CH (Accurate Lock), or equal
1	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Floor Stop	L02121 x 3 FASTENERS
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1	Auto Door Bottom	R0Y346 - HEAVY DUTY
1	Set Seals	R3C164

PROVIDE SECURITY FASTENERS FOR ALL HARDWARE ITEMS.

NO CLOSER REQUIRED DUE TO EXEMPTION FOR PATIENT ROOM DOORS.

HW-MH5Each Door to Have:RATED/NON-RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X HOSPITAL TIP X ADJUSTA-SCREWS
2	Anti-Ligature Pulls	DL34042 x BTB MOUNT (TRIMCO), OR EQUAL
1	Deadlatch	F30 LESS TRIM BOTH SIDES
1	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Floor Stop	L02121 x 3 FASTENERS
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1	Auto Door Bottom	R0Y346 - HEAVY DUTY
1	Set Seals	R3C164

PROVIDE SECURITY FASTENERS FOR ALL HARDWARE ITEMS.

NO CLOSER REQUIRED AT RATED DOORS DUE TO EXEMPTION FOR PATIENT ROOM DOORS.

HW-MH5AEach Door to Have:RATED

1	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X HOSPITAL TIP X ADJUSTA-SCREWS
2	Anti-Ligature Pulls	DL34042 x BTB MOUNT (TRIMCO), OR EQUAL
1	Deadlatch	F30 LESS TRIM BOTH SIDES
1	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1	Floor Stop	L02121 x 3 FASTENERS
3	Silencers	L03011

STONE THRESHOLD BY OTHER TRADES.

PROVIDE SECURITY FASTENERS FOR ALL HARDWARE ITEMS.

HW-MH6Each Pair to Have:RATED/NON-RATED

2	Continuous Hinges	A51031B x INTEGRAL HINGE GUARD CHANNEL X HOSPITAL TIP X ADJUSTA-SCREWS
2	Anti-Ligature Pulls (act. 1f)	DL34042 x BTB MOUNT (TRIMCO), OR EQUAL
2	Manual Flush Bolts	L04251/L04261 (VERIFY)
1	Dust Proof Strike	L04021
1	Deadlatch	F30 LESS TRIM BOTH SIDES
1	Overlapping Astragal	R5Y634 x R0E154 x THRU-BOLTS
2	Armor Plates	J101 x 1.275 MM (0.050 INCH) THICKNESS
2	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2	Floor Stops	L02121 x 3 FASTENERS
1	Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
2	Auto Door Bottom	R0Y336 - HEAVY DUTY
1	Set Seals	R3C164

PROVIDE SECURITY FASTENERS FOR ALL HARDWARE ITEMS.

HW-MH6AEach Pair to Have:NON-RATED/RATED

2	Continuous Hinge	A51031B x INTEGRAL HINGE GUARD CHANNEL X HOSPITAL TIP X ADJUSTA-SCREWS
2	Manual Flush Bolts	L04251/L04261 (VERIFY)
1	Dust Proof Strike	L04021
1	Passage Latch	F01 x LESS TRIM
1	Set Anti-Ligature Trim	CH (Accurate Lock), or equal
1	Overlapping Astragal	R5Y634 x R0E154 x THRU-BOLTS
2	Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
2	Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2	Floor Stop	L02121 x 3 FASTENERS
1	Set Seals	R3C164

PROVIDE SECURITY FASTENERS FOR ALL HARDWARE ITEMS.

NO CLOSER REQUIRED DUE TO EXEMPTION FOR PATIENT ROOM DOORS.

- - - E N D - - -

**SECTION 08 71 13
AUTOMATIC DOOR OPERATORS**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies equipment, controls and accessories for automatic operation of swing doors.

1.2 RELATED WORK

- A. Door hardware; Section 08 71 00, DOOR HARDWARE.
- B. Special doors: Section 08 17 10, INTEGRATED DOOR ASSEMBLIES.
- C. Section 08 11 13, HOLLOW METAL DOORS AND FRAMES.
- D. Electric general wiring, connections and equipment requirements; Division 26, ELECTRICAL.
- E. Wood Doors: Section 08 14 00, INTERIOR WOOD DOORS.
- F. Anchoring: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.3 QUALITY ASSURANCE

- A. Automatic door operators, controls and other equipment shall be products of a manufacturer regularly engaged in manufacturing such equipment for a minimum of three years.
- B. One type of automatic door equipment shall be used throughout the building.
- C. Equipment installer shall have specialized experience and shall be approved by the manufacturer.

1.4 WARRANTY

- A. Warranty period shall be two years in lieu of one year.

1.5 MAINTENANCE MANUALS

- A. In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on automatic door operators.

1.6 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's literature and data describing operators, power units, controls, door hardware and safety devices.
- C. Shop Drawings:
 - 1. Showing location of controls and safety devices in relationship to each automatically operated door.

2. Showing layout, profiles, product components, including anchorage, accessories, as applicable.
3. Submit templates, wiring diagrams, fabrication details and other information to coordinate the proper installation of the automatic door operators.
- D. Submit in writing to the COTR that items listed in Article 1.3 are in compliance.

1.7 DESIGN CRITERIA

- A. As a minimum automatic door equipment shall comply with the requirements of BHMA 156.10. Except as otherwise noted on drawings, provide operators which will move the doors from the fully closed to fully opened position in five seconds maximum time interval, when speed adjustment is at maximum setting.
- B. Equipment: Conforming to UL 325. Provide key operated power disconnect wall switch for each door installation.
- C. Electrical Wiring, Connections and Equipment: Provide all motor, starter, controls, associated devices, and interconnecting wiring required for the installation. Equipment and wiring shall be as specified in Division 26, ELECTRICAL.

1.8 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Builders Hardware Manufacturers Association, Inc. (BHMA):
A156.10-05.....Power Operated Pedestrian Doors (BHMA 1601)
- C. National Fire Protection Association (NFPA):
101-09.....Life Safety Code
- D. Underwriters Laboratory (UL):
325-10.....Door, Drapery, Gate, Louver, and Window
Operators and Systems

1.9 DELIVERY AND STORAGE

- A. Delivery shall be in factory's original, unopened, undamaged container with identification labels attached.

PART 2 - PRODUCTS

2.1 SWING DOOR OPERATORS

- A. General: Swing door operators shall be of institutional type, door panel size 600 mm to 1250 mm (2'-0" to 5'-0") width, weight not to exceed 300 kg (600 pounds), electric operated for overhead mounting

within the header or transom. Furnish metal mounting supports, brackets and other accessories necessary for the installation of operators at the head of the door frames. The motor on automatic door operator shall be provided with an interlock so that the motor will not operate when doors are electrically locked from opening.

- B. Operators shall have checking mechanism providing cushioning action at last part of door travel, in both opening and closing cycle. Operators shall be capable of recycling doors instantaneously to full open position from any point in the closing cycle when control switch is activated. Operators shall, when automatic power is interrupted or shut-off, permit doors to easily open manually without damage to automatic operator system.
- C. Operator, enclosed in housing, shall open door by energizing motor and shall stop by electrically reducing voltage and stalling motor against mechanical stop. Door shall close by means of spring energy, and close force shall be controlled by gear system and motor being used as dynamic break without power, or controlled by hydraulic closer in electro-hydraulic operators. System shall operate as manual door control in event of power failure. Opening and closing speeds shall be adjustable:
 - 1. Operator Housing: Housing shall be a minimum of 112 mm (4-1/2 inches) wide by 140 mm (5.5 inches) high aluminum extrusions with enclosed end caps for application to 100 mm (4 inches) and larger frame systems. All structural sections shall have a minimum thickness of 3.2 mm (0.125 inch) and be fabricated of a minimum of 6063-T5 aluminum alloy.
 - 2. Power Operator: Completely assembled and sealed unit which shall include gear drive transmission, mechanical spring and bearings, all located in aluminum case and filled with special lubricant for extreme temperature conditions. Complete unit shall be rubber mounted with provisions for easy maintenance and replacement, without removing door from pivots or frame.
 - 3. Connecting hardware shall have drive arm attached to door with a pin linkage rotating in a self-lubricating bearing. Door shall not pivot on shaft of operator.
 - 4. Electrical Control: Operator shall have a self contained electrical control unit, including necessary transformers, relays, rectifiers, and other electronic components for proper operation and switching

of power operator. All connecting harnesses shall have interlocking plugs.

2.2 MICROPROCESSOR CONTROLS

- A. The system shall include a multi-function microprocessor control providing adjustable hold open time (1-30 seconds), LED indications for sensor input signals and operator status and power assist close options. Control shall be capable of receiving activation signals from any device with normally open dry contact output. All activation modes shall provide fully adjustable opening speed:
- B. The door shall be held open by low voltage applied to the continuous duty motor. The control shall include an adjustable safety circuit that monitors door operation and stops the opening direction of the door if an obstruction is sensed. The motor shall include a recycle feature that reopens the door if an obstruction is sensed at any point during the closing cycle. The control shall include a standard three position key switch with functions for ON, OFF, and HOLD OPEN, mounted on operator enclosure, door frame, or wall, as indicated in the architectural drawings.

2.3 POWER UNITS

Each power unit shall be self-contained, electric operated and independent of the door operator. Capacity and size of power circuits shall be in accordance with automatic door operator manufacturer's specifications and Division 26 - ELECTRICAL.

2.4 DOOR CONTROLS

- A. Opening and closing actions of doors shall be actuated by controls and safety devices specified, and conform to ANSI 156.10. Controls shall cause doors to open instantly when control device is actuated; hold doors in open positions; then, cause doors to close, unless safety device or reactivated control interrupts operation.
- B. Manual Controls:
 - 1. Push Plate Wall Switch: Recess type, stainless steel push plate minimum 100 mm by 100 mm (four-inch by four-inch), with 13 mm (1/2-inch) high letters "To Operate Door--Push" engraved on face of plate.
- C. Motion Detector: The motion detector may be surface mounted or concealed, to provide a signal to actuate the door operator, and monitor the immediate zone, to detect intrusion by persons, carts or similar objects. The zone which the detector monitors shall be 1500 mm

(five feet) deep and 1500 mm (five feet) across, plus or minus 150 mm (six inches) on all dimensions. The maximum response time shall be no less than 25 milliseconds. Unit shall be designed to operate on 24 volts AC. The control shall not be affected by cleaning material, solvents, dust, dirt and outdoor weather conditions.

2.5 SAFETY DEVICES

- A. General: Area over which doors swing shall be a safety section and anyone standing in path of door's movement shall be protected by a safety device.
- B. Each swing door shall have installed on the pull side a presence sensor to detect any person standing in the door swing path and prevent the door from opening.
- C. Time delay switches shall be adjustable between 3 to 60 seconds and shall control closing cycle of doors.
- D. Decals with sign "In", "Do Not Enter" or "Caution Door Swings in" shall be installed on applicable face of each door.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Coordinate installation of equipment with other related work. Manual controls and power disconnect switches shall be recessed or semi-flush mounted in partitions. Secure operator components to adjacent construction with suitable fastenings. Conceal conduits, piping, and electric equipment, in finish work.
- B. Install power units in locations shown. Where units are to be mounted on walls, provide metal supports or shelves for the units. All equipment, including time delay switches, shall be accessible for maintenance and adjustment.
- C. Operators shall be adjusted and must function properly for the type of traffic (pedestrians, carts, stretchers and wheelchairs) expected to pass through doors. Each door leaf of pairs of doors shall open and close in synchronization. On pairs of doors, operators shall allow either door to be opened manually without the other door opening.
- D. Install controls at positions shown and make them convenient for particular traffic expected to pass through openings. Maximum height of push plate wall switches from finished floors shall be 40 inches unless otherwise approved by the COTR.

3.2 INSTRUCTIONS

- A. Following the installation and final adjustments of the door operators, the installer shall fully instruct VA personnel for 4 hours on the operating, servicing and safety requirements for the swing and sliding automatic door operators.
- B. Coordinate instruction to VA personnel with VA COTR.

- - - E N D - - -

**SECTION 08 80 00
GLAZING**

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies glass, polycarbonate, and related glazing materials and accessories. Glazing products specified apply to factory or field glazed items.

1.2 RELATED WORK

- A. Factory glazed by manufacturer and install in following units:
 - 1. Mirrors: Section 10 28 00, TOILET, BATH, AND LAUNDRY ACCESSORIES.
 - 2. Section 08 51 13, ALUMINUM WINDOWS.
 - 3. Glazing on doors: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, Section 08 14 00, INTERIOR WOOD DOORS, and Section 08 17 10, INTEGRATED DOOR ASSEMBLIES.
 - 4. Restraining Glass: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
 - 5. Skylights: Section 08 63 00, METAL FRAMED SKYLIGHTS.

1.3 LABELS

- A. Temporary labels:
 - 1. Provide temporary label on each light of glass identifying manufacturer or brand and glass type, quality and nominal thickness.
 - 2. Label in accordance with NFRC (National Fenestration Rating Council) label requirements.
 - 3. Temporary labels shall remain intact until glass is approved by the COTR.
- B. Permanent labels:
 - 1. Locate in corner for each pane.
 - 2. Label in accordance with ANSI Z97.1 and SGCC (Safety Glass Certification Council) label requirements.
 - a. Tempered glass.
 - b. Laminated glass or have certificate for panes without permanent label.
 - c. Polycarbonate sheets for skylights.

1.4 PERFORMANCE REQUIREMENTS

- A. Building Enclosure Vapor Retarder and Air Barrier:
 - 1. Utilize the inner pane of multiple pane sealed units for the continuity of the air barrier and vapor retarder seal.

2. Maintain a continuous air barrier and vapor retarder throughout the glazed assembly from glass pane to heel bead of glazing sealant.

B. Glass Thickness:

1. Select thickness of exterior glass to withstand dead loads and wind loads acting normal to plane of glass at design pressures calculated in accordance with applicable code.
2. Test in accordance with ASTM E 1300.
3. Thicknesses listed are minimum. Coordinate thicknesses with framing system manufacturers.

1.5 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Certificates:
1. Certificates stating that wire glass, meets requirements for safety glazing material as specified in ANSI Z97.1.
 2. Certificate on shading coefficient.
 3. Certificate on "R" value when value is specified.
- C. Warranty: Submit written guaranty, conforming to General Condition requirements, and to "Warranty of Construction" Article in this Section.
- D. Manufacturer's Literature and Data:
1. Glass, and polycarbonate; each kind required.
 2. Insulating glass units.
 3. Elastic compound for metal sash glazing.
 4. Glazing cushion.
 5. Sealing compound.
- E. Samples:
1. Size: 150 mm by 150 mm (6 inches by 6 inches).
 2. Tinted glass.
 3. Frosted polycarbonate.
- F. Preconstruction Adhesion and Compatibility Test Report: Submit glazing sealant manufacturer's test report indicating glazing sealants were tested for adhesion to glass and glazing channel substrates and for compatibility with glass and other glazing materials.

1.6 DELIVERY, STORAGE AND HANDLING

- A. Delivery: Schedule delivery to coincide with glazing schedules so minimum handling of crates is required. Do not open crates except as required for inspection for shipping damage.

- B. Storage: Store cases according to printed instructions on case, in areas least subject to traffic or falling objects. Keep storage area clean and dry.
- C. Handling: Unpack cases following printed instructions on case. Stack individual windows on edge leaned slightly against upright supports with separators between each.

1.7 PROJECT CONDITIONS

Field Measurements: Field measure openings before ordering tempered glass products. Be responsible for proper fit of field measured products.

1.8 WARRANTY

- A. Warranty: Conform to terms of "Warranty of Construction", FAR clause 52.246-21, except extend warranty period for the following:
 - 1. Insulating glass units to remain sealed for 10 years.

1.9 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):
 - Z97.1-04.....Safety Glazing Material Used in Building -
Safety Performance Specifications and Methods
of Test.
- C. American Society for Testing and Materials (ASTM):
 - C1363-05.....Thermal Performance of Building Assemblies, by
Means of A Hot Box Apparatus
 - C542-05.....Lock-Strip Gaskets.
 - C716-06.....Installing Lock-Strip Gaskets and Infill
Glazing Materials.
 - C794-06.....Adhesion-in-Peel of Elastomeric Joint Sealants.
 - C864-05.....Dense Elastomeric Compression Seal Gaskets,
Setting Blocks, and Spacers.
 - C920-08.....Elastomeric Joint Sealants.
 - C964-07.....Standard Guide for Lock-Strip Gasket Glazing.
 - C1036-06.....Flat Glass.
 - C1048-04.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated
and Uncoated Glass.
 - C1172-09.....Laminated Architectural Flat Glass.

- C1376-10.....Pyrolytic and Vacuum Deposition Coatings on
Flat Glass.
- D635-06.....Rate of Burning and/or Extent and Time of
Burning of Self-Supporting Plastic in a
Horizontal Position.
- D4802-02.....Poly (Methyl Methacrylate) Acrylic Plastic
Sheet.
- E84-09.....Surface Burning Characteristics of Building
Materials.
- E1300-09.....Determining Load Resistance of Glass in
Buildings.
- E2190-08.....Insulating Glass Unit
- D. Commercial Item Description (CID):
- A-A-59502.....Plastic Sheet, Polycarbonate
- E. Code of Federal Regulations (CFR):
- 16 CFR 1201 - Safety Standard for Architectural Glazing Materials;
1977, with 1984 Revision.
- F. National Fire Protection Association (NFPA):
- 80-08.....Fire Doors and Windows.
- G. National Fenestration Rating Council (NFRC)
- H. Safety Glazing Certification Council (SGCC) 2009:
Certified Products Directory (Issued Semi-Annually).
- I. Underwriters Laboratories, Inc. (UL):
- 752-06.....Bullet-Resisting Equipment.
- J. Unified Facilities Criteria (UFC):
- 4-010-01-2007.....DOD Minimum Antiterrorism Standards for
Buildings
- K. Glass Association of North America (GANA):
- Glazing Manual (Latest Edition)
Sealant Manual (2008)
- L. American Society of Civil Engineers (ASCE):
- ASCE 7-10.....Wind Load Provisions

PART 2 - PRODUCT

2.1 GLASS

- A. Use thickness stated unless specified otherwise in assemblies.
- B. Clear Glass:
1. ASTM C1036, Type I, Class 1, Quality q3.
 2. Thickness, 6 mm (1/4 inch).

C. Patterned and Wired Flat Glass:

1. ASTM C1036, Type II, Class 1, Form 1, Pattern P1, Finish F1, Quality Q5, Mesh m1.
2. Thickness, 6 mm (1/4 inch).

2.2 HEAT-TREATED GLASS

A. Clear Tempered Glass:

1. ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3 6mm (1/4 inch) thick.
2. Thickness, 6 mm (1/4 inch).

2.3 POLYCARBONATE SHEETS

- A. Pre-molded polycarbonate sheets, double glazed for skylight unit.
- B. Engineered and pre-tested for intended application.
- C. Top sheet with interior face frosted for translucent finish.
- D. Bottom sheet with clear finish.

2.4 COATED GLASS

A. Low-E Tempered Glass:

1. ASTM C1048, Kind FT, Condition C, Type I, Class 1, Quality q3 with low emissivity pyrolytic coating having an E of 0.15.
2. Apply coating to third surface of insulating glass units.
3. Thickness, 4.8 mm (3/16 inch).

2.5 INSULATING GLASS UNITS

- A. Provide factory fabricated, hermetically sealed glass unit consisting of two panes of glass separated by a dehydrated air space and comply with ASTM E2190.
- B. Assemble units using glass types specified:
- C. Sealed Edge Units (SEU):
 1. Insulating Glass Unit Makeup
 - a. Outboard Lite
 1. Glass type: Clear Tempered Glass.
 2. Glass Tint: Clear
 3. Nominal Thickness: 1/4 Inch.
 4. Glass Strength: (Tempered)
 5. Coating Orientation: (N/A)
 - b. Spacer
 1. Nominal Thickness: 1/2 Inch.
 2. Gas Fill: (Air)
 - c. Inboard Lite
 1. Glass Type: Low-E Tempered Glass.

2. Glass Tint: Light Silver
3. Nominal Thickness: 1/4 Inch
4. Glass Strength: (Tempered)
5. Coating Orientation: (Surface No. 3)
2. Performance Characteristics (Center of Glass)
 - a. Visible Transmittance: 23%
 - b. Visible Reflectance: 63%
 - c. Winter U-factor (U-value): 0.47
 - d. Shading Coefficient (SC): 0.43
 - e. Solar heat Gain Coefficient (SHGC): 0.52
3. Glass shall be tempered as required by codes, or as required to meet thermal stress and wind loads.
4. Glass heat-treated by horizontal (roller hearth) process with inherent roller wave distortion parallel to the bottom edge of the glass as installed when specified.

2.5 GLAZING ACCESSORIES

- A. As required to supplement the accessories provided with the items to be glazed and to provide a complete installation. Ferrous metal accessories exposed in the finished work shall have a finish that will not corrode or stain while in service.
- B. Setting Blocks: ASTM C864:
 1. Channel shape; having 6 mm (1/4 inch) internal depth.
 2. Shore a hardness of 80 to 90 Durometer.
 3. Block lengths: 50 mm (two inches) except 100 to 150 mm (four to six inches) for insulating glass.
 4. Block width: Approximately 1.6 mm (1/16 inch) less than the full width of the rabbet.
 5. Block thickness: Minimum 4.8 mm (3/16 inch). Thickness sized for rabbet depth as required.
- C. Spacers: ASTM C864:
 1. Channel shape having a 6 mm (1/4 inch) internal depth.
 2. Flanges not less 2.4 mm (3/32 inch) thick and web 3 mm (1/8 inch) thick.
 3. Lengths: One to 25 to 76 mm (one to three inches).
 4. Shore a hardness of 40 to 50 Durometer.
- D. Sealing Tapes:

1. Semi-solid polymeric based material exhibiting pressure-sensitive adhesion and withstanding exposure to sunlight, moisture, heat, cold, and aging.
 2. Shape, size and degree of softness and strength suitable for use in glazing application to prevent water infiltration.
- E. Lock-Strip Glazing Gaskets: ASTM C542, shape, size, and mounting as indicated.
- F. Glazing Sealants: ASTM C920, silicone neutral cure:
1. Type S.
 2. Class 25
 3. Grade NS.
 4. Shore A hardness of 25 to 30 Durometer.
- G. Color:
1. Color of glazing compounds, gaskets, and sealants used for aluminum color frames shall match color of the finished aluminum and be nonstaining.
 2. Color of other glazing compounds, gaskets, and sealants which will be exposed in the finished work and unpainted shall be black, gray, or neutral color.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verification of Conditions:
1. Examine openings for glass and glazing units; determine they are proper size; plumb; square; and level before installation is started.
 2. Verify that glazing openings conform with details, dimensions and tolerances indicated on manufacturer's approved shop drawings.
- B. Advise Contractor of conditions which may adversely affect glass and glazing unit installation, prior to commencement of installation: Do not proceed with installation until unsatisfactory conditions have been corrected.
- C. Verify that wash down of adjacent masonry is completed prior to erection of glass and glazing units to prevent damage to glass and glazing units by cleaning materials.

3.2 PREPARATION

- A. For sealant glazing, prepare glazing surfaces in accordance with GANA-02 Sealant Manual.

- B. Determine glazing unit size and edge clearances by measuring the actual unit to receive the glazing.
- C. Shop fabricate and cut glass with smooth, straight edges of full size required by openings to provide GANA recommended edge clearances.
- D. Verify that components used are compatible.
- E. Clean and dry glazing surfaces.
- F. Prime surfaces scheduled to receive sealants, as determined by preconstruction sealant-substrate testing.

3.3 INSTALLATION - GENERAL

- A. Install in accordance with GANA-01 Glazing Manual and GANA-02 Sealant Manual unless specified otherwise.
- B. Glaze in accordance with recommendations of glazing and framing manufacturers, and as required to meet the Performance Test Requirements specified in other applicable sections of specifications.
- C. Set glazing without bending, twisting, or forcing of units.
- D. Do not allow glass to rest on or contact any framing member.
- E. Glaze doors and operable sash, in a securely fixed or closed and locked position, until sealant, glazing compound, or putty has thoroughly set.
- F. Tempered Glass: Install with roller distortions in horizontal position unless otherwise directed.
- G. Insulating Glass Units:
 - 1. Glaze in compliance with glass manufacturer's written instructions.
 - 2. When glazing gaskets are used, they shall be of sufficient size and depth to cover glass seal or metal channel frame completely.
 - 3. Do not use putty or glazing compounds.
 - 4. Do not grind, nip, cut, or otherwise alter edges and corners of fused glass units after shipping from factory.
 - 5. Install with tape or gunnable sealant in wood sash.
- H. Fire Resistant Glass:
 - 1. Wire glass: Glaze in accordance with NFPA 80.

3.4 INSTALLATION - WET/DRY METHOD (PREFORMED TAPE AND SEALANT)

- A. Cut glazing tape to length and set against permanent stops, 5 mm (3/16 inch) below sight line. Seal corners by butting tape and dabbing with butyl sealant.
- B. Apply heel bead of butyl sealant along intersection of permanent stop with frame ensuring full perimeter seal between glass and frame to complete the continuity of the air and vapor seal.

- C. Place setting blocks at 1/4 points with edge block no more than 150 mm (6 inches) from corners.
- D. Rest glazing on setting blocks and push against tape and heel bead of sealant with sufficient pressure to achieve full contact at perimeter of pane or glass unit.
- E. Install removable stops, with spacer strips inserted between glazing and applied stops, 6 mm (1/4 inch) below sight line. Place glazing tape on glazing pane or unit with tape flush with sight line.
- F. Fill gap between glazing and stop with S type sealant to depth equal to bite of frame on glazing, but not more than 9 mm (3/8 inch) below sight line.
- G. Apply cap bead of S type sealant along void between the stop and the glazing, to uniform line, flush with sight line. Tool or wipe sealant surface smooth.

3.5 INSTALLATION - INTERIOR WET/DRY METHOD (TAPE AND SEALANT)

- A. Cut glazing tape to length and install against permanent stops, projecting 1.6 mm (1/16 inch) above sight line.
- B. Place setting blocks at 1/4 points with edge block no more than 150 mm (6 inches) from corners.
- C. Rest glazing on setting blocks and push against tape to ensure full contact at perimeter of pane or unit.
- D. Install removable stops, spacer shims inserted between glazing and applied stops at 600 mm (24 inch) intervals, 6 mm (1/4 inch) below sight line.
- E. Fill gaps between pane and applied stop with S type sealant to depth equal to bite on glazing, to uniform and level line.
- F. Trim protruding tape edge.

3.6 REPLACEMENT AND CLEANING

- A. Clean new glass surfaces removing temporary labels, paint spots, and defacement after approval by the COTR.
- B. Replace cracked, broken, and imperfect glass, or glass which has been installed improperly.
- C. Leave glass, putty, and other setting material in clean, whole, and acceptable condition.

3.7 PROTECTION

Protect finished surfaces from damage during erection, and after completion of work. Strippable plastic coatings on colored anodized finish are not acceptable.

VA ROSEBURG

CORRECT SPD AND SURGICAL DEFICIENCIES

- - - E N D - - -

**SECTION 08 90 00
LOUVERS AND VENTS**

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies fixed wall louvers, door louvers and wall vents.

1.2 RELATED WORK

- A. Louvers in steel doors: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES.
- B. Color of finish: Section 09 06 00, SCHEDULE FOR FINISHES.
- C. Anchoring: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
Each type, showing material, finish, size of members, method of assembly, and installation and anchorage details.
- C. Manufacturer's Literature and Data:
Each type of louver and vent.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. The Master Painters Institute (MPI):
Approved Product List - November 2007
- C. American Society for Testing and Materials (ASTM):
A167-99(R2004).....Stainless and Heat-Resisting Chromium - Nickel
Steel Plate, Sheet, and Strip
A1008/A1008M REV A-07...Steel, Sheet, Carbon, Cold Rolled, Structural,
and High Strength Low-Alloy with Improved
Formability
B209/B209M-07.....Aluminum and Aluminum Alloy, Sheet and Plate
B221-06.....Aluminum and Aluminum Alloy Extruded Bars, Rods,
Wire, Shapes, and Tubes
B221M-07.....Aluminum and Aluminum Alloy Extruded Bars, Rods,
Wire Shapes, and Tubes
- D. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-505 (1988).....Metal Finishes Manual
- E. National Fire Protection Association (NFPA):

90A-02.....Installation of Air Conditioning and Ventilating
Systems

G. American Architectural Manufacturers Association (AAMA):

605-98.....High Performance Organic Coatings on
Architectural Extrusions and Panels

H. Air Movement and Control Association, Inc. (AMCA):

500-L-99.....Testing Louvers

PART 2 - PRODUCTS

2.1 MATERIALS

A. Aluminum, Extruded: ASTM B221/B221M.

B. Stainless Steel: ASTM A167, Type 302B.

C. Carbon Steel: ASTM A1008/A1008M.

D. Aluminum, Plate and Sheet: ASTM B209/B209M.

E. Fasteners: Fasteners for securing louvers and wall vents to adjoining construction, except as otherwise specified or shown, shall be toggle or expansion bolts, of size and type as required for each specific type of installation and service condition.

1. Where type, size, or spacing of fasteners is not shown or specified, submit shop drawings showing proposed fasteners, and method of installation.

2. Fasteners for louvers, louver frames, and wire guards shall be of stainless steel or aluminum.

F. Inorganic Zinc Primer: MPI No. 19.

2.2 EXTERIOR WALL LOUVERS

A. General:

1. Provide fixed type louvers of size and design shown.

2. Heads, sills and jamb sections shall have formed caulking slots or be designed to retain caulking. Head sections shall have exterior drip lip, and sill sections an integral water stop.

3. Furnish louvers with sill extension or separate sill as shown.

4. Frame shall be mechanically fastened or welded construction with welds dressed smooth and flush.

B. Performance Characteristics:

1. Weather louvers shall have a minimum of 50% percent free area and shall pass 600fpm (intake), and 100 fpm (exhaust) free area velocity at a pressure drop not exceeding 0.25 (inch) water gage and carry not more than 0.01 (ounces) of water per m² (square foot) of free area for 15 minutes when tested per AMCA Standard 500-L.

2. Louvers shall bear AMCA certified rating seals for air performance and water penetration ratings.

C. Aluminum Louvers:

1. General: Frames, blades, sills and mullions (sliding interlocking type); 2 mm (0.081-inch) thick extruded aluminum. Blades shall be drainable type and have reinforcing bosses.
2. Louvers, fixed: Make frame sizes 13 mm (1/2-inch) smaller than openings. Single louvers frames shall not exceed 1700 mm (66 inches) wide. When openings exceed 1700 mm (66 inches), provide twin louvers separated by mullion members.

2.3 CLOSURE ANGLES AND CLOSURE PLATES

- A. Fabricate from 2 mm (0.074-inch) thick aluminum.
- B. Provide continuous closure angles and closure plates on inside head, jambs and sill of exterior wall louvers.
- C. Secure angles and plates to louver frames with screws, and to masonry or concrete with fasteners as specified.

2.4 WIRE GUARDS

- A. Provide wire guards on outside of all exterior louvers, except on exhaust air louvers.
- B. Fabricate frames from 2 mm (0.081-inch) thick extruded or sheet aluminum designed to retain wire mesh.
- C. Wire mesh shall be woven from not less than 1.6 mm (0.063-inch) diameter aluminum wire in 13 mm (1/2-inch) square mesh.
- D. Miter corners and join by concealed corner clips or locks extending about 57 mm (2-1/4 inches) into rails and stiles. Equip wire guards over four feet in height with a mid-rail constructed as specified for frame components.
- E. Fasten frames to outside of louvers with aluminum devices designed to allow removal and replacement without damage to the wire guard or the louver.

2.5 EXTERIOR DOOR LOUVERS

- A. Fabricate of 1.6 mm (0.063-inch) thick extruded aluminum. Miter frames at corners and join by concealed corner brackets.
- B. Equip louvers on outside with wire guards, except omit wire guards for louvers in doors located completely below enclosed areaways.

2.6 WALL VENTS

- A. Fabricate exterior wall vents from 4.7 mm (0.187-inch) thick aluminum plate, perforated in diamond lattice pattern, with not over 19 mm (3/4-inch) openings.
- B. Vents shall have aluminum screen frame with aluminum alloy insect screening mounted on back of vent by means of 19 mm x 5 mm (3/4-inch by 3/16-inch) top and bottom bars screwed to grille.

- C. Vent Frames In Masonry: Fabricate of 45 mm x 30 mm x 5 mm (1-3/4 inch by 1-1/4 inch by 3/16-inch) steel angles bolted with 6 mm (1/4-inch) diameter expansion bolts at jambs.

2.7 AIR INTAKE VENTS

- A. Fabricate exterior louvered wall ventilators for fresh air intake for air conditioning units from extruded aluminum, ASTM B221. Form with integral horizontal louvers and frame, with drip extending beyond face of wall and integral water stops.
- B. Provide aluminum closures where shown for inside face of dummy vents.
- C. Provide 0.8 m (0.032-inch) thick aluminum sleeves where shown.

2.8 FINISH

- A. In accordance with NAAMM Metal Finishes Manual: AMP 500-505
- B. Aluminum Louvers, Air Intake Vents, and Wire Guards:
 - 1. Anodized finish
 - a. AA-C22A42 Chemically etched medium matte, with integrally colored anodic coating, Class I Architectural, 0.7 mils thick.
 - 1. Match adjacent wall color.
- C. Aluminum Wall Vents: Sand blasted satin finish.
- D. Stainless Steel: Mechanical finish No. 4 in accordance with NAAMM Metal Finishes Manual.

2.9 PROTECTION

- A. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces of the dissimilar material with a heavy coat of bituminous paint (complete coverage), or by separating the contact surfaces with a performed synthetic rubber tape having pressure sensitive adhesive coating on one side.
- B. Isolate the aluminum from plaster, concrete and masonry by coating aluminum with zinc-chromate primer.
- C. Protect finished surfaces from damage during fabrication, erection, and after completion of the work. Strippable plastic coating on colored anodized finish is not approved.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Set work accurately, in alignment and where shown. Items shall be plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.
- B. Furnish setting drawings and instructions for installation of anchors and for the positioning of items having anchors to be built into masonry

construction. Provide temporary bracing for such items until masonry is set.

- C. Provide anchoring devices and fasteners as shown and as necessary for securing louvers and vents to building construction as specified. Power actuated drive pins may be used, except for removal items and where members would be deformed or substrate damaged by their use.

3.2 CLEANING AND ADJUSTING

- A. After installation, all exposed prefinished and plated items and all items fabricated from stainless steel and aluminum shall be cleaned as recommended by the manufacturer and protected from damage until completion of the project.
- B. All movable parts, including hardware, shall be cleaned and adjusted to operate as designed without binding or deformation of the members, so as to be centered in the opening of frame, and where applicable, to have all contact surfaces fit tight and even without forcing or warping the components

- - - E N D - - -

SECTION 09 06 00
SCHEDULE FOR FINISHES

SECTION 09 06 00-SCHEDULE FOR FINISHES

VAMC: ROSEBURG
Location: OREGON
Project no. and Name: CORRECT SPD AND SURGICAL DEFICIENCIES
Submission: REVISION 1
Date: January 18, 2013

**SECTION 09 06 00
SCHEDULE FOR FINISHES**

PART I - GENERAL**1.1 DESCRIPTION**

This section contains a coordinated system in which requirements for materials specified in other sections shown are identified by abbreviated material names and finish codes in the room finish schedule or shown for other locations.

1.2 MANUFACTURERS

Manufacturer's trade names and numbers used herein are only to identify colors, finishes, textures and patterns. Products of other manufacturer's equivalent to colors, finishes, textures and patterns of manufacturers listed that meet requirements of technical specifications will be acceptable upon approval in writing by contracting officer for finish requirements.

1.3 SUBMITALS

Submit in accordance with SECTION 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES—provide quadruplicate samples for color approval of materials and finishes specified in this section.

1.4 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.

B. MASTER PAINTING INSTITUTE: (MPI)

2001.....Architectural Painting Specification Manual

PART 2- PRODUCTS**2.1 DIVISION 05 - METALS**

A. SECTION 05 31 00, STEEL DECKING, SECTION 05 36 00, COMPOSITE METAL DECKING

Finish	Color
Paint (@ exposed Ceilings)	Kelly Moore (Match Walls)

B. SECTION 05 50 00, METAL FABRICATION

Item	Finish
Roof Top mechanical Equipment Screens	Industrial Louvers (Model No. 250 XPI) Stone White (391A454 731A539)
Modular Channel Units	Mill
Channel Door Frames	Paint (where exposed) Kelly Moore, OW205-1 Soap Suds
Edge Guards Angles for Opening in Slabs	Mill
Metal Gratings and Frames	Prefinished Stair Tread Gratings (G 90)
Grating Nose Warning Strip	Prefinished (Epoxy Paint-Yellow))
Aluminum Plate Door Sill	Mill
Steel Ladders	Paint KM-12 (Sierra White)
Aluminum Ladders	Mill
Steel Pipe Railings and Gates (not on Steel Stairs)	Paint KM-12 (Sierra White)
Steel Counter or Bench Top Frame and Legs.	Stainless Steel (Satin No. 4)

C. SECTION 05 51 00, METAL STAIRS

Component	Finish	Color
Newel Posts	Paint (Kelly Moore)	White (Match existing metal window frames)
Guard Rails	Paint (Kelly Moore)	White (Match existing metal window frames)
Handrails	Paint (Kelly Moore)	White (Match existing metal window frames)
Stringers	Paint (Kelly Moore)	White (Match existing metal window frames)
Risers	Paint (Kelly Moore)	White (Match existing metal window frames)
Underside	Paint (Kelly Moore)	White (Match existing metal window frames)
Treads	Pre-Finished	G-90 by Manufacturer

D. SECTION 05 50 00, METAL FABRICATIONS

1. BUILT-IN COUNTER			
Room No. and Name	Component	Material	Finish
Various	Countertop	Stainless Steel	No. 4 Satin
	Vertical Surface(s)	Stainless Steel	No. 4 Satin

2.2 DIVISION 07 - THERMAL AND MOISTURE PROTECTION

A. SECTION 07 45 00, EXTERIOR ALUMINUM FACED COMPOSITE PANELS (INCLUDING PARAPET CAP)

Material	Type	Ext. Finish	Int. Finish	Manufacturer	Mfg. Color Name/No.
Alucobond Plus	Wet Rout and Return	Coil Coated FEVE	---	3A Composites	Bone White - 30

B. SETION 07 53 23, ETHYLENE-PROPYLENE-DIENE-MONOMER ROOFING

Color	Manufacturer	Mfg. Color Name/No.
White	Firestone	90 Mil Ecowhite Platinum EPDM

C. SECTION 07 60 00, FLASHING AND SHEET METAL

Item	Material	Finish
Copings (Except Parapets)	Aluminum	Color Anodized - White to Match Existing
Miscellaneous Flashing (Roof)	Aluminum	Color Anodized - White to Match Existing
Miscellaneous Flashing	Stainless Steel	Paint to Match Adjacent Surface

D. SECTION 07 71 00 / 07 72 00, ROOF SPECIALITIES AND ACCESSORIES

Item	Material	Finish	Manufacturer	Manufacturer/Color Name/Number.
Roof Hatch	Aluminum	Mill	Acudor	---
Equipment Support	Galv. Steel	Paint	Greenbeck/York	KM-Sierra White 12
Parapet Copings	Aluminum	Coil Coated FEVE	3A Composites	Bonewhite - 30
Roof Expansion Joint Covers	Extruded Aluminum	Mill	Construction Specialties, Inc.	BRJ-400

E. SECTION 07 92 00, JOINT SEALANTS

Location	Color	Manufacturer	Manufacturer Color
New to Existing Walls	White	Dow Corning	White
Building Expansion Joints	Gray	Dow Corning	Gray
Masonry Sealed Joints	Gray	Dow Corning	Gray

F. SECTION 07 95 13, EXPANSION JOINT COVER ASSEMBLIES

	Material	Finish	Manufacturer	Mfg. Color Name/No.
Floor Component Cover Plate Frame Casket or Sealant (interior only)	Aluminum	Clear Anodized	Construction Specialties, Inc.	GTP-400HD (2-Hour)
	Elastomeric Sealant	---		Gray (Seal)
Wall Component Cover Plate Frame Casket or Sealant (interior only)	Aluminum	Clear Anodized	Construction Specialties, Inc.	ASM-400 (2-Hour)
	Elastomeric Sealant	---		
Ceiling Component Cover Plate, Gasket or Sealant (interior only)	Aluminum	Clear Anodized	Construction Specialties, Inc.	SFC-400
	Elastomeric Extrusion	---		
Exterior Wall Cover Plate Frame Thermoplastic Joint	Aluminum	Clear Anodized	Construction Specialties, Inc.	SF-400
	Elastomeric Extrusion	---		Gray (Seal)

2.3 DIVISION 08 - OPENINGS

A. SECTION 08 11 13, HOLLOW METAL DOORS AND FRAMES

Paint both sides of door and frames same color including ferrous metal louvers, and hardware attached to door	
Component	Color of Paint Type and Gloss
Door (2 nd Floor)	Match Adjacent Wall
Frame (2 nd Floor)	Match Base
Vision Panel Window Frame (2 nd Floor)	Kelly Moore, OW205-1 Soap Suds
Door and Frame (1 st Floor)	Match adjacent existing doors & frames

B. SECTION 08 14 00, WOOD DOORS

Component	Finish/Color
Doors (Stained)	Clear Stain
Doors (Painted)	Match Adjacent Wall
Frames	Match Base

C. SECTION 08 31 13, ACCESS DOORS AND FRAMES

Material	Finish/Color
Steel	Match adjacent surface color
Stainless steel	Satin No. 4

D. SECTION 08 51 13, ALUMINUM WINDOWS

Type	Finish	Glazing	Manufacturer	Mfg. Color Name/No.
Fixed Flush Wall Window	Color Anodized	I.G.U.	Vistawall	4100 Series (KM23 - Swiss Coffee)

E. WINDOW SILLS

Room No. and Name	Material	Finish
Offices/Conference	Solid Surface	Corian Anthracite

F. SECTION 08 63 00, METAL-FRAMED SKYLIGHTS

Item	Material	Finish
Metal Frame	Anodized Aluminum	White (Match existing Skylight)
Polycarbonate Sheets	Exterior Sheet / Interior Sheet	Frosted / Clear

G. SECTION 08 71 00, BUILDERS HARDWARE

Item	Material	Finish
Hinges	Stainless Steel	630
Door Closers	Aluminum	Satin
Closer/ Holder	Aluminum	Satin
Floor Stops	Stainless Steel	630
Door Holders	Stainless Steel	630
Lock/ Latches	Stainless Steel	630
Key Cabinet	Steel	Painted Black
Armor Plates	Metal Plastic	Match Door
Kick Mop Plates	Metal Plastic	Match Door
Door Edging	Steel	652
Exit Device	Aluminum	Satin
Flush Bolts	Stainless Steel	630
Door Pulls	Stainless Steel	630
Push Plates	Stainless Steel	630
Combination Push Pull Plate	Stainless Steel	630
Coordinators	Steel	652
Light Proof Seals	Rubber	Black
Weather Strip	Rubber	Black
Threshold	Aluminum	Mill

H. SECTION 08 80 00, GLAZING

Glazing Type	Manufacturer	Mfg. Color Name/No.
Low-E Coated Glass	Guardian Industries	Light Silver, SNR 43 Clear

I. SECTION 08 90 00, LOUVERS

Item	Manufacturer	Finish
Aluminum	Greeheck	Match Wall Color
Rooftop	See Section 05 50 00	See Section 05 50 00

2.4 DIVISION 09 - FINISHES

A. SECTION 09 24 00, PORTLAND CEMENT PLASTERING

Finish code	Integral	Color	Manufacturer	Mfg. Color Name/No.
---	No	Match Existing	La Habra	Match Existing

B. SECTION 09 30 13, CERAMIC TILING

1. CERAMIC MOSAIC TILE (FT)					
Location	Size	Shape	Collection	Manufacturer	Mfg. Color Name/No.
Floor (Men's)+(H.A.C)	2 x 2	Square	Permatones	Dal Tile	Elemental Tan 6566
Base (Men's)+(H.A.C)	2 x 2	Coved	Permatones	Dal Tile	Elemental Tan 6566
Wall (Men's)+(H.A.C)	2 x 2	Square	Permatones	Dal Tile	Almond 6465
Floor (Women's)	2 x 2	Square	Permatones	Dal Tile	Elemental Tan 6566
Base (Women's)	2 x 2	Coved	Permatones	Dal Tile	Elemental Tan 6566
Wall (Women's)	2 x 2	Square	Permatones	Dal Tile	Almond 6465
Cart Wash / Manual Wash	4 x 4	Square	Permatones	Dal Tile	Almond 6465

2. SECTION 09 30 13, PORCELAIN PAVER TILE (PPT)					
Finish Code	Size	Shape	Pattern	Manufacturer	Mfg. Color Name/No.
Floor	12 x 12	Square	Florenza	Dal Tile	Oliva FZ02
Wall	12 x 12	Square	Florenza	Dal Tile	Oliva FZ02

3. SECTION 09 30 13, PORCELAIN PAVER TILE GROUT		
Finish Code	Manufacturer	Mfg. Color Name/No.
---	Dal Tile	As recommended by Tile Mfr.

4. SECTION 09 30 13, MARBLE THRESHOLDS		
Location	Manufacturer	Mfg. Color Name/No.
Men's Toilet	Dal Tile	Match Tile
Women's Toilet	Dal Tile	Match Tile

5. SECTION 09 30 13, METAL DIVIDER STRIPS		
Size	Material	Manufacturer
Per Application	Brass	---

C. SECTION 09 51 00, ACOUSTICAL CEILINGS

Finish Code	Component	Color Pattern	Manufacturer	Mfg Name/No.
	Exposed Suspension System	Donn DX/DXL	U.S.G.	White
AT	Type III	Radar	U.S.G.	White
AT (SP)	Type III A	Cima Plus	U.S.G.	White

D. SECTION 09 65 16, RESILIENT SHEET FLOORING

Finish Code	Pattern name	Manufacturer	Mfg. Color Name/No.
RSF	Linorette	Armstrong	LP402 Brisbane Blue
WSF	Medintone	Armstrong	H8311 Natural White

E. SECTION 09 65 16, RESILIENT SHEET FLOORING, HEAT WELDED SEAMS

Finish Code	Pattern name	Manufacturer	Mfg. Color Name/No.
---	---	Armstrong	Match Flooring

1. SECTION 09 65 16, CAP STRIPS (WSF)

Finish Code	Manufacturer	Mfg. Color Name/No.
---	Armstrong	Match Flooring

F. SECTION 09 65 13, RESILIENT BASE STAIR TREADS AND ACCESSORIES

Location	Item	Height	Manufacturer	Mfg Name/No.
At RSF	Rubber Base (RB)	4" Inches	Johnsonite	18 - Navy Blue
At CPT	Rubber Base (RB)	4" Inches	Johnsonite	18 - Navy Blue
At C	Rubber Base (RB)	4" Inches	Johnsonite	18 - Navy Blue

G. SECTION 09 68 00, CARPET MODULES (CFT)

1. SECTION 09 68 00, CARPET EDGE STRIP			
Finish Code	Material	Manufacturer	Mfg. Color Name/No.
---	Metal	Shaw	Black
---	Vinyl	Shaw	Match Carpet

H. SECTION 09 68 00, CARPET MODULES (CPT)

Finish Code	Size	Pattern direction	Manufacturer	Mfg. Color Name/No.
CPT	2' x 2'	Expert Tile 59377	Shaw	35410 Knappster

I. SECTION 09 67 23.60, URETHANE RESINOUS FLOORING (RES)

Finish code	Manufacturer	Mfg. Color Name/No.
RES-6A	Dex-O-Tex	413 Speed Way Gray

J. SECTION 09 96 59, HIGH-BUILD GLASED COATING (SC)

Finish code	Manufacturer	Mfg. Color Name/No.
All Rooms or Spaces where (SC) is Scheduled	Kelly Moore	OW205-1 Soap Suds Gloss Level (5)

K. SECTION 09 91 00, PAINT AND COATINGS

1. MPI Gloss and Sheen Standards

		Gloss @60	Sheen @85
Gloss Level 1	a traditional matte finish-flat	max 5 units, and	max 10 units
Gloss Level 2	a high side sheen flat-"a velvet-like" finish	max 10 units, and	10-35 units
Gloss Level 3	a traditional "egg-shell like" finish	10-25 units, and	10-35 units
Gloss Level 4	a "satin-like" finish	20-35 units, and	min. 35 units
Gloss Level 5	a traditional semi-gloss	35-70 units	
Gloss Level 6	a traditional gloss	70-85 units	
Gloss level 7	a high gloss	more than 85 units	

*PAINT COLORS EXCEPT WHERE (SC) IS SCHEDULED

2. Paint Location	Gloss	Manufacturer	Mfg. Color Name/No.
Corridors and Hall	3	Kelly Moore	OW205-1, Soap Suds
Ante Rooms	3	Kelly Moore	OW205-1, Soap Suds
Locker Rooms	3	Kelly Moore	OW205-1, Soap Suds
Toilet Rooms	3	Kelly Moore	OW205-1, Soap Suds
Exit Passage Way	3	Kelly Moore	OW205-1, Soap Suds
Electrical & Mechanical Rooms	3	Kelly Moore	OW205-1, Soap Suds
Vestibule	3	Kelly Moore	OW205-1, Soap Suds
Roof Access	3	Kelly Moore	OW205-1, Soap Suds
Room 132A	3	Kelly Moore	OW205-1, Soap Suds
Offices	3	Kelly Moore	OW205-1, Soap Suds

2.5 DIVISION 10 - SPECIALTIES**A. SECTION 08 90 00, LOUVERS AND WALL VENTS**

Item	Material	Finish	Manufacturer	Mfg. Color Name/No.
Louvers	Aluminum	Color Anodized	Greenheck	White (Match Adjacent Wall)
Vents	Aluminum	Color Anodized	Greenheck	White (Match Adjacent Wall)

B. SECTION 10 26 00, WALL GUARDS AND CORNER GUARDS

Item	Material	Manufacturer	Mfg. Color Name/No.
Vinyl Corner Guards	Vinyl	Acrovyn, SM-20N	930-Blue Silk
Vinyl Wall Guards (Crash Rails)	Vinyl	Acrovyn, SCR-48N	930-Blue Silk
Stainless Steel Wall Guard (Crash Rails)	Stainless Steel	Acrovyn, SCR-1655V	Stainless Steel, Type 304
Stainless Steel Corner Guards	Stainless Steel	Acrovyn, CO-8	Stainless Steel, Type 304

C. SECTION 10 28 00 / 10 14 00 / 11 17 36, MISCELLANEOUS SPECIALITIES

Room No. and Name	Item	Finish	Manufacturer	Mfg. Color Name/No.
---	Mop racks	Stainless Steel	Bobrick	Satin No. 4
---	Package Transfer Box	Stainless Steel	Clean Air Products	Satin No. 4

D. SECTION 10 44 13, FIRE EXTINGUISHER CABINETS

Component	Material	Finish
Cabinet and Door Frame	Baked Enamel	White
Door	Glass	Clear Tempered

E. SECTION 10 28 00, TOILET AND BATH ACCESSORIES

Item	Material (or Type)	Manufacturer	Mfg. Color Name/No.
Combination Paper Towel Dispenser and Disposal	Stainless Steel	Bobrick	B-36903, Satin No. 4
Toilet Tissue Dispenser	Stainless Steel	Bobrick	B-2888, Satin No. 4
Grab Bars	Stainless Steel	Bobrick	B-5806, Satin No. 4
Shower Curtain Rod	Stainless Steel	---	Satin No. 4
Cloths Hooks	Stainless Steel	Bobrick	B-671, Satin No. 4
Towel Bars	Stainless Steel	---	Satin No. 4
Metal Framed Mirror	Stainless Steel	Bobrick	B-293, Satin No. 4
Spherical Mirrors	Quarter Dome	See All	PV18-180 Degree
Spherical Mirrors		See All	PV18-90 Degree

2.6 DIVISION 12- FURNISHINGS

A. SECTION 12 24 00, WINDOW SHADES

Component	Material	Manufacturer	Mfg. Color Name/No.
Integral Venetian Blinds	Aluminum	Kyler Industries	0157 Silver

B. SECTION 12 31 00, METAL CASEWORK

Item/ Type	Finish	Manufacturer	Mfg. Color Name/No.
1. CABINETS	Stainless Steel	---	Satin No. 4

C. SECTION 12 32 00, WOOD CASEWORK

Item Type	Manufacturer	Location	Material	Finish/Color
Exterior Surfaces	Wilsonart	Conference Room	Plastic laminate	D73-60 Pewter
Countertop	Corian	Conference Room	Solid Surface	Anthracite
Interior Surfaces	Wilsonart	Conference Room	Plastic Laminate	Designer White
Shelves	Wilsonart	Conference Room	Plastic Laminate	Designer White

D. SECTION 12 36 00, COUNTERTOPS AND ACCESSORIES

Type	Finish/Color
Methyl Methacrylate	Antracite (E)
Stainless Steel	Satin No. 4

2.7 DIVISION 22 - PLUMBING

A. SECTION 22 40 00, PLUMBING FIXTURES AND TRIM

Item	Color
Water Closet	White Vitreous China
Lavatories	White Vitreous China
Service Sink Corner	Tan Terrazzo

PART III EXECUTION

3.1 FINISH SCHEDULES & MISCELLANEOUS ABBREVIATIONS

FINISH SCHEDULE & MISCELLANEOUS ABBREVIATIONS	
Term	Abbreviation

Access Flooring	AF
Accordion Folding Partition	AFP

Acoustical Ceiling	AT
Acoustical Ceiling, Special Faced	AT (SP)
Acoustical Metal Pan Ceiling	AMP
Acoustical Wall Panel	AWP
Acoustical Wall Treatment	AWT
Acoustical Wallcovering	AWF
Anodized Aluminum Colored	AAC
Anodized Aluminum Natural Finish	AA
Baked On Enamel	BE
Brick Face	BR
Brick Flooring	BF
Brick Paving	BP
Carpet	CP
Carpet Athletic Flooring	CAF
Carpet Module Tile	CPT
Ceramic Glazed Facing Brick	CGFB
Ceramic Mosaic Tile	FTCT
Concrete	C
Concrete Masonry Unit	CMU
Divider Strips Marble	DS MB
Epoxy Coating	EC
Epoxy Resin Flooring	ERF
Existing	E
Exposed Divider Strips	EXP
Exterior	EXT
Exterior Finish System	EFS
Exterior Paint	EXT-P
Exterior Stain	EXT-ST
Fabric Wallcovering	WF
Facing Tile	SCT
Feature Strips	FS
Floor Mats & Frames	FM
Floor Tile, Mosaic	FT

Fluorocarbon	FC
Folding Panel Partition	FP
Foot Grille	FG
Glass Masonry Unit	GUMU
Glazed Face CMU	GCMU
Glazed Structural Facing Tile	SFTU
Granite	GT
Gypsum Wallboard	GWB
High Glazed Coating	SC
Latex Mastic Flooring	LM
Linear Metal Ceiling	LMC
Linear Wood Ceiling	LWC
Marble	MB
Material	MAT
Mortar	M
Multi-Color Coating	MC
Natural Finish	NF
Paint	P
Paver Tile	PVT
Perforated Metal Facing (Tile or Panels)	PMF
Plaster	PL
Plaster High Strength	HSPL
Plaster Keene Cement	KC
Plastic Laminate	HPDL
Polypropylene Fabric Wallcovering	PFW
Porcelain Paver Tile	PPT
Quarry Tile	QT
Radiant Ceiling Panel System	RCP
Resilient Stair Tread	RST
Rubber Base	RB
Rubber Tile Flooring	RT
Spandrel Glass	SLG
Stain	ST
Stone Flooring	SF
Structural Clay	SC

Suspension Decorative Grids Grids	SDG
Terrazzo Portland Cement	PCT
Terrazzo Tile	TT
Terrazzo, Thin Set	
Textured Gypsum Ceiling Panel	TGC
Textured Metal Ceiling Panel	TMC
Thin set Terrazzo	TST

Veneer Plaster	VP
Vinyl Base	VB
Vinyl Coated Fabric Wallcovering	W
Vinyl Composition Tile	VCT
Vinyl Sheet Flooring	VSF
Vinyl Sheet Flooring (Welded Seams)	WSF
Wall Border	WB
Wood	WD

3.2 FINISH SCHEDULE SYMBOLS

Symbol Definition

** Same finish as adjoining walls
 - No color required
 E Existing
 XX To match existing
 EFTR Existing finish to remain
 RM Remove

--- E N D---

**SECTION 09 22 16
NON-STRUCTURAL METAL FRAMING**

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies steel studs wall systems, shaft wall systems, ceiling or soffit suspended or furred framing, wall furring, fasteners, and accessories for the screw attachment of gypsum board, plaster bases or other building boards.

1.2 RELATED WORK

- A. Load bearing framing: Section 05 40 00, COLD-FORMED METAL FRAMING.
- B. Support for wall mounted items: Section 05 50 00, METAL FABRICATIONS.
- C. Pull down tabs in steel decking: Section 05 36 00, COMPOSITE METAL DECKING.
- D. Ceiling suspension systems for acoustical tile or panels and lay in gypsum board panels: Section 09 51 00, ACOUSTICAL CEILINGS, Section 09 29 00, GYPSUM BOARD.
- E. Penetrations through fire rated construction: Section 07 84 00, FIRESTOPPING.
- F. Anchoring and Bracing: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- G. Insulation: Section 07 21 13, THERMAL INSULATION.

1.3 TERMINOLOGY

- A. Description of terms shall be in accordance with ASTM C754, ASTM C11, ASTM C841 and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by beams, trusses, or bar joists. In interstitial spaces with walk-on floors the underside of the walk-on floor is the underside of structure overhead.
- C. Thickness of steel specified is the minimum bare (uncoated) steel thickness.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Studs, runners and accessories.
 - 2. Hanger inserts.
 - 3. Channels (Rolled steel).
 - 4. Furring channels.

5. Screws, clips and other fasteners.

C. Shop Drawings:

1. Typical ceiling suspension system.
2. Typical metal stud and furring construction system including details around openings and corner details.
3. Typical shaft wall assembly
4. Typical fire rated assembly and column fireproofing showing details of construction same as that used in fire rating test.

D. Test Results: Fire rating test designation, each fire rating required for each assembly.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

In accordance with the requirements of ASTM C754.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society For Testing And Materials (ASTM)

A123-09.....Zinc (Hot-dip Galvanized) Coatings on Iron and Steel Products

A653/A653M-09.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot-Dip Process

A641-09.....Zinc-Coated (Galvanized) Carbon Steel Wire

C11-10.....Terminology Relating to Gypsum and Related Building Materials and Systems

C635-07.....Manufacture, Performance, and Testing of Metal Suspension System for Acoustical Tile and Lay-in Panel Ceilings

C636-06.....Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels

C645-09.....Non-Structural Steel Framing Members

C754-09.....Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products

C841-03(R2008).....Installation of Interior Lathing and Furring

C954-07.....Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness

C1002-07.....Steel Self-Piercing Tapping Screws for the
Application of Gypsum Panel Products or Metal
Plaster Bases to Wood Studs or Steel Studs
E580-09.....Application of Ceiling Suspension Systems for
Acoustical Tile and Lay-in Panels in Areas
Requiring Moderate Seismic Restraint.

PART 2 - PRODUCTS

2.1 PROTECTIVE COATING

Galvanize steel studs, runners (track), rigid (hat section) furring channels, "Z" shaped furring channels, and resilient furring channels, with coating designation of G-60 minimum, per ASTM 123.

2.2 STEEL STUDS AND RUNNERS (TRACK)

- A. ASTM C645, modified for thickness specified and sizes as shown.
 - 1. Use ASTM A525 steel, 0.8 mm (0.0329-inch) thick bare metal (33 mil).
 - 2. Runners same thickness as studs.
- B. Provide not less than two cutouts in web of each stud, approximately 300 mm (12 inches) from each end, and intermediate cutouts on approximately 600 mm (24-inch) centers.
- C. Doubled studs for openings and studs for supporting concrete backer-board.
- D. Studs 3600 mm (12 feet) or less in length shall be in one piece.
- E. Shaft Wall Framing:
 - 1. Conform to rated wall construction.
 - 2. C-H Studs.
 - 3. E Studs.
 - 4. J Runners.
 - 5. Steel Jamb-Strut.

2.3 FURRING CHANNELS

- A. Rigid furring channels (hat shape): ASTM C645.
- B. Resilient furring channels:
 - 1. Not less than 0.45 mm (0.0179-inch) thick bare metal.
 - 2. Semi-hat shape, only one flange for anchorage with channel web leg slotted on anchorage side, channel web leg on other side stiffens fastener surface but shall not contact anchorage surface other channel leg is attached to.
- C. "Z" Furring Channels:
 - 1. Not less than 0.45 mm (0.0179-inch)-thick bare metal, with 32 mm (1-1/4 inch) and 19 mm (3/4-inch) flanges.
 - 2. Web furring depth to suit thickness of insulation with slotted perforations.

- D. Rolled Steel Channels: ASTM C754, cold rolled; or, ASTM C841, cold rolled.

2.4 FASTENERS, CLIPS, AND OTHER METAL ACCESSORIES

- A. ASTM C754, except as otherwise specified.
- B. For fire rated construction: Type and size same as used in fire rating test.
- C. Fasteners for steel studs thicker than 0.84 mm (0.033-inch) thick. Use ASTM C954 steel drill screws of size and type recommended by the manufacturer of the material being fastened.
- D. Clips: ASTM C841 (paragraph 6.11), manufacturer's standard items. Clips used in lieu of tie wire shall have holding power equivalent to that provided by the tie wire for the specific application.
- E. Concrete ceiling hanger inserts (anchorage for hanger wire and hanger straps): Steel, zinc-coated (galvanized), manufacturers standard items, designed to support twice the hanger loads imposed and the type of hanger used.
- F. Tie Wire and Hanger Wire:
 - 1. ASTM A641, soft temper, Class 1 coating.
 - 2. Gage (diameter) as specified in ASTM C754 or ASTM C841.
- G. Attachments for Wall Furring:
 - 1. Manufacturers standard items fabricated from zinc-coated (galvanized) steel sheet.
 - 2. For concrete or masonry walls: Metal slots with adjustable inserts or adjustable wall furring brackets. Spacers may be fabricated from 1 mm (0.0396-inch) thick galvanized steel with corrugated edges.
- H. Power Actuated Fasteners: Type and size as recommended by the manufacturer of the material being fastened.

2.5 SUSPENDED CEILING SYSTEM FOR GYPSUM BOARD (OPTION)

- A. Conform to ASTM C635, heavy duty, with not less than 35 mm (1-3/8 inch) wide knurled capped flange face designed for screw attachment of gypsum board.
- B. Wall track channel with 35 mm (1-3/8 inch) wide flange.

PART 3 - EXECUTION

3.1 INSTALLATION CRITERIA

- A. Where fire rated construction is required for walls, partitions, columns, beams and floor-ceiling assemblies, the construction shall be same as that used in fire rating test.
- B. Construction requirements for fire rated assemblies and materials shall be as shown and specified, the provisions of the Scope paragraph (1.2)

of ASTM C754 and ASTM C841 regarding details of construction shall not apply.

3.2 INSTALLING STUDS

- A. Install studs in accordance with ASTM C754, except as otherwise shown or specified.
- B. Space studs not more than 610 mm (24 inches) on center.
- C. Cut studs 6 mm to 9 mm (1/4 to 3/8-inch) less than floor to underside of structure overhead when extended to underside of structure overhead.
- D. Where studs are shown to terminate above suspended ceilings, provide bracing as shown or extend studs to underside of structure overhead.
- E. Extend studs to underside of structure overhead for fire, rated partitions, smoke partitions, shafts, sound rated partitions and insulated exterior wall furring.
- F. At stainless steel modular partitions and cover panels, studs may terminate at ceiling. When not supported by equipment, suspend and/or brace partitions / cover panels with trapeze bars.
- G. Openings:
 - 1. Frame jambs of openings in stud partitions and furring with two studs placed back to back.
 - 2. Fasten back to back studs together with 9 mm (3/8-inch) long Type S pan head screws at not less than 600 mm (two feet) on center, staggered along webs.
 - 3. Studs fastened flange to flange shall have splice plates on both sides approximately 50 X 75 mm (2 by 3 inches) screwed to each stud with two screws in each stud. Locate splice plates at 600 mm (24 inches) on center between runner tracks.
- H. Fastening Studs:
 - 1. Fasten studs located adjacent to partition intersections, corners and studs at jambs of openings to flange of runner tracks with two screws through each end of each stud and flange of runner.
 - 2. Do not fasten studs to top runner track when studs extend to underside of structure overhead.
- I. Chase Wall Partitions:
 - 1. Locate cross braces for chase wall partitions to permit the installation of pipes, conduits, carriers and similar items.
 - 2. Use studs or runners as cross bracing not less than 63 mm (2-1/2 inches wide).
- J. Form building seismic or expansion joints with double studs back to back spaced 75 mm (three inches) apart plus the width of the seismic or expansion joint.

K. Form control joint, with double studs spaced 13 mm (1/2-inch) apart.

3.3 INSTALLING WALL FURRING FOR FINISH APPLIED TO ONE SIDE ONLY

- A. In accordance with ASTM C754, or ASTM C841 except as otherwise specified or shown.
- B. Wall furring-Stud System:
 - 1. Framed with 63 mm (2-1/2 inch) studs, 600 mm (24 inches) on center.
 - 2. Brace as specified in ASTM C754 for Wall Furring-Stud System or brace with sections or runners or studs placed horizontally at not less than three foot vertical intervals on side without finish.
 - 3. Securely fasten braces to each stud with two Type S pan head screws at each bearing.
- C. Direct attachment to masonry or concrete; rigid channels or "Z" channels:
 - 1. Install rigid (hat section) furring channels at 600 mm (24 inches) on center, horizontally or vertically.
 - 2. Install "Z" furring channels vertically spaced not more than 600 mm (24 inches) on center.
 - 3. At corners where rigid furring channels are positioned horizontally, provide mitered joints in furring channels.
 - 4. Ends of spliced furring channels shall be nested not less than 200 mm (8 inches).
 - 5. Fasten furring channels to walls with power-actuated drive pins or hardened steel concrete nails. Where channels are spliced, provide two fasteners in each flange.
 - 6. Locate furring channels at interior and exterior corners in accordance with wall finish material manufacturers printed erection instructions. Locate "Z" channels within 100 mm (4 inches) of corner.
- D. Installing Wall Furring-Bracket System: Space furring channels not more than 400 mm (16 inches) on center.

3.4 INSTALLING SUPPORTS REQUIRED BY OTHER TRADES

- A. Provide for attachment and support of electrical outlets, plumbing, recessed type plumbing fixture accessories, access panel frames, wall bumpers, wall-hung casework, handrail brackets, recessed fire extinguisher cabinets and other items like auto door buttons and auto door operators supported by stud construction.
- B. Provide additional studs where required. Install metal backing plates, or special metal shapes as required, securely fastened to metal studs.

3.5 INSTALLING SHAFT WALL SYSTEM

- A. Conform to UL Design No. U438 for two-hour fire rating.

- B. Position J runners at floor and ceiling with the short leg toward finish side of wall. Securely attach runners to structural supports with power driven fasteners at both ends and 600 mm (24 inches) on center.
- C. After liner panels have been erected, cut C-H studs and E studs, from 9 mm (3/8-inch) to not more than 13 mm (1/2-inch) less than floor-to-ceiling height. Install C-H studs between liner panels with liner panels inserted in the groove.
- D. Install full-length steel E studs over shaft wall line at intersections, corners, hinged door jambs, columns, and both sides of closure panels.
- E. Suitably frame all openings to maintain structural support for wall:
 - 1. Provide necessary liner fillers and shims to conform to label frame requirements.
 - 2. Frame openings cut within a liner panel with E studs around perimeter.
 - 3. Frame openings with vertical E studs at jambs, horizontal J runner at head and sill.

3.6 INSTALLING FURRED AND SUSPENDED CEILINGS OR SOFFITS

- A. Install furred and suspended ceilings or soffits in accordance with ASTM C754 or ASTM C841 except as otherwise specified or shown for screw attached gypsum board ceilings and for plaster ceilings or soffits.
 - 1. Space framing at 400 mm (16-inch) centers for metal lath anchorage.
 - 2. Space framing at 600 mm (24-inch) centers for gypsum board anchorage.
- B. Concrete slabs on steel decking composite construction:
 - 1. Use pull down tabs when available.
 - 2. Use power activated fasteners when direct attachment to structural framing can not be accomplished.
- C. Where bar joists or beams are more than 1200 mm (48 inches) apart, provide intermediate hangers so that spacing between supports does not exceed 1200 mm (48 inches). Use clips, bolts, or wire ties for direct attachment to steel framing.
- D. Existing concrete construction exposed or concrete on steel decking:
 - 1. Use power actuated fasteners either eye pin, threaded studs or drive pins for type of hanger attachment required.
 - 2. Install fasteners at approximate mid height of concrete beams or joists. Do not install in bottom of beams or joists.
- E. Steel decking without concrete topping:
 - 1. Do not fasten to steel decking 0.76 mm (0.0299-inch) or thinner.
 - 2. Toggle bolt to decking 0.9 mm (0.0359-inch) or thicker only where anchorage to steel framing is not possible.
- F. Installing suspended ceiling system for gypsum board (ASTM C635 Option):

1. Install only for ceilings to receive screw attached gypsum board.
2. Install in accordance with ASTM C636.
 - a. Install main runners spaced 1200 mm (48 inches) on center.
 - b. Install 1200 mm (four foot) tees not over 600 mm (24 inches) on center; locate for edge support of gypsum board.
 - c. Install wall track channel at perimeter.

G. Installing Ceiling Bracing System:

1. Construct bracing of 38 mm (1-1/2 inch) channels for lengths up to 2400 mm (8 feet) and 50 mm (2 inch) channels for lengths over 2400 mm (8 feet) with ends bent to form surfaces for anchorage to carrying channels and over head construction. Lap channels not less than 600 mm (2 feet) at midpoint back to back. Screw or bolt lap together with two fasteners.
2. Install bracing at an approximate 45 degree angle to carrying channels and structure overhead; secure as specified to structure overhead with two fasteners and to carrying channels with two fasteners or wire ties.
3. Brace suspended ceiling or soffit framing in seismic areas in accordance with ASTM E580.

3.7 TOLERANCES

- A. Fastening surface for application of subsequent materials shall not vary more than 3 mm (1/8-inch) from the layout line.
- B. Plumb and align vertical members within 3 mm (1/8-inch.)
- C. Level or align ceilings within 3 mm (1/8-inch.)

- - - E N D - - -

**SECTION 09 24 00
PORTLAND CEMENT PLASTERING**

PART 1 GENERAL**1.1 DESCRIPTION**

This section specifies lathing and Portland cement based plaster (stucco).

1.2 RELATED WORK

- A. Steel framing members for attachment of plaster bases: Section 05 40 00, COLD-FORMED METAL FRAMING, and Section 09 22 16, NON-STRUCTURAL METAL FRAMING.
- B. Room finish schedule and color: Section 09 06 00, SCHEDULE FOR FINISHES.

1.3 TERMINOLOGY

- A. Definitions and description of terms shall be in accordance with ASTM C11, C841, and C926 and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by beams, trusses, and bar joists.
- C. Self-furring Lath: Metal plastering bases having dimples or crimps designed to hold the plane of the back of the lath 6 to 10 mm (1/4 to 3/8 inch) away from the plane of the solid backing.
- D. Solid Backing or Solid Bases: Concrete, masonry, sheathing, rigid insulation, and similar materials to which plaster is directly applied.
- E. Wet Areas: Areas of a building where cyclic or continuous exposure to very humid or wet conditions, or in which a dew point condition may occur in the plaster. Dew point conditions occur frequently in such areas as laundries, natatoriums, cart and dish washing spaces, hydrotherapy, kitchens, bathing or shower rooms and similar areas.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Accessories for plaster, each type.
 - 2. Metal plastering bases, each type.
 - 3. Fasteners.
 - 4. Bonding compounds, including application instructions.
 - 5. Admixtures, including mixing and application instructions.
- C. Samples:

Accessories for plaster, each type, not less than 150 mm (6 inches) long.

Panel showing finish coat 600 by 600 mm (24 x 24 inches).

1.5 PROJECT CONDITIONS

- A. Maintain work areas for interior work at a temperature of not less than 4°C (40°F) for not less than 48 hours prior to application of plaster, during application of plaster and until plaster is completely dry.
- B. Exterior plaster shall not be applied when the ambient temperature is less than 4°C (40°F).
- C. Plaster shall not be applied to frozen surfaces or surfaces containing frost.
- D. Frozen materials shall not be used in the mix.
- E. Plaster coats shall be protected against freezing for a period of not less than 24 hours after application.

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. American Society for Testing And Materials (ASTM):
 - A653/A653M-10.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
 - A641-09.....Zinc-Coated (Galvanized) Carbon Steel Wire
 - C11-10.....Terminology Relating to Gypsum and Related Building Materials and Systems.
 - C91-05.....Masonry Cement
 - C150-09.....Portland Cement
 - C207-06.....Hydrated Lime for Masonry Purposes
 - C260-10.....Air Entraining Admixtures for Concrete.
 - C841-08.....Installation of Interior Lathing and Furring
 - C847-10.....Metal Lath
 - C897-05(R2009).....Aggregate for Job-Mixed Portland Cement Based Plasters
 - C926-06.....Application of Portland Cement-Based Plaster
 - C933-09.....Welded Wire Lath
 - C979-10.....Pigments for Integrally Colored Concrete
 - C1002-07.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs

C. Commercial Item Description (CID):

A-A-55615.....Shield, Expansion (Wood Screw and Lag Bolt Self-Threading Anchors)

D. Federal Specifications (Fed Spec.):

UU-B-790A.....Building Paper, Vegetable Fiber (Kraft, Waterproofed, Water Repellent and Fire Resistant)

PART 2 - PRODUCTS**2.1 METAL PLASTERING BASES**

A. Expanded Metal Lath:

1. ASTM C847, zinc-coated (galvanized) except as modified by ASTM C841 and this specification. Self furring where applied over solid backing.
2. Stucco Mesh: Flat expanded diamond mesh pattern, with openings approximately 38 by 75 mm (1-1/2 by 3 inches), weighing not less than 1.9 kg/ m² (3.6 pounds per square yard), with backing as specified.

B. Wire Lath:

1. Zinc coated (Galvanized).
2. Welded Wire Lath: ASTM C933, with backing as specified.
3. Self furring where applied over solid backing.

C. Building Paper Backing for Metal Plastering Bases:

1. Backing attached to lath as specified in ASTM C933.
2. Vapor Permeable Backing: Fed. Spec. UU-B-790, Type I, Grade D.
3. Water Resistant Backing: Fed. Spec. UU-B-790, Type I, Grade B.

2.2 ACCESSORIES FOR CEMENT PLASTER (STUCCO)

- A. ASTM C841, except fabricate from zinc alloy.
- B. Control Joints: ASTM C841, zinc.

2.3 FASTENERS

- A. Tie, wire, screws, clips, and other fasteners ASTM C841, except as otherwise specified.
- B. Fasteners for securing metal plastering bases shall have heads, or be through washers large enough to engage two strands of the metal plastering base.
- C. For fire rated construction; type and size as used in fire rated test.
- D. Screws: ASTM C1002.
- E. Expansion Shields: CID A-A-55615, of the Type and Class applicable.

2.4 CEMENT

- A. Portland: ASTM C150, Type I.
- B. Masonry: ASTM C91. Lime where added, ASTM C207, Type S.
- C. White where required for white finish coat.

2.5 LIME

- A. ASTM C206, Type S.
- B. ASTM C207, Type S.

2.6 AGGREGATES (SAND)

- A. ASTM C897, graded as required to suit texture of finish specified.
- B. White where white finish coat is specified.

2.7 BONDING AGENT

ASTM C932.

2.8 FACTORY PREPARED FINISH COAT FOR CEMENT PLASTER (STUCCO)

- A. Factory prepared dry blend of materials, integrally colored, designed for exterior finish coat application.
- B. Pigments: ASTM C979, lime proof mineral oxide.
- C. Not more than 35 percent, by weight of all ingredients (cement, aggregate, hydrated lime, admixture and coloring pigment) shall pass a number 100 sieve.

2.9 ADMIXTURES

Air Entrainment: ASTM C260.

PART 3 - EXECUTION**3.1 METAL PLASTERING BASES (LATH) LOCATIONS**

- A. Where plaster is required on solid concrete or masonry bases, use wire lath or stucco mesh.
- B. On ceiling or soffit framing use flat diamond mesh lath.
- C. On interior wall framing:
 - 1. Use flat diamond mesh lath.
 - 2. Use lath with water resistant backing in wet areas.
- D. Over steel columns, use self-furring flat diamond mesh lath.
- E. Where metal plastering bases are used as a base for exterior cement plaster over wall sheathing, use wire lath or stucco mesh with water resistant backing.

3.2 APPLYING METAL PLASTERING BASES

- A. In accordance with ASTM C841, except as otherwise specified or shown.
- B. Form true surfaces, straight or in fair curves where shown, without sags or buckles and with long dimension of lath at right angles to direction of supports.
- C. Lath for ceiling or soffit construction shall terminate at casing bead (floating angle construction) at perimeter angles between walls and ceilings or soffits.

- D. Lath with backing shall be applied to produce a paper to paper and metal to metal lap at ends and sides of adjacent sheets, whether full sheets or less than full sheets are used:
 - 1. Backing shall be lapped 50 mm (2 inches) for both horizontal and vertical laps.
 - 2. Horizontal laps shall be ship lap fashion to conduct water to the outside and over flashing or waterproofing.
- E. Metal plastering bases shall not be continuous through expansion and control joints, but shall be stopped at each side.
- F. Attach metal lath directly to masonry and concrete with hardened nails, power actuated drive pins or other approved fasteners. Fasteners shall be located at the dimples or crimps only.
- G. Wood plugs are not acceptable.

3.3 INSTALLING PLASTERING ACCESSORIES

- A. Install accessories in accordance with ASTM C841, except as otherwise specified.
 - 1. Set plastering accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces as specified for metal lath.
 - 2. Install in one piece, within the limits of the longest commercially available lengths.
- B. Corner Beads: Install at all vertical and horizontal external plaster corners, as required to establish grounds, and where shown.
- C. Strip Lath:
 - 1. Install metal lath strips centered over joints between dissimilar materials, such as hollow tile, brick, concrete masonry units, concrete, and joints with metal lath on framing or furring, where both such surfaces are required to be plastered and are in contact with each other in same plane, except where expansion joints and casing beads are required.
 - 2. Wire tie or fasten strip lath to base along both edges at not over 150 mm (six inches) on centers.
- D. Casing Beads:
 - 1. Install casing beads where shown and at following locations where plaster terminates to provide finish trim.
 - 2. Where plaster terminates against non-plastered surfaces such as masonry, concrete, and wood.
 - 3. Where plaster terminates against trim of steel frames and trim of other materials and equipment, except where trim overlaps plaster.

4. Around perimeter of openings except where edge is covered by flanges. Locate to conform to dimensions shown on shop drawings.
5. Where plaster for new walls or furring (vertical or horizontal) terminates against existing construction.
6. Both sides of expansion and control joints unless shown otherwise.
7. Install casing bead at perimeter angles between walls and ceilings so as to provide floating angle (unrestrained) construction in accordance with ASTM C841.

E. Cornerites:

1. Install at interior corners of walls, partitions, and other vertical surfaces to be plastered, except where metal lath is carried around angle.
2. Fasten only as necessary to retain position during plastering.
3. Omit cornerites at junction of new plastered walls with existing plastered walls at locations where casing beads are specified.

F. Control Joints:

1. Where control joints are placed parallel to framing members, install joints within 100 mm (four inches) of the framing member.
2. Install control joints only to the edges of abutting sheets of lath so that the lath is not continuous or tied across the joint.
3. Joints shall extend the full width and height of the wall or length of soffit/ceiling plaster membrane.

3.4 SURFACE PREPARATION OF SOLID BASES

- A. Surfaces that are to receive plaster shall be prepared and conditioned in accordance with ASTM C926, except as otherwise specified.

B. New surfaces of masonry and concrete:

1. Remove projections and clean concrete surface of form oil.
2. Fill depressions, holes, cracks and similar voids flush with Portland cement plaster to provide substrate within the tolerance specified in ASTM C926.
3. Use bonding agent.
4. Cover with self furring lath where required to keep the total plaster thickness as specified in Table 4 of ASTM C926.

C. Existing surfaces of concrete and masonry:

1. Clean surface of dirt and other foreign matter which will prevent bond.
2. Apply dash bond coat or bonding agent as specified herein.
3. Where existing surfaces have a coating such as paint or bituminous waterproofing apply metal plastering base as specified herein.

3.5 PORTLAND CEMENT BASED PLASTER

- A. Provide portland cement based plaster where cement plaster (stucco) is shown and specified, and as follows:
 - 1. Three coat work shall be used over all metal plastering bases, with or without solid backing.
 - 2. Two coat work may only be used over solid bases meeting the requirements of Paragraph, SURFACE PREPARATION OF SOLID BASES.
- B. Proportion, mix and apply plaster in accordance with ASTM C926, except as otherwise specified.
 - 1. Use air entrained plaster for all exterior work.
 - 2. Use coloring pigments for finish coat when integral color other than white is specified.
 - 3. Use white cement with white sand when white finish coat is specified.
 - 4. Factory prepared finish coat: Add water, mix, and apply as specified by manufacturer.
 - 5. Color:
 - a. Color of finish coat shall be natural cement color when painted or other coating is specified.
 - b. Color of painted cement plaster shall match existing color.
 - 6. Finish coat shall match existing adjacent cement plaster.

- - - E N D - - -

**SECTION 09 29 00
GYPSUM BOARD**

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies installation and finishing of gypsum board.

1.2 RELATED WORK

- A. Installation of steel framing members for walls, partitions, furring, soffits, and ceilings: Section 05 40 00, COLD-FORMED METAL FRAMING, and Section 09 22 16, NON-STRUCTURAL METAL FRAMING.
- B. Sound deadening board: Section 07 21 13, THERMAL INSULATION.
- C. Acoustical Sealants: Section 07 92 00, JOINT SEALANTS.
- D. Lay in gypsum board ceiling panels: Section 09 51 00, ACOUSTICAL CEILING.
- E. Penetrations through fire rated construction: section 07 84 00, FIRESTOPPING.
- F. Framing and bracing ceiling suspension system: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.3 TERMINOLOGY

- A. Definitions and description of terms shall be in accordance with ASTM C11, C840, and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by the trusses or bar joists.
- C. "Yoked": Gypsum board cut out for opening with no joint at the opening (along door jamb or above the door).

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Cornerbead and edge trim.
 - 2. Finishing materials.
 - 3. Laminating adhesive.
 - 4. Gypsum board, each type.
- C. Shop Drawings:
 - 1. Typical gypsum board installation, showing corner details, edge trim details and the like.
 - 2. Typical sound rated assembly, showing treatment at perimeter of partitions and penetrations at gypsum board.

3. Typical shaft wall assembly.
4. Typical fire rated assembly and column fireproofing, indicating details of construction same as that used in fire rating test.

D. Samples:

1. Cornerbead.
2. Edge trim.
3. Control joints.

E. Test Results:

1. Fire rating test, each fire rating required for each assembly.
2. Sound rating test.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

In accordance with the requirements of ASTM C840.

1.6 ENVIRONMENTAL CONDITIONS

In accordance with the requirements of ASTM C840.

1.7 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing And Materials (ASTM):

- C11-08.....Terminology Relating to Gypsum and Related Building Materials and Systems
- C475-02.....Joint Compound and Joint Tape for Finishing Gypsum Board
- C840-08.....Application and Finishing of Gypsum Board
- C919-08.....Sealants in Acoustical Applications
- C954-07.....Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Stud from 0.033 in. (0.84mm) to 0.112 in. (2.84mm) in thickness
- C1002-07.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs
- C1047-05.....Accessories for Gypsum Wallboard and Gypsum Veneer Base
- C1177-06.....Glass Mat Gypsum Substrate for Use as Sheathing
- C1658-06.....Glass Mat Gypsum Panels
- C1396-06.....Gypsum Board
- E84-08.....Surface Burning Characteristics of Building Materials

- C. Underwriters Laboratories Inc. (UL):
Latest Edition.....Fire Resistance Directory
- D. Inchcape Testing Services (ITS):
Latest Editions.....Certification Listings

PART 2 - PRODUCTS

2.1 GYPSUM BOARD

- A. Gypsum Board: ASTM C1396, Type X, 16 mm (5/8 inch) thick unless shown otherwise. Shall contain a minimum of 20 percent recycled gypsum.
- B. Coreboard or Shaft Wall Liner Panels.
 - 1. ASTM C1396, Type X.
 - 2. ASTM C1658: Glass Mat Gypsum Panels,
 - 3. Coreboard for shaft walls 300, 400, 600 mm (12, 16, or 24 inches) wide by required lengths 25 mm (one inch) thick with paper faces treated to resist moisture.
- C. Water Resistant Gypsum Backing Board: ASTM C620, Type X, 16 mm (5/8 inch) thick.
- D. Gypsum cores shall contain a minimum of 95 percent post industrial recycled gypsum content. Paper facings shall contain 100 percent post-consumer recycled paper content.

2.2 GYPSUM SHEATHING BOARD

- A. ASTM C1396, Type X, water-resistant core, 16 mm (5/8 inch) thick.

2.3 ACCESSORIES

- A. ASTM C1047, except form of 0.39 mm (0.015 inch) thick zinc coated steel sheet or rigid PVC plastic.
- B. Flanges not less than 22 mm (7/8 inch) wide with punchouts or deformations as required to provide compound bond.

2.4 FASTENERS

- A. ASTM C1002 and ASTM C840, except as otherwise specified.
- B. ASTM C954, for steel studs thicker than 0.04 mm (0.33 inch).
- C. Select screws of size and type recommended by the manufacturer of the material being fastened.
- D. For fire rated construction, type and size same as used in fire rating test.
- E. Clips: Zinc-coated (galvanized) steel; gypsum board manufacturer's standard items.

2.5 FINISHING MATERIALS AND LAMINATING ADHESIVE

ASTM C475 and ASTM C840. Free of antifreeze, vinyl adhesives, preservatives, biocides and other VOC. Adhesive shall contain a maximum VOC content of 50 g/l.

PART 3 - EXECUTION**3.1 GYPSUM BOARD HEIGHTS**

- A. Extend all layers of gypsum board from floor to underside of structure overhead on following partitions and furring:
 - 1. Two sides of partitions:
 - a. Fire rated partitions.
 - b. Smoke partitions.
 - c. Sound rated partitions.
 - d. Full height partitions shown (FHP).
 - 2. One side of partitions or furring:
 - a. Inside of exterior wall furring or stud construction.
 - b. Room side of room without suspended ceilings.
 - c. Furring for pipes and duct shafts, except where fire rated shaft wall construction is shown.
 - 3. Extend all layers of gypsum board construction used for fireproofing of columns from floor to underside of structure overhead, unless shown otherwise.
- B. In locations other than those specified, extend gypsum board from floor to heights as follows:
 - 1. Not less than 100 mm (4 inches) above suspended acoustical ceilings.
 - 2. At ceiling of suspended gypsum board ceilings.
 - 3. At existing ceilings.

3.2 INSTALLING GYPSUM BOARD

- A. Coordinate installation of gypsum board with other trades and related work.
- B. Install gypsum board in accordance with ASTM C840, except as otherwise specified.
- C. Moisture and Mold-Resistant Assemblies: Provide and install moisture and mold-resistant glass mat gypsum wallboard products with moisture-resistant surfaces complying with ASTM C1658 where shown and in locations which might be subject to moisture exposure during construction.
- D. Use gypsum boards in maximum practical lengths to minimize number of end joints.
- E. Bring gypsum board into contact, but do not force into place.
- F. Ceilings:
 - 1. For single-ply construction, use perpendicular application.
 - 2. For two-ply assemblies:
 - a. Use perpendicular application.

- b. Apply face ply of gypsum board so that joints of face ply do not occur at joints of base ply with joints over framing members.
- G. Walls (Except Shaft Walls):
- 1. When gypsum board is installed parallel to framing members, space fasteners 300 mm (12 inches) on center in field of the board, and 200 mm (8 inches) on center along edges.
 - 2. When gypsum board is installed perpendicular to framing members, space fasteners 300 mm (12 inches) on center in field and along edges.
 - 3. Stagger screws on abutting edges or ends.
 - 4. For single-ply construction, apply gypsum board with long dimension either parallel or perpendicular to framing members as required to minimize number of joints except gypsum board shall be applied vertically over "Z" furring channels.
 - 5. For two-ply gypsum board assemblies, apply base ply of gypsum board to assure minimum number of joints in face layer. Apply face ply of wallboard to base ply so that joints of face ply do not occur at joints of base ply with joints over framing members.
 - 6. For three-ply gypsum board assemblies, apply plies in same manner as for two-ply assemblies, except that heads of fasteners need only be driven flush with surface for first and second plies. Apply third ply of wallboard in same manner as second ply of two-ply assembly, except use fasteners of sufficient length enough to have the same penetration into framing members as required for two-ply assemblies.
 - 7. No offset in exposed face of walls and partitions will be permitted because of single-ply and two-ply or three-ply application requirements.
 - 8. Installing Two Layer Assembly Over Sound Deadening Board:
 - a. Apply face layer of wallboard vertically with joints staggered from joints in sound deadening board over framing members.
 - b. Fasten face layer with screw, of sufficient length to secure to framing, spaced 300 mm (12 inches) on center around perimeter, and 400 mm (16 inches) on center in the field.
 - 9. Control Joints ASTM C840 and as follows:
 - a. Locate at both side jambs of openings if gypsum board is not "yoked". Use one system throughout.
 - b. Not required for wall lengths less than 9000 mm (30 feet).
 - c. Extend control joints the full height of the wall or length of soffit/ceiling membrane.
- H. Acoustical or Sound Rated Partitions, Fire and Smoke Partitions:

1. Cut gypsum board for a space approximately 3 mm to 6 mm (1/8 to 1/4 inch) wide around partition perimeter.
 2. Coordinate for application of caulking or sealants to space prior to taping and finishing.
 3. For sound rated partitions, use sealing compound (ASTM C919) to fill the annular spaces between all receptacle boxes and the partition finish material through which the boxes protrude to seal all holes and/or openings on the back and sides of the boxes. STC minimum values as shown.
- I. Electrical and Telecommunications Boxes:
1. Seal annular spaces between electrical and telecommunications receptacle boxes and gypsum board partitions.
- J. Accessories:
1. Set accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces as specified.
 2. Install in one piece, without the limits of the longest commercially available lengths.
 3. Corner Beads:
 - a. Install at all vertical and horizontal external corners and where shown.
 - b. Use screws only. Do not use crimping tool.
 4. Edge Trim (casings Beads):
 - a. At both sides of expansion and control joints unless shown otherwise.
 - b. Where gypsum board terminates against dissimilar materials and at perimeter of openings, except where covered by flanges, casings or permanently built-in equipment.
 - c. Where gypsum board surfaces of non-load bearing assemblies abut load bearing members.

3.3 INSTALLING GYPSUM SHEATHING

- A. Install in accordance with ASTM C840, except as otherwise specified or shown.
- B. Use screws of sufficient length to secure sheathing to framing.
- C. Space screws 9 mm (3/8 inch) from ends and edges of sheathing and 200 mm (8 inches) on center. Space screws a maximum of 200 mm (8 inches) on center on intermediate framing members.
- D. Apply 600 mm by 2400 mm (2 foot by 8 foot) sheathing boards horizontally with tongue edge up.

- E. Apply 1200 mm by 2400 mm or 2700 mm (4 ft. by 8 ft. or 9 foot) gypsum sheathing boards vertically with edges over framing.

3.4 CAVITY SHAFT WALL

- A. Coordinate assembly with Section 09 22 16, NON-STRUCTURAL METAL FRAMING, for erection of framing and gypsum board.
- B. Conform to UL Design No. U438 or FM WALL CONSTRUCTION 12-2/HR (Nonbearing for two-hour fire rating).
- C. Cut coreboard (liner) panels 25 mm (one inch) less than floor-to-ceiling height, and erect vertically between J-runners on shaft side.
 - 1. Where shaft walls exceed 4300 mm (14 feet) in height, position panel end joints within upper and lower third points of wall.
 - 2. Stagger joints top and bottom in adjacent panels.
 - 3. After erection of J-struts of opening frames, fasten panels to J-struts with screws of sufficient length to secure to framing staggered from those in base, spaced 300 mm (12 inches) on center.
- D. Gypsum Board:
 - 1. Two hour wall:
 - a. Erect base layer (backing board) vertically on finish side of wall with end joints staggered. Fasten base layer panels to studs with 25 mm (one inch) long screws, spaced 600 mm (24 inches) on center.
 - b. Use laminating adhesive between plies in accordance with UL or FM if required by fire test.
 - c. Apply face layer of gypsum board required by fire test vertically over base layer with joints staggered and attach with screws of sufficient length to secure to framing staggered from those in base, spaced 300 mm (12 inches) on center.
 - 2. Where coreboard is covered with face layer of gypsum board, stagger joints of face layer from those in the coreboard base.
- E. Treat joints, corners, and fasteners in face layer as specified for finishing of gypsum board.

3.5 FINISHING OF GYPSUM BOARD

- A. Finish joints, edges, corners, and fastener heads in accordance with ASTM C840. Use Level 5 finish for all finished areas open to public view.
- B. Before proceeding with installation of finishing materials, assure the following:
 - 1. Gypsum board is fastened and held close to framing or furring.
 - 2. Fastening heads in gypsum board are slightly below surface in dimple formed by driving tool.
- C. Finish joints, fasteners, and all openings, including openings around penetrations, on that part of the gypsum board extending above suspended

ceilings to seal surface of non decorated smoke barrier, fire rated and sound rated gypsum board construction. After the installation of hanger rods, hanger wires, supports, equipment, conduits, piping and similar work, seal remaining openings and maintain the integrity of the smoke barrier, fire rated and sound rated construction. Sanding is not required of non decorated surfaces.

3.6 REPAIRS

- A. After taping and finishing has been completed, and before decoration, repair all damaged and defective work, including nondecorated surfaces.
- B. Patch holes or openings 13 mm (1/2 inch) or less in diameter, or equivalent size, with a setting type finishing compound or patching plaster.
- C. Repair holes or openings over 13 mm (1/2 inch) diameter, or equivalent size, with 16 mm (5/8 inch) thick gypsum board secured in such a manner as to provide solid substrate equivalent to undamaged surface.
- D. Tape and refinish scratched, abraded or damaged finish surfaces including cracks and joints in non decorated surface to provide smoke tight construction, fire protection equivalent to the fire rated construction, and STC equivalent to the sound rated construction.

- - - E N D - - -

**SECTION 09 30 13
CERAMIC/PORCELAIN TILING**

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies ceramic, and porcelain tile, marble thresholds and terrazzo divider strips, waterproofing membranes for thin-set applications, crack isolation membranes, and tile backer board.

1.2 RELATED WORK

- A. Sealing of joints where specified: Section 07 92 00, JOINT SEALANTS.
- B. Color, texture and pattern of field tile and trim shapes, size of field tile, trim shapes, and color of grout specified: Section 09 06 00, SCHEDULE FOR FINISHES.
- C. Metal and resilient edge strips at joints with new resilient or RES flooring,: Section 09 65 19, RESILIENT TILE FLOORING, and Section 09 67 23.60, RESINOUS (URETHANE AND EPOXY) FLOORING (RES-6).

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
 - 1. Base tile, each type, each color, each size.
 - 2. Mosaic floor tile panels, 225 mm by 225 mm (9 inches by 9 inches), each type, color, size and pattern.
 - 3. Porcelain tile, each type, color, patterns and size.
 - 4. Wall (or wainscot) tile, each color, size and pattern.
 - 5. Trim shapes, bullnose cap and cove including bullnose cap and base pieces at internal and external corners of vertical surfaces, each type, color, and size.
- C. Product Data:
 - 1. Ceramic and porcelain tile, marked to show each type, size, and shape required.
 - 2. Chemical resistant grout (Epoxy).
 - 3. Cementitious backer unit.
 - 4. Divider strip.
 - 5. Reinforcing tape.
 - 6. Leveling compound.
 - 7. Latex-Portland cement mortar.
 - 8. Organic adhesive.
 - 9. Slip resistant tile.
 - 10. Waterproofing isolation membrane.

11. Fasteners.

D. Certification:

1. Master grade, ANSI A137.1.
2. Manufacturer's certificates indicating that the following materials comply with specification requirements:
 - a. Chemical resistant grout (epoxy).
 - b. Modified epoxy emulsion.
 - c. Cementitious backer unit.
 - d. Reinforcing tape.
 - e. Latex-Portland cement mortar.
 - f. Leveling compound.
 - g. Organic adhesive.
 - h. Waterproof isolation membrane.
 - i. Factory mounted tile suitability for application in wet area specified under 2.1, A, 3 with list of successful in-service performance locations.

1.4 DELIVERY AND STORAGE

- A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.
- B. Store material to prevent damage or contamination.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):
 - A10.20-05.....Safety Requirements for Ceramic Tile, Terrazzo, and Marble Works
 - A108.1A-05.....Installation of Ceramic Tile in the Wet-Set Method with Portland Cement Mortar
 - A108.1B-05.....Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with dry-Set or latex-Portland Cement Mortar
 - A108.1C-05.....Contractors Option; Installation of Ceramic Tile in the Wet-Set method with Portland Cement Mortar or Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with Dry-Set or Latex-Portland Cement Mortar
 - A108.4-05.....Installation of Ceramic Tile with Organic Adhesives or Water Cleanable Tile Setting Epoxy Adhesives

- A108.5-05.....Installation of Ceramic Tile with Dry-Set
Portland Cement Mortar or Latex-Portland Cement
Mortar
- A108.6-05.....Installation of Ceramic Tile with Chemical
Resistant, Water Cleanable Tile-Setting and
Grouting Epoxy
- A108.8-05.....Installation of Ceramic Tile with Chemical
Resistant Furan Resin Mortar and Grout
- A108.10-05.....Installation of Grout in Tilework
- A108.11-05.....Interior Installation of Cementitious Backer
Units
- A108.13-05.....Installation of Load Bearing, Bonded, Waterproof
Membranes for Thin-Set Ceramic Tile and
Dimension Stone
- A118.1-05.....Dry-Set Portland Cement Mortar
- A118.3-05.....Chemical Resistant, Water Cleanable Tile-Setting
Epoxy and Water Cleanable Tile-Setting and
Grouting Epoxy Adhesive
- A118.4-05.....Latex-Portland Cement Mortar
- A118.5-05.....Chemical Resistant Furan Mortars and Grouts for
Tile Installation
- A118.6-05.....Standard Cement Grouts for Tile Installation
- A118.9-05.....Cementitious Backer Units
- A118.10-05.....Load Bearing, Bonded, Waterproof Membranes for
Thin-Set Ceramic Tile and Dimension Stone
Installation
- A136.1-05.....Organic Adhesives for Installation of Ceramic
Tile
- A137.1-88.....Ceramic Tile
- C. American Society For Testing And Materials (ASTM):
- A185-07.....Steel Welded Wire Fabric, Plain, for Concrete
Reinforcing
- C109/C109M-07.....Standard Test Method for Compressive Strength of
Hydraulic Cement Mortars (Using 2 inch. or [50-
mm] Cube Specimens)
- C241-90 (R2005).....Abrasion Resistance of Stone Subjected to Foot
Traffic
- C348-02.....Standard Test Method for Flexural Strength of
Hydraulic-Cement Mortars

C627-93(R2007).....Evaluating Ceramic Floor Tile Installation
Systems Using the Robinson-Type Floor Tester

C954-07.....Steel Drill Screws for the Application of Gypsum
Board on Metal Plaster Base to Steel Studs from
0.033 in (0.84 mm) to 0.112 in (2.84 mm) in
thickness

C979-05.....Pigments for Integrally Colored Concrete

C1002-07.....Steel Self-Piercing Tapping Screws for the
Application of Panel Products

C1027-99(R2004).....Determining "Visible Abrasion Resistance on
Glazed Ceramic Tile"

C1028-07.....Determining the Static Coefficient of Friction
of Ceramic Tile and Other Like Surfaces by the
Horizontal Dynamometer Pull Meter Method

C1127-01.....Standard Guide for Use of High Solids Content,
Cold Liquid-Applied Elastomeric Waterproofing
Membrane with an Integral Wearing Surface

C1178/C1178M-06.....Standard Specification for Coated Glass Mat
Water-Resistant Gypsum Backing Panel

D4397-02.....Standard Specification for Polyethylene Sheeting
for Construction, Industrial and Agricultural
Applications

D5109-99(R2004).....Standard Test Methods for Copper-Clad
Thermosetting Laminates for Printed Wiring
Boards

D. Marble Institute of America (MIA): Design Manual III-2007

E. Tile Council of America, Inc. (TCA):

2007.....Handbook for Ceramic Tile Installation

PART 2 - PRODUCTS

2.1 TILE

- A. Comply with ANSI A137.1, Standard Grade, except as modified:
 - 1. Inspection procedures listed under the Appendix of ANSI A137.1.
 - 2. Abrasion Resistance Classification:
 - a. Tested in accordance with values listed in Table 1, ASTM C 1027.
 - b. Class V, 12000 revolutions for floors in Corridors, Kitchens,
Storage including Refrigerated Rooms
 - c. Class IV, 6000 revolutions for remaining areas.
 - 3. Slip Resistant Tile for Floors:
 - a. Coefficient of friction, when tested in accordance with ASTM
C1028, required for level of performance:

- 1) Not less than 0.7 (wet condition) for bathing areas.
 - 2) Not less than 0.8 on ramps for wet and dry conditions.
 - 3) Not less than 0.6, except 0.8 on ramps as stated above, for wet and dry conditions for other areas.
- b. Tile Having Abrasive Grains:
1. Unglazed Ceramic Mosaic Tile: Abrasive grains throughout body of the tile.
- c. Porcelain Paver Tile: Matte surface finish.
4. Mosaic tile may be mounted or joined together by a resinous bonding material along tile edges.
 5. Do not use back mounted tiles in showers and manual wash area unless certified by manufacturer as noted in paragraph 1.3.D.
 6. Factory Blending: For tile with color variations, within the ranges selected during sample submittals blend tile in the factory and package so tile units taken from one package show the same range in colors as those taken from other packages and match approved samples.
 7. Factory-Applied Temporary Protective Coating:
 - a. Protect exposed face surfaces (top surface) of tile against adherence of mortar and grout by pre-coating with a continuous film of petroleum paraffin wax, applied hot.
 - b. Do not coat unexposed tile surfaces.
 - c. Pre-wax tiles set or grouted with epoxy or latex modified mortars.
- B. Unglazed Ceramic Mosaic Tile: Nominal 6 mm (1/4 inch) thick with cushion edges.
- C. Glazed Wall Tile: Cushion edges, glazing, as specified in Section 09 06 00, SCHEDULE FOR FINISHES.
- D. Porcelain Paver Tile: Nominal 8 mm (5/16 inch) thick, with cushion edges. Porcelain tile produced by the dust pressed method shall be made of approximately 50% feldspar; the remaining 50% shall be made up of various high-quality light firing ball clays yielding a tile with a water absorption rate of 0.5% or less and a breaking strength of between 390 to 400 pounds.
- E. Trim Shapes:
1. Conform to applicable requirements of adjoining floor and wall tile.
 2. Use slip resistant trim shapes for horizontal surfaces of showers and toilet rooms, overflow ledges, recessed steps, shower curbs, drying area curbs, and seats.
 3. Use trim shapes sizes conforming to size of adjoining field wall tile unless detailed or specified otherwise in Section 09 06 00, SCHEDULE FOR FINISHES.

4. Internal and External Corners:

- a. Square internal and external corner joints are not acceptable.
- b. External corners including edges: Use bullnose shapes.
- c. Internal corners: Use cove shapes.
- d. Base to floor internal corners: Use special shapes providing integral cove vertical and horizontal joint.
- e. Base to floor external corners: Use special shapes providing bullnose vertical edge with integral cove horizontal joint. Use stop at bottom of openings having bullnose return to wall.
- f. Wall top edge internal corners: Use special shapes providing integral cove vertical joint with bullnose top edge.
- g. Wall top edge external corners: Use special shapes providing bullnose vertical and horizontal joint edge.
- h. For unglazed ceramic mosaic and glazed wall tile installed in Portland cement mortar setting bed, use cove and bullnose shapes as applicable. When ceramic mosaic wall and base tile is required, use C Series cove and bullnose shapes.
- i. For unglazed ceramic mosaic and glazed wall tile installed in dry-set Portland cement mortar, latex-Portland cement mortar, and organic adhesive (thin set methods), use cove and surface bullnose shapes as applicable.
- j. Provide cove and bullnose shapes as required to complete tile work.

2.2 CEMENTITIOUS BACKER UNITS

- A. Use in showers or wet areas.
- B. ANSI A118.9.
- C. Use Cementitious backer units in maximum available lengths.
- D. Backer unit meet or exceed the following additional physical properties:

<u>Property</u>	<u>Test Method</u>	<u>Value</u>
Water absorption	ASTM C948	Less than 20 percent by weight

2.3 JOINT MATERIALS FOR CEMENTITIOUS BACKER UNITS

- A. Reinforcing Tape: Vinyl coated woven glass fiber mesh tape, open weave, 50 mm (2 inches) wide. Tape with pressure sensitive adhesive backing will not be permitted.
- B. Tape Embedding Material: Latex-Portland cement mortar complying with ANSI A118.4.
- C. Joint material, including reinforcing tape, and tape embedding material, shall be as specifically recommended by the backer unit manufacturer.

2.4 FASTENERS

A. Screws for Cementitious Backer Units.

1. Standard screws for gypsum board are not acceptable.
2. Minimum 11 mm (7/16 inch) diameter head, corrosion resistant coated, with washers.
3. ASTM C954 for steel 1 mm (0.033 inch) thick.
4. ASTM C1002 for steel framing less than 0.0329 inch thick.

B. Washers: Galvanized steel, 13 mm (1/2 inch) minimum diameter.

2.5 GLASS MAT WATER RESISTANT GYPSUM BACKER BOARD

Confirm to ASTM C1178/C1178M, Optional System for Cementitious Backer Units.

2.6 SETTING MATERIALS OR BOND COATS

A. Conform to TCA Handbook for Ceramic Tile Installation.

B. Latex-Portland Cement Mortar: ANSI A118.4.

1. For wall applications, provide non-sagging, latex-Portland cement mortar complying with ANSI A118.4.
2. Prepackaged Dry-Mortar Mix: Factory-prepared mixture of Portland cement; dry, redispersible, ethylene vinyl acetate additive; and other ingredients to which only water needs to be added at Project site.

C. Organic Adhesives: ANSI A136.1, Type 1.

D. Chemical-Resistant Bond Coat:

1. Epoxy Resin Type: ANSI A118.3.

E. Waterproofing Isolation Membrane:

1. Sheet System TCA F122-02.
2. Composite sheet consisting of ASTM D5109, Type II, Grade I Chlorinated Polyethylene (CM) sheet reinforced on both sides with a non-woven polyester fiber.
3. Designed for use in wet areas as an isolation and positive waterproofing membranes for thin-set bonding of sheet to substrate and thin-set bonding of ceramic and porcelain tile or marble to sheet. Suited for both horizontal and vertical applications.
4. Conform to the following additional physical properties:

Property	Units	Results	Test Method
Hardness Shore A	Points	70-80	ASTM D2240 (10 Second Reading)
Shrinkage	Percent	5 maximum	ASTM D1204
Brittleness		No crack remains flexible at temperature-37 degrees C (-25	ASTM D2497 13 mm (1/2- inch) Mandrel Bend

		degrees F)	
Retention of Properties after Heat Aging	Percent of original	80 Tensile 80 Breaking 80 Elongation	ASTM D3045, 90 degrees C (194 degrees F) for 168 hours

6. Manufacturer's standard sheet size with prefabricated or preformed inside and outside corners.
7. Sheet manufacturer's solvent welding liquid or xylene and edge sealant.

2.7 GROUTING MATERIALS

A. Coloring Pigments:

1. Pure mineral pigments, limeproof and nonfading, complying with ASTM C979.
2. Add coloring pigments to grout by the manufacturer.
3. Job colored grout is not acceptable.
4. Use is required in Latex-Portland Cement Grout.

B. Chemical-Resistant Grout:

1. Epoxy grout, ANSI A118.3.

C. Grout Sealer:

1. Provide penetrating sealer such as Aqua-Mix or approved equal.

2.8 PATCHING AND LEVELING COMPOUND

- A. Portland cement base, polymer-modified, self-leveling compound, manufactured specifically for resurfacing and leveling concrete floors. Products containing gypsum are not acceptable.

B. Shall have minimum following physical properties:

1. Compressive strength - 25 MPa (3500 psig) per ASTM C109/C109M.
2. Flexural strength - 7 MPa (1000 psig) per ASTM C348 (28 day value).
3. Tensile strength - 600 psi per ANSI 118.7.
4. Density - 1.9.

- C. Capable of being applied in layers up to 38 mm (1-1/2 inches) thick without fillers and up to 100 mm (four inches) thick with fillers, being brought to a feather edge, and being trowelled to a smooth finish.

- D. Primers, fillers, and reinforcement as required by manufacturer for application and substrate condition.

- E. Ready for use in 48 hours after application.

2.9 MARBLE

- A. Soundness Classification in accordance with MIA Design Manual III Groups.

B. Thresholds:

1. Group A, Minimum abrasive hardness (Ha) of 10.0 per ASTM C241.

2. Honed finish on exposed faces.
3. Thickness and contour as shown.
4. Fabricate from one piece without holes, cracks, or open seams; full depth of wall or frame opening by full width of wall or frame opening; 19 mm (3/4-inch) minimum thickness and 6 mm (1/4-inch) minimum thickness at beveled edge.
5. Set not more than 13 mm (1/2-inch) above adjoining finished floor surfaces, with transition edges beveled on a slope of no greater than 1:2. On existing floor slabs provide 13 mm (1/2-inch) above ceramic tile surface with bevel edge joint top flush with adjacent floor.
6. One piece full width of door opening. Notch thresholds to match profile of door jambs.

2.10 METAL DIVIDER STRIPS

- A. Terrazzo type divider strips.
- B. Heavy top type strip with 5 mm (3/16 inch) wide top and 38 mm (1-1/2 inch) long leg.
- C. Embedded leg perforated and deformed for keying to mortar.
- D. Aluminum or brass as specified in Section 09 06 00, SCHEDULE FOR FINISHES.

2.11 WATER

Clean, potable and free from salts and other injurious elements to mortar and grout materials.

2.12 CLEANING COMPOUNDS

- A. Specifically designed for cleaning masonry and concrete and which will not prevent bond of subsequent tile setting materials including patching and leveling compounds and elastomeric waterproofing membrane and coat.
- B. Materials containing acid or caustic material not acceptable.

2.13 FLOOR MORTAR BED REINFORCING

ASTM A185 welded wire fabric without backing, MW3 x MW3 (2 x 2-W0.5 x W0.5).

2.14 POLYETHYLENE SHEET

- A. Polyethylene sheet conforming to ASTM D4397.
- B. Nominal thickness: 0.15 mm (six mils).
- C. Use sheet width to minimize joints.

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS

- A. Maintain ambient temperature of work areas at not less than 16 degree C (60 degrees F), without interruption, for not less than 24 hours before installation and not less than three days after installation.

- B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation and ANSI Specifications for installation.
- C. Do not install tile when the temperature is above 38 degrees C (100 degrees F).
- D. Do not install materials when the temperature of the substrate is below 16 degrees C (60 degrees F).
- E. Do not allow temperature to fall below 10 degrees C (50 degrees F) after fourth day of completion of tile work.

3.2 ALLOWABLE TOLERANCE

- A. Variation in plane of sub-floor, including concrete fills leveling compounds and mortar beds:
 - 1. Not more than 1 in 500 (1/4 inch in 10 feet) from required elevation where Portland cement mortar setting bed is used.
 - 2. Not more than 1 in 1000 (1/8 inch in 10 feet) where dry-set Portland cement, and latex-Portland cement mortar setting beds and chemical-resistant bond coats are used.
- B. Variation in Plane of Wall Surfaces:
 - 1. Not more than 1 in 400 (1/4 inch in eight feet) from required plane where Portland cement mortar setting bed is used.
 - 2. Not more than 1 in 800 (1/8 inch in eight feet) where dry-set or latex-Portland cement mortar or organic adhesive setting materials is used.

3.3 SURFACE PREPARATION

- A. At showers over existing concrete, cut, chip, and grind concrete total of 2 inches below top of concrete deck. Apply patching compound to receive new shower pan waterproofing.
- B. Cleaning New Concrete or Masonry:
 - 1. Chip out loose material, clean off all oil, grease dirt, adhesives, curing compounds, and other deterrents to bonding by mechanical method, or by using products specifically designed for cleaning concrete and masonry.
 - 2. Use self-contained power blast cleaning systems to remove curing compounds and steel trowel finish from concrete slabs where ceramic tile will be installed directly on concrete surface with thin-set materials.
 - 3. Steam cleaning or the use of acids and solvents for cleaning will not be permitted.
- C. Patching and Leveling:

1. Mix and apply patching and leveling compound in accordance with manufacturer's instructions.
 2. Fill holes and cracks and align concrete floors that are out of required plane with patching and leveling compound.
 - a. Thickness of compound as required to bring finish tile system to elevation shown.
 - b. Float finish except finish smooth for elastomeric waterproofing.
 - c. At substrate expansion, isolation, and other moving joints, allow joint of same width to continue through underlayment.
 3. Apply patching and leveling compound to concrete and masonry wall surfaces that are out of required plane.
 4. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.
- D. Mortar Bed for Slopes to Drains:
1. Slope compound to drain where drains are shown.
 2. Install mortar bed in depressed slab sloped to drains not less than 1 in 200 (1/16 inch per foot).
 3. Allow not less than 50 mm (2 inch) depression at edge of depressed slab.
 4. Screed for slope to drain and float finish.
 5. Cure mortar bed for not less than seven days. Do not use curing compounds or coatings.
- E. Additional preparation of concrete floors for tile set with epoxy, or furan-resin shall be in accordance with the manufacturer's printed instructions.
- F. Cleavage Membrane:
1. Install polythene sheet as cleavage membrane in depressed slab when waterproof membrane is not scheduled or indicated.
 2. Turn up at edge of depressed floor slab to top of floor.
- G. Walls:
1. In showers or other wet areas cover studs with polyethylene sheet.
 2. Apply patching and leveling compound to concrete and masonry surfaces that are out of required plane.
 3. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.
 4. Apply metal lath to framing in accordance with ANSI A108.1:

- a. Use fasteners specified in paragraph "Fasteners." Use washers when lath opening is larger than screw head.
 - b. Apply scratch and leveling coats to metal lath in accordance with ANSI A108.1.C.
 - c. Total thickness of scratch and leveling coats:
 - 1) Apply 9 mm to 16 mm (3/8 inch to 5/8 inch) thick over solid backing.
 - 2) 16 mm to 19 mm (5/8 to 3/4 inch) thick on metal lath over studs.
 - 3) Where wainscots are required to finish flush with wall surface above, adjust thickness required for flush finish.
 - d. Apply scratch and leveling coats more than 19 mm (3/4 inch) thick in two coats.
- H. Existing Floors and Walls:
1. Remove existing composition floor finishes and adhesive. Prepare surface by grinding, chipping, self-contained power blast cleaning or other suitable mechanical methods to completely expose uncontaminated concrete or masonry surfaces. Follow safety requirements of ANSI A10.20.
 2. Remove existing concrete fill or topping to structural slab. Clean and level the substrate for new setting bed and waterproof membrane or cleavage membrane.
 3. Where new tile bases are required to finish flush with plaster above or where they are extensions of similar bases in conjunction with existing floor tiles cut channel in floor slab and expose rough wall construction sufficiently to accommodate new tile base and setting material.

3.4 CEMENTITIOUS BACKER UNITS

- A. Remove polyethylene wrapping from cementitious backer units and separate to allow for air circulation. Allow moisture content of backer units to dry down to a maximum of 35 percent before applying joint treatment and tile.
- B. Install in accordance with ANSI A108.11 except as specified otherwise.
- C. Install units horizontally or vertically to minimize joints with end joints over framing members. Units with rounded edges; face rounded edge away from studs to form a V joint for joint treatment.
- D. Secure cementitious backer units to each framing member with screws spaced not more than 200 mm (eight inches) on center and not closer than 13 mm (1/2 inch) from the edge of the backer unit or as recommended by

backer unit manufacturer. Install screws so that the screw heads are flush with the surface of the backer unit.

E. Where backer unit joins shower pans or waterproofing, lap backer unit over turned up waterproof system. Install fasteners only through top one-inch of turned up waterproof systems.

F. Do not install joint treatment for seven days after installation of cementitious backer unit.

G. Joint Treatment:

1. Fill horizontal and vertical joints and corners with latex-Portland cement mortar. Apply fiberglass tape over joints and corners and embed with same mortar.

2. Leave 6 mm (1/4 inch) space for sealant at lips of tubs, sinks, or other plumbing receptors.

3.5 GLASS MAT WATER-RESISTANT GYPSUM BACKER BOARD

A. Install in accordance with manufacturer's instructions. TCA Systems W245-01.

B. Treat joints with tape and latex-Portland cement mortar or adhesive.

3.6 MARBLE

A. Secure thresholds and stools in position with minimum of two stainless steel dowels.

B. Set in dry-set Portland cement mortar or latex-Portland cement mortar bond coat.

C. Set threshold to finish 12mm (1/2 inch) above ceramic tile floor unless shown otherwise, with bevel edge joint top flush with adjacent floor similar to TCA detail TR611-02.

3.7 METAL DIVIDER STRIPS

A. Install metal divider strips in floor joints between ceramic and quarry tile floors and between tile floors and adjacent flooring of other materials where the finish floors are flush unless shown otherwise.

B. Set divider strip in mortar bed to line and level centered under doors or in openings.

3.8 CERAMIC TILE - GENERAL

A. Comply with ANSI A108 series of tile installation standards in "Specifications for Installation of Ceramic Tile" applicable to methods of installation.

B. Comply with TCA Installation Guidelines:

C. Installing Mortar Beds for Floors:

1. Install mortar bed to not damage cleavage or waterproof membrane; 32 mm (1-1/2 inch) minimum thickness.

2. Install floor mortar bed reinforcing centered in mortar fill.

3. Screed finish to level plane or slope to drains where shown, float finish.
4. For thin set systems cure mortar bed not less than seven days. Do not use curing compounds or coatings.
5. For tile set with Portland cement paste over plastic mortar bed coordinate to set tile before mortar bed sets.

D. Setting Beds or Bond Coats:

1. Set floor tile in thin set mortar over water isolation membrane ANSI 108.13, TCA System F122 in following spaces:
 - a. Toilet Rooms.
 - b. House Keeping Aids Closet (HAC).
2. Set wall tile installed over concrete or masonry in latex-Portland cement mortar, ANSI 108.1B. and TCA System W211-02, W221-02 or W222-02.
3. Set wall tile installed over concrete backer board in latex-Portland cement mortar, ANSI A108.1B.
4. Set wall tile installed over latex-Portland cement mortar over a cured mortar bed, ANSI A108.1C, TCA System W231-02, W241-02.
5. Set tile over concrete in recessed pits in dry set Portland cement mortar, ANSI A108.1C, TCA System S151-02
6. Set tile installed over gypsum board and gypsum plaster in organic adhesive, ANSI A108.4, TCA System W242-02.
7. Set trim shapes in same material specified for setting adjoining tile.

E. Workmanship:

1. Lay out tile work so that no tile less than one-half full size is used. Make all cuts on the outer edge of the field.
2. Set tile firmly in place with finish surfaces in true planes. Align tile flush with adjacent tile unless shown otherwise.
3. Form intersections and returns accurately.
4. Cut and drill tile neatly without marring surface.
5. Cut edges of tile abutting penetrations, finish, or built-in items:
 - a. Fit tile closely around electrical outlets, piping, fixtures and fittings, so that plates, escutcheons, collars and flanges will overlap cut edge of tile.
 - b. Seal tile joints water tight as specified in Section 07 92 00, JOINT SEALANTS, around electrical outlets, piping fixtures and fittings before cover plates and escutcheons are set in place.
6. Completed work shall be free from hollow sounding areas and loose, cracked or defective tile.

7. Remove and reset tiles that are out of plane or misaligned.
8. Floors:
 - a. Extend floor tile beneath casework and equipment, except those units mounted in wall recesses.
 - b. Align finish surface of new tile work flush with other and existing adjoining floor finish where shown.
 - c. In areas where floor drains occur, slope to drains where shown.
 - d. Shove and vibrate tiles over 200 mm (8 inches) square to achieve full support of bond coat.
9. Walls:
 - a. Cover walls and partitions, including pilasters, furred areas, and freestanding columns from floor to ceiling, or from floor to nominal wainscot heights shown with tile.
 - b. Finish reveals of openings with tile, except where other finish materials are shown or specified.
 - c. At window openings, provide tile stools and reveals, except where other finish materials are shown or specified.
 - d. Finish wall surfaces behind and at sides of casework and equipment, except those units mounted in wall recesses, with same tile as scheduled for room proper.
10. Joints:
 - a. Keep all joints in line, straight, level, perpendicular and of even width unless shown otherwise.
 - b. Make joints 2 mm (1/16 inch) wide for glazed wall tile and mosaic tile work.
 - c. Make joints in Paver tile, porcelain type; maximum 3 mm (1/8 inch) wide.
11. Back Buttering: For installations indicated below, obtain 100 percent mortar coverage by complying with applicable special requirements for back buttering of tile in referenced ANSI A108 series of tile installation standards:
 - a. Tile wall installations in wet areas, including showers, manual cart wash, and automatic cart wash area.
 - b. Tile installed with chemical-resistant mortars and grouts.
 - c. Tile wall installations composed of tiles 200 by 200 mm (8 by 8 inches or larger).
 - d. Exterior tile wall installations.

3.9 PORCELAIN TILE INSTALLED WITH LATEX PORTLAND CEMENT BONDING MORTAR

Due to the denseness of porcelain tile use latex Portland cement bonding mortar that meets the requirements of ANSI A118.4. Bonding mortars shall

be mixed in accordance with manufacturer's instructions. Improper liquid ratios and dwell time before placement of bonding mortar and tile shall affect bond.

3.10 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH DRY-SET PORTLAND CEMENT AND LATEX-PORTLAND CEMENT MORTAR

- A. Installation of Tile: ANSI A108.5, except as specified otherwise.
- B. Slope tile work to drains not less than 1 in 100 (1/8 inch per foot).

3.11 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH ORGANIC ADHESIVE

Installation of Tile: ANSI A108.4.

3.12 CERAMIC AND PORCELAIN TILE INSTALLED WITH WATERPROOF ISOLATION MEMBRANE

- A. Surface Preparation: Prepare surfaces as specified in paragraph 3.3G
- B. Installation of Waterproof Isolation Membrane: ANSI A108.13 and TCA F122-02.
 - 1. Prime surfaces, where required, in accordance with manufacturer's instructions.
 - 2. Extend material over flashing rings of drains and turn up vertical surfaces not less than 100 mm (four inches) above finish floor surface.
 - 3. After installation test for leaks with 25 mm (one inch) of water for 24 hours.
- C. Installation of Tile in thin set mortar over waterproof membrane:
 - 1. Spread no more material than can be covered with tile before material starts to set.
 - 2. Apply tile in thin set material in accordance with the coating manufacturer's instructions in lieu at aggregate surfacing specified in ASTM C1127. Do not install top coat over tile.

3.14 GROUTING

- A. Grout Type and Location:
 - 1. Grout for glazed wall and base tile, paver tile and unglazed mosaic tile, epoxy grout.
 - 2. After curing, seal all grout joints with penetrating sealer.
- B. Workmanship:
 - 1. Install and cure grout in accordance with the applicable standard.
 - 2. Epoxy Grout: ANSI A108.6.
 - 3. Seal all joints, in accordance with sealer manufacturer instructions.

3.15 MOVEMENT JOINTS

- A. Prepare tile expansion, isolation, construction and contraction joints for installation of sealant. Refer to Section 07 92 00, JOINT SEALANTS.
- B. TCA details EJ 171-02.

- C. At expansion joints, rake out joint full depth of tile and setting bed and mortar bed. Do not cut waterproof or isolation membrane.
- D. Rake out grout at joints between tile, service sink, at toe of base, and where shown not less than 6 mm (1/4 inch) deep.

3.16 CLEANING

- A. Thoroughly sponge and wash tile. Polish glazed surfaces with clean dry cloths.
- B. Methods and materials used shall not damage or impair appearance of tile surfaces.
- C. The use of acid or acid cleaners on glazed tile surfaces is prohibited.
- D. Clean tile grouted with epoxy, furan and commercial Portland cement grout and tile set in elastomeric bond coat as recommended by the manufacturer of the grout and bond coat.

3.17 PROTECTION

- A. Keep traffic off tile floor, until grout and setting material is firmly set and cured.
- B. Where traffic occurs over tile floor, cover tile floor with not less than 9 mm (3/8 inch) thick plywood, wood particle board, or hardboard securely taped in place. Do not remove protective cover until time for final inspection. Clean tile of any tape, adhesive and stains.

3.18 TESTING FINISH FLOOR

- A. Test floors in accordance with ASTM C627 to show compliance with codes 1 through 10.

- - - E N D - - -

**SECTION 09 51 00
ACOUSTICAL CEILINGS**

PART 1- GENERAL**1.1 DESCRIPTION**

- A. Acoustical units.
- B. Adhesive application.

1.2 RELATED WORK

- A. Color, pattern, and location of each type of acoustical unit:
Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Access doors in adhesive applied tile: Section 08 31 13, ACCESS DOORS
AND FRAMES.
- C. framing and Bracing suspension system: Section 13 05 41, SEISMIC
RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.3 SUBMITTAL

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA,
AND SAMPLES.
- B. Samples:
 - 1. Acoustical units, each type, with label indicating conformance to
specification requirements.
 - 2. Colored markers for units providing access.
- C. Manufacturer's Literature and Data:
 - 1. Ceiling suspension system, each type, showing complete details of
installation.
 - 2. Acoustical units, each type
- D. Manufacturer's Certificates: Acoustical units, each type, in accordance
with specification requirements.

1.4 DEFINITIONS

- A. Standard definitions as defined in ASTM C634.
- B. Terminology as defined in ASTM E1264.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent
referenced. Publications are referenced in the text by basic
designation only.
- B. American Society for Testing and Materials (ASTM):
 - A641/A641M-03.....Zinc-coated (Galvanized) Carbon Steel Wire
 - A653/A653M-07.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-
Iron Alloy-coated (Galvannealed) by the Hot-Dip
Process

C423-07.....	Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
C634-02 (E2007).....	Standard Terminology Relating to Environmental Acoustics
C635-04.....	Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings
C636-06.....	Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels
E84-07.....	Surface Burning Characteristics of Building Materials
E119-07.....	Fire Tests of Building Construction and Materials
E413-04.....	Classification for Rating Sound Insulation.
E580-06.....	Application of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Requiring Seismic Restraint
E1264-(R2005).....	Classification for Acoustical Ceiling Products

PART 2- PRODUCTS

2.1 METAL SUSPENSION SYSTEM

- A. ASTM C635, heavy-duty system, except as otherwise specified.
 - 1. Ceiling suspension system members may be fabricated from either of the following unless specified otherwise.
 - a. Galvanized cold-rolled steel, bonderized.
 - b. Extruded aluminum.
 - 2. Use same construction for cross runners as main runners. Use of lighter-duty sections for cross runners is not acceptable.
 - 3. Use aluminum suspension in toilets adjacent to shower areas.
- B. Exposed grid suspension system for support of lay-in panels:
 - 1. Exposed grid width not less than 22 mm (7/8 inch) with not less than 8 mm (5/16 inch) panel bearing surface.
 - 2. Fabricate wall molding and other special molding from the same material with same exposed width and finish as the exposed grid members.
 - 3. On exposed metal surfaces apply baked-on enamel flat texture finish in color to match adjacent acoustical units unless specified otherwise in Section 09 06 00, SCHEDULE FOR FINISHES.

2.2 PERIMETER SEAL

- A. Vinyl, polyethylene or polyurethane open cell sponge material having density of 1.3 plus or minus 10 percent, compression set less than 10 percent with pressure sensitive adhesive coating on one side.

B. Thickness as required to fill voids between back of wall molding and finish wall.

C. Not less than 9 mm (3/8 inch) wide strip.

2.3 WIRE

A. ASTM A641.

B. For wire hangers: Minimum diameter 2.68 mm (0.1055 inch).

C. For bracing wires: Minimum diameter 3.43 mm (0.1350 inch).

2.4 ANCHORS AND INSERTS

A. Use anchors or inserts to support twice the loads imposed by hangers attached thereto.

B. Hanger Inserts:

1. Fabricate inserts from steel, zinc-coated (galvanized after fabrication).

C. Clips:

1. Galvanized steel.

2. Designed to clamp to steel beam or bar joists, or secure framing member together.

3. Designed to rigidly secure framing members together.

4. Designed to sustain twice the loads imposed by hangers or items supported.

D. Tile Splines: ASTM C635.

2.5 CARRYING CHANNELS FOR SECONDARY FRAMING

A. Fabricate from cold-rolled or hot-rolled steel, black asphaltic paint finish, free of rust.

B. Weighing not less than the following, per 300 m (per thousand linear feet):

Size mm	Size Inches	Cold-rolled		Hot-rolled	
		Kg	Pound	Kg	Pound
38	1 1/2	215.4	475	508	1120
50	2	267.6	590	571.5	1260

2.6 ADHESIVE

A. ASTM D1779, having flame spread index of 25 or less when tested in accordance with ASTM E84.

B. Developing minimum strength of 7 kg/m² (one psi) of contact surface 48 hours after installation in temperature of 21 °C (70 °F).

2.7 ACOUSTICAL UNITS

A. General:

1. Ceiling Tile shall meet minimum 37% bio-based content in accordance with USDA Bio-Preferred Product requirements.
 2. ASTM E1264, weighing 3.6 kg/m² (3/4 psf) minimum for mineral fiber panels or tile.
 3. Class A Flame Spread: ASTM 84
 4. Minimum NRC (Noise Reduction Coefficient): 0.55 unless specified otherwise: ASTM C423.
 5. Minimum CAC (Ceiling Attenuation Class): 40-44 range unless specified otherwise: ASTM E413.
 6. Manufacturers standard finish, minimum Light Reflectance (LR) coefficient of 0.75 on the exposed surfaces, except as specified otherwise in Section 09 06 00, SCHEDULE FOR FINISHES.
 7. Lay-in panels: Sizes as shown, with square edges.
- B. Type III Units - Mineral base with water-based painted finish less than 10 g/l VOC, Form 2 - Water felted, minimum 16 mm (5/8 inch) thick. Mineral base to contain minimum 65 percent recycled content.
- C. Type IV Units - Mineral base with membrane-faced overlay, Form 2 - Water felted, minimum 16 mm (5/8 inch) thick. Apply over the paint coat on the face of the unit a poly (vinyl) chloride overspray having a flame spread index of 25 or less when tested in accordance with ASTM E84.

2.8 ACCESS IDENTIFICATION

- A. Markers:
1. Use colored markers with pressure sensitive adhesive on one side.
 2. Make colored markers of paper or plastic, 6 to 9 mm (1/4 to 3/8 inch) in diameter.
- B. Use markers of the same diameter throughout building.
- C. Color Code: Use following color markers for service identification:
- | | |
|-------------|--|
| Color..... | Service |
| Red..... | Sprinkler System: Valves and Controls |
| Green..... | Domestic Water: Valves and Controls |
| Yellow..... | Chilled Water and Heating Water |
| Orange..... | Ductwork: Fire Dampers |
| Blue..... | Ductwork: Dampers and Controls |
| Black..... | Gas: Laboratory, Medical, Air and Vacuum |

PART 3 EXECUTION

3.1 CEILING TREATMENT

- A. Treatment of ceilings shall include sides and soffits of ceiling beams, furred work 600 mm (24 inches) wide and over, and vertical surfaces at changes in ceiling heights unless otherwise shown. Install acoustic tiles after wet finishes have been installed and solvents have cured.

B. Lay out acoustical units symmetrically about center lines of each room or space unless shown otherwise on reflected ceiling plan.

1. In rooms or areas with skylights, a light ceiling grid with skylight grid above.

C. Moldings:

1. Install metal wall molding at perimeter of room, column, or edge at vertical surfaces.
2. Install special shaped molding at changes in ceiling heights and at other breaks in ceiling construction to support acoustical units and to conceal their edges.

D. Perimeter Seal:

1. Install perimeter seal between vertical leg of wall molding and finish wall, partition, and other vertical surfaces.
2. Install perimeter seal to finish flush with exposed faces of horizontal legs of wall molding.

E. Existing ceiling:

1. Where extension of existing ceilings occur, match existing.
2. Where acoustical units are salvaged and reinstalled or joined, use salvaged units within a space. Do not mix new and salvaged units within a space which results in contrast between old and new acoustic units.
3. Comply with specifications for new acoustical units for new units required to match appearance of existing units.

3.2 CEILING SUSPENSION SYSTEM INSTALLATION

A. General:

1. Install metal suspension system for acoustical tile and lay-in panels in accordance with ASTM C636, except as specified otherwise.
2. Use direct or indirect hung suspension system or combination thereof as defined in ASTM C635.
3. Support a maximum area of 1.48 m² (16 sf) of ceiling per hanger.
4. Prevent deflection in excess of 1/360 of span of cross runner and main runner.
5. Provide extra hangers, minimum of one hanger at each corner of each item of mechanical, electrical and miscellaneous equipment supported by ceiling suspension system not having separate support or hangers.
6. Provide not less than 100 mm (4 inch) clearance from the exposed face of the acoustical units to the underside of ducts, pipe, conduit, secondary suspension channels, concrete beams or joists; and steel beam or bar joist unless furred system is shown,
7. Use main runners not less than 1200 mm (48 inches) in length.

8. Install hanger wires vertically. Angled wires are not acceptable except for seismic restraint bracing wires.

B. Anchorage to Structure:

1. Steel:

- a. When steel framing does not permit installation of hanger wires at spacing required, install carrying channels for attachment of hanger wires.
 - (1) Size and space carrying channels to insure that the maximum deflection specified will not be exceeded.
 - (2) Attach hangers to steel carrying channels, spaced four feet on center, unless area supported or deflection exceeds the amount specified.
- b. Attach carrying channels to the bottom flange of steel beams spaced not 1200 mm (4 feet) on center before fire proofing is installed. Weld or use steel clips to attach to beam to develop full strength of carrying channel.
- c. Attach hangers to bottom chord of bar joists or to carrying channels installed between the bar joists when hanger spacing prevents anchorage to joist. Rest carrying channels on top of the bottom chord of the bar joists, and securely wire tie or clip to joist.

C. Direct Hung Suspension System:

1. As illustrated in ASTM C635.
2. Support main runners by hanger wires attached directly to the structure overhead.
3. Maximum spacing of hangers, 1200 mm (4 feet) on centers unless interference occurs by mechanical systems. Use indirect hung suspension system where not possible to maintain hanger spacing.

D. Indirect Hung Suspension System:

1. As illustrated in ASTM C635.
2. Space carrying channels for indirect hung suspension system not more than 1200 mm (4 feet) on center. Space hangers for carrying channels not more than 2400 mm (8 feet) on center or for carrying channels less than 1200 mm (4 feet) on center so as to insure that specified requirements are not exceeded.
3. Support main runners by specially designed clips attached to carrying channels.

E. Seismic Ceiling Bracing System:

1. Construct system in accordance with ASTM E580.

2. Connect bracing wires to structure above as specified for anchorage to structure and to main runner or carrying channels of suspended ceiling at bottom.

3.3 ACOUSTICAL UNIT INSTALLATION

- A. Cut acoustic units for perimeter borders and penetrations to fit tight against penetration for joint not concealed by molding.
- B. Install lay-in acoustic panels in exposed grid with not less than 6 mm (1/4 inch) bearing at edges on supports.
 1. Install tile to lay level and in full contact with exposed grid.
 2. Replace cracked, broken, stained, dirty, or tile not cut for minimum bearing.
- C. Markers:
 1. Install markers of color code specified to identify the various concealed piping, mechanical, and plumbing systems.
 2. Attach colored markers to exposed grid on opposite sides of the units providing access.
 3. Attach marker on exposed ceiling surface of upward access acoustical unit.

3.4 CLEAN-UP AND COMPLETION

- A. Replace damaged, discolored, dirty, cracked and broken acoustical units.
- B. Leave finished work free from defects.

- - - E N D - - -

**SECTION 09 65 13
RESILIENT BASE AND ACCESSORIES**

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies the installation of vinyl or rubber base.

1.2 RELATED WORK

- A. Color and texture: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Integral base with sheet flooring: Section 09 65 16, RESILIENT SHEET FLOORING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Base and stair material manufacturer's recommendations for adhesives.
 - 3. Application and installation instructions.
- C. Samples:
 - 1. Base: 150 mm (6 inches) long, each type and color.
 - 2. Resilient Stair Treads: 150 mm (6 inches) long.
 - 3. Sheet Rubber Flooring: 300 mm (12 inches) square.
 - 4. Adhesive: Literature indicating each type.

1.4 DELIVERY

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.
- B. Materials from containers which have been distorted, damaged or opened prior to installation will be rejected.

1.5 STORAGE

- A. Store materials in weather tight and dry storage facility.
- B. Protect material from damage by handling and construction operations before, during, and after installation.

1.6 APPLICABLE PUBLICATIONS

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - F1344-04.....Rubber Floor Tile
 - F1859-04.....Rubber Sheet Floor Covering without Backing
 - F1860-04.....Rubber Sheet Floor Covering with Backing

F1861-02.....Resilient Wall Base

C. Federal Specifications (Fed. Spec.):

RR-T-650E.....Treads, Metallic and Non-Metallic, Nonskid

PART 2 - PRODUCTS

2.1 GENERAL

Use only products by the same manufacturer and from the same production run.

2.2 RESILIENT BASE

- A. ASTM F1861, 3 mm (1/8 inch) thick, 100 mm (4 inches) high, Type TP Rubber, Thermoplastics, Group 2-layered with molded top. Style B-cove.
- B. Where carpet occurs, use Style A-straight.
- C. Use only one type of base throughout.

2.3 PRIMER (FOR CONCRETE FLOORS)

As recommended by the adhesive and tile manufacturer.

2.4 LEVELING COMPOUND (FOR CONCRETE FLOORS)

Provide products with latex or polyvinyl acetate resins in the mix.

2.5 ADHESIVES

- A. Use products recommended by the material manufacturer for the conditions of use.
- B. Use low-VOC adhesive during installation. Water based adhesive with low VOC is preferred over solvent based adhesive.

PART 3 - EXECUTION

3.1 PROJECT CONDITIONS

- A. Maintain temperature of materials above 21° C (70 °F), for 48 hours before installation.
- B. Maintain temperature of rooms where work occurs, between 21° C and 27° C (70°F and 80°F) for at least 48 hours, before, during, and after installation.
- C. Do not install materials until building is permanently enclosed and wet construction is complete, dry, and cured.

3.2 INSTALLATION REQUIREMENTS

- A. The respective manufacturer's instructions for application and installation will be considered for use when approved by the COTR.
- B. Submit proposed installation deviation from this specification to the COTR indicating the differences in the method of installation.
- C. The COTR reserves the right to have test portions of material installation removed to check for non-uniform adhesion and spotty adhesive coverage.

3.3 PREPARATION

- A. Examine surfaces on which material is to be installed.
- B. Fill cracks, pits, and dents with leveling compound.
- C. Level to 3 mm (1/8 inch) maximum variations.
- D. Do not use adhesive for leveling or filling.
- E. Grind, sand, or cut away protrusions; grind high spots.
- F. Clean substrate area of oil, grease, dust, paint, and deleterious substances.
- G. Substrate area dry and cured. Perform manufacturer's recommended bond and moisture test.
- H. Preparation of existing installation:
 - 1. Remove existing base and stair treads including adhesive.
 - 2. Do not use solvents to remove adhesives.
 - 3. Prepare substrate as specified.

3.4 BASE INSTALLATION

- A. Location:
 - 1. Unless otherwise specified or shown, where base is scheduled, install base over toe space of base of casework, lockers, and where other equipment occurs.
 - 2. Extend base scheduled for room into adjacent closet, alcoves, and around columns.
- B. Application:
 - 1. Apply adhesive uniformly with no bare spots.
 - 2. Set base with joints aligned and butted to touch for entire height.
 - 3. Before starting installation, layout base material to provide the minimum number of joints with no strip less than 600 mm (24 inches) length.
 - a. Short pieces to save material will not be permitted.
 - b. Locate joints as remote from corners as the material lengths or the wall configuration will permit.
- C. Form corners and end stops as follows:
 - 1. Score back of outside corner.
 - 2. Score face of inside corner and notch cove.
- D. Roll base for complete adhesion.

3.5 CLEANING AND PROTECTION

- A. Clean all exposed surfaces of base and adjoining areas of adhesive spatter before it sets.
- B. Keep traffic off resilient material for at least 72 hours after installation.
- C. Clean and polish materials in the following order:

1. After two weeks, scrub resilient base, with a minimum amount of water and a mild detergent. Leave surfaces clean and free of detergent residue. Polish resilient base to a gloss finish.
- D. Where protective materials are removed and immediately prior to acceptance, replace damaged materials and re-clean resilient materials. Damaged materials are defined as having cuts, gouges, scrapes or tears and not fully adhered.

- - - E N D - - -

**SECTION 09 65 16
RESILIENT SHEET FLOORING**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This Section specifies the installation of vinyl and linoleum sheet flooring with backing and integral cove base.
- B. Installation of sheet flooring including following:
 - 1. Heat welded seams.
 - 2. Integral cove base: Installed at intersection of floor and vertical surfaces.

1.2 RELATED WORK

- A. Concrete floors: Section 03 30 00, CAST-IN-PLACE CONCRETE.
- B. Color, pattern and texture: Section 09 06 00, SCHEDULE FOR FINISHES.
- C. Resilient base required over metal base of casework: Section 12 31 00, MANUFACTURED METAL CASEWORK.
- D. Resilient base over base of lockers, equipment and casework: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.

1.3 QUALITY CONTROL-QUALIFICATIONS:

- A. The Contracting Officer shall approve products or service of proposed manufacturer, suppliers, and installers, and the Contractor shall submit certification that:
 - 1. Heat welded seaming is manufacturer's prescribed method of installation.
 - 2. Installer is approved by manufacturer of materials and has technical qualifications, experience, trained personnel, and facilities to install specified items.
 - 3. Manufacturer's product submitted has been in satisfactory operation, on three installations similar and equivalent in size to this project for three years. Submit list of installations.
- B. The sheet vinyl and linoleum floor coverings shall meet fire performance characteristics as determined by testing products, per ASTM test method, indicated below by Underwriters Laboratories, Inc. (UL) or another recognized testing and inspecting agency acceptable to authorities having jurisdiction.
 - 1. Critical Radiant Flux: 0.45 watts per sq. cm or more, Class I, per ASTM E648.
 - 2. Smoke Density: Less than 450 per ASTM E662.
- C. The floor covering manufacturer shall certify that products supplied for installation comply with local regulations controlling use of volatile organic compounds (VOC's).

1.4 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, submit following:
- B. Manufacturer's Literature and Data:
 - 1. Description of resilient material and accessories to be provided.
 - 2. Resilient material manufacturer's recommendations for adhesives, weld rods, sealants, and underlayment.
 - 3. Application and installation instructions.
- C. Samples:
 - 1. Sheet material, 38 mm by 300 mm (1-1/2 inch by 12 inch), of each color and pattern with a welded seam using proposed welding rod and 300 mm (12 inches) square for each type, pattern and color.
 - 2. Cap strip and fillet strip, 300 mm (12 inches) for integral base.
 - 3. Shop Drawings and Certificates: Layout of joints showing patterns where joints are expressed, and type and location of obscure type joints. Indicate orientation of directional patterns.
 - 4. Certificates: Quality Control Certificate Submittals and lists specified in paragraph, QUALIFICATIONS.
 - 5. Edge strips: 150 mm (6 inches) long each type.
 - 6. Adhesive, underlayment and primer: Pint container, each type.

1.5 PROJECT CONDITIONS

- A. Maintain temperature of floor materials and room, where work occurs, above 18 ° C (65 °F) and below 38 °C (100 °F) for 48 hours before, during and for 48 hours after installation. After above period, room temperature shall not fall below 13 °C (55 °F).
- B. Construction in or near areas to receive flooring work shall be complete, dry and cured. Do not install resilient flooring over slabs until they have been cured and are sufficiently dry to achieve a bond with adhesive. Follow flooring manufacturer's recommendations for bond and moisture testing.
- C. Building shall be permanently enclosed. Schedule construction so that floor receives no construction traffic when completed.

1.6 DELIVERY, STORAGE AND HANDLING

- A. Deliver materials to site in original sealed packages or containers; labeled for identification with manufacturer's name and brand.
- B. Deliver sheet flooring full width roll, completely enclosed in factory wrap, clearly marked with the manufacturer's number, type and color, production run number and manufacture date.
- C. Store materials in weathertight and dry storage facility. Protect from damage due to handling, weather, and construction operations before,

during and after installation. Store sheet flooring on end with ambient temperatures maintained as recommended by manufacturer.

- D. Store sheet flooring on end.
- E. Move sheet vinyl and linoleum floor coverings and installation accessories into spaces where they will be installed at least 48 hours in advance of installation.

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society For Testing Materials (ASTM):
 - E648-09.....Critical Radiant Flux of Floor-Covering Systems Using a Radiant Energy Source.
 - E662-09.....Specific Optical Density of Smoke Generated by Solid Materials.
 - F710-08.....Practice for Preparing Concrete Floors and Other Monolithic Floors to Receive Resilient Flooring.
 - F1303-04.....Sheet Vinyl Floor Covering with Backing.
 - F1869-04.....Moisture Vapor Emission Rate of Concrete Subfloor using Anhydrous Calcium Chloride
 - F1913-04.....Sheet Vinyl Flooring without Backing
 - F2170-09.....Determining Relative Humidity in Concrete Floor Slabs using In-situ Probes
- C. Resilient Floor Covering Institute (RFCI):
 - Recommended Work Practices for Removal of Resilient Floor Coverings.

1.8 SCHEDULING

Interior finish work such as plastering, drywall finishing, concrete, terrazzo, ceiling work, and painting work shall be complete and dry before installation. Mechanical, electrical, and other work above ceiling line shall be completed. Heating, ventilating, and air conditioning systems shall be installed and operating in order to maintain temperature and humidity requirements.

1.9 WARRANTY:

Submit written warranty, in accordance with FAR clause 52.246-21, Warranty of Construction requirements except that warranty period shall be extended to include two (2) years.

PART 2 - PRODUCTS

2.1 SHEET VINYL AND LINOLEUM FLOOR COVERINGS

- A. Sheet Vinyl and Linoleum Floor Coverings: Smooth face, minimum thickness nominal

2 mm (0.08 inch). Sheet flooring shall conform to ASTM F1913 and material requirements specified in ASTM F1303, Type II, Grade 1. Linoleum shall be made from renewable materials such as cork, linseed oil, wood resin, and jute backing. Foam backed sheet flooring is not acceptable.

- B. Size: Provide maximum size sheet material produced by manufacturer to provide minimum number of joints. Minimum size width acceptable - 1200 mm (48 inches).
- C. Each color and pattern of sheet flooring shall be of same production run.

2.2 WELDING ROD:

Product of floor covering manufacturer in color shall match field color of sheet vinyl and linoleum covering.

2.3 APPLICATION MATERIALS AND ACCESSORIES

- A. Floor and Base Adhesive: Type recommended by sheet flooring material manufacturer for conditions of use.
- B. Mastic Underlayment (for concrete floors): Provide products with latex or polyvinyl acetate resins in mix. Condition to be corrected shall determine type of underlayment selected for use.
- C. Base Accessories:
 - 1. Fillet Strip: 19 mm (3/4 inch) radius fillet strip compatible with resilient sheet material.
 - 2. Cap Strip: Extruded flanged zero edge vinyl reducer strip approximately 25 mm (one inch) exposed height with 13 mm (1/2 inch) flange.

2.4 SHEET FLOORING

- A. ASTM F1303, Type II, Grade 1, except for backing requirements. Foam backed sheet flooring is not acceptable.
- B. Minimum nominal thickness 2 mm (0.08 inch); 1800 mm (6 ft) minimum width.
- C. Critical Radiant Flux: 0.45 watts per sq.cm or more, Class I, per ASTM E648.
- D. Smoke density: less than 450 per ASTM E662.
- E. Color and pattern of sheet flooring of the same production run.

2.5 ADHESIVES

Water resistant type recommended by the sheet flooring manufacturer for the conditions of use. VOC not to exceed 50g/L

2.6 BASE CAP STRIP AND COVE STRIP

- A. Extruded vinyl compatible with the sheet flooring.

- B. Cap strip "J" shape with feathered edge flange approximately 25 mm (one inch) wide; top designed to receive sheet flooring with 13 mm (1/2 inch) flange lapping top of flooring
- C. Cove strip 70 mm (2-3/4 inch) radius.

2.7 LEVELING COMPOUND (FOR CONCRETE FLOORS)

Provide cementitious products with latex or polyvinyl acetate resins in the mix.

2.8 PRIMER (FOR CONCRETE SUBFLOORS)

As recommended by the adhesive or sheet flooring manufacturer.

2.9 EDGE STRIPS

- A. Extruded aluminum, mill finish, mechanically cleaned.
- B. 28 mm (1-1/8 inch) wide, 6 mm (1/4 inch) thick, bevel one edge to 3 mm (1/8 inch) thick.
- C. Drill and counter sink edge strips for flat head screws. Space holes near ends and approximately 225 mm (9 inches) on center in between.

2.10 SEALANT

- A. As specified in Section 07 92 00, JOINT SEALANTS.
- B. Compatible with sheet flooring.

PART 3 - EXECUTION

3.1 PROJECT CONDITIONS

- A. Maintain temperature of sheet flooring above 36 °C (65 °F), for 48 hours before installation.
- B. Maintain temperature of rooms where sheet flooring work occurs above 36 °C (65 °F), for 48 hours, before installation and during installation.
- C. After installation, maintain temperature at or above 36 °C (65 °F.)
- D. Building is permanently enclosed.
- E. Wet construction in or near areas to receive sheet flooring is complete, dry and cured.

3.2 SUBFLOOR PREPARATION

- A. Concrete Subfloors: Verify that concrete slabs comply with ASTM F710.
 - 1. Installer shall examine surfaces on which resilient sheet flooring is to be installed, and shall advise Contractor, in writing, of areas which are unacceptable for installation of flooring material. Installer shall advise Contractor which methods are to be used to correct conditions that will impair proper installation. Installation shall not proceed until unsatisfactory conditions have been corrected.

2. Slab substrates dry, free of curing compounds, sealers, hardeners, and other materials which would interfere with bonding of adhesive. Determine adhesion and dryness characteristics by performing bond and moisture tests recommended by Resilient Floor Covering Institute recommendations in manual RFCI-MRP.
 3. Apply self leveling and patching compound as required to achieve even surface suitable to receive new flooring.
- B. Broom or vacuum clean substrates to be covered by sheet vinyl and linoleum floor coverings immediately before installation. Following cleaning, examine substrates to determine if there is visually any evidence of moisture, alkaline salts, carbonation, or dust.
- C. Primer: If recommended by flooring manufacturer, prior to application of adhesive, apply concrete slab primer in accordance with manufacturer's directions.
- D. Correct conditions which will impair proper installation, including trowel marks, pits, dents, protrusions, cracks or joints.
- E. Fill cracks, joints, depressions, and other irregularities in concrete with leveling compound.
1. Do not use adhesive for filling or leveling purposes.
 2. Do not use leveling compound to correct imperfections which can be corrected by spot grinding.
 3. Trowel to smooth surface free of trowel marks, pits, dents, protrusions, cracks or joint lines.
- F. Clean floor of oil, paint, dust and deleterious substances. Leave floor dry and cured free of residue from existing curing or cleaning agents.
- G. Moisture Testing: Perform moisture and pH test as recommended by the flooring and adhesive manufacturers. Perform test locations starting on the deepest part of the concrete structure. Proceed with installation only after concrete substrates meet or exceed the manufacturer's requirements. In the absence of specific guidance from the flooring or adhesive manufacturer the following requirements are to be met:
1. Perform moisture vapor emission tests in accordance with ASTM F1869. Proceed with installation only after substrates have a maximum moisture-vapor-emission rate of 1.36 kg of water/92.9 sq. m (3lb of water/1000 sq. ft.) in 24 hours.
 2. Perform concrete internal relative humidity testing using situ probes in accordance with ASTM F2170. Proceed with installation only after concrete reaches maximum 75 percent relative humidity level measurement.

- H. Preparation shall include the removal of existing roofing substrates, flooring and/ or existing adhesive. Do not use solvents to remove adhesives. Coordinate with Asbestos Abatement Section if asbestos abatement procedures will be involved.

3.3 INSTALLATION OF FLOORING

- A. Install work in strict compliance with manufacturer's instructions and approved layout drawings.
- B. Maintain uniformity of sheet vinyl and linoleum floor covering direction and avoid cross seams.
- C. Arrange for a minimum number of seams and place them in inconspicuous and low traffic areas, but in no case less than 150 mm (6 inches) away from parallel joints in flooring substrates.
- D. Match edges of resilient floor coverings for color shading and pattern at seams.
- E. Where resilient sheet flooring abuts other flooring material floors shall finish level.
- F. Extend sheet vinyl and linoleum floor coverings into toe spaces, door reveals, closets, and similar openings.
- G. Inform the COTR of conflicts between this section and the manufacturer's instructions or recommendations for auxiliary materials, or installation methods, before proceeding.
- H. Install sheet in full coverage adhesives.
1. Air pockets or loose edges will not be accepted.
 2. Trim sheet materials to touch in the length of intersection at pipes and vertical projections; seal joints at pipe with waterproof cement or sealant.
- I. Keep joints to a minimum; avoid small filler pieces or strips.
- J. Follow manufacturer's recommendations for seams at butt joints. Do not leave any open joints that would be readily visible from a standing position.
- K. Follow manufacturer's recommendations regarding pattern match, if applicable.
- L. Installation of Edge Strips:
1. Locate edge strips under center lines of doors unless otherwise indicated.
 2. Set aluminum strips in adhesive, anchor with lead anchors and stainless steel Phillips screws.
- M. Integral Cove Base Installation:
1. Set preformed fillet strip to receive base.

2. Install the base with adhesive, terminate expose edge with the cap strip.
3. Form internal and external corners to the geometric shape generated by the cove at either straight or radius corners.
4. Solvent weld joints as specified for the flooring. Seal cap strip to wall with an adhesive type sealant.
5. Unless otherwise specified or shown where sheet flooring is scheduled, provide integral base at intersection of floor and vertical surfaces. Provide sheet flooring and base scheduled for room on floors and walls under and behind areas where casework, laboratory and pharmacy furniture and other equipment occurs, except where mounted in wall recesses.

3.4 INSTALLATION OF INTEGRAL COVED BASE

- A. Set preformed cove to receive base. Install base material with adhesive and terminate exposed edge with cap strip. Integral base shall be 100 mm (4 inches) high.
- B. Internal and external corners shall be formed to geometric shape generated by cove at either square or radius corners.

3.5 WELDING

- A. Heat weld all joints of flooring and base using equipment and procedures recommended by flooring manufacturer.
- B. Welding shall consist of routing joint, inserting a welding rod into routed space, and terminally fusing into a homogeneous joint.
- C. Upon completion of welding, surface across joint shall finish flush, free from voids, and recessed or raised areas.
- D. Fusion of Material: Joint shall be fused a minimum of 65 percent through thickness of material, and after welding shall meet specified characteristics for flooring.

3.6 CLEANING

- A. Clean small adhesive marks during application of sheet flooring and base before adhesive sets, excessive adhesive smearing will not be accepted.
- B. Remove visible adhesive and other surface blemishes using methods and cleaner recommended by floor covering manufacturers.
- C. Clean and polish materials per flooring manufacturer's written recommendations.
- D. Vacuum floor thoroughly.
- E. Do not wash floor until after period recommended by floor covering manufacturer and then prepare in accordance with manufacturer's recommendations.

F. Upon completion, COTR shall inspect floor and base to ascertain that work was done in accordance with manufacturer's printed instructions.

G. Perform initial maintenance according to flooring manufacturer's written recommendations.

3.7 PROTECTION:

A. Protect installed flooring as recommended by flooring manufacturer against damage from rolling loads, other trades, or placement of fixtures and furnishings.

B. Keep traffic off sheet flooring for 24 hours after installation.

C. Where construction traffic is anticipated, cover sheet flooring with reinforced kraft paper properly secured and maintained until removal is authorized by the COTR.

D. Where protective materials are removed and immediately prior to acceptance, repair any damage, re-clean sheet flooring, lightly re-apply polish and buff floor.

- - - E N D - - -

SECTION 09 67 23.60
RESINOUS (URETHANE AND EPOXY MORTAR) FLOORING (RES-6)

PART 1 - GENERAL**1.1 DESCRIPTION**

A. This section specifies Resinous (Resinous urethane mortar) waterproofing flooring with integral cove base and pit liner:

1. High Abuse Climatic Troweled and Sealed Urethane Mortar Flooring System.

1.2 RELATED WORK

- A. Concrete and Moisture Vapor Barrier: Section 03 30 00, CAST-IN-PLACE CONCRETE.
- B. Color and location of each type of resinous (urethane mortar) flooring:
As indicated in Section 09 06 00, SCHEDULE FOR FINISHES.
- C. Floor Drains: Division 22, PLUMBING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
1. Description of each product to be provided.
 2. Application and installation instructions.
 3. Maintenance Instructions: Submit manufacturer's written instructions for recommended maintenance practices.
- C. Qualification Data: For Installer.
- D. Sustainable Submittal:
1. Product data for products having recycled content, submit documentation indicating percentages by weight of postconsumer and pre consumer recycled content.
 - a. Include statements indicating costs for each product having recycled content, and low emitting materials.
 2. Product data: Include printed statement of VOC content indicating compliance with environmental requirements.
 3. Product data: 12%-35% Post-consumer recycled glass content.
 4. Product data: Renewable resin.
 5. Product data for field applied, interior, paints, coatings, and primers, include printed statement of VOC content indicating compliance with environmental requirements.
- E. Samples:
1. Each color and texture specified in Section 09 06 00, SCHEDULE FOR FINISHES.

2. Samples for verification: For each (color and texture) resinous flooring system required, 6 inches (152 mm) square, applied to a rigid backing by installer for this project.
 3. Sample showing construction from substrate to finish surface in thickness specified and color and texture of finished surfaces. Finished flooring must match the approved samples in color and texture.
- F. Shop Drawings: Include plans, sections, component details, and attachment to other trades. Indicate layout of the following:
1. Patterns.
 2. Edge configurations.
 3. Waterproofing Membrane.
- G. Certifications and Approvals:
1. Manufacturer's certification of material and substrate compliance with specification.
 2. Manufacturer's approval of installer.
 3. Contractor's certificate of compliance with Quality Assurance requirements.
- H. Warranty: As specified in this section.

1.4 QUALITY ASSURANCE

- A. Manufacture Certificate: Manufacturer shall certify that a particular resinous flooring system has been manufactured and in use for a minimum of five (5) years.
- B. Installer Qualifications: Engage an experienced installer (applicator) who is experienced in applying resinous flooring systems similar in material, design, and extent to those indicated for this project for a minimum period of five (5) years, whose work has resulted in applications with a record of successful in-service performance, and who is acceptable to resinous flooring manufacturer.
1. Engage an installer who is certified in writing by resinous flooring manufacturer as qualified to apply resinous flooring systems indicated.
 2. Contractor shall have completed at least five (5) projects of similar size and complexity. Include list of at least five (5) projects. List must include owner (purchaser); address of installation, contact information at installation project site; and date of installation.
 3. Installer's Personnel: Employ persons trained for application of specified product.
- C. Source Limitations:

1. Obtain primary resinous flooring materials including primers, resins, hardening agents, grouting coats and finish or sealing coats from a single manufacturer.
 2. Provide secondary materials, including patching and fill material, joint sealant, and repair material of type and from source recommended by manufacturer of primary materials.
- D. Mockups: Apply mockups to verify selections made under sample submittals and to demonstrate aesthetic effects and establish quality standards for materials and execution.
1. Apply full-thickness mockups on 48 inch (1200 mm)square floor area selected by VA COTR.
 - a. If applicable include 48 inch (1200 mm)length of integral cove base.
 2. Approved mockups not damaged during the testing may become part of the completed work if undisturbed at time of Substantial Completion.
 3. Sign off from VA COTR on texture for slipresistance and clean ability must be complete before installation of flooring system.
- E. Pre-Installation Conference:
1. Convene a meeting not less than thirty days prior to starting work.
 2. Attendance:
 - a. Contractor
 - b. VA COTR
 3. Review the following:
 - a. Environmental requirements
 - 1) Air and surface temperature
 - 2) Relative humidity
 - 3) Ventilation
 - 4) Dust and contaminates
 - b. Protection of surfaces not scheduled to be coated
 - c. Inspect and discuss condition of substrate and other preparatory work performed
 - d. Review and verify availability of material; installer's personnel, equipment needed
 - e. Design and patterns and edge conditions.
 - f. Performance of the coating with chemicals anticipated in the area receiving the resinous (urethane mortar/cement) flooring system
 - g. Application and repair
 - h. Field quality control
 - i. Cleaning
 - j. Protection of coating systems

- k. One-year inspection and maintenance
- l. Coordination with other work
- F. Manufacturer's Field Services: Manufacturer's representative shall provide technical assistance and guidance for surface preparation and application of resinous flooring systems.
- G. Contractor Job Site Log: Contractor shall document daily; the work accomplished environmental conditions and any other condition event significant to the long term performance of the urethane mortar/cement flooring materials installation. The Contractor shall maintain these records for one year after Substantial Completion.
- H. Volatile Organic Compound content to remain under 100g/liter.

1.5 MATERIAL PACKAGING DELIVERY AND STORAGE

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.
- B. Protect materials from damage and contamination in storage or delivery, including moisture, heat, cold, direct sunlight, etc.
- C. Maintain temperature of storage area between 60 and 80 degrees F (15 and 26 degrees C).
- D. Keep containers sealed until ready for use.
- E. Do not use materials beyond manufacturer's shelf life limits.
- F. Package materials in factory pre-weighed and in single, easy to manage batches sized for ease of handling and mixing proportions from entire package or packages. No On site weighing or volumetric measurements are allowed.

1.6 PROJECT CONDITIONS

- A. Environmental Limitations: Comply with resinous flooring manufacturer's written instructions for substrate temperature, ambient temperature, moisture, ventilation, and other conditions affecting resinous flooring applications.
 - 1. Maintain material and substrate temperature between 65 and 85 degrees F (18 and 30 degrees C) during resinous flooring application and for not less than 24 hours after application.
- B. Lighting: Provide permanent lighting or, if permanent lighting is not in place, simulate permanent lighting conditions during resinous flooring application.
- C. Close spaces to traffic during resinous flooring application and for not less than 24 hours after application, unless manufacturer recommends a longer period.

- D. Concrete substrate shall be properly cured for a minimum of 30 days. A vapor barrier must be present for concrete subfloors on or below grade. Otherwise, an osmotic pressure resistant grout must be installed prior to the resinous flooring.

1.7 WARRANTY

- A. Work subject to the terms of the Article "Warranty of Construction" FAR clause 52.246-21.
- B. Warranty: Manufacture shall furnish a single, written warranty covering the full assembly (including substrata) for both material and workmanship for a extended period of five (5) full years from date of installation, or provide a joint and several warranty signed on a single document by manufacturer and applicator jointly and severally warranting the materials and workmanship for a period of five (5) full years from date of installation. A sample warranty letter must be included with bid package or bid may be disqualified.

1.8 APPLICABLE PUBLICATIONS

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
- B221-08.....Standard Specification for Aluminum and
Aluminum-Alloy Extruded Bars, Rods, Wire,
Profiles, and Tubes
- C307-03 (2008).....Standard Test Method for Tensile Strength of
Chemical-Resistant Mortar, Grouts, and
Monolithic Surfacing
- C413-01(2006).....Standard Test Method for Absorption of Chemical-
Resistant Mortars, Grouts, Monolithic Surfacing
and Polymer Concretes
- C531-00(2005).....Standard Test Method for Linear Shrinkage and
Coefficient of Thermal Expansion of Chemical-
Resistant Mortars, Grouts, Monolithic
Surfacing, and Polymer Concretes
- C579-01(2006).....Standard Test Method for Compressive Strength of
Chemical-Resistant Mortars, Grouts, Monolithic
Surfacing, and Polymer Concretes
- C580-02(2008).....Standard Test Method for Flexural Strength and
Modulus of Elasticity of Chemical-Resistant
Mortars, Grouts, Monolithic Surfacing, and
Polymer Concretes

C811-98(2008).....Standard Practice for Surface Preparation of
Concrete for Application of Chemical-Resistant
Resin Monolithic Surfacing

D1308-02(2007).....Standard Test Method for Effect of Household
Chemicals on Clear and Pigmented Organic
Finishes

D2047-04Standard Test Method for Static Coefficient of
Friction of Polish-Coated Flooring Surfaces as
Measured by the James Machine

D2240-05.....Standard Test Method for Rubber Property –
Durometer Hardness

D4060-07.....Standard Test Method for Abrasion Resistance of
Organic Coatings by the Taber Abraser

D4226-09.....Standard Test Methods for Impact Resistance of
Rigid Poly(Vinyl Chloride) (PVC) Building
Products

D7234-05.....Standard Test Methods for Pull-Off Adhesion
Strength of Coatings on Concrete Using Portable
Pull-Off Adhesion Testers

F1869-09.....Standard Test Method for Measuring Moisture
Vapor Emission Rate of Concrete Subfloor Using
Anhydrous Calcium Chloride

F2170-09.....Standard Test Method for Determining Relative
Humidity in Concrete Floor Slabs Using in situ
Probes

C. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 501.....Finishes for Aluminum

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION FOR RES-6A (HEAVY DUTY CLIMATIC)

A. System Descriptions:

1. Monolithic, multi-component urethane chemistry resinous flooring system, Screed and steel finish trowel applied, chemical and thermal cycling and shock resistant. Self priming multiple component polyurethane mortar, including waterproofing membrane quartz aggregates for texture and associated high performance urethane sealer. Temperature resistance to 250 degrees F (121 degrees C) where required.

B. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up.

C. System Components: Verify specific requirements as systems vary by manufacturer. Verify mortar base product, build up layers of broadcast systems will not be accepted. Verify compatibility with substrate. Use manufacturer's standard components, compatible with each other and as follows:

1. Mortar (Body coat):

- a. Resin: Urethane with rapidly renewable resin components.
- b. Formulation Description: Multiple component high solids.
- c. Application Method: Screed and steel finish trowel.
- d. Thickness of coat(s): Nominal thickness 3/8 inch (9.37mm).
- e. Number of Coats: One.
- f. Aggregates: Quartz texture broadcast into wet urethane mortar base.

2. Seal Coat(s):

- a. Resin: Urethane.
- b. Formulation Description: Pigmented Two-component, high solids.
- c. Application Method: Squeegee and Back roll.
- d. Number of Coats: One.

D. Physical Properties:

1. Physical Properties of flooring system when tested as follows:

Property	Test	Value
Compressive Strength	ASTM C579	5,000 psi after 7 days
Tensile Strength	ASTM C307	1,000 psi
Flexural Strength	ASTM C580	2,400 psi
Water Absorption	ASTM C413	0.056%
Coefficient of friction dry/slip index wet	ASTM D2047	>1.0 dry >1.0 wet
Impact Resistance	ASTM D4226	> 160 in. lbs
Abrasion Resistance	ASTM D4060	0.05 gm maximum weight loss
Thermal Coefficient of Linear Expansion	ASTM C531	1.1×10^{-5} mm/ °C mm
Hardness Shore D	ASTM D2240	80 to 84
Bond Strength	ASTM D7234	>300 psi 100% concrete failure
Chemical Resistance of the following:	ASTM D1308	No Effect
Acetic acid	5 percent	
Ammonium hydroxide	10 percent	
Citric Acid	50 percent	
Fatty acid Motor Oil, 20W		
Hydrochloric acid	10 percent	
Salt water	10 percent	
Sodium Hydroxide	10 percent	
Sulfuric acid	10 percent	
Trisodium phosphate	5 percent	
Urine		
Feces		
Hydrogen peroxide	28 percent	
Distilled Water		
Sodium Hypochloride	5.28 percent	

2.2 SUPPLEMENTAL MATERIALS

- A. Textured Top Coat: Type recommended or produced by manufacturer of seamless resinous flooring system, slip resistance for desired final finish.
- B. Joint Sealant: Type recommended or produced by resinous flooring manufacturer for type of service or joint conditioned indicated.
- C. Waterproof Membrane: Type recommended or produced by manufacturer of resinous floor coatings for type of service and conditions as specified.

- D. Crack Isolation Membrane: Type recommended or produced by manufacturer of resinous flooring for conditions as specified.
- E. Anti-Microbial Additive: Incorporate anti-microbial chemical additive to prevent growth of most bacteria, algae, fungi, mold, mildew, yeast, etc.
- F. Patching and Fill Material: Resinous product of or approved by resinous coating manufacturer for application indicated. Resinous based materials only. Cementitious or single component product are not acceptable.
 - 1. required on all penetrations through newly installed resinous flooring.

2.3 TROWELED COVE BASE

- A. Same physical properties as specified resinous mortar system.
 - 1. Climatic.

2.4 BASE CAP STRIP

- A. Aluminum, Extruded: ASTM B221, Alloy 6063-T6.
- B. Shape for 3/16 inch (4.76 mm) depth of base material, "J" configuration.
- C. Finish:
 - 1. Finish exposed surfaces in accordance with NAAMM Metal Finishes Manual.
 - 2. Aluminum: NAAMM Amp 501:
 - a. Clear anodic coating, AA-C22A41 chemically etched medium matte, with Architectural Class 1, 0.7 mils (0.018 mm) or thicker.

PART 3 - EXECUTION

3.1 INSPECTION

- A. Examine the areas and conditions where monolithic resinous (urethane mortar) flooring system with integral base is to be installed with the VA COTR.
- B. Moisture Vapor Emission Testing: Perform moisture vapor transmission testing in accordance with ASTM F1869 to determine the MVER of the substrate prior to commencement of the work. See section 3.4, 3.

3.2 PROJECT CONDITIONS

- A. Maintain temperature of rooms (air and surface) where work occurs, between 70 and 90 degrees F (21 and 32 degrees C) for at least 48 hours, before, during, and 24 hours after installation. Maintain temperature at least 70 degrees F (21 degrees C) during cure period.
- B. Maintain relative humidity less than 75 percent.
- C. Do not install materials until building is permanently enclosed and wet construction is complete, dry, and cured.
- D. Maintain proper ventilation of the area during application and curing time period.
 - 1. Comply with infection control measures of the VA Medical Center.

3.3 INSTALLATION REQUIREMENTS

- A. The manufacturer's instructions for application and installation shall be reviewed with the VA COTR for the seamless resinous (urethane mortar) flooring system with integral cove base and trench liner.
- B. Substrate shall be approved by manufacturer technical representative.

3.4 PREPARATION

- A. General: Prepare and clean substrates according to resinous flooring manufacturer's written instructions for substrate indicated. Provide clean, dry, and neutral Ph substrate for resinous flooring application.
- B. Concrete Substrates: Provide sound concrete surfaces free of laitance, glaze, efflorescence, curing compounds, form-release agents, dust, dirt, grease, oil, and other contaminants incompatible with resinous flooring.
 - 1. Prepare concrete substrates as follows:
 - a. Comply with ASTM C 811 requirements, unless manufacturer's written instructions are more stringent. Use of acids is never allowed.
 - 2. Repair damaged and deteriorated concrete according to resinous flooring manufacturer's written recommendations. Apply patching and self leveling compound as required to achieve even surface suitable to receive new flooring.
 - 3. Verify that concrete substrates are dry.
 - a. Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with application only after substrates have maximum moisture-vapor-emission rate of **[5 lb of water/1000 sq. ft. (1.36 kg of water/92.9 sq. m)]** in 24 hours.
 - b. MVT threshold for monolithic resinous Non - climatic flooring shall not exceed 5 lbs/1000 square feet (0.0001437 kPa) in a 24 hour period. MVT threshold for monolithic resinous climatic flooring shall not exceed 6 lbs/1000 square feet (0.0002155 kPa) over a 24 hour period.
 - c. When MVT emission exceeds this limit, apply manufacturer's recommended vapor control primer or other corrective measures as recommended by manufacturer prior to application of flooring or membrane systems.
 - d. Perform in situ probe test, ASTM F2170. Proceed with application only after substrates do not exceed a maximum potential equilibrium relative humidity of 75-80 percent.
 - a. Provide a written report showing test placement and results.
 - 4. Verify that concrete substrates have neutral Ph and that resinous flooring will adhere to them. Perform tests recommended by

- manufacturer. Proceed with application only after substrates pass testing.
- C. Resinous Materials: Mix components and prepare materials according to resinous flooring manufacturer's written instructions.
 - D. Use patching and fill material to fill holes and depressions in substrates according to manufacturer's written instructions.
 - E. Treat control joints and other nonmoving substrate cracks to prevent cracks from reflecting through resinous flooring according to manufacturer's written recommendations. Allowances should be included for flooring manufacturer recommended joint fill material, and concrete crack treatment.
 - F. Prepare wall to receive integral cove base and trench liner:
 - 1. Verify wall material is acceptable for resinous flooring application, if not, install material (e.g. cement board) to receive base.
 - 2. Fill voids in wall surface to receive base, install undercoats (e.g. water proofing membrane, and/or crack isolation membrane) as recommended by resinous flooring manufacturer.
 - 3. Install base and trench liner prior to flooring if required by resinous flooring manufacturer.
 - 4. Grind, cut or sand protrusions to receive base application.

3.5 APPLICATION

- A. General: Apply components of resinous flooring system according to manufacturer's written instructions to produce a uniform, monolithic wearing surface of thickness indicated.
 - 1. Coordinate application of components to provide optimum adhesion of resinous flooring system to substrate, and optimum intercoat adhesion.
 - 2. Cure resinous flooring components according to manufacturer's written instructions. Prevent contamination during application and curing processes.
 - 3. At substrate expansion and isolation joints, provide joint in resinous flooring to comply with resinous flooring manufacturer's written recommendations.
 - a. Apply joint sealant to comply with manufacturer's written recommendations.
- B. Apply cove base: Trowel to wall surfaces at a 1 inch radius, before applying flooring. Apply according to manufacturer's written instructions and details including those for taping, mixing, priming, and troweling, sanding, and top coating of cove base. Round internal and external corners.

- C. Trowel mortar base: Mix mortar material according to manufacturer's recommended procedures. Climatic resinous flooring systems may vary slightly on mode of application. Application should be based upon the following: Uniformly spread mortar over substrate using a specially designed screed box adjusted to manufacturer's recommended height. Metal trowel (hand or power) single mortar coat in thickness indicated for flooring system, grout to fill substrate voids. When cured, sand to remove trowel marks and roughness
- D. Topcoat: Mix and roller apply the topcoat(s) with strict adherence to manufacturer's installation procedures and coverage rates.

3.6 TOLERANCE

- A. From line of plane: Maximum 1/8 inch (3.18 mm) in total distance of flooring and base.
- B. From radius of cove: Maximum of 1/8 inch (3.18 mm) plus or 1/16-inch (1.59 mm) minus.

3.7 CURING, PROTECTION AND CLEANING

- A. Cure resinous flooring materials in compliance with manufacturer's directions, taking care to prevent contamination during stages of application and prior to completion of curing process.
- B. Close area of application for a minimum of 24 hours.
- C. Protect resinous flooring materials from damage and wear during construction operation.
 - 1. Cover flooring with kraft type paper.
 - 2. Optional 6 mm (1/4 inch) thick hardboard, plywood, or particle board where area is in foot or vehicle traffic pattern, rolling or fixed scaffolding and overhead work occurs.
- D. Remove temporary covering and clean resinous flooring just prior to final inspection. Use cleaning materials and procedures recommended by resinous flooring manufacturer.

- - - E N D - - -

**SECTION 09 68 00
CARPETING**

PART 1 - GENERAL**1.1 DESCRIPTION**

Section specifies carpet, edge strips, adhesives, and other items required for complete installation.

1.2 RELATED WORK

- A. Color and texture of carpet and edge strip: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Resilient wall base: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.

1.3 QUALITY ASSURANCE

- A. Carpet installed by mechanics certified by the Floor Covering Installation Board.
- B. Certify and label the carpet that it has been tested and meets criteria of CRI IAQ Carpet Testing Program for indoor air quality.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Product Data:
 - 1. Manufacturer's catalog data and printed documentation stating physical characteristics, durability, resistance to fading and flame resistance characteristics for each type of carpet material and installation accessory.
 - 2. Manufacturer's printed installation instructions for the carpet, including preparation of installation substrate, seaming techniques and recommended adhesives and tapes.
 - 3. Manufacturer's certificate verifying carpet containing recycled materials include percentage of recycled materials as specified.
- C. Samples:
 - 1. Carpet: "Production Quality" samples 300 x 300 mm (12 x 12 inches) of carpets, showing quality, pattern and color specified in Section 09 06 00, SCHEDULE FOR FINISHES.
 - 2. Floor Edge Strip (Molding): 150 mm (6 inches) long of each color and type specified.
- D. Shop Drawings: Installers layout plan showing seams and cuts for sheet carpet and carpet module.
- E. Maintenance Data: Carpet manufacturer's maintenance instructions describing recommended type of cleaning equipment and material, spotting and cleaning methods and cleaning cycles.

1.5 DELIVERY AND STORAGE

- A. Deliver carpet in manufacturer's original wrappings and packages clearly labeled with manufacturer's name, brand, name, size, dye lot number and related information.
- B. Deliver adhesives in containers clearly labeled with manufacturer's name, brand name, number, installation instructions, safety instructions and flash points.
- C. Store in a clean, dry, well ventilated area, protected from damage and soiling. Maintain storage space at a temperature above 16 degrees C (60 degrees F) for 2 days prior to installation.

1.6 ENVIRONMENTAL REQUIREMENTS

Areas in which carpeting is to be installed shall be maintained at a temperature above 16 degrees C (60 degrees F) for 2 days before installation, during installation and for 2 days after installation. A minimum temperature of 13 degrees C (55 degrees F) shall be maintained thereafter for the duration of the contract. Traffic or movement of furniture or equipment in carpeted area shall not be permitted for 24 hours after installation. Other work which would damage the carpet shall be completed prior to installation of carpet.

1.7 WARRANTY

Carpet and installation subject to terms of "Warranty of Construction" FAR clause 52.246-21, except that warranty period is extended to two years.

1.8 APPLICABLE PUBLICATIONS

- A. Publication listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):
ANSI/NSF 140-07.....Sustainable Carpet Assessment Standard
- C. American Association of Textile Chemists and Colorists (AATCC):
AATCC 16-04.....Colorfastness to Light
AATCC 129-05.....Colorfastness to Ozone in the Atmosphere under High Humidities
AATCC 134-06.....Electric Static Propensity of Carpets
AATCC 165-99.....Colorfastness to Crocking: Textile Floor Conerings-AATCC Crockmeter Method
- D. American Society for Testing and Materials (ASTM):
ASTM D1335-05.....Tuft Bind of Pile Yarn Floor Coverings
ASTM D3278-96 (R2004)...Flash Point of Liquids by Small Scale Closed-Cup Apparatus

ASTM D5116-06.....Determinations of Organic Emissions from Indoor
Materials/Products

ASTM D5252-05.....Operation of the Hexapod Tumble Drum Tester

ASTM D5417-05.....Operation of the Vettermann Drum Tester

ASTM E648-06.....Critical Radiant Flux of Floor-Covering Systems
Using a Radiant Heat Energy Source

E. The Carpet and Rug Institute (CRI):

CRI 104-02.....Installation of Commercial Carpet

PART 2 - PRODUCTS

2.1 CARPET

A. Physical Characteristics:

1. Carpet free of visual blemishes, streaks, poorly dyed areas, fuzzing of pile yarn, spots or stains and other physical and manufacturing defects.
2. Manufacturers standard construction commercial carpet:
 - a. Modular Tile: 660 mm (24 inches) square tile.
3. Provide static control to permanently control static build up to less than 2.0 kV when tested at 20 percent relative humidity and 21 degrees C (70 degrees F) in accordance with AATCC 134.
4. Pile Height: Maximum 3.25 mm (0.10 inch).
5. Pile Fiber: Nylon with recycled content 25 percent minimum branded (federally registered trademark).
6. Pile Type: Level Loop.
7. Backing materials: Manufacturer's unitary backing designed for glue-down installation using recovered materials.
8. Appearance Retention Rating (ARR): Carpet shall be tested and have the minimum 3.5-4.0 Severe ARR when tested in accordance with either the ASTM D 5252 (Hexapod) or ASTM D 5417 (Vettermann) test methods using the number of cycles for short and long term tests as specified.
9. Tuft Bind: Minimum force of 40 N (10 lb) required to pull a tuft or loop free from carpet backing. Test per ASTM D1335.
10. Colorfastness to Crocking: Dry and wet crocking and water bleed, comply with AATCC 165 Color Transference Chart for colors, minimum class 4 rating.
11. Colorfastness to Ozone: Comply with AATCC 129, minimum rating of 4 on the AATCC color transfer chart.
12. Delamination Strength: Minimum of 440 N/m (2.5 lb/inch) between secondary backing.
13. Flammability and Critical Radiant Flux Requirements:

- a. Test Carpet in accordance with ASTM E 648.
- b. Class I: Not less than 0.45 watts per square centimeter.
- c. Carpet in corridors, exits and Medical Facilities: Class I.
- 14. Density: Average Pile Yarn Density (APYD):
 - a. Corridors, lobbies, entrances, common areas or multipurpose rooms, open offices, waiting areas and dining areas: Minimum APYD 6000.
 - b. Other areas: Minimum APYD 4000.
- 15. VOC Limits: Use carpet and carpet adhesive that comply with the following limits for VOC content when tested according to ASTM D 5116:
 - a. Carpet, Total VOCs: 0.5 mg/sq.m x hr.
 - b. Carpet, 4-PC (4-Phenylcyclohexene): 0.05 mg/sq.m x hr.
 - c. Carpet, Formaldehyde: 0.05 mg/sq.m x hr.
 - d. Carpet, Styrene: 0.4 mg/sq.m x hr.
 - e. Adhesive, Total VOCs: 10.00 mg/sq.m x hr.
 - f. Adhesive, Formaldehyde: 0.05 mg/sq.m x hr.
 - g. Adhesive, 2-Ethyl-1-Hexanol: 3.00 mg/sq.m x hr.
- B. Shall meet platinum level of ANSI/NSF 140.
- C. Color, Texture, and Pattern: As specified in Section 09 06 00, SCHEDULE FOR FINISHES.

2.2 ADHESIVE AND CONCRETE PRIMER

- A. Waterproof, resistant to cleaning solutions, steam and water, nonflammable, complies with air-quality standards as specified. Adhesives flashpoint minimum 60 degrees C (140 degrees F), complies with ASTM D 3278.
- B. Seam Adhesives: Waterproof, non-flammable and non-staining.

2.3 SEAMING TAPE

- A. Permanently resistant to carpet cleaning solutions, steam, and water.
- B. Recommended by carpet manufacturer.

2.4 EDGE STRIPS (MOLDING)

- A. Vinyl Edge Strip:
 - 1. Beveled floor flange minimum 50 mm (2 inches) wide.
 - 2. Beveled surface to finish flush with carpet for tight joint and other side to floor finish.
 - 3. Color as specified in Section 09 06 00, SCHEDULE FOR FINISHES.

2.5 LEVELING COMPOUND (FOR CONCRETE FLOORS)

- A. Provide Portland cement bases polymer modifier with latex or polyvinyl acetate resin manufactured specifically for resurfacing and leveling concrete floors. Products containing gypsum are not acceptable.

- B. Determine the type of underlayment selected for use by condition to be corrected.

PART 3 - EXECUTION

3.1 SURFACE PREPARATION

- A. Examine surfaces on which carpeting is to be installed.
- B. Clean floor of oil, waxy films, paint, dust and deleterious substances that prevent adhesion, leave floor dry and cured, free of residue from curing or cleaning agents.
- C. Correct conditions which will impair proper installation, including trowel marks, pits, dents, protrusions, cracks or joints.
- D. Fill cracks, joints depressions, and other irregularities in concrete with leveling compound.
 - 1. Do not use adhesive for filling or leveling purposes.
 - 2. Do not use leveling compound to correct imperfections which can be corrected by spot grinding.
 - 3. Trowel to smooth surface free of trowel marks, pits, dents, protrusions, cracks or joint lines.
- E. Test new concrete subfloor prior to adhesive application for moisture and surface alkalinity per CRI 104 Section 6.3.1 or per ASTM E1907.

3.2 CARPET INSTALLTION

- A. Do not install carpet until work of other trades including painting is complete and dry.
- B. Install in accordance with CRI 104 direct glue down installation.
 - 1. Relax carpet in accordance with Section 6.4.
 - 2. Comply with indoor air quality recommendations noted in Section 6.5.
 - 3. Maintain temperature in accordance with Section 15.3.
- C. Secure carpet to subfloor of spaces with adhesive applied as recommended by carpet manufacturer.
- D. Follow carpet manufacturer's recommendations for matching pattern and texture directions.
- E. Cut openings in carpet where required for installing equipment, pipes, outlets, and penetrations.
 - 1. Bind or seal cut edge of sheet carpet and replace flanges or plates.
 - 2. Use additional adhesive to secure carpets around pipes and other vertical projections.
- G. Carpet Modules:
 - 1. Install per CRI 104, Section 13, Adhesive Application.
 - 2. Lay carpet modules with pile in same direction unless specified otherwise in Section 09 06 00, SCHEDULE FOR FINISHES.

3. Install carpet modules so that cleaning methods and solutions do not cause dislocation of modules.
4. Lay carpet modules uniformly to provide tight flush joints free from movement when subject to traffic.

3.3 EDGE STRIPS INSTALLATION

- A. Install edge strips over exposed carpet edges adjacent to uncarpeted finish flooring.
- B. Anchor vinyl edge strip to floor with adhesive apply adhesive to edge strip and insert carpet into lip and press lip down over carpet.

3.4 PROTECTION AND CLEANING

- A. Remove waste, fasteners and other cuttings from carpet floors.
- B. Vacuum carpet and provide suitable protection. Do not use polyethylene film.
- C. Do not permit traffic on carpeted surfaces for at least 48 hours after installation. Protect the carpet in accordance with CRI 104.
- D. Do not move furniture or equipment on unprotected carpeted surfaces.
- E. Just before final acceptance of work, remove protection and vacuum carpet clean.

- - - E N D - - -

**SECTION 09 91 00
PAINTING**

PART 1-GENERAL**1.1 DESCRIPTION**

- A. Section specifies field painting.
- B. Section specifies prime coats which may be applied in shop under other sections.
- C. Painting includes shellacs, stains, varnishes, coatings specified, and striping or markers and identity markings.

1.2 RELATED WORK

- A. Shop prime painting of steel and ferrous metals: Division 05 - METALS, Division 08 - OPENINGS, Division 10 - SPECIALTIES, Division 11 - EQUIPMENT, Division 12 - FURNISHINGS, Division 13 - SPECIAL CONSTRUCTION, Division 21 - FIRE SUPPRESSION, Division 22 - PLUMBING, Division 23 - HEATING, VENTILATION AND AIR-CONDITIONING, Division 26 - ELECTRICAL, and Division 28 - ELECTRONIC SAFETY AND SECURITY sections.
- B. Prefinished flush doors with transparent finishes: Section 08 14 00, WOOD DOORS.
- C. Type of Finish, Color, and Gloss Level of Finish Coat: Section 09 06 00, SCHEDULE FOR FINISHES.
- D. Glazed wall surfacing or tile like coatings: Section 09 96 59, HIGH-BUILD GLAZED COATINGS.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
Before work is started, or sample panels are prepared, submit manufacturer's literature, the current Master Painters Institute (MPI) "Approved Product List" indicating brand label, product name and product code as of the date of contract award, will be used to determine compliance with the submittal requirements of this specification. The Contractor may choose to use subsequent MPI "Approved Product List", however, only one list may be used for the entire contract and each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer. No variation from the MPI "Approved Product List" where applicable is acceptable.
- C. Sample Panels:
 - 1. After painters' materials have been approved and before work is started submit sample panels showing each type of finish and color specified.

2. Panels to show color: Composition board, 100 by 250 by 3 mm (4 inch by 10 inch by 1/8 inch).
 3. Panel to show transparent finishes: Wood of same species and grain pattern as wood approved for use, 100 by 250 by 3 mm (4 inch by 10 inch face by 1/4 inch) thick minimum, and where both flat and edge grain will be exposed, 250 mm (10 inches) long by sufficient size, 50 by 50 mm (2 by 2 inch) minimum or actual wood member to show complete finish.
 4. Attach labels to panel stating the following:
 - a. Federal Specification Number or manufacturers name and product number of paints used.
 - b. Specification code number specified in Section 09 06 00, SCHEDULE FOR FINISHES.
 - c. Product type and color.
 - d. Name of project.
 5. Strips showing not less than 50 mm (2 inch) wide strips of undercoats and 100 mm (4 inch) wide strip of finish coat.
- D. Sample of identity markers if used.
- E. Manufacturers' Certificates indicating compliance with specified requirements:
1. Manufacturer's paint substituted for Federal Specification paints meets or exceeds performance of paint specified.
 2. High temperature aluminum paint.
 3. Epoxy coating.
 4. Intumescent clear coating or fire retardant paint.
 5. Plastic floor coating.

1.4 DELIVERY AND STORAGE

- A. Deliver materials to site in manufacturer's sealed container marked to show following:
1. Name of manufacturer.
 2. Product type.
 3. Batch number.
 4. Instructions for use.
 5. Safety precautions.
- B. In addition to manufacturer's label, provide a label legibly printed as following:
1. Federal Specification Number, where applicable, and name of material.
 2. Surface upon which material is to be applied.
 3. If paint or other coating, state coat types; prime, body or finish.

- C. Maintain space for storage, and handling of painting materials and equipment in a neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.
- D. Store materials at site at least 24 hours before using, at a temperature between 18 and 30 degrees C (65 and 85 degrees F).

1.5 MOCK-UP PANEL

- A. Before starting application of water paint mixtures, or cementitious paint, apply paint as specified to an area, not to exceed 9 m² (100 ft²), selected by COTR.
- B. Finish and texture approved by COTR will be used as a standard of quality for remainder of work.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.
- B. American Conference of Governmental Industrial Hygienists (ACGIH):
ACGIH TLV-BKLT-2008.....Threshold Limit Values (TLV) for Chemical Substances and Physical Agents and Biological Exposure Indices (BEIs)
ACGIH TLV-DOC-2008.....Documentation of Threshold Limit Values and Biological Exposure Indices, (Seventh Edition)
- C. American National Standards Institute (ANSI):
A13.1-07.....Scheme for the Identification of Piping Systems
- D. American Society for Testing and Materials (ASTM):
D260-86.....Boiled Linseed Oil
- E. Commercial Item Description (CID):
A-A-1555.....Water Paint, Powder (Cementitious, White and Colors) (WPC) (cancelled)
A-A-3120.....Paint, For Swimming Pools (RF) (cancelled)
- F. Federal Specifications (Fed Spec):
TT-P-1411A.....Paint, Copolymer-Resin, Cementitious (For Waterproofing Concrete and Masonry Walls) (CEP)
- G. Master Painters Institute (MPI):
No. 1-07.....Aluminum Paint (AP)
No. 4-07.....Interior/ Exterior Latex Block Filler
No. 5-07.....Exterior Alkyd Wood Primer
No. 7-07.....Exterior Oil Wood Primer
No. 8-07.....Exterior Alkyd, Flat MPI Gloss Level 1 (EO)
No. 9-07.....Exterior Alkyd Enamel MPI Gloss Level 6 (EO)
No. 10-07.....Exterior Latex, Flat (AE)

No. 11-07.....Exterior Latex, Semi-Gloss (AE)
No. 18-07.....Organic Zinc Rich Primer
No. 22-07.....Aluminum Paint, High Heat (up to 590° - 1100F)
(HR)
No. 26-07.....Cementitious Galvanized Metal Primer
No. 27-07.....Exterior / Interior Alkyd Floor Enamel, Gloss (FE)
No. 31-07.....Polyurethane, Moisture Cured, Clear Gloss (PV)
No. 36-07.....Knot Sealer
No. 43-07.....Interior Satin Latex, MPI Gloss Level 4
No. 44-07.....Interior Low Sheen Latex, MPI Gloss Level 2
No. 45-07.....Interior Primer Sealer
No. 46-07.....Interior Enamel Undercoat
No. 47-07.....Interior Alkyd, Semi-Gloss, MPI Gloss Level 5 (AK)
No. 48-07.....Interior Alkyd, Gloss, MPI Gloss Level 6 (AK)
No. 49-07.....Interior Alkyd, Flat, MPI Gloss Level 1 (AK)
No. 50-07.....Interior Latex Primer Sealer
No. 51-07.....Interior Alkyd, Eggshell, MPI Gloss Level 3
No. 52-07.....Interior Latex, MPI Gloss Level 3 (LE)
No. 53-07.....Interior Latex, Flat, MPI Gloss Level 1 (LE)
No. 54-07.....Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)
No. 59-07.....Interior/Exterior Alkyd Porch & Floor Enamel, Low
Gloss (FE)
No. 60-07.....Interior/Exterior Latex Porch & Floor Paint, Low
Gloss
No. 66-07.....Interior Alkyd Fire Retardant, Clear Top-Coat (ULC
Approved) (FC)
No. 67-07.....Interior Latex Fire Retardant, Top-Coat (ULC
Approved) (FR)
No. 68-07.....Interior/ Exterior Latex Porch & Floor Paint,
Gloss
No. 71-07.....Polyurethane, Moisture Cured, Clear, Flat (PV)
No. 74-07.....Interior Alkyd Varnish, Semi-Gloss
No. 77-07.....Epoxy Cold Cured, Gloss (EC)
No. 79-07.....Marine Alkyd Metal Primer
No. 90-07.....Interior Wood Stain, Semi-Transparent (WS)
No. 91-07.....Wood Filler Paste
No. 94-07.....Exterior Alkyd, Semi-Gloss (EO)
No. 95-07.....Fast Drying Metal Primer
No. 98-07.....High Build Epoxy Coating
No. 101-07.....Epoxy Anti-Corrosive Metal Primer

- No. 108-07.....High Build Epoxy Coating, Low Gloss (EC)
- No. 114-07.....Interior Latex, Gloss (LE) and (LG)
- No. 115-07.....Water Based Epoxy Coating (EC)
- No. 119-07.....Exterior Latex, High Gloss (acrylic) (AE)
- No. 135-07.....Non-Cementitious Galvanized Primer
- No. 138-07.....Interior High Performance Latex, MPI Gloss Level 2
(LF)
- No. 139-07.....Interior High Performance Latex, MPI Gloss Level 3
(LL)
- No. 140-07.....Interior High Performance Latex, MPI Gloss Level 4
- No. 141-07.....Interior High Performance Latex (SG) MPI Gloss
Level 5

H. Steel Structures Painting Council (SSPC):

- SSPC SP 1-04 (R2004)....Solvent Cleaning
- SSPC SP 2-04 (R2004)....Hand Tool Cleaning
- SSPC SP 3-04 (R2004)....Power Tool Cleaning

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Cementitious Paint (CEP): TT-P-1411A [Paint, Copolymer-Resin, Cementitious (CEP)], Type 1 for exterior use, Type II for interior use.
- B. Wood Sealer: MPI 31 (gloss) or MPI 71 (flat) thinned with thinner recommended by manufacturer at rate of about one part of thinner to four parts of varnish.
- C. Plastic Tape:
 - a. Pigmented vinyl plastic film in colors as specified in Section 09 06 00, SCHEDULE FOR FINISHES or specified.
 - b. Pressure sensitive adhesive back.
 - c. Widths as shown.
- D. Identity markers options:
 - a. Pressure sensitive vinyl markers.
 - b. Snap-on coil plastic markers.
- E. Aluminum Paint (AP): MPI 1.
- F. Interior/Exterior Latex Block Filler: MPI 4.
- G. Exterior Alkyd Wood Primer: MPI 5.
- H. Exterior Oil Wood Primer: MPI 7.
- I. Exterior Alkyd Enamel (EO): MPI 9.
- J. Exterior Latex, Flat (AE): MPI 10.
- K. Exterior Latex, Semi-Gloss (AE): MPI 11.
- L. Organic Zinc rich Coating (HR): MPI 18.
- M. High Heat Resistant Coating (HR): MPI 22.

- N. Knot Sealer: MPI 36.
- O. Interior Primer Sealer: MPI 45.
- P. Interior Enamel Undercoat: MPI 46.
- Q. Interior Alkyd, Semi-Gloss (AK): MPI 47.
- R. Interior Latex Primer Sealer: MPI 50.
- S. Interior Latex, MPI Gloss Level 3 (LE): MPI 52.
- T. Interior Latex, Flat, MPI Gloss Level 1 (LE): MPI 53.
- U. Interior Alkyd Fire Retardant, Clear Top-Coat (ULC Approved) (FC): MPI 66.
- V. Interior Latex Fire Retardant, Top-Coat (ULC Approved) (FR): MPI 67.
- W. Interior/ Exterior Latex Porch & Floor Paint, gloss: MPI 68.
- X. Interior Wood Stain, Semi-Transparent (WS): MPI 90.
- Y. Wood Filler Paste: MPI 91.
- Z. Exterior Alkyd, Semi-Gloss (EO): MPI 94.
- AA. Fast Drying Metal Primer: MPI 95.
- BB. Epoxy Anti-Corrosive Metal Primer: MPI 101.
- CC. Water Based Epoxy: MPI 115.
- DD. Waterborne Galvanized Primer: MPI 134.
- EE. Non-Cementitious Galvanized Primer: MPI 135.
- FF. Interior High Performance Latex, MPI Gloss Level 3 (LL): MPI 139.

2.2 PAINT PROPERTIES

- A. Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately and paints requiring specified additives.
- B. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.

2.3 REGULATORY REQUIREMENTS/QUALITY ASSURANCE

- A. Paint materials shall conform to the restrictions of the local Environmental and Toxic Control jurisdiction.
 - 1. Volatile Organic Compounds (VOC): VOC content of paint materials shall not exceed 10g/l for interior latex paints/primers and 50g/l for exterior latex paints and primers.
 - 2. Lead-Base Paint:
 - a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.
 - b. Regulations concerning prohibition against use of lead-based paint in federal and federally assisted construction, or rehabilitation of residential structures are set forth in Subpart F, Title 24, Code of Federal Regulations, Department of Housing and Urban Development.

3. Asbestos: Materials shall not contain asbestos.
4. Chromate, Cadmium, Mercury, and Silica: Materials shall not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or free crystalline silica.
5. Human Carcinogens: Materials shall not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.
6. Use high performance acrylic paints in place of alkyd paints, where possible.
7. VOC content for solvent-based paints shall not exceed 250g/l and shall not be formulated with more than one percent aromatic hydro carbons by weight.

PART 3 - EXECUTION

3.1 JOB CONDITIONS

- A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.
 1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.
 2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each days work.
- B. Atmospheric and Surface Conditions:
 1. Do not apply coating when air or substrate conditions are:
 - a. Less than 3 degrees C (5 degrees F) above dew point.
 - b. Below 10 degrees C (50 degrees F) or over 35 degrees C (95 degrees F), unless specifically pre-approved by the Contracting Officer and the product manufacturer. Under no circumstances shall application conditions exceed manufacturer recommendations.
 2. Maintain interior temperatures until paint dries hard.
 3. Do no exterior painting when it is windy and dusty.
 4. Do not paint in direct sunlight or on surfaces that the sun will soon warm.
 5. Apply only on clean, dry and frost free surfaces except as follows:
 - a. Apply water thinned acrylic and cementitious paints to damp (not wet) surfaces where allowed by manufacturer's printed instructions.
 - b. Dampened with a fine mist of water on hot dry days concrete and masonry surfaces to which water thinned acrylic and cementitious paints are applied to prevent excessive suction and to cool surface.

3.2 SURFACE PREPARATION

- A. Method of surface preparation is optional, provided results of finish painting produce solid even color and texture specified with no overlays.
- B. General:
 - 1. Remove prefinished items not to be painted such as lighting fixtures, escutcheon plates, hardware, trim, and similar items for reinstallation after paint is dried.
 - 2. Remove items for reinstallation and complete painting of such items and adjacent areas when item or adjacent surface is not accessible or finish is different.
 - 3. See other sections of specifications for specified surface conditions and prime coat.
 - 4. Clean surfaces for painting with materials and methods compatible with substrate and specified finish. Remove any residue remaining from cleaning agents used. Do not use solvents, acid, or steam on concrete and masonry.
- C. Wood:
 - 1. Sand to a smooth even surface and then dust off.
 - 2. Sand surfaces showing raised grain smooth between each coat.
 - 3. Wipe surface with a tack rag prior to applying finish.
 - 4. Surface painted with an opaque finish:
 - a. Coat knots, sap and pitch streaks with MPI 36 (Knot Sealer) before applying paint.
 - b. Apply two coats of MPI 36 (Knot Sealer) over large knots.
 - 5. After application of prime or first coat of stain, fill cracks, nail and screw holes, depressions and similar defects with wood filler paste. Sand the surface to make smooth and finish flush with adjacent surface.
 - 6. Before applying finish coat, reapply wood filler paste if required, and sand surface to remove surface blemishes. Finish flush with adjacent surfaces.
 - 7. Fill open grained wood such as oak, walnut, ash and mahogany with MPI 91 (Wood Filler Paste), colored to match wood color.
 - a. Thin filler in accordance with manufacturer's instructions for application.
 - b. Remove excess filler, wipe as clean as possible, dry, and sand as specified.

D. Ferrous Metals:

1. Remove oil, grease, soil, drawing and cutting compounds, flux and other detrimental foreign matter in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Remove loose mill scale, rust, and paint, by hand or power tool cleaning, as defined in SSPC-SP 2 (Hand Tool Cleaning) and SSPC-SP 3 (Power Tool Cleaning). Exception: where high temperature aluminum paint is used, prepare surface in accordance with paint manufacturer's instructions.
3. Fill dents, holes and similar voids and depressions in flat exposed surfaces of hollow steel doors and frames, access panels, roll-up steel doors and similar items specified to have semi-gloss or gloss finish with TT-F-322D (Filler, Two-Component Type, For Dents, Small Holes and Blow-Holes). Finish flush with adjacent surfaces.
 - a. This includes flat head countersunk screws used for permanent anchors.
 - b. Do not fill screws of item intended for removal such as glazing beads.
4. Spot prime abraded and damaged areas in shop prime coat which expose bare metal with same type of paint used for prime coat. Feather edge of spot prime to produce smooth finish coat.
5. Spot prime abraded and damaged areas which expose bare metal of factory finished items with paint as recommended by manufacturer of item.

E. Zinc-Coated (Galvanized) Metal, and Aluminum, Surfaces Specified Painted:

1. Clean surfaces to remove grease, oil and other deterrents to paint adhesion in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Spot coat abraded and damaged areas of zinc-coating which expose base metal on hot-dip zinc-coated items with MPI 18 (Organic Zinc Rich Coating). Prime or spot prime with MPI 134 (Waterborne Galvanized Primer) or MPI 135 (Non- Cementitious Galvanized Primer) depending on finish coat compatibility.

F. Masonry, Concrete, Cement Board, Cement Plaster and Stucco:

1. Clean and remove dust, dirt, oil, grease efflorescence, form release agents, laitance, and other deterrents to paint adhesion.
2. Use emulsion type cleaning agents to remove oil, grease, paint and similar products. Use of solvents, acid, or steam is not permitted.
3. Remove loose mortar in masonry work.
4. Repair broken and spalled concrete edges with concrete patching compound to match adjacent surfaces as specified in CONCRETE Sections.

Remove projections to level of adjacent surface by grinding or similar methods.

G. Gypsum Plaster and Gypsum Board:

1. Remove efflorescence, loose and chalking plaster or finishing materials.
2. Remove dust, dirt, and other deterrents to paint adhesion.
3. Fill holes, cracks, and other depressions with CID-A-A-1272A [Plaster, Gypsum (Spackling Compound) finished flush with adjacent surface, with texture to match texture of adjacent surface. Patch holes over 25 mm (1-inch) in diameter as specified in Section for plaster or gypsum board.

3.3 PAINT PREPARATION

- A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.
- B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturer's printed instructions.
- C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.
- D. Mix two component and two part paint and those requiring additives in such a manner as to uniformly blend as specified in manufacturer's printed instructions unless specified otherwise.
- E. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

3.4 APPLICATION

- A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.
- B. Unless otherwise specified, apply paint in three coats; prime, body, and finish. When two coats applied to prime coat are the same, first coat applied over primer is body coat and second coat is finish coat.
- C. Apply each coat evenly and cover substrate completely.
- D. Allow not less than 48 hours between application of succeeding coats, except as allowed by manufacturer's printed instructions, and approved by the COTR.
- E. Finish surfaces to show solid even color, free from runs, lumps, brushmarks, laps, holidays, or other defects.
- F. Apply by brush, roller or spray, except as otherwise specified.
- G. Do not spray paint in existing occupied spaces unless approved by the COTR, except in spaces sealed from existing occupied spaces.

- H. Do not paint in closed position operable items such as access doors and panels, window sashes, overhead doors, and similar items.

3.5 PRIME PAINTING

- A. After surface preparation prime surfaces before application of body and finish coats, except as otherwise specified.
- B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.
- C. Additional field applied prime coats over shop or factory applied prime coats are not required except for exterior exposed steel apply an additional prime coat.
- D. Prime rebates for stop and face glazing of wood, and for face glazing of steel.
- E. Wood and Wood Particleboard:
 - 1. Use same kind of primer specified for exposed face surface.
 - a. Exterior wood: MPI 7 (Exterior Oil Wood Primer) for new construction and MPI 5 (Exterior Alkyd Wood Primer) for repainting bare wood primer except where MPI 90 (Interior Wood Stain, Semi-Transparent (WS)) is scheduled.
 - b. Interior wood except for transparent finish: MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat), thinned if recommended by manufacturer.
 - c. Transparent finishes as specified under Transparent Finishes on Wood except Floors.
 - 2. Apply two coats of primer MPI 7 (Exterior Oil Wood Primer) or MPI 5 (Exterior Alkyd Wood Primer) or sealer MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat) to surfaces of wood doors, including top and bottom edges, which are cut for fitting or for other reason.
 - 3. Apply one coat of primer MPI 7 (Exterior Oil Wood Primer) or MPI 5 (Exterior Alkyd Wood Primer) or sealer MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat) as soon as delivered to site to surfaces of unfinished woodwork, except concealed surfaces of shop fabricated or assembled millwork and surfaces specified to have varnish, stain or natural finish.
 - 4. Back prime and seal ends of exterior woodwork, and edges of exterior plywood specified to be finished.
 - 5. Apply MPI 67 (Interior Latex Fire Retardant, Top-Coat (ULC Approved) (FR) to wood for fire retardant finish.
- F. Metals except boilers, incinerator stacks, and engine exhaust pipes:

1. Steel and iron: MPI 95 (Fast Drying Metal Primer). Use MPI 101 (Cold Curing Epoxy Primer) where MPI 115 (Water Based Epoxy) finish is specified.
 2. Zinc-coated steel and iron: MPI 134 (Waterborne Galvanized Primer).
 3. Aluminum scheduled to be painted: MPI 95 (Fast Drying Metal Primer).
 4. Terne Metal: MPI 95 (Fast Drying Metal Primer).
 5. Copper and copper alloys scheduled to be painted: MPI 95 (Fast Drying Metal Primer).
 6. Machinery not factory finished: MPI 9 (Exterior Alkyd Enamel (EO)).
 7. Asphalt coated metal: MPI 1 (Aluminum Paint (AP)).
 8. Metal over 94 degrees C. (200 degrees F), Boilers, Incinerator Stacks, and Engine Exhaust Pipes: MPI 22 (High Heat Resistant Coating (HR)).
- G. Gypsum Board:
1. Surfaces scheduled to have MPI 52 (Interior Latex, MPI Gloss Level 3 (LE)) finish: Use MPI 52 (Interior Latex, MPI Gloss Level 3 (LE)) respectively.
 2. Primer: MPI 50 (Interior Latex Primer Sealer) except use MPI 45 (Interior Primer Sealer) in shower and bathrooms.
 3. Surfaces scheduled to receive vinyl coated fabric wallcovering: Use MPI 45 (Interior Primer Sealer).
 4. Use MPI 101 (Cold Curing Epoxy Primer) for surfaces scheduled to receive MPI 115 (Water Based Epoxy) finish.
- H. Concrete Masonry Units except glazed or integrally colored and decorative units:
1. MPI 4 (Block Filler) on interior surfaces.
 2. Prime exterior surface as specified for exterior finishes.
- I. Cement Plaster or stucco and Cement board Interior Surfaces of Ceilings and Walls:
1. MPI 52 (Interior Latex, MPI Gloss Level 3 (LE)) in dry areas, except use two coats where substrate has aged less than six months.
 2. Use MPI 139 (Interior High Performance Latex, MPI Gloss level 3 (LL)) in wet areas, as scheduled.
- J. Concrete Floors: MPI 68 (Interior/ Exterior Latex Porch & Floor Paint, Gloss) at concrete floors.

3.6 EXTERIOR FINISHES

- A. Apply following finish coats where specified in Section 09 06 00, SCHEDULE FOR FINISHES.

B. Wood:

1. Do not apply finish coats on surfaces concealed after installation, top and bottom edges of wood doors and sash, or on edges of wood framed insect screens.
2. Portion of sash runs of double hung wood windows, concealed by sash when in a closed position: Apply two coats of ASTM D260 mixed with not more than 0.12L (1/4 pint) of dryer per 3.89L (gallon).
3. Two coats of MPI 10 Exterior Latex, Flat (AE)) on exposed surfaces, except where transparent finish is specified.

C. Steel and Ferrous Metal:

1. Two coats of MPI 94 (Exterior Alkyd, Semi-Gloss (EO)) on exposed surfaces, except on surfaces over 94 degrees C (200 degrees F).
2. One coat of MPI 22 (High Heat Resistant Coating (HR)) on surfaces over 94 degrees K (200 degrees F) and on surfaces of boiler stacks or engine exhaust pipes.

D. Machinery without factory finish except for primer: One coat MPI 94 (Exterior Alkyd, Semi-Gloss (EO)).**E. Concrete Masonry Units Cement Plaster or Concrete:****1. General:**

- a. Where specified in Section 09 06 00, SCHEDULE FOR FINISHES or shown.
 - b. Mix as specified in manufacturer's printed directions.
 - c. Do not mix more paint at one time than can be used within four hours after mixing. Discard paint that has started to set.
 - d. Dampen warm surfaces above 24 degrees C (75 degrees F) with fine mist of water before application of paint. Do not leave free water on surface.
 - e. Cure paint with a fine mist of water as specified in manufacturer's printed instructions.
2. Use two coats of TT-P-1411 (Paint, Co-polymer-Resin, Cementitious (CEP)), unless specified otherwise.

3.7 INTERIOR FINISHES**A. Apply following finish coats over prime coats in spaces or on surfaces specified in Section 09 06 00, SCHEDULE FOR FINISHES.****B. Metal Work:**

1. Apply to exposed surfaces.
2. Omit body and finish coats on surfaces concealed after installation except electrical conduit containing conductors over 600 volts.
3. Ferrous Metal, Galvanized Metal, and Other Metals Scheduled:
 - a. Apply two coats of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) unless specified otherwise.

- b. Asphalt Coated Metal: One coat MPI 1 (Aluminum Paint (AP)).
- c. Ferrous Metal over 94 degrees K (200 degrees F): Boilers, Incinerator Stacks, and Engine Exhaust Pipes: One coat MPI 22 (High Heat Resistant Coating (HR)).
- C. Gypsum Board:
 - 1. One coat of MPI 45 (Interior Primer Sealer) plus one coat of MPI 139 (Interior High Performance Latex, MPI Gloss level 3 (LL)).
 - 2. Two coats of MPI 115 (Water Based Epoxy) on surfaces scheduled to receive Special Coating (SC) finish.
- D. Plaster:
 - 1. One coat of MPI 45 (Interior Primer Sealer) plus one coat of MPI 139 (Interior High Performance Latex, MPI Gloss level 3 (LL)).
 - 2. Two coats of MPI 115 (Water Based Epoxy) on surfaces scheduled to receive Special Coating (SC) finish.
- E. Masonry and Concrete Walls:
 - 1. Over MPI 4 (Interior/Exterior Latex Block Filler) on CMU surfaces.
 - 2. Two coats of MPI 52 (Interior Latex, MPI Gloss Level 3 (LE)).
- F. Wood:
 - 1. Sanding:
 - a. Use 220-grit sandpaper.
 - b. Sand sealers and varnish between coats.
 - c. Sand enough to scarify surface to assure good adhesion of subsequent coats, to level roughly applied sealer and varnish, and to knock off "whiskers" of any raised grain as well as dust particles.
 - 2. Sealers:
 - a. Apply sealers specified except sealer may be omitted where pigmented, penetrating, or wiping stains containing resins are used.
 - b. Allow manufacturer's recommended drying time before sanding, but not less than 24 hours or 36 hours in damp or muggy weather.
 - c. Sand as specified.
 - 3. Paint Finish:
 - a. One coat of MPI 45 (Interior Primer Sealer) plus one coat of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) (SG).
 - b. One coat MPI 67 (Interior Latex Fire Retardant, Top-Coat (ULC Approved) (FR), intumescent type (FR), on exposed wood and above ceilings where shown.
 - 4. Transparent Finishes on Wood Except Floors.
 - a. Stain Finish:
 - 1) One coat of MPI 90 (Interior Wood Stain, Semi-Transparent (WS)).

- 2) Use wood stain of type and color required to achieve finish specified. Do not use varnish type stains.
- 3) One coat of sealer as written in 2.1 B.
- 4) Two coats of MPI 31 (Polyurethane Moisture Cured, Clear Gloss (PV)).
- b. MPI 66 (Interior Alkyd Fire Retardant, Clear Top-Coat(ULC Approved) (FC)) Intumescent Type, Fire Retardant Coating (FC) where scheduled: Two coats.
- G. Cement Board: One coat of MPI 139 (Interior High Performance Latex, MPI Gloss level 3 (LL)).
- H. Concrete Floors: One coat of MPI 68 (Interior/ Exterior Latex Porch & Floor Paint, Gloss (FE)).
- I. Miscellaneous:
 1. Apply where specified in Section 09 06 00, SCHEDULE FOR FINISHES.
 2. MPI 1 (Aluminum Paint): Two coats of aluminum paint.
 3. Existing acoustical units scheduled to be repainted except acoustical units with a vinyl finish:
 - a. Clean units free of dust, dirt, grease, and other deterrents to paint adhesion.
 - b. Mineral fiber units: One coat of MPI 53 (Interior Latex, Flat, MPI Gloss Level 1 (LE)).

3.8 REFINISHING EXISTING PAINTED SURFACES

- A. Clean, patch and repair existing surfaces as specified under surface preparation.
- B. Remove and reinstall items as specified under surface preparation.
- C. Remove existing finishes or apply separation coats to prevent non compatible coatings from having contact.
- D. Patched or Replaced Areas in Surfaces and Components: Apply spot prime and body coats as specified for new work to repaired areas or replaced components.
- E. Except where scheduled for complete painting apply finish coat over plane surface to nearest break in plane, such as corner, reveal, or frame.
- F. In existing rooms and areas where alterations occur, clean existing stained and natural finished wood retouch abraded surfaces and then give entire surface one coat of MPI 71 (Polyurethane, Moisture Cured, Clear Flat (PV)).
- G. Refinish areas as specified for new work to match adjoining work unless specified or scheduled otherwise.
- H. Coat knots and pitch streaks showing through old finish with MPI 36 (Knot Sealer) before refinishing.

- I. Sand or dull glossy surfaces prior to painting.
- J. Sand existing coatings to a feather edge so that transition between new and existing finish will not show in finished work.

3.9 PAINT COLOR

- A. Color and gloss of finish coats is specified in Section 09 06 00, SCHEDULE FOR FINISHES.
- B. For additional requirements regarding color see Articles, REFINISHING EXISTING PAINTED SURFACE and MECHANICAL AND ELECTRICAL FIELD PAINTING SCHEDULE.
- C. Coat Colors:
 - 1. Color of priming coat: Lighter than body coat.
 - 2. Color of body coat: Lighter than finish coat.
 - 3. Color prime and body coats to not show through the finish coat and to mask surface imperfections or contrasts.
- D. Painting, Caulking, Closures, and Fillers Adjacent to Casework:
 - 1. Paint to match color of casework where casework has a paint finish.
 - 2. Paint to match color of wall where casework is stainless steel, plastic laminate, or varnished wood.

3.10 MECHANICAL AND ELECTRICAL WORK FIELD PAINTING SCHEDULE

- A. Field painting of mechanical and electrical consists of cleaning, touching-up abraded shop prime coats, and applying prime, body and finish coats to materials and equipment if not factory finished in space scheduled to be finished.
- B. In spaces not scheduled to be finish painted in Section 09 06 00, SCHEDULE FOR FINISHES paint as specified under paragraph H, colors.
- C. Paint various systems specified in Division 02 - EXISTING CONDITIONS, Division 21 - FIRE SUPPRESSION, Division 22 - PLUMBING, Division 23 - HEATING, VENTILATION AND AIR-CONDITIONING, Division 26 - ELECTRICAL, and Division 28 - ELECTRONIC SAFETY AND SECURITY.
- D. Paint after tests have been completed.
- E. Omit prime coat from factory prime-coated items.
- F. Finish painting of mechanical and electrical equipment is not required when located in interstitial spaces, above suspended ceilings, in concealed areas such as pipe and electric closets, pipe basements, pipe tunnels, trenches, attics, roof spaces, shafts and furred spaces except on electrical conduit containing feeders 600 volts or more.
- G. Omit field painting of items specified in paragraph, Building and Structural WORK NOT PAINTED.
- H. Color:

1. Paint items having no color specified in Section 09 06 00, SCHEDULE FOR FINISHES to match surrounding surfaces.
2. Paint colors as specified in Section 09 06 00, SCHEDULE FOR FINISHES except for following:
 - a. WhiteExterior unfinished surfaces of enameled plumbing fixtures. Insulation coverings on breeching and uptake inside boiler house, drums and drum-heads, oil heaters, condensate tanks and condensate piping.
 - b. Gray:Heating, ventilating, air conditioning and refrigeration equipment (except as required to match surrounding surfaces), and water and sewage treatment equipment and sewage ejection equipment.
 - c. Aluminum Color: Ferrous metal on outside of boilers and in connection with boiler settings including supporting doors and door frames and fuel oil burning equipment, and steam generation system (bare piping, fittings, hangers, supports, valves, traps and miscellaneous iron work in contact with pipe).
 - d. Federal Safety Red: Exposed fire protection piping hydrants, post indicators, electrical conducts containing fire alarm control wiring, and fire alarm equipment.
 - e. Federal Safety Orange: .Entire lengths of electrical conduits containing feeders 600 volts or more.
 - f. Color to match brickwork sheet metal covering on breeching outside of exterior wall of boiler house.
- I. Apply paint systems on properly prepared and primed surface as follows:
 1. Exterior Locations:
 - a. Apply two coats of MPI 94 (Exterior Alkyd, Semi-gloss (EO)) to the following ferrous metal items:
Vent and exhaust pipes with temperatures under 94 degrees C (200 degrees F), roof drains, fire hydrants, post indicators, yard hydrants, exposed piping and similar items.
 - b. Apply two coats of MPI 11 (Exterior Latex, Semi Gloss (AE)) to the following metal items:
Galvanized and zinc-copper alloy metal.
 - c. Apply one coat of MPI 22 (High Heat Resistant Coating (HR)), 650 degrees C (1200 degrees F) to incinerator stacks, boiler stacks, and engine generator exhaust.
 2. Interior Locations:
 - a. Apply two coats of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) to following items:

- 1) Metal under 94 degrees C (200 degrees F) of items such as bare piping, fittings, hangers and supports.
- 2) Equipment and systems such as hinged covers and frames for control cabinets and boxes, cast-iron radiators, electric conduits and panel boards.
- 3) Heating, ventilating, air conditioning, plumbing equipment, and machinery having shop prime coat and not factory finished.
- b. Apply one coat of MPI 50 (Interior Latex Primer Sealer) and one coat of MPI 53 (Interior Latex, Flat, MPI Gloss Level 1 (LE)) on finish of insulation on boiler breeching and uptakes inside boiler house, drums, drumheads, oil heaters, feed water heaters, tanks and piping.
- c. Apply two coats of MPI 22 (High Heat Resistant Coating (HR)) to ferrous metal surface over 94 degrees K (200 degrees F) of following items:
 - 1) Exterior of boilers and ferrous metal in connection with boiler settings including supporting members, doors and door frames and fuel oil burning equipment.
 - 2) Steam line flanges, bare pipe, fittings, valves, hangers and supports over 94 degrees K (200 degrees F).
 - 3) Engine generator exhaust piping and muffler.
- d. Paint electrical conduits containing cables rated 600 volts or more using two coats of MPI 94 (Exterior Alkyd, Semi-gloss (EO)) in the Federal Safety Orange color in exposed and concealed spaces full length of conduit.
3. Other exposed locations:
 - a. Metal surfaces, except aluminum, of cooling towers exposed to view, including connected pipes, rails, and ladders: Two coats of MPI 1 (Aluminum Paint (AP)).
 - b. Cloth jackets of insulation of ducts and pipes in connection with plumbing, air conditioning, ventilating refrigeration and heating systems: One coat of MPI 50 (Interior Latex Primer Sealer) and one coat of MPI 10 (Exterior Latex, Flat (AE)).

3.11 BUILDING AND STRUCTURAL WORK FIELD PAINTING

- A. Painting and finishing of interior and exterior work except as specified under paragraph 3.11 B.
 1. Painting and finishing of new and existing work including colors and gloss of finish selected is specified in Finish Schedule, Section 09 06 00, SCHEDULE FOR FINISHES.
 2. Painting of disturbed, damaged and repaired or patched surfaces when entire space is not scheduled for complete repainting or refinishing.

3. Painting of ferrous metal and galvanized metal.
 4. Painting of wood with fire retardant paint exposed in attics, when used as mechanical equipment space.
 5. Identity painting and safety painting.
- B. Building and Structural Work not Painted:
1. Prefinished items:
 - a. Casework, doors, elevator entrances and cabs, metal panels, wall covering, and similar items specified factory finished under other sections.
 - b. Factory finished equipment and pre-engineered metal building components such as metal roof and wall panels.
 2. Finished surfaces:
 - a. Hardware except ferrous metal.
 - b. Anodized aluminum, stainless steel, chromium plating, copper, and brass, except as otherwise specified.
 - c. Signs, fixtures, and other similar items integrally finished.
 3. Concealed surfaces:
 - a. Inside dumbwaiter, elevator and duct shafts, interstitial spaces, pipe basements, crawl spaces, pipe tunnels, above ceilings, attics, except as otherwise specified.
 - b. Inside walls or other spaces behind access doors or panels.
 - c. Surfaces concealed behind permanently installed casework and equipment.
 4. Moving and operating parts:
 - a. Shafts, chains, gears, mechanical and electrical operators, linkages, and sprinkler heads, and sensing devices.
 - b. Tracks for overhead or coiling doors, shutters, and grilles.
 5. Labels:
 - a. Code required label, such as Underwriters Laboratories Inc., Inchcape Testing Services, Inc., or Factory Mutual Research Corporation.
 - b. Identification plates, instruction plates, performance rating, and nomenclature.
 6. Galvanized metal:
 - a. Exterior chain link fence and gates, corrugated metal areaways, and gratings.
 - b. Gas Storage Racks.
 - c. Except where specifically specified to be painted.
 7. Metal safety treads and nosings.
 8. Gaskets.

9. Concrete curbs, gutters, pavements, retaining walls, exterior exposed foundations walls and interior walls in pipe basements.
10. Face brick.
11. Structural steel encased in concrete, masonry, or other enclosure.
12. Structural steel to receive sprayed-on fire proofing.
13. Ceilings, walls, columns in interstitial spaces.
14. Ceilings, walls, and columns in pipe basements.

3.12 IDENTITY PAINTING SCHEDULE

- A. Identify designated service in accordance with ANSI A13.1, unless specified otherwise, on exposed piping, piping above removable ceilings, piping in accessible pipe spaces, interstitial spaces, and piping behind access panels.
 1. Legend may be identified using 2.1 C options or by stencil applications.
 2. Apply legends adjacent to changes in direction, on branches, where pipes pass through walls or floors, adjacent to operating accessories such as valves, regulators, strainers and cleanouts a minimum of 12 000 mm (40 feet) apart on straight runs of piping. Identification next to plumbing fixtures is not required.
 3. Locate Legends clearly visible from operating position.
 4. Use arrow to indicate direction of flow.
 5. Identify pipe contents with sufficient additional details such as temperature, pressure, and contents to identify possible hazard. Insert working pressure shown on drawings where asterisk appears for High, Medium, and Low Pressure designations as follows:
 - a. High Pressure - 414 kPa (60 psig) and above.
 - b. Medium Pressure - 104 to 413 kPa (15 to 59 psig).
 - c. Low Pressure - 103 kPa (14 psig) and below.
 - d. Add Fuel oil grade numbers.
 6. Legend name in full or in abbreviated form as follows:

PIPING	COLOR OF EXPOSED PIPING	COLOR OF BACKGROUND	COLOR OF LETTERS	LEGEND BBREVIATIONS
Blow-off		Yellow	Black	Blow-off
Boiler Feedwater		Yellow	Black	Blr Feed
A/C Condenser Water Supply		Green	White	A/C Cond Wtr Sup
A/C Condenser Water Return		Green	White	A/C Cond Wtr Ret
Chilled Water Supply		Green	White	Ch. Wtr Sup
Chilled Water Return		Green	White	Ch. Wtr Ret

Shop Compressed Air		Yellow	Black	Shop Air
Air-Instrument Controls		Green	White	Air-Inst Cont
Drain Line		Green	White	Drain
Emergency Shower		Green	White	Emg Shower
High Pressure Steam		Yellow	Black	H.P. _____*
High Pressure Condensate Return		Yellow	Black	H.P. Ret _____*
Medium Pressure Steam		Yellow	Black	M. P. Stm _____*
Medium Pressure Condensate Return		Yellow	Black	M.P. Ret _____*
Low Pressure Steam		Yellow	Black	L.P. Stm _____*
Low Pressure Condensate Return		Yellow	Black	L.P. Ret _____*
High Temperature Water Supply		Yellow	Black	H. Temp Wtr Sup
High Temperature Water Return		Yellow	Black	H. Temp Wtr Ret
Hot Water Heating Supply		Yellow	Black	H. W. Htg Sup
Hot Water Heating Return		Yellow	Black	H. W. Htg Ret
Gravity Condensate Return		Yellow	Black	Gravity Cond Ret
Pumped Condensate Return		Yellow	Black	Pumped Cond Ret
Vacuum Condensate Return		Yellow	Black	Vac Cond Ret
Fuel Oil - Grade		Green	White	Fuel Oil-Grade ____*
Boiler Water Sampling		Yellow	Black	Sample
Chemical Feed		Yellow	Black	Chem Feed
Continuous Blow-Down		Yellow	Black	Cont. B D
Pumped Condensate		Black		Pump Cond
Pump Recirculating		Yellow	Black	Pump-Recirc.
Vent Line		Yellow	Black	Vent
Alkali		Yellow	Black	Alk
Bleach		Yellow	Black	Bleach
Detergent		Yellow	Black	Det
Liquid Supply		Yellow	Black	Liq Sup
Reuse Water		Yellow	Black	Reuse Wtr
Cold Water (Domestic)	White	Green	White	C.W. Dom
Hot Water (Domestic)				
Supply	White	Yellow	Black	H.W. Dom
Return	White	Yellow	Black	H.W. Dom Ret
Tempered Water	White	Yellow	Black	Temp. Wtr
Ice Water				
Supply	White	Green	White	Ice Wtr
Return	White	Green	White	Ice Wtr Ret
Reagent Grade Water		Green	White	RG
Reverse Osmosis		Green	White	RO

Sanitary Waste	Green	White	San Waste
Sanitary Vent	Green	White	San Vent
Storm Drainage	Green	White	St Drain
Pump Drainage	Green	White	Pump Disch
Chemical Resistant Pipe			
Waste	Yellow	Black	Acid Waste
Vent	Yellow	Black	Acid Vent
Atmospheric Vent	Green	White	ATV
Silver Recovery	Green	White	Silver Rec
Oral Evacuation	Green	White	Oral Evac
Fuel Gas	Yellow	Black	Gas
Fire Protection Water			
Sprinkler	Red	White	Auto Spr
Standpipe	Red	White	Stand
Sprinkler	Red	White	Drain
Hot Water Supply Domestic/Solar Water	H.W. Sup Dom/SW		
Hot Water Return Domestic/Solar Water	H.W. Ret Dom/SW		

7. Electrical Conduits containing feeders over 600 volts, paint legends using 50 mm (2 inch) high black numbers and letters, showing the voltage class rating. Provide legends where conduits pass through walls and floors and at maximum 6100 mm (20 foot) intervals in between. Use labels with yellow background with black border and words Danger High Voltage Class, 15000.
8. See Sections for methods of identification, legends, and abbreviations of the following:
 - a. Medical Gases and vacuum lines: Section 22 63 00, GAS SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES.
 - c. Conduits containing high voltage feeders over 600 volts: Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS.

B. Fire and Smoke Partitions:

1. Provide labels to identify partitions above ceilings on both sides of partitions except within shafts. Refer to plans for graphic design and location of labels.

C. Identify columns in pipe basements and interstitial space:

1. Apply stenciled number and letters to correspond with grid numbering and lettering shown.
2. Paint numbers and letters 100 mm (4 inches) high, locate 450 mm (18 inches) below overhead structural slab.

3. Apply on four sides of interior columns and on inside face only of exterior wall columns.

4. Color:

a. Use black on concrete columns.

b. Use white or contrasting color on steel columns.

3.13 PROTECTION CLEAN UP, AND TOUCH-UP

A. Protect work from paint droppings and spattering by use of masking, drop cloths, removal of items or by other approved methods.

B. Upon completion, clean paint from hardware, glass and other surfaces and items not required to be painted of paint drops or smears.

C. Before final inspection, touch-up or refinished in a manner to produce solid even color and finish texture, free from defects in work which was damaged or discolored.

- - - E N D - - -

**SECTION 09 96 59
HIGH-BUILD GLAZED COATINGS**

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies a special coating (SC) system designed to provide on interior masonry or other surfaces a glazed tile like finish.

1.2 RELATED WORK

Location, color and texture (Class): Section 09 06 00, SCHEDULE FOR FINISHES.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
 - 1. Material samples, 150 mm (six inches) square, showing the number of coats of each coating material on each substrate to which the material is to be applied. Apply coating to the samples in a setback procedure, leaving exposed a portion of the substrate and subsequent portions of each coat.
 - 2. Color samples, minimum 75 mm (three inches) by 125 mm (five inches) of each color and texture (Class) specified.
- C. Certificates:
 - 1. Certifying that the coating complies with requirements of this specification, including resistance to abrasion and resistance to perspiration.
 - 2. Certifying that the coating supplied is the same, with manufacturing tolerances, as the coating tested.
- D. Manufacturer's Literature and Data:

Literature and data describing the coating material to be furnished.
Printed application for instructions for each substrate.
- E. Test Reports: Reports of tests certifying compliance with requirement specified.

1.4 ENVIRONMENTAL REQUIREMENTS

Apply coating only when surface and air ambient temperature is above 10°C (50 degrees F) and maintained for a period of not less than 48 hours after applications, except as otherwise required by the coating manufacturer.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. The Master Painters Institute (MPI):
Approved Product List - 2010

PART 2 - PRODUCTS**2.1 GLAZED COATING**

- A. In existing occupied buildings, use Water Based Epoxy, MPI No. 115.

PART 3 - EXECUTION**3.1 PREPARATION OF SURFACES**

- A. Patch surfaces as required for receiving glazed coating. Fill masonry block and make surfaces smooth and free of voids and pinholes. Assure surfaces are clean, dry, well cured, sound and free of ridges and depressions.
- B. Wait for new plaster surfaces to cure for not less than 30 days before starting application of the coating system.
- C. Remove or protect items not requiring coating.

3.2 APPLICATION

- A. Finish Film Thickness: Apply materials at not less than the manufacturer's recommended spreading rate.
- B. On previously coated surfaces, apply one base coat and one finish coat.
- C. On bare concrete block and cast in place concrete apply two base coats and one finish coat.
- D. On bare gypsum board and plaster apply one primer coat, one base coat and one finish coat.
- E. In rooms or spaces shown or specified to have glazed coating, apply the glazed coating to surfaces behind casework and equipment, except behind those items built into wall recesses.
- F. Make edges of glazed coatings sharp and clean without overlapping adjoining other materials or colors.
- G. Apply glazed coating in areas specified under Section 09 06 00, SCHEDULE FOR FINISHES.

3.3 CLEANING AND PROTECTION

- A. During progress of the work and upon completion, promptly clean adjacent surfaces and materials of spills, spatters, drips, and stains from glazed coatings application. Remove glazed coatings by proper methods exercising care to prevent damage to finished surfaces and materials.

- B. Protect work of other trades against damage resulting from glazed coatings work.
- C. Touch up damaged coating surfaces before final acceptance.

- - - E N D - - -

**SECTION 10 14 00
SIGNAGE**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies interior signage for room numbers, directional signs, code required signs, temporary interior signs.
- B. Sign systems shall match facilities existing signage standard as shown on the plans.

1.2 RELATED WORK

- A. Lighted EXIT signs for egress purposes are specified under Division 26, ELECTRICAL.

1.3 MANUFACTURER'S QUALIFICATIONS

Sign manufacturer shall provide evidence that they regularly and presently manufactures signs similar to those specified in this section as one of their principal products.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 00, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- B. Samples: Sign panels and frames, with letters and symbols, each type. Submit 2 sets. One set of samples will be retained by COTR, other returned to Contractor.
 - 1. Sign Panel, 200 mm x 250 mm (8 inches x 10 inches), with letters.
 - 2. Color samples of each color, 150 mm x 150 mm (6 inches x 6 inches. Show anticipated range of color and texture.
 - 3. Sample of typeface, arrow and symbols in a typical full size layout.
- C. Manufacturer's Literature:
 - 1. Showing the methods and procedures proposed for the concealed anchorage of the signage system to each surface type.
 - 2. Manufacturer's printed specifications, anchorage details, installation and maintenance instructions.
- D. Samples: Sign location plan, showing location, type and total number of signs required. Refer to Article 4.0 Room Number Schedule to develop a list of room numbers to be confirmed with the VA.
- E. Shop Drawings: Scaled for manufacture and fabrication of sign types. Identify materials, show joints, welds, anchorage, accessory items, mounting and finishes.
- F. Full size layout patterns for dimensional letters.

1.5 DELIVERY AND STORAGE

- A. Deliver materials to job in manufacturer's original sealed containers with brand name marked thereon. Protect materials from damage.
- B. Package to prevent damage or deterioration during shipment, handling, storage and installation. Maintain protective covering in place and in good repair until removal is necessary.
- C. Deliver signs only when the site and mounting services are ready for installation work to proceed.
- D. Store products in dry condition inside enclosed facilities.

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - B209-07.....Aluminum and Aluminum-Alloy Sheet and Plate
 - B221-06.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and tubes.
- C. Federal Specifications (Fed Spec):
 - MIL-PRF-8184F.....Plastic Sheet, Acrylic, Modified.
 - MIL-P-46144C.....Plastic Sheet, Polycarbonate

1.7 MINIMUM SIGN REQUIREMENTS

- A. Permanent Rooms and Spaces:
 - 1. Tactile and Braille Characters, raised minimum 0.793 mm (1/32 in). Characters shall be accompanied by Grade 2 Braille.
 - 2. Type Styles: Characters shall be uppercase, Optima.
 - 3. Character Height: Minimum 16 mm (5/8 in) high, Maximum 50 mm (2 in).
 - 4. Symbols (Pictograms): Equivalent written description shall be placed directly below symbol, outside of symbol's background field. Border dimensions of symbol background shall be minimum 150 mm (6 in) high.
 - 5. Finish and Contrast: Characters and background shall be eggshell, matte or other non-glare finish with adequate contrast with background.
 - 6. Mounting Location and Height: As shown. Mounted on wall adjacent to the latch side of the door and to avoid door swing and protruding objects.
- B. Overhead Signs:
 - 1. Type Styles: As shown. Characters shall have a width-to-height ratio between 3:5 and 1:1. Characters shall have a stroke width-to-height ratio of between 1:5 and 1:10.

2. Character Height: minimum 75 mm (3 in) high for overhead signs. As shown, for directional signs.
3. Finish and Contrast: Same as for signs of permanent rooms and spaces.
4. Mounting Location and Height: As shown.

1.8 COLORS AND FINISHES:

Colors and material finishes as shown on the plans.

PART 2 - PRODUCTS

2.1 GENERAL

- A. Signs of type, size and design shown on the drawings and as specified.
- B. Signs complete with lettering, framing and related components for a complete installation.
- C. Provide graphics items as completed units produced by a single manufacturer, including necessary mounting accessories, fittings and fastenings.
- D. Do not scale drawings for dimensions. Contractor to verify and be responsible for all dimensions and conditions shown by these drawings. COTR to be notified of any discrepancy in drawing, in field directions or conditions, and/or of any changes required for all such construction details.
- E. The Sign Contractor, by commencing work of this section, assumes overall responsibility, as part of his warranty of work, to assure that assemblies, components and parts shown or required within the work of the section, comply with the Contract Documents. The Contractor shall further warrant: That all components, specified or required to satisfactorily complete the installation are compatible with each other and with conditions of installations.

2.2 PRODUCTS

- A. Aluminum:
 1. Sheet and Plate: ASTM B209.
 2. Extrusions and Tubing: ASTM B221.
- B. Cast Acrylic Sheet: MIL-PRF-8184F; Type II, class 1, Water white non-glare optically clear. Matt finish water white clear acrylic shall not be acceptable.
- C. Polycarbonate: MIL-P-46144C; Type I, class 1.
- D. Vinyl: 0.1 mm thick machine cut, having a pressure sensitive adhesive and integral colors.

2.3 SIGN STANDARDS

- A. Typography:
 1. Type Style: Optima. Initial caps or all caps as indicated in Sign Message Schedule.

2. Letter spacing: See graphic standards on drawings.
3. Letter spacing: See graphic standards on drawings.
4. All text and symbols to be provided in size, colors, typefaces and letter spacing shown. Text shall be a true, clean, accurate reproduction of typeface(s) shown. Text shown in drawings are for layout purposes only; final text for signs shall be confirmed with VA prior to fabrication.

B. Project Colors and Finishes: See Section 09 06 00, SCHEDULE FOR FINISHES.

2.4 SIGN TYPES

A. General:

1. The interior sign system is comprised of sign types families that are identified by a letter and number which identify a particular group of signs. An additional number identifies a specific type of sign within that family.

a. IN indicates a component construction based sign.

1. The exterior sign system shall be comprised of sign types families that are identified by a letter and number which identify a particular group of signs. An additional number identifies a specific type of sign within that family.
2. EN designation indicates exterior non-illuminated sign.

B. Interchangeable Component System:

1. Sign Type Families: 04, 07, and 08.
2. Interior sign system capable of being arranged in a variety of configurations with a minimum of attachments, devices and connectors.
 - a. Interchangeable nature of the system shall allow for changes of graphic components of the installed sign, without changing sign in its entirety.
3. Rail Insert functions as a mounting device for Copy Panels on to the Rail Back. The Rail Insert mounts to the back of the Copy Panel with adhesive suitable for use with the particular copy insert material.
 - a. Shall allow Copy Panels to slide or snap into the horizontal Rail Back for ease of changeability.
 - b. Shall mount to the back of the Copy Panel with adhesive suitable for use with particular Copy Panel material.
4. Copy Panels shall accept various forms of copy and graphics, and attaches to the Rail Back with the Rail Insert. Copy Panels shall be either ABS plastic with integral color or an acrylic lacquer finish; photo polymer; or, acrylic.

- a. Interchangeable by sliding horizontally from either side of sign, and to other signs in system of equal or greater width or height.
- b. Cleanable without use of special chemicals or cleaning solutions.
- c. Copy Insert Materials.
 - 1) ABS Inserts - 2.3 mm (.090 inches) extruded ABS plastic core with .07 mm (.003 inches) acrylic cap bonded during extrusion/texturing process. Pressure bonded to extruded Rail Insert using adhesive. Background color is either integral or painted in acrylic lacquer. ABS inserts finished in a chromium industries #HM335RA texture pattern to prevent glare.
 - 2) Photo polymer Inserts - 3 mm (.125 inches) phenolic photo polymer with raised copy etched to 2.3 mm (.0937 inches), bonded to an ABS plastic or extruded aluminum insert with adhesive. Background color is painted in acrylic enamel.
 - 3) Changeable Paper/ Insert Holder - Extruded insert holder with integral Rail Insert for connection with structural back panel in 6063T5 aluminum with a black anodized finish. Inserts into holder are paper with a clear 0.7 mm (.030 inches) textured cover. Background color is painted in acrylic lacquer.
 - 4) Acrylic - 2 mm (.080 inches) non-glare acrylic. Pressure bonded to extruded Rail Insert using adhesive. Background color is painted in acrylic lacquer or acrylic enamel.
 - 5) Extruded 6063T5 aluminum with a black anodized finish Insert Holder with integral Rail Insert for connection with Structural Back Panel to hold a 0.7 mm (.030 inches) textured polycarbonate insert and a Sliding Tile which mounts in the Inset Holder and slides horizontally.
 - 6) End Caps - Extruded using 6063T5 aluminum with a black anodized. End Caps interlock with Rail Back with clips to form an integral unit, enclosing and securing the changeable Copy Panels, without requiring tools for assembly.
 - a) Shall be interchangeable to either end of sign and to other signs in the system of equal height.
 - b) Mechanical fasteners can be added to the End Caps that will secure it to Rail Back to make sign tamper resistant.
 - 7) Joiners - Extruded using 6063T5 aluminum with a black anodized finish. Rail Joiners connect Rail Backs together blindly, providing a butt joint between Copy Inserts.
 - 8) Accent Joiners - Extruded using 6063T5 aluminum with a mirror polished finish. Joiner shall connect Rail Backs together with

a visible 3 mm (.125 inches) horizontal rib, flush to the adjacent Copy Panel surfaces.

- 9) Top Accent Rail - Extruded using 6063T5 aluminum with a mirror polished finish. Rail shall provide 3 mm (.125 inches) high decorative trim cap, which butts flush to adjacent Copy Panel and encloses top of Rail Back and Copy Panel.

10) Typography

- a) Vinyl First Surface Copy (non-tactile) - Applied Vinyl copy.
- b) Subsurface Copy Inserts - Textured 1 mm (.030 inches) clear polycarbonate face with subsurface applied Vinyl copy. Face shall be back sprayed with paint and laminated to an extruded aluminum carrier insert.
- c) Integral Tactile Copy Inserts - phenolic photo polymer etched with 2.3 mm (.0937 inches) raised copy.
- d) Silk-screened First Surface Copy (non-tactile) - Injection molded or extruded ABS plastic or aluminum insert with first surface applied enamel silk-screened copy.

C. Sign Type Family 07 and 08:

- 1. All text and graphics are to be first surface silk-screened.

D. Sign Type Family 04:

- 1. All text and graphics are to be first surface applied vinyl letters.
- 2. IN-04: Type IN-04 incorporates Braille and Room number to create a singular integrated sign.

F. Sign Type Family 07:

- 1. All text and graphics are to be first surface applied vinyl letters except for under sliding tile.
- 2. Protect text, which is covered by sliding tile, so tile does not wear away letters.

G. Temporary Interior Signs:

- 1. Fabricated from 50 kg (110 pound) matte finished white paper cut to 100 mm (4 inch) wide by 300 mm (12 inch) long. Punched 3 mm (.125 inch) hole with edge of hole spaced 13 mm (.5 inch) in from edge and centered on 100 mm (4 inch) side. Reinforce hole on both sides with suitable material that prevents tie from pulling through hole. Ties are steel wire 0.3 mm (0.120 inch) thick attached to tag with twist leaving 150 mm (6 inch) long free ends.
- 2. Mark architectural room number on sign, with broad felt marker in clearly legible numbers or letters that identify room, corridor or space as shown on floor plans.

3. Install temporary signs to all rooms that have a room, corridor or space number. Attach to door frame, door knob or door pull.
 - a. Doors that do not require signs are: corridor doors in corridor with same number, folding doors or partitions, toilet doors, bathroom doors within and between rooms, closet doors within rooms, communicating doors in partitions between rooms with corridor entrance doors.
 - b. Replace and missing damaged or illegible signs.

2.5 FABRICATION

- A. Design components to allow for expansion and contraction for a minimum material temperature range of 56 °C (100 °F), without causing buckling, excessive opening of joints or over stressing of adhesives, welds and fasteners.
- B. Form work to required shapes and sizes, with true curve lines and angles. Provide necessary rebates, lugs and brackets for assembly of units. Use concealed fasteners whenever and wherever possible.
- C. Shop fabricate so far as practicable. Joints fastened flush to conceal reinforcement, or welded where thickness or section permits.
- D. Contact surfaces of connected members be true. Assembled so joints will be tight and practically unnoticeable, without use of filling compound.
- E. Signs shall have fine, even texture and be flat and sound. Lines and miters sharp, arises unbroken, profiles accurate and ornament true to pattern. Plane surfaces be smooth flat and without oil-canning, free of rack and twist. Maximum variation from plane of surface plus or minus 0.3 mm (0.015 inches). Restore texture to filed or cut areas.
- F. Level or straighten wrought work. Members shall have sharp lines and angles and smooth surfaces.
- G. Extruded members to be free from extrusion marks. Square turns and corners sharp, curves true.
- H. Drill holes for bolts and screws. Conceal fastenings where possible. Exposed ends and edges mill smooth, with corners slightly rounded. Form joints exposed to weather to exclude water.
- I. Finish hollow signs with matching material on all faces, tops, bottoms and ends. Edge joints tightly mitered to give appearance of solid material.
- J. All painted surfaces properly primed. Finish coating of paint to have complete coverage with no light or thin applications allowing substrate or primer to show. Finished surface smooth, free of scratches, gouges, drips, bubbles, thickness variations, foreign matter and other imperfections.

- K. Movable parts, including hardware, are to be cleaned and adjusted to operate as designed without binding or deformation of members. Doors and covers centered in opening or frame. All contact surfaces fit tight and even without forcing or warping components.
- L. Pre-assemble items in shop to greatest extent possible to minimize field splicing and assembly. Disassemble units only as necessary for shipping and handling limitations. Clearly mark units for re-assembly and coordinated installation.
- M. No signs are to be manufactured until final sign message schedule and location review has been completed by the COTR & forwarded to contractor.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Protect products against damage during field handling and installation. Protect adjacent existing and newly placed construction, landscaping and finishes as necessary to prevent damage during installation. Paint and touch up any exposed fasteners and connecting hardware to match color and finish of surrounding surface.
- B. Mount signs in proper alignment, level and plumb according to the sign location plan and the dimensions given on elevation and sign location drawings. Where otherwise not dimensioned, signs shall be installed where best suited to provide a consistent appearance throughout the project. When exact position, angle, height or location is in doubt, contact COTR for clarification.
- C. Contractor shall be responsible for all signs that are damaged, lost or stolen while materials are on the job site and up until the completion and final acceptance of the job.
- D. Remove or correct signs or installation work COTR determines as unsafe or as an unsafe condition.
- E. At completion of sign installation, clean exposed sign surfaces. Clean and repair any adjoining surfaces and landscaping that became soiled or damaged as a result of installation of signs.
- F. Locate signs as shown on the Sign Location Plans.
- G. Certain signs may be installed on glass. A blank glass back up is required to be placed on opposite side of glass exactly behind sign being installed. This blank glass back up is to be the same size as sign being installed.
- H. Contractor will be responsible for verifying that behind each sign location there are no utility lines that will be affected by installation of signs. Any damage during installation of signs to

utilities will be the sole responsibility of the Contractor to correct and repair.

- I. Furnish inserts and anchoring devices which must be set in concrete or other material for installation of signs. Provide setting drawings, templates, instructions and directions for installation of anchorage devices which may involve other trades.

4.0 ROOM NUMBER SCHEDULE

<u>ROOM NUMBER PER PLANS</u>	<u>ACTUAL ROOM NUMBER TO BE USED</u>	<u>REMARKS</u>
132A	---	VA to determine.
132A1	---	VA to determine.
132A2	---	VA to determine.
E200	F200	
E200A1	F200A1	
E200B	F200B	
E200B1	F200B1	
E201	F201	
E201B1	F201B1	
E201B2	F201B2	
E201B3	F201B3	
E202	F202	
E203	F203	
E203A	F203A	
E203B	F203B	
E203B1	F203B1	
E203B2	F203B2	
E203C	F203C	
E203D	F203D	
E204	F204	
E205	E229	No room sign required.
E205A	F205A	
E205B	F205B	
E205B1	F205B1	
E205C	F205C	
E205D	F205D	
E205D1	F205D1	
E205D2	F205D2	

E205D3	F205D3	
E205D4	F205D4	
E206	F206	
E207	F207	
C1	E225*	No room sign required.
C2	E226*	No room sign required.
C3	E227*	No room sign required.
C4	E228*	No room sign required.
C5	E230*	No room sign required.
C6	E231*	No room sign required.
D211	D211*	*Existing Sign

- - - END - - -

**SECTION 10 26 00
WALL AND DOOR PROTECTION**

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies wall guards (crash rails or bumper guards) and corner guards.

1.2 RELATED WORK

- A. Armor plates and kick plates not specified in this section: Section 08 71 00, DOOR HARDWARE.
- B. Color and texture of aluminum and resilient material: Section 09 06 00, SCHEDULE FOR FINISHES.
- C. Anchoring: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Show design and installation details.
- C. Manufacturer's Literature and Data:
 - 1. Wall Guards.
 - 2. Corner Guards.
- D. Test Report: Showing that resilient material complies with specified fire and safety code requirements.

1.4 DELIVERY AND STORAGE

- A. Deliver materials to the site in original sealed packages or containers marked with the name and brand, or trademark of the manufacturer.
- B. Protect from damage from handling and construction operations before, during and after installation.
- C. Store in a dry environment of approximately 21° C (70 degrees F) for at least 48 hours prior to installation.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
 - B221-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
 - D256-06.....Impact Resistance of Plastics

D635-06.....Rate of Burning and/or Extent and Time of
Burning of Self-Supporting Plastics in a
Horizontal Position

E84-09.....Surface Burning Characteristics of Building
Materials

C. The National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06.....Metal Finishes Manual

D. National Fire Protection Association (NFPA):
80-10.....Standard for Fire Doors and Windows

E. Society of American Automotive Engineers (SAE):
J 1545-05.....Instrumental Color Difference Measurement for
Exterior Finishes.

F. Underwriters Laboratories Inc. (UL):
Annual Issue.....Building Materials Directory

PART 2 - PRODUCTS

2.1 MATERIALS

A. Stainless Steel: ASTM A167, Type 302B.

B. Aluminum Extruded: ASTM B221, Alloy 6063, Temper T5 or T6. Aluminum alloy used for colored anodizing coating shall be as required to produce specified color.

C. Resilient Material:

1. Extruded and injection molded acrylic vinyl or extruded polyvinyl chloride meeting following requirements:

a. Minimum impact resistance of 1197 ps (25 ft lbs per sq.ft) when tested in accordance with ASTM D256 (Izod impact, ft.lbs. per inch notch).

b. Class 1 fire rating when tested in accordance with ASTM E84, having a maximum flame spread of 25 and a smoke developed rating of 450 or less.

c. Rated self extinguishing when tested in accordance with ASTM D635.

d. Material shall be labeled and tested by Underwriters Laboratories or other approved independent testing laboratory.

e. Integral color with all colored components matched in accordance with SAE J 1545 to within plus or minus 1.0 on the CIE-LCH scales.

f. Same finish on exposed surfaces.

2.2 CORNER GUARDS

A. Resilient, Shock-Absorbing Corner Guards: Flush mounted and Surface mounted type of 6 mm 1/4-inch corner) formed to profile shown.

1. Snap-on corner guard formed from resilient material, minimum 2 mm (0.078-inch) thick, free floating on a continuous 1.6 mm (0.063-inch)

thick extruded aluminum retainer. Design retainer used for flush mounted type to act as a stop for adjacent wall finish material. Provide appropriate mounting hardware, cushions and base plates as required.

2. Provide factory fabricated end closure caps at top and bottom of surface mounted corner guards.
3. Flush mounted corner guards installed on any fire rated wall shall maintain the fire rating of the wall. Provide fire test of proposed corner guard system to verify compliance.
 - a. Where insulating materials are an integral part of the corner guard system, the insulating materials shall be provided by the manufacturer of the corner guard system.
 - b. All exposed metal in fire rated assemblies shall have a paintable finish.

B. Stainless Steel Corner Guards: Fabricate of 1.6 mm (0.0625-inch) thick stainless steel. Form guards of dimensions and to contour shown.

2.3 WALL GUARDS AND HANDRAILS

A. Resilient Wall Guards:

1. Wall Guards (Crash Rails): Snap-on covers of resilient material, minimum 2.8 mm (0.110-inch) thick, shall be free-floated over 50 mm (two-inch) wide aluminum retainer clips, minimum 2.3 mm (0.090-inch) thick, anchored to wall at maximum 600 mm (24 inches) on center, supporting a continuous aluminum retainer, minimum 1.6 mm (0.062-inch) thick; or, shall be free-floated over a continuous extruded aluminum retainer, minimum 2.3 (0.090-inch) thick anchored to wall at maximum 600 mm (24 inches) on center.
2. Provide wall guards (crash rails) with prefabricated and closure caps, inside and outside corners, concealed splices, cushions, mounting hardware and other accessories as required. End caps and corners shall be field adjustable to assure close alignment with handrails and wall guards (crash rails). Screw or bolt closure caps to aluminum retainer.

B. Stainless Steel Wall Guards: Construct wall guard, including brackets, of minimum 4.75 mm (0.1875-inch) thick stainless steel to design shown.

2.4 FASTENERS AND ANCHORS

- A. Provide fasteners and anchors as required for each specific type of installation.
- B. Where type, size, spacing or method of fastening is not shown or specified, submit shop drawings showing proposed installation details.

2.5 FINISH

- A. In accordance with NAAMM AMP 500 series.
- B. Aluminum:
 - 1. Exposed aluminum: AAC22A31 chemically etched medium matte, with clear anodic coating, Class II Architectural, 0.4 mil thick.
 - 2. Concealed aluminum: Mill finish as fabricated, uniform in color and free from surface blemishes.
- C. Stainless Steel: NAAMM finish Number 4.
- D. Resilient Material: Embossed texture and color in accordance with SAE J 1545 and as specified in Section 09 06 00, SCHEDULE FOR FINISHES.

PART 3 - INSTALLATION**3.1 RESILIENT CORNER GUARDS**

Install corner guards on walls in accordance with manufacturer's instructions.

3.2 STAINLESS STEEL CORNER GUARDS

- A. Mount guards on external corners of interior walls, partitions and columns as shown.
- B. Where corner guards are installed on walls, partitions or columns finished with plaster or ceramic tile, provide continuous 16 gage perforated, galvanized Z-shape steel anchors welded to back edges of corner guards and, wired to metal studs. Coat back surfaces of corner guards, where shown, with a non-flammable, sound deadening material. Corner guards shall overlap finish plaster surfaces.
 - 1. Where corner guards are installed on exposed structural glazed facing tile units or masonry wall, partitions or columns, anchor corner guards to existing walls with 6 mm (1/4-inch) oval head stainless steel countersunk expansion or toggle bolts. Grout spaces solid between guards and backing with Portland cement and sand mortar.
 - 2. Where corner guards are installed on gypsum board, clean surface and anchor guards with a neoprene solvent-type contact adhesive specifically manufactured for use on gypsum board construction. Remove excess adhesive from around edge of guard and allow to cure undisturbed for 24 hours.

3.3 WALL GUARDS (CRASH RAIL)

Secure guards to walls with brackets and fasteners in accordance with manufacturer's details and instructions.

- - - E N D - - -

**SECTION 10 28 00
TOILET, BATH, AND LAUNDRY ACCESSORIES**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies manufactured items usually used in dressing rooms, toilets, baths, locker rooms and at sinks in related spaces.
- B. Items Specified:
 - 1. Combination paper towel dispenser and disposal unit.
 - 2. Toilet tissue dispenser.
 - 3. Grab Bars.
 - 4. Shower curtain rods.
 - 5. Clothes hooks, robe or coat.
 - 6. Towel bars.
 - 7. Metal framed mirror.
 - 8. Mop racks.
 - 9. Stainless steel shelves.
 - 10. Spherical mirrors (at Corridors).
- B. This section also specifies custom fabricated items used in toilets and related spaces.

1.2 RELATED WORK

- A. Color of finishes: Section 09 06 00, SCHEDULE FOR FINISHES
- B. Ceramic toilet and bath accessories: Section 09 30 13, CERAMIC TILING.
- C. Anchoring: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
 - 1. Each product specified.
 - 2. Paper towel dispenser and combination dispenser and disposal units.
 - 3. Metal framed mirrors, showing shelf where required, fillers, and design and installation of units when installed on ceramic tile wainscots and offset surfaces.
 - 4. Shower Curtain rods, showing required length for each location.
 - 5. Grab bars, showing design and each different type of anchorage.
 - 6. Show material and finish, size of members, and details of construction, installation and anchorage of mop racks.
- C. Samples:
 - 1. One of each type of accessory specified.

2. After approval, samples may be used in the work.

D. Manufacturer's Literature and Data:

1. All accessories specified.
2. Show type of material, gages or metal thickness in inches, finishes, and when required, capacity of accessories.
3. Show working operations of spindle for toilet tissue dispensers.
4. Mop racks.

E. Manufacturer's Certificates:

1. Anodized finish as specified.

1.4 QUALITY ASSURANCE

- A. Each product shall meet, as a minimum, the requirements specified, and shall be a standard commercial product of a manufacturer regularly presently manufacturing items of type specified.
- B. Each accessory type shall be the same and be made by the same manufacturer.
- C. Each accessory shall be assembled to the greatest extent possible before delivery to the site.
- D. Include additional features, which are not specifically prohibited by this specification, but which are a part of the manufacturer's standard commercial product.

1.5 PACKAGING AND DELIVERY

- A. Pack accessories individually to protect finish.
- B. Deliver accessories to the project only when installation work in rooms is ready to receive them.
- C. Deliver inserts and rough-in frames to site at appropriate time for building-in.
- D. Deliver products to site in sealed packages of containers; labeled for identification with manufacturer's name, brand, and contents.

1.6 STORAGE

- A. Store products in weathertight and dry storage facility.
- B. Protect from damage from handling, weather and construction operations before, during and after installation in accordance with manufacturer's instructions.

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
A167-99(R2004).....Stainless and Heat-Resisting Chromium-Nickel
Steel Plate, Sheet and Strip.

- A176-99(R2004).....Stainless and Heat-Resisting Chromium Steel
Plate, Sheet, and Strip
- A269-07.....Seamless and Welded Austenitic Stainless Steel
Tubing for General Service
- A312/A312M-06.....Seamless and Welded Austenitic Stainless Steel
Pipes
- A653/A653M-07.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-
Iron Alloy-Coated (Galvannealed) by the Hot-Dip
Process
- B221-06.....Aluminum and Aluminum-Alloy Extruded Bars, Rods,
Wire, Shapes, and Tubes
- B456-03.....Electrodeposited Coatings of Copper Plus Nickel
Plus Chromium and Nickel Plus Chromium
- C1036-06.....Flat Glass
- C1048-04.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated
and Uncoated Glass
- D635-06.....Rate of Burning and/or Extent and Time of
Burning of Self Supporting Plastics in a
Horizontal Position
- F446-85 (R2004).....Consumer Safety Specification for Grab Bars and
Accessories Installed in the Bathing Area.
- A269-07.....Seamless and Welded Austenitic Stainless Steel
Tubing for General Service
- D3453-01.....Flexible Cellular Materials - Urethane for
Furniture and Automotive Cushioning, Bedding,
and Similar Applications
- D3690-02.....Vinyl-Coated and Urethane-Coated Upholstery
Fabrics
- C. The National Association of Architectural Metal Manufacturers (NAAMM):
- AMP 500 Series.....Metal Finishes Manual
- AMP 500-505-88.....Metal Finishes Manual and Finishes for Stainless
Steel
- D. American Welding Society (AWS):
- D10.4-86 (R2000).....Welding Austenitic Chromium-Nickel Stainless
Steel Piping and Tubing
- E. Federal Specifications (Fed. Specs.):
- A-A-3002.....Mirrors, Glass
- FF-S-107C (2).....Screw, Tapping and Drive
- FF-S-107C.....Screw, Tapping and Drive.

WW-P-541E(1).....Plumbing Fixtures (Accessories, Land Use) Detail
Specification

PART 2 - PRODUCTS**2.1 MATERIALS**

- A. Aluminum: ASTM B221, alloy 6063-T5 and alloy 6463-T5.
- B. Stainless Steel:
 - 1. Plate or sheet: ASTM A167, Type 302, 304, or 304L, except ASTM A176 where Type 430 is specified, 0.0299-inch thick unless otherwise specified.
 - 2. Tube: ASTM A269, Alloy Type 302, 304, or 304L.
- C. Stainless Steel Tubing: ASTM A269, Grade 304 or 304L, seamless or welded.
- D. Stainless Steel Pipe: ASTM A312; Grade TP 304 or TP 304L.
- E. Steel Sheet: ASTM A653, zinc-coated (galvanized) coating designation G90.
- F. Glass:
 - 1. ASTM C1036, Type 1, Class 1, Quality q2, for mirrors.
- G. Foam Rubber: ASTM D3453, Grade BD, Type 2.
- H. Plywood: PS1, Grade CD.

2.2 FASTENERS

- A. Exposed Fasteners: Stainless steel or chromium plated brass, finish to match adjacent surface.
- B. Concealed Fasteners: Steel, hot-dip galvanized (except in high moisture areas such as showers or bath tubs use stainless steel).
- C. Toggle Bolts: For use in hollow masonry or frame construction.
- D. Hex bolts: For through bolting on thin panels.
- E. Expansion Shields: Lead or plastic as recommended by accessory manufacturer for component and substrate for use in solid masonry or concrete.
- F. Screws:
 - 1. ASME B18.6.4.
 - 2. Fed Spec. FF-S-107, Stainless steel Type A.
- G. Adhesive: As recommended by manufacturer for products to be joined.

2.3 FINISH

- A. In accordance with NAAMM AMP 500 series.
- B. Anodized Aluminum:
 - 1. AA-C22A41 Chemically etched medium matte, with clear anodic coating, Class I Architectural, 0.7-mil thick.
- C. AA-M32 Mechanical finish, medium satin.
 - 1. Stainless Steel: NAAMM AMP 503, finish number 4.

2.4 FABRICATION - GENERAL

- A. Welding, AWS D10.4.
- B. Grind dress, and finish welded joints to match finish of adjacent surface.
- C. Form exposed surfaces from one sheet of stock, free of joints.
- D. Provide steel anchors and components required for secure installation.
- E. Form flat surfaces without distortion. Keep exposed surfaces free from scratches and dents. Reinforce doors to prevent warp or twist.
- F. Isolate aluminum from dissimilar metals and from contact with building materials as required to prevent electrolysis and corrosion.
- G. Hot-dip galvanized steel, except stainless steel, anchors and fastening devices.
- H. Shop assemble accessories and package with all components, anchors, fittings, fasteners and keys.
- I. Key items alike.
- J. Provide templates and rough-in measurements as required.
- K. Round and deburr edges of sheets to remove sharp edges.

2.5 COMBINATION PAPER TOWEL DISPENSER AND DISPOSAL UNITS

- A. Recessed type.
- B. Dispensing capacity for 400 sheets of any type of paper toweling.
- C. Fabricate of stainless steel.
- D. Form face frames, from one piece.
- E. Provide each door with continuous stainless steel piano hinge and tumbler lock, keyed alike.
- F. Provide removable waste receptacle approximately 40 liter (10.5 gallon) capacity, fabricated of 0.45 mm (0.018-inch) thick stainless steel.

2.6 TOILET TISSUE DISPENSERS

- A. Double roll surface mounted type.
- B. Mount on continuous backplate.
- C. Removable spindle ABS plastic or chrome plated plastic.
- D. Wood rollers are not acceptable.

2.7 GRAB BARS

- A. Fed. Spec WW-P-541/8B, Type IV, bars, surface mounted, Class 2, grab bars and ASTM F446.
- B. Fabricate of either stainless steel, except use only one type throughout the project:
 - 1. Stainless steel: Grab bars, flanges, mounting plates, supports, screws, bolts, and exposed nuts and washers.
- C. Concealed mount partitions.
- D. Bars:

1. Fabricate from 38 mm (1-1/2 inch) outside diameter tubing.
 - a. Stainless steel, minimum 1.2 mm (0.0478 inch) thick.
2. Fabricate in one continuous piece with ends turned toward walls, except swing up and where grab bars are shown continuous around three sides of showers, bars may be fabricated in two sections, with concealed slip joint between.
3. Continuous weld intermediate support to the grab bar.
4. Swing up bars manually operated. Designed to prevent bar from falling when in raised position.

E. Flange for Concealed Mounting:

1. Minimum of 2.65 mm (0.1046 inch) thick, approximately 75 mm (3 inch) diameter by 13 mm (1/2 inch) deep, with provisions for not less than three set screws for securing flange to back plate.
2. Insert grab bar through center of the flange and continuously weld perimeter of grab bar flush to back side of flange.

F. Back Plates:

1. Minimum 2.65 mm (0.1046 inch) thick metal.
2. Fabricate in one piece, approximately 6 mm (1/4 inch) deep, with diameter sized to fit flange. Provide slotted holes to accommodate anchor bolts.

2.8 SHOWER CURTAIN RODS

- A. Stainless steel tubing, ASTM A569, minimum 1.27 mm (0.050 inch) wall thickness, 32 mm (1 1/4 inch) outside diameter.
- B. Flanges, stainless steel rings, 66 mm (2 5/8 inch) minimum outside diameter, with 2 holes opposite each other for 6 mm (1/4 inch) stainless steel fastening bolts. Provide a set screw within the curvature of each flange for securing the rod.

2.9 CLOTHES HOOKS-ROBE OR COAT

- A. Fabricate hook units either of chromium plated brass with a satin finish, or stainless steel, using 6 mm (1/4 inch) minimum thick stock, with edges and corners rounded smooth to the thickness of the metal, or 3 mm (1/8 inch) minimum radius.
- B. Fabricate each unit as a double hook on a single shaft, integral with or permanently fastened to the wall flange, provided with concealed fastenings.

2.10 TOWEL BARS

- A. Fed. Spec. WW-P-541/8B, Type IV, Bar, Surface mounted; Class 1, towel.
- B. Stainless steel.
- C. Bar Length: 450 and 600 mm (18 and 24 inches) as shown.
- D. Finish of brackets or supports same as bar.

2.11 METAL FRAMED MIRRORS

- A. Fed. Spec. A-A-3002 metal frame; stainless steel, type 304.
- B. Mirror Glass:
 - 1. Minimum 6 mm (1/4 inch) thick.
 - 2. Set mirror in a protective vinyl glazing tape.
 - 3. Use tempered glass for mirrors in Mental Health and Behavioral Nursing units.
- C. Frames:
 - 1. Channel or angle shaped section with face of frame not less than 9 mm (3/8 inch) wide. Fabricate with square corners.
 - 2. Use either 0.9 mm (0.0359 inch) thick stainless steel, or extruded aluminum, with clear anodized finish 0.4 mils thick.
 - 3. Filler:
 - a. Where mirrors are mounted on walls having ceramic tile wainscots not flush with wall above, provide fillers at void between back of mirror and wall surface.
 - b. Fabricate fillers from same material and finish as the mirror frame, contoured to conceal the void behind the mirror at sides and top.
 - 4. Attached Shelf for Mirrors:
 - a. Fabricate shelf of the same material and finish as the mirror frame.
 - b. Make shelf approximately 125 mm (five inches) in depth, and extend full width of the mirror.
 - c. Close the ends and the front edge of the shelf to the same thickness as the mirror frame width.
 - d. Form shelf for aluminum framed mirror as an integral part of the bottom frame member. Form stainless steel shelf with concealed brackets to attach to mirror frame.
- D. Back Plate:
 - 1. Fabricate backplate for concealed wall hanging of either zinc-coated, or cadmium plated 0.9 mm (0.036 inch) thick sheet steel, die cut to fit face of mirror frame, and furnish with theft resistant concealed wall fastenings.
 - 2. Use set screw type theft resistant concealed fastening system for mounting mirrors.
- E. Mounting Bracket:
 - 1. Designed to support mirror tight to wall.
 - 2. Designed to retain mirror with concealed set screw fastenings.

2.12 MOP RACKS

- A. Minimum 1.0M (40 inches) long with five holders.
- B. Clamps:
 - 1. Minimum of 1.3 mm (0.050-inch) thick stainless steel bracket retaining channel with a hard rubber serrated cam; pivot mounted to channel.
 - 2. Clamps to hold handles from 13 mm (1/2-inch) minimum to 32 mm (1-1/4 inch) maximum diameter.
- C. Support:
 - 1. Minimum of 1 mm (0.0375 inch) thick stainless steel hat shape channel to hold clamps away from wall as shown.
 - 2. Drill wall flange for 3 mm (1/8 inch) fasteners above and below clamp locations.
- D. Secure clamps to support with oval head machine screws or rivets into continuous reinforcing back of clamps.
- E. Finish on stainless Steel: AMP 503-No. 4.

2.13 STAINLESS STEEL SHELVES (TYPE 44)

- A. Shelves:
 - 1. Fabricate shelves of 1.2 mm (0.0478-inch) thick sheet to size and design shown.
 - 2. Fabricate shelves of hollow metal type construction, forming a depression as shown, with closed fronts, backs, ends and bottoms. Reinforce shelves with 1.2 mm (0.0478-inch) thick sheet steel hat channel stiffeners, full depth, welded to underside of top at bracket locations.
 - 3. Miter cuts, where made at corners of shelves, continuously welding.
- B. Form brackets of 3 mm (1/8-inch) thick steel as shown. Drill brackets for 6 mm (1/4-inch) anchor bolts.
- C. Weld or Screw brackets to shelves.

2.14 SPHERICAL MIRRORS

- A. Half dome and quarter dome types (18" inch Diameter).
- B. Provide panoramic dome mirrors by See All or approved equal:

See All Industries, Inc.

3623 South Laflin Place

Chicago, Illinois, 60609

Tel. 800.873.1313

www.SeeAll.com

PART 3 - EXECUTION**3.1 PREPARATION**

- A. Before starting work notify COTR in writing of any conflicts detrimental to installation or operation of units.
- B. Verify with the COTR the exact location of accessories.

3.2 INSTALLATION

- A. Set work accurately, in alignment and where shown. Items shall be plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.
- B. Toggle bolt to steel anchorage plates in frame partitions or hollow masonry.
- C. Install accessories in accordance with the manufacturer's printed instructions and ASTM F446.
- D. Install accessories plumb and level and securely anchor to substrate.
- E. Install accessories in a manner that will permit the accessory to function as designed and allow for servicing as required without hampering or hindering the performance of other devices.
- F. Position and install dispensers, and other devices in countertops, clear of drawers, permitting ample clearance below countertop between devices, and ready access for maintenance as needed.
- G. Align mirrors, dispensers and other accessories even and level, when installed in battery.
- H. Install accessories to prevent striking by other moving, items or interference with accessibility.
- I. Install spherical mirrors per manufacturer's instructions and anchor to wall per manufacturer's instructions.

3.3 CLEANING

After installation, clean as recommended by the manufacturer and protect from damage until completion of the project.

- - - E N D - - -

SECTION 10 44 13
FIRE EXTINGUISHER CABINETS

PART 1 - GENERAL**1.1 DESCRIPTION**

This section covers recessed fire extinguisher cabinets.

1.2 RELATED WORK

- A. Acrylic glazing: Section 08 80 00, GLAZING.
- B. Field Painting: Section 09 91 00, PAINTING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data: Fire extinguisher cabinet including installation instruction and rough opening required.
- C. Anchoring: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.4 APPLICATION PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Testing and Materials (ASTM):
D4802-02.....Poly (Methyl Methacrylate) Acrylic Plastic Sheet

PART 2 - PRODUCTS**2.1 FIRE EXTINGUISHER CABINET**

Recessed type with flat trim of size and design shown.

2.2 FABRICATION

- A. Form body of cabinet from 0.9 mm (0.0359 inch) thick sheet steel.
- B. Fabricate door and trim from 1.2 mm (0.0478 inch) thick sheet steel with all face joints fully welded and ground smooth.
 - 1. Glaze doors with 6 mm (1/4 inch) thick ASTM D4802, clear acrylic sheet, Category B-1, Finish 1.
 - 2. Design doors to open 180 degrees.
 - 3. Provide continuous hinge, pull handle, and adjustable roller catch.

2.3 FINISH

- A. Finish interior of cabinet body with baked-on semigloss white enamel.
- B. Finish door, frame with manufacturer's standard baked-on prime coat suitable for field painting.
- C. Color: As indicated in Section 09 06 00, SCHEDULE OF FINISHES.

PART 3 - EXECUTION

- A. Install fire extinguisher cabinets in prepared openings and secure in accordance with manufacturer's instructions.

- - - E N D - - -

SECTION 11 13 10
FRONT PROJECTION SCREENS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Electrically operated, ceiling recessed, front projection screens.

1.2 RELATED SECTIONS

- A. Section 05 50 00 - METAL FABRICATIONS: Suspension systems for projection screens.
- B. Section 06 10 00 - ROUGH CARPENTRY: Fasteners.
- C. Section 09 22 16 - NON-STRUCTURAL METAL FRAMING: Supports and trim for suspended ceilings.
- D. Anchoring: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- E. Section 09 29 00 - GYPSUM BOARD: Ceiling for recessed screen installation.
- F. Section 0951 00 - ACOUSTICAL CEILINGS.
- G. Section 26 05 11 - REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: for electrical wiring, connections, and installation of remote control switches for electrically operated projection screens.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES..
- B. Manufacturer's data sheets on each product to be used, including:
 - 1. Preparation instructions and recommendations.
 - 2. Storage and handling requirements and recommendations.
 - 3. Installation methods.
- C. Wiring diagram for electrically operated units.
- D. Shop Drawings: Shop drawings showing layout and types of projection screens. Show the following:
 - 1. Location of screen centerline.
 - 2. Location of wiring connections.
 - 3. Seams in viewing surfaces.
 - 4. Detailed drawings for concealed mounting.
 - 5. Connections to suspension systems.
 - 6. Anchorage details.
 - 7. Accessories.
 - 8. Frame details.
- E. Verification Samples: For each finish product specified, two samples, minimum size 6 inches (150 mm) square, representing actual product, color,

and patterns.

1.4 QUALITY ASSURANCE

- A. Single Source Responsibility: Obtain each type of projection screen required from a single manufacturer as a complete unit, including necessary mounting hardware and accessories.
- B. Coordination of Work: Coordinate layout and installation of projection screens with other construction supported by, or penetrating through, ceilings, including light fixtures, HVAC equipment, fire-suppression system, and partitions.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Do not deliver projection screens until building is enclosed and other construction where screens will be installed is substantially complete.
- B. Store products in manufacturer's unopened packaging until ready for installation.
- C. Protect screens from damage during delivery, handling, storage, and installation.

1.6 COORDINATION

- A. Coordinate work with installation of ceilings, electric service power characteristics, and location.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. Acceptable Manufacturer: Draper, Inc., which is located at: 411 S. Pearl P. O. Box 425 ; Spiceland, IN 47385-0425; Toll Free Tel: 800-238-7999; Tel: 765-987-7999; Fax: 866-637-5611; Email: request_info@drapercontract@draperinc.com; Web: www.draperinc.com OR APPROVED EQUAL.
- B. Requests for substitutions will be considered in accordance with provisions of Section 01600.

2.2 MOTORIZED, CEILING RECESSED, FRONT PROJECTION SCREENS

- A. Signature/Series E: Electric motor operated, extruded aluminum case, independently motorized closure. Extruded aluminum case, finished white. UL approved "Suitable for use in environmental air space." Case size 9-3/4 inches (248 mm) deep and 9-1/8 inches (232 mm) wide for screen sizes up to 144 inches wide;. Bottom of case fully enclosed by aluminum panels and motorized aluminum trap door with concealed hinges. Trap door supported entirely along front and back edges without crack around perimeter of door. Trap door opens into case when screen is lowered. Closure panels screw-attached to case and may be removed manually for access to roller and drive assembly. Case shall have white finish.
 - 1. Motor Screen Controls, UL certified.

- a. Single station control rated 115V AC, 60 Hz with 3-position rocker switch with cover plate to stop or reverse screen at any point.
 - b. Locking switch cover plate for limited access to three position switch.
2. Projection Viewing Surface:
- a. Matt white, washable surface. For use with any type projector where light can be controlled. GREENGUARD for Children and Schools certified.
3. Viewing Area H x W.
- a. Audio Visual Format.
 - 1) Provide with black border.
 - 2) 60 inches x 60 inches (1524 mm x 1524 mm).

PART 3 EXECUTION

3.1 EXAMINATION

- A. Do not begin installation until substrates have been properly prepared.
- B. Verify rough-in openings are properly prepared.
- C. If substrate preparation is the responsibility of another installer, notify the VA of unsatisfactory preparation before proceeding.

3.2 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

3.3 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Install front projection screens with screen cases in position and relationship to adjoining construction as indicated, securely anchored to supporting substrate, and in manner that produces a smoothly operating screen with plumb and straight vertical edges and plumb and flat viewing surfaces when screen is lowered.
- C. Test electrically operated units to verify that screen, controls, limit switches, closure and other operating components are in optimum functioning condition.

3.4 PROTECTION

- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.

END OF SECTION

**SECTION 11 17 36
PACKAGE TRANSFER UNITS**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies package transfer units.

1.2 RELATED WORK

- A. Anchoring: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.3 SUBMITTAL

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- B. Shop Drawings: Show material and finish, size of members, and details of construction, installation and anchorage:
1. Package transfer box
- C. Manufacturer's Literature and Data:
1. Package transfer box
- D. Certificates: Letter from manufacturer indicating the products have been certified to meet the specified ratings.

1.4 DELIVERY

Deliver products to site in sealed packages of containers; labeled for identification with manufacturer's name, brand, and contents.

1.5 STORAGE

- A. Store products in weathertight and dry storage facility.
- B. Protect from damage from handling, weather and construction operations before, during and after installation in accordance with manufacturer's instructions.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

- B. American Society for Testing and Materials (ASTM):

A167-99(R2004).....Stainless and Heat-Resisting Chromium-Nickel
Steel Plate, Sheet, and Strip

A1008-07.....Steel, Sheet, Cold-Rolled, Carbon, Structural
High Strength Low Alloy

B26/B26M-05.....Aluminum Alloy Sand Castings

B221-06.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Shapes, and Tubes

- C. American Society of Mechanical Engineers (ASME):
B18.6.4-98(R2005).....Thread Forming and Thread Cutting Tapping
Screws
- D. American Welding Society (AWS):
D9.1-06.....Sheet Metal Welding Code
- E. National Association of Architectural Metal Manufacturers (NAAMM)
AMP 500-505-1988.....Metal Finishes Manual
- F. Federal Specifications (Fed. Spec):
A-A-1922A.....Shield, Expansion
- G. Underwriters Laboratories, Inc. (UL):
752-06.....Bullet-Resisting Equipment.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Aluminum:
 - 1. Extruded: ASTM B221, alloy 6063-T5 and alloy 6463-T5.
 - 2. Cast: ASTM B26.
- B. Stainless Steel: ASTM A167, Type 302B.
- C. Steel Sheet: ASTM A1008.
- D. Fasteners:
 - 1. Exposed Fasteners: Stainless steel or chromium plated brass, finish to match adjacent surface.
 - 2. Concealed Fasteners: Steel, hot-dip galvanized.
 - 3. Screws: ASME B18.6.4.
 - 4. Expansion Shields: A-A-1922A as recommended by manufacturer for component and substrate for use in solid masonry or concrete.
- E. Finishes: Stainless Steel, Satin No. 4.

2.2 PRODUCT REQUIREMENTS

Products meet, as a minimum, the requirements specified, and be a standard commercial product of a manufacturer regularly and presently manufacturing products specified.

2.3 PACKAGE TRANSFER BOX

- A. Prefabricated type, of size and design shown complete with doors, body and flanges.
- B. Doors: Steel with steel piano hinges.
 - 1. Mechanical interlocking type that prevents both doors from being opened at same time.
 - 2. Pull handles on both sides. Bright chromium plated finish on handles.

3. Rubber gaskets, and sealants to achieve air tight lock when door is closed.
- C. Body of transfer box: Use welded sheet steel with steel fixed outer flanges and adjustable inner flanges.
- D. Finish paint exposed doors and flanges, in color specified in Section 09 06 00, SCHEDULE FOR FINISHES.
 1. Manufacturer's standard stainless steel surfaces (exterior and interior surfaces) of package transfer box.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install product by experienced mechanics capable of installing item in accordance with drawings, specifications, and shop drawings.
- B. Set work accurately, in alignment and where shown. Install plumb, level, free of rack and twist, and set parallel or perpendicular to required line and plane of surface.
- C. Provide anchoring devices and fasteners necessary for securing each item to building construction.
 1. Do not use power actuated drive pins.
 2. Do not anchor to wood ground strips.
- D. Touch up abraded and damaged areas of finish coat with paint furnished by the manufacturer.
- E. Fit flanges of package transfer box tight against walls. Use shims where required for leveling.

3.2 CLEANING AND ADJUSTING

- A. After installation, clean items as recommended by the manufacturer and protect from damage until completion of the project.
- B. Adjust movable parts including hardware to operate as designed, without binding or deformation of the members, centered in the opening or frame, and where applicable, with contact surfaces fit tight and even, without forcing or warping the components.

- - - E N D - - -

SECTION 11 71 01
MEDICAL WASHING AND STERILIZING EQUIPMENT

PART 1 - GENERAL**1.1 DESCRIPTIONS**

This section specifies Medical Reprocessing and Sterilization Equipment including washer disinfectors, cart washers, ultrasonic cleaners, automated endoscope re-processors, steam sterilizers, ethylene oxide (EtO) sterilizer/aerator combination units, ethylene oxide (EtO) abators, ETOa sterilizers, ethylene oxide (EtO) monitoring stations, liquid chemical sterilizers, drying cabinets, detergent dispensing units, water treatment systems, steam guns, and endoscope pre-processing sinks.

1.2 DEFINITIONS

- A. Ultrasonic Cleaner: A mechanical system that uses sound waves, water and detergent to loosen soil from instruments. Both countertop and floor units are available.
- B. Washer/Disinfector: An automated washing unit that uses high-temperature water and detergent to clean and high-level disinfect instruments and trays.
 - 1. Cube Model - Single chamber washer/disinfector.
- C. Cart Washer: An automated washing unit that uses high-temperature water and detergent to clean and high-level disinfect carts and equipment.
- D. Endoscope Drying Cabinet: Freestanding cabinet used to dry endoscopes with forced, filtered air within the cabinet, as well as through the channels of the scopes.
- E. Equipment Drying Cabinet: Freestanding cabinet used to dry equipment with forced, filtered air and variable temperature settings. There are single door and pass-thru units available.
- F. Automated Endoscopic Re-Processor (AER): Automated washing unit that uses water and EPA-approved high level disinfectants to clean and high level disinfect immersible, flexible endoscopes.
- G. Steam Sterilizer: A machine used to sterilize instruments and equipment by subjecting them to high-pressure steam up to 275°F. Sterilizers are available in both cart-loading and floor-loading models. They can be either freestanding or recessed, with single or double doors (pass-thru). Steam sterilizers are also known as autoclaves.
- H. Ethylene-Oxide (EtO) Sterilizer/Aerator Combination: A machine that combines the sterilization and aeration process into one unit. Ethylene

Oxide gas is used to sterilize heat-sensitive instruments and equipment by subjecting them to a temperature of up to 130°F, and an aeration cycle immediately follows the sterilization cycle. ETO sterilizers can be freestanding or recessed, with single doors. A dedicated exhaust system is required for Ethylene Oxide.

- I. Ethylene Oxide (EtO) Disposal System (Abator): A machine used as a pollution-control device, that converts ethylene oxide gas exhausted from sterilizer/aerator units to CO₂ and water vapor through a heated catalytic process.
- J. Ethylene Oxide (EtO) Monitoring Station: A continuous monitoring device (Single point or multi-point system) used to detect Ethylene Oxide leakage into the room.
- K. Gas Plasma Sterilizer: A machine that uses hydrogen peroxide gas plasma to sterilize heat-sensitive instruments and equipment. These sterilizers are available as either floor, cart, or counter-mounted.
- L. Liquid Chemical Sterilizer: A machine that uses a low-temperature liquid chemical sterilant to process heat-sensitive rigid and flexible endoscopes.
- M. Water Treatment System: A mechanical system for use with steam sterilizers, washer/disinfectors and cart washers, that decreases the contaminants in the municipal water to reduce boiler scaling and instrument spotting.
- N. Detergent Dispensing System: A mechanical system that dispenses measured doses of detergent or other chemicals directly to washer disinfectors and cart washers.
- O. Steam Gun: Refer to Section 23 22 13, STEAM AND CONDENSATE HEATING PIPING.
- P. Endoscope Pre-Processing Sink: Refer to Section 22 40 00, PLUMBING FIXTURES.

1.3 RELATED WORK

- A. Section 22 11 00, FACILITY WATER DISTRIBUTION and Section 22 13 00, FACILITY SANITARY SEWERAGE: Plumbing Connections.
- B. Section 22 15 00, GENERAL SERVICE COMPRESSED-AIR SYSTEMS: Connections to Compressed Air System.
- C. Section 22 40 00, PLUMBING FIXTURES.
- D. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- E. Section 23 22 13, STEAM AND CONDENSATE HEATING PIPING: Steam Connections, Steam Gun.

- F. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC: Remote monitoring of ETO Monitoring system.
- G. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Electrical Connections.
- H. Anchoring: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.4 PERFORMANCE REQUIREMENTS

- A. Equipment shall have built-in monitoring for timed cycles, and control devices for proper temperature and pressure. Equipment shall have a printer, either integrated or remote, for recording cycle time, temperature, and pressure.
- B. Manufacturer safeguards must be provided with the equipment to protect the operator from harm during normal operation of the equipment.

1.5 QUALITY CONTROL

- A. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC: Quality Assurance 1.3.D - Products Criteria.
- B. Mechanical, electrical, and associated systems shall be safe, reliable, efficient, durable, easily and safely operable, maintainable, and accessible.
- C. Standard Products: Material and equipment shall be the standard products of the selected manufacturer, and they should be regularly engaged in the manufacture of such products for at least 3 years. The design, model and size of each item shall have been in satisfactory and efficient operation on at least three installations for approximately three years. However, digital electronics devices, software and systems such as controls, instruments, computer work stations, shall be the current generation of technology and basic design that has a proven satisfactory service record of at least three years.
- D. All items furnished shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.
- E. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be products of one manufacturer.
- F. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.

- G. Installer Qualifications: Installer is authorized representative of sterilizer manufacturer and employs factory-trained personnel to install sterilizers. Installer is licensed as may be necessary by regulatory organizations.
- H. Steam Sterilizers: Comply with the most current version of ANSI/AAMI ST8.
- I. Ethylene-Oxide Sterilizers: Comply with the most current version of ANSI/AAMI ST24.

1.6 SUBMITTALS

- A. Submit in accordance with specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data: Include the following:
 - 1. Illustrations and descriptions of medical reprocessing equipment.
 - 2. Optional auxiliary equipment and controls.
 - 3. Catalog or model numbers for each component.
 - 4. Utility requirements.
- C. Shop Drawings: Show details of fabrication, installation, adjoining construction, coordination with mechanical and electrical work, anchorage, and other work required for complete installation.
- D. Field Test Reports: Provide certification reports from accredited service technicians or installers.
- E. Operating Instructions: Comply with requirements in specification Section 01 00 00, GENERAL REQUIREMENTS.

1.7 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American National Standards Institute/Association for the Advancement of Medical Instrumentation (ANSI/AAMI):
 - ST8-2008.....Hospital Steam Sterilizer, 3rd edition
 - ST24-1999 (R2009).....Automatic, General-Purpose Ethylene Oxide Sterilizers and Ethylene Oxide Sterilant Sources Intended for Use in Health Care Facilities
- C. National Association of Architectural Metal Manufacturers (NAAMM):
 - AMP 500-06.....Metal Finishes Manual

1.8 WARRANTY

Comply with FAR clause 52.246-21 in all areas except for warranty period, which shall be two years for all equipment.

1.9 GUARANTEE PERIOD SERVICES

Engage factory-trained authorized manufacturers' representatives to perform maintenance service on equipment during guarantee period.

1. Maintenance Service:

a. Inspection of equipment at regularly scheduled intervals as defined by the manufacturer.

b. Testing, cleaning, adjusting, repairing, and furnishing and installing replacement components as required to maintain equipment in reliable working condition.

2. Maintenance service does not include cleaning, adjusting, repairing, furnishing and installing replacement components required because of improper use.

PART 2 - PRODUCTS**2.1 ULTRASONIC CLEANER**

A. Floor Model:

1. Chamber:

a. Interior: Stainless steel.

b. Tank capacity: 6.5 gallons.

2. Doors:

a. Quantity: Single.

b. Operation: Automatic.

3. Loading: Manual.

4. Heat Source: Electric.

5. Temperature:

a. Solution tank: 100° - 120°F.

6. Electrical Requirements: 120V.

B. Countertop Model:

1. Chamber:

a. Interior: Stainless steel.

b. Tank capacity: 3 gallons to 6 gallons.

2. Doors:

a. Quantity: Single.

b. Operation: Manual.

3. Loading: Manual.

4. Heat Source: Electric.

- 5. Temperature:
 - a. Solution tank: ambient to 176°F.
- 6. Electrical Requirements: 08V.

2.2 WASHER/DISINFECTOR

- A. Cube Model:
 - 1. Chamber Interior: Stainless steel.
 - 2. Doors:
 - a. Quantity: Single.
 - b. Operation: Automatic.
 - 3. Loading: Automatic.
 - 4. Controls: Microprocessor.
 - 5. Heat Source: Steam.
 - 6. Electrical Requirements: 208V.
 - 7. Standard Cycles: Wash.
 - 8. Optional Cycles: Purified Water Rinse, Dry.
 - 9. Temperature:
 - a. Wash Cycle: 140 - 180°F.
 - b. Rinse Cycle: 158 - 194°F.

2.3 CART WASHER

- A. Interior: Stainless steel.
 - 1. Chamber Capacity: 134 - 241 cu. ft.
- B. Doors:
 - 1. Quantity: Single (Pass-thru).
 - 2. Operation: Automatic.
- C. Controls: Microprocessor.
- D. Heat Source: Electric Boiler
- E. Electrical Requirements: 208V.
- F. Standard Cycles: Wash, Rinse, Dry.
- G. Optional Cycles: Thermal Disinfection Rinse.
- H. Installation Options: Pit mount.
- I. Temperature:
 - 1. Wash Cycle: 120 - 180°F.
 - 2. Rinse Cycle: 180 - 194°F.
- J. Loading: Manual.

2.4 ENDOSCOPE DRYING CABINET

- A. Chamber:
 - 1. Interior: Painted steel.
 - 2. Capacity: Up to 10 Endoscopes.

B. Doors:

1. Quantity: Double.
2. Operation: Manual.
3. Configuration: Front opening.

C. Loading: Manual.

D. Heat Source: Electric:

1. Cabinet Temperature: 149 - 158 degrees F.
2. Standard Drying Time: 0 - 120 minutes.

E. Cabinet Filtration: HEPA filtered air through chamber and internal endoscope channels.

F. Air Flow Monitoring: Constant.

G. Electrical Requirements: 120V.

2.5 EQUIPMENT DRYING CABINET

A. Chamber:

1. Interior: Stainless steel.
2. Capacity: Up to 9 Shelves or cassettes.

B. Doors:

1. Quantity: Single.
2. Operation: Manual.
3. Configuration: Front opening.

C. Loading: Manual.

D. Heat Source: Electric.

1. Cabinet Temperature: 158 - 194 degrees F.
2. Standard Drying Time: 0 - 90 minutes.

E. Cabinet Filtration: HEPA filtered air.

F. Electrical Requirements: 120V.

2.6 AUTOMATIC ENDOSCOPE RE-PROCESSOR (AER)

A. Configuration: Free Standing.

B. Chamber:

1. Chamber Quantity: Single.
2. Chamber Processing Capacity: 2 scopes max with certain models.

C. Standard Cycle:

1. Time: 22 - 42 minutes.

D. Printer: Integrated.

E. Water Pressure: 30 - 70 PSI.

F. Electrical Requirements: 120V.

2.7 STEAM STERILIZER

A. Chamber:

1. Interior: Stainless steel.
2. Chamber Sizes: Medium (10.5 to 20.7 cu. ft.).
3. Chamber Pressure: up to 45 PSIG.
4. Chamber Temperature: 230 - 275 degrees F.

B. Doors:

1. Quantity: Single, Double (Pass-thru).
2. Operation: Manual Power.
3. Configuration: Front opening, Back opening (Pass through).

C. Standard Cycles: Gravity, Vacuum.

D. Heat Source: Electric boiler (built-in).

E. Loading: Manual.

F. Recorder: Integrated Printer.

G. Control Options: Integrated controls.

H. Installation Options: Floor mount.

I. Electrical Requirements: 208V, 480V.

2.8 ETHYLENE-OXIDE STERILIZER/AERATOR COMBINATION

A. Chamber:

1. Interior: Stainless steel.
2. Size: 7.9 cu.ft.

B. Cycle Time:

1. Exposure: 0 to 99 hours.
2. Aeration: 0 to 99 hours.
3. Chamber Pressure: Minimum 80 psi.
4. Warm Sterilization Temperature: 55 degrees C (131 degrees F).
5. Cold Sterilization Temperature: 37 degrees C (98.6 degrees F).
6. Warm Aeration Temperature: 54 degrees C (130 degrees F).
7. Cold Aeration Temperature: 38 degrees C (100 degrees F).

C. Doors:

1. Quantity: Single.
2. Operation: Manual.

D. Recorder: Integrated Printer.

E. Installation Options: Recessed.

F. Electrical Requirements: 220V.

G. Vent Outlet: Ethylene oxide vent pipe connection for vent pipe connection to abator.

H. Sterilant Delivery System: Single-Use Gas cartridge.

2.9 ETHYLENE-OXIDE ABATOR

A. System Components:

1. Catalytic cell.
2. Heater.
3. Blower (Fan): 230V.
4. Prefilter.
5. Interconnection Kit: Links abator to ethylene-oxide sterilizer.
6. Construction: Stainless Steel.
7. Electrical Requirements: 220V.

B. Vent Accessories:

1. Inlet Vent: Ethylene oxide vent pipe connection for vent pipe connection to sterilizer.
2. Outlet Vent: Exhaust discharge connection. Provide 3 way blender exhaust discharge fitting with exhaust duct connection to mix high temperature abator discharge with room air for low temperature abator exhaust.
3. Auxiliary Vent: Ethylene oxide emergency vent pipe connection for vent pipe connection to outdoors.

2.10 ETHYLENE-OXIDE (ETO) MONITOR:

A. System Components:

1. Electro Chemical Sensors Range 0-100 PPM (EtO/organic vapor).
2. Pre-filter to allow for greater specificity.
3. Supervisory panel where readings can be taken.
4. Alarm and strobe device (audible and visual alarm).
5. Second alarm for notification (Police, Fire Dept, etc.).
6. Provide remote monitoring of the EtO monitoring system via the DDC control system. Coordinate interface with Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

2.11 GAS PLASMA STERILIZER (HYDROGEN PEROXIDE):

A. Chamber:

1. Interior: Aluminum.
2. Capacity: 1.1 cu. ft. to 9.5 cu. ft.
3. Standard Cycle:
 - a. Table top: 28 to 38 minutes.
 - b. Floor Unit: 47 to 75 minutes.
4. Cycle Temperature: Up to 131 °F.
5. Sterilant Delivery System: Cartridge.

B. Doors:

1. Quantity: Single.
2. Operation: Manual.

- 3. Configuration: Side hinged.
- C. Loading: Manual.
- D. Heat Source: Electric.
- E. Electrical Requirements: 120V.

2.12 WATER TREATMENT SYSTEM:

- A. Configuration: Free Standing.
- B. Water Treatment Process:
 - 1. Pre-Filtration.
 - 2. Recirculation.
 - 3. Deionization.
 - 4. Final Filtration.
 - 5. Heating.
- C. Average Output: 5,000 gallons per day.
- D. Electrical Requirements: 115V.

2.14 DETERGENT DISPENSING SYSTEM:

- A. Configuration: Wall Mounted.
- B. Controls: PC Based.
- C. Dispensing Options: Enzymatic Solution, Detergent.
- D. Electrical Requirements: 110V.

2.15 STERILIZER-ENCLOSURE PANELS (MODULAR WALLS)

- A. Design and custom fabricate to conceal from view body, wiring, piping, and other appurtenances, and to confine water vapor, gases, and heat in the enclosed area:
 - 1. Size panels and support members to extend from floor to finished ceiling.
- B. Panels: Fabricate panels of not less than 1.27 mm (0.050-inch) thick stainless steel, with corners welded. Insulate with 13 mm (1/2-inch) moisture-resistant, sound-deadening, material bonded to surface of back side.
- C. Support Columns: Fabricate of not less than 1.52 mm (0.060 inch) thick, stainless-steel tubing, not less than 38 mm (1-1/2 inches) square, with mounting plates welded to top and bottom.
 - 1. Location: At each side of doors and at each vertical panel extending from floor to finished ceiling.
- D. Scribe Strips: Stainless-steel closures to fit assembly to wall or ceiling.
 - 1. Maximum Width: 102 mm (4 inches). Use panels to close spaces greater than 102 mm (4 inches).

- E. Finish: No. 4 finish (bright, directional polish) complying with NAAMM's "Metal Finishes Manual for Architectural and Metal Products. "Finish after welding.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install sterilizers according to manufacturer's written instructions.
- B. Coordinate installation with related mechanical and electrical work. Provide cutouts and openings for plumbing and electrical work as indicated or as required by trades involved.

3.2 TESTS

- A. Field test installed equipment after water and steam systems are pressurized for proper operation.
 - 1. Operate each unit for six hours through repeated full cycles. During and after testing, there shall be no evidence of leaks, overheating, electrical failure, or other symptoms of failure.
 - 2. For units that fail testing, make adjustments and corrections to installation, or replace equipment, and repeat tests until equipment complies with requirements.

3.3 PROTECTING AND CLEANING

- A. Protect equipment from dirt, water, and chemical or mechanical injury during the remainder of the construction period.
- B. At the completion of work, clean equipment as required to produce ready-for-use condition.

3.4 INSTRUCTIONS

- A. Instruct personnel and transmit operating instructions in accordance with requirements in specification Section 01 00 00, GENERAL REQUIREMENTS.
- B. Training must be provided by the manufacturer or installer.

- - - E N D - - -

SECTION 12 24 00
WINDOW SHADES

PART 1 - GENERAL**1.1 DESCRIPTION**

Integral Venetian blinds are specified in this section. Window shades shall be furnished complete, including brackets, fittings and hardware.

1.2 RELATED WORK

- A. Color of exposed parts of venetian blinds, (including tapes and cords):
Section 09 06 00, SCHEDULE FOR FINISHES.

1.3 QUALITY CONTROL

Manufacturer's Qualification: Venetian blind manufacturer shall provide evidence that the manufacture of blinds are a major product, and that the blinds have performed satisfactorily on similar installations.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
1. Venetian blind slats, 300 mm (12 inches) long, including cord and tape, showing color and finish.
- C. Manufacturer's literature and data; showing details of construction and hardware for:
1. Venetian blinds

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced to in the text by the basic designation only.
- B. Federal Specifications (Fed. Spec.):
- AA-V-00200B.....Venetian Blinds, Shade, Roller, Window, Roller,
Slat, Cord, and Accessories
- C. American Society for Testing and Materials (ASTM):
- A167-99(R2009).....Stainless and heat-Resisting Chromium-Nickel
Steel Plate, Sheet and Strip
- B221/B221M-08.....Aluminum-Alloy Extruded Bars, Rods, Wire,
Shapes, and Tubes
- D635-10.....Rate of Burning and/or Extent and Time of
Burning of Self-Supporting Plastics in a
Horizontal Position
- D648-07.....Deflection Temperature of Plastics Under
Flexural Load in the Edgewise Position

D1784-08.....Rigid Poly (Vinyl Chloride) (PVC) Compounds and
Chlorinated Poly (Vinyl Chloride) (CPVC)
Compounds

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Stainless Steel: ASTM A167
- B. Cords for Venetian Blinds: No. 4 braided nylon or No. 4-1/2 braided cotton having not less than 175 pounds breaking strength.
- C. Extruded Aluminum: ASTM B221/B221M.

2.2 VENETIAN BLINDS AND SHADES ENCLOSED IN WINDOWS

Shades or blinds inside of windows panes shall be used for manual turn-knob operation..

2.3 FASTENINGS

Zinc-coated or cadmium plated metal, aluminum or stainless steel fastenings of proper length and type. Except as otherwise specified, fastenings for use with various structural materials shall be as follows:

Type of Fastening	Structural Material
Wood screw	Wood
Tap screw	Metal
Case-hardened, self-tapping screw	Sheet Metal
Screw or bolt in expansion shields	Solid masonry
Toggle bolts	Hollow blocks, wallboard and plaster

2.4 FABRICATION

- A. Fabricate venetian blinds to fit measurements of finished openings obtained at site.
- B. Venetian Blinds: Venetian blinds shall have 3/8-inch width horizontal slats positioned within ladder tapes. Multiple blinds in openings are to be of same type and divided at mullions.
 - 1. Head-rails shall fully enclose operating mechanism on three sides and ends.
 - 2. Bottom rails shall be fully enclosed to prevent contact of tapes and sill at underside.

3. Finish concealed metal work of head-rails including concealed mechanism, with one shop coat of paint. Do not paint parts that have non-rusting finish, or parts where motion of friction occurs.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Venetian Blinds: Support blinds in level position by brackets and intermediate supports that will permit easy removal and replacement of units without damage to blind, or adjacent surfaces. Provide at least two fasteners for each bracket or other support.
 1. Install blinds between window unit with steel trim. Mount brackets on trim reveal, flush with face of trim and secure with steel screws.

- - - E N D - - -

**SECTION 12 31 00
MANUFACTURED METAL CASEWORK**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies metal casework and related accessories, including base cabinets, wall cabinets, and full height cabinets.
- B. Items specified in this section:
 - 1. S.P.D. Casework: Including metal casework of the following types:
 - a. Built-in counter (Stainless Steel).
 - b. Casework (Stainless Steel).

1.2 RELATED WORK

- A. Color of casework finish: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Electrical Components: Division 26, ELECTRICAL.
- C. Anchoring: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.3 QUALITY ASSURANCE

- A. Approval by Contracting Officer of proposed manufacturer, or suppliers, will be based upon submission by Contractor certification that, manufacturer regularly and presently manufactures casework specified as one of their principal products.
- B. Installer has technical qualifications, experience, trained personnel, and facilities to install specified items.
- C. Furnish supervision of installation at construction site by a qualified technician regularly employed by casework installer.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Certificates:
 - 1. Manufacturer's Certificate of qualifications specified and finish on casework.
 - 2. Contractor's Certificate of installer's qualifications specified.
- C. Manufacturer's Literature and Data:
 - 1. Brochures showing name and address of manufacturer, and catalog or model number of each item incorporated into the work.
 - 2. Manufacturer's illustration and detailed description.
 - 3. List of deviations from contract specifications.
 - 4. Locks, each kind
- D. Shop Drawings (1/2 Full Scale):
 - 1. Showing details of casework construction, including kinds of materials and finish, hardware, accessories and relation to finish of

adjacent construction, including specially fabricated items or components.

2. Fastenings and method of installation.
3. Location of service connections and access.

E. Samples:

1. Metal plate, 150 mm (six inch) square, showing chemical resistant finish, in each color.
2. One complete casework assembly, including cabinet(s) with drawers and cupboard.
3. One glazed sliding door with track and pertinent hardware. A complete cabinet may be submitted to fulfill this requirement.
4. Cabinets for subsequent installation may be submitted for above requirements.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.

B. American Society for Testing and Materials (ASTM):

A36/A36M-08.....Carbon Structural Steel

A167-99(R 2009).....Stainless and Heat-Resisting Chromium Steel
Plate Sheet and Strip

A283/A283M-03(R 2007)...Low and Intermediate Tensile Strength Carbon
Steel Plates

A568/A568M-09.....Steel, Sheet, Carbon and High-Strength, Low-
Alloy Hot-Rolled and Cold-Rolled, General
Requirements

A794/A794M-09.....Standard Specification for Commercial Steel
(CS), Sheet, Carbon (0.16% Maximum to 0.25%
Maximum) Cold Rolled

B456-03(R2009).....Electrodeposited Coatings of Copper Plus Nickel
Plus Chromium and Nickel Plus Chromium

C1036-06.....Flat Glass

C. American National Standard Institute:

Z97.1-09.....Safety Glazing Material used In Buildings

D. Builders Hardware Manufacturers Association (BHMA):

A156.1-06.....Butts and Hinges

A156.9-10.....Cabinet Hardware

A156.5-10.....Auxiliary Locks and Associated Products

A156.11-10.....Cabinet Locks

A156.16-02.....Auxiliary Hardware

E. American Welding Society (AWS):

- D1.1-10.....Structural Welding Code Steel
- D1.3-08.....Structural Welding Code Sheet Steel
- F. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-505-06 Series...Metal Finishes Manual
- G. U.S. Department of Commerce, Product Standard (PS):
PS 1-95.....Construction and Industrial Plywood
- H. Federal Specifications (Fed. Spec.):
FF-N-836D.....Nut, Square, Hexagon Cap, Slotted, Castle
Knurled, Welding and Single Ball Seat
A-A-55615.....Shield, Expansion; Nail Expansion (Wood Screw
and Lag Bolt Self-Threading Anchors)

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Sheet Steel:
 - 1. ASTM A794, cold rolled, Class 1 finish, stretcher leveled.
 - 2. Other types of cold rolled steel meeting requirements of ASTM A568 may be used for concealed parts.
- B. Structural Steel: ASTM A283 or ASTM A36.
- C. Stainless Steel: ASTM A167, Type 302B.
- D. Plywood:
 - 1. Prod. Std. PS 1, seven ply, interior.
 - 2. Where both sides are exposed, use Grade AA.
 - 3. Grade AB for other uses.
- E. Fasteners:
 - 1. Exposed to view, chrome plated steel or stainless steel, or finished to match adjacent surface.
 - 2. Use round head or countersunk fasteners where exposed in cabinets.
 - 3. Expansion Bolts: Fed Spec. A-A-55615. Do not use lead or plastic shields.
 - 4. Nuts: Fed Spec FF-N-836. Type III, Style 15 where exposed.
 - 5. Sex Bolts: Capable of supporting twice the load.

2.2 MANUFACTURED PRODUCTS

- A. When two or more units are required, use products of one manufacturer.
- B. Manufacturer of equipment assemblies, which include components made by other, shall assume complete responsibility for the final assembled unit.
- C. Constituent parts which are alike, use products of a single manufacturer.

2.3 CASEWORK FABRICATION

- A. General:
 - 1. Welding: Comply with AWS Standards.

2. Reinforce with angles, channels, and gussets to support intended loads, notch tightly, fit and weld joints.
3. Constructed of sheet steel, except where reinforcing required.

B. Minimum Steel Thickness:

0.89 mm (0.035 inch) (20 gage)	Drawer fronts, backs, bodies, closure plates or scribe and filler strips less than 75 mm (three inches) wide, sloping top, shelf reinforcement channel and shelves. Toe space or casework soffits and ceilings under sloping tops.
1.20 mm (0.047 inch) (18 gage)	Base pedestals, casework top sides, back, and bottom panels, closure scribe and filler strips 75 mm (three inches) or more. Reinforcement for drawers with locks. Tables legs, spreaders and stretchers, when fabricated of cold rolled tubing. Metal for desks; except legs and aprons. Door exterior and interior panels, flush or glazed. Cross rails of base units. Front bottom rails, back bottom rails; rails may be 1.49 mm (0.059 inch) (16 gage) thick. Uprights or posts. Top corner gussets.
1.49 mm (0.059 inch) (16 gage)	Aprons, apron division, reinforcing gussets, table legs, desk legs and aprons, spreaders and stretchers when formed without welding. Toe base gussets, drawer slides, and other metal work. Front top rails and back rails except top back rails may be 1.2 mm (0.047 inch) (18 gage) thick.
1.88 mm (0.074 inch) (14 gage)	Drawer runners door tracks.
2.64 mm (0.104 inch) (12 gage)	Base unit bottom corner gussets and leg sockets.
3 mm (0.12 inch) (11 gage)	Reinforcement for hinge reinforcement inside doors and cabinets.

C. Casework Construction:

1. Welded assembly.
2. Fabricate with enclosed uprights or posts full height or width at front, include sides, backs, bottoms, soffits, ceilings under sloping tops, headers and rail, assembled to form an integral unit.
3. Form sides to make rabbeted stile 19 to 28 mm (3/4 to 1-1/8 inch) wide, closed by channel containing shelf adjustment slots.
4. Make bottom of walls units flush, double panel construction.
5. Make top and cross rails of "U" shaped channel.
6. Provide enclosed backs and bottoms in cabinets, including drawer units.
7. Provide finish panel on exposed cabinet backs.

8. Do not use screws and bolts in construction or assembly of casework, except to secure hardware, applied door stops, accessories, removable panels and where casework is required to fastened end to end or back to back.
 9. Fabricate casework, except benches, and desks with finished end panels.
 10. Close flush exposed soffits of wall hung shelving, knee spaces in counters, and toe spaces at bases.
 11. In base units with sinks provide one piece, lowered backs.
 12. In base units with doors provide removable backs.
 13. Provide built-in raceways or tubular or channel shaped members of casework for installation of wiring and electric work. Mount junction boxes on rear of cabinets, Electric work is specified in electrical sections of specifications.
 14. Provide reinforcing for hardware.
 15. Size Dimensions:
 - a. Used dimensions shown or specified within tolerances specified.
 - b. Tolerance:
 - 1) Depth: 325 mm (13 inches) in lieu of 300 mm (12 inches), 450 mm (18 inches) in lieu of 400 mm (16 inches), except wall hung units above counter. 525 mm (21 inches) to 600 mm (24 inches) in lieu of 550 mm (22 inches).
 - 2) Width: Minus 25 mm (one inch).
 - 3) Height: 25 mm (one inch) plus or minus for wall hung cabinets and counter mounted cabinets, excluding sloping tops. 25 mm (one inch) plus for floor standing cabinets, excluding base and sloping tops. Full height cabinets shown back to back same height.
 - 4) Manufacturer's tolerance for the same length, depth or height: Not to exceed 1.58 mm (0.0625 inches).
- D. Base Pedestals:
1. Provide adjustable leveling bolts accessible through stainless steel plugs, or notch in the base concealed when resilient base is applied.
 2. Except where flush metal base is shown, provide toe space at front recessed 75 mm (3 inches).
- E. Doors:
1. Hollow metal type, flush and glazed doors not less than 16 mm (5/8 inch) thick.
 2. Fabricate flush metal doors of two panels formed into pans with corners welded and ground smooth. Provide flush doors with a sound deadening core.

3. Provide sheet steel hinge reinforcement inside doors.
4. Doors removable without use of tools except where equipped with locks.

F. Sloping Tops:

1. Provide sloping tops for casework where shown.
2. Where ceilings interfere with installation of sloping tops. Provide filler plates as specified.
3. Omit sloping tops or filler plates whenever ceiling material is turned down and furred-in at face of casework.
4. Provide exposed ends of sloping tops with flush closures.
5. Fasten sloping tops with sheet metal screws inserted from cabinet interior; space fastener as recommended by manufacturer.

G. Shelves:

1. Capable of supporting an evenly distributed minimum load of 122 kg/m² (twenty-five pounds per square foot) without visible distortion.
2. Flange shelves down 19 mm (3/4 inch) on edges, with front and bearing edges flanged back 13 mm (1/2 inch).
3. For shelves over 1050 mm (42 inches) in length and over 300 mm (12 inches) in depth install 38 mm by 13 mm by 0.9 mm (1-1/2 x 1/2 x 0.0359 inch) thick sheet steel hat channel reinforcement welded to underside midway between front and back and extending full length of shelf.
4. Weld shelves to metal back and ends unless shown adjustable.
5. Provide means of positive locking shelf in position, and to permit adjustment without use of tools.

H. Undercounter Table, and Suspended Computer Mounting Shelf Frames:

1. Using welded construction.
2. Open frame type with aprons and legs when required.
3. Aprons:
 - a. Channels shaped welded at corners, with leg sockets and reinforcing triangular corner gussets welded in corners.
 - b. Pierce sockets to receive leg bolts and notch gussets to receive legs.
 - c. Upper flange perforated or slotted to receive screws at 200 mm (8 inch) centers, and back channels when installed against wall. Size slots for 6 mm (1/4 inch) anchor bolts.
 - d. Pierce aprons to receive drawer formation, rail at top of drawer opening. Install channel shaped apron division welded at ends, 762 mm 30 inches apart to front and back aprons, or at each side of drawer.
 - e. Fabricate metal components from sheet steel.

- 1) Use 1.5 mm (0.0598 inch) thick sheet for gussets and channel aprons.
- 2) Use 1.2 mm (0.0478 inch) thick sheet for other items.
- f. At knee space, provide exposed metal sides and metal closure plate for soffit. Where shown at knee space, provide exposed metal back secured with continuous angle closures at both side.
4. Legs:
 - a. Cold rolled tubing or 1.5 mm (0.0598 inch) formed steel.
 - b. Leveling-anchoring device at floor.
 - c. Stud bolt at top for attachment to leg socket.
5. Leg Braces:
 - a. Tables and benches not anchored to walls.
 - b. Brace back against front legs near bottom with steel angle, channel or tubular braces.
 - c. Fasten braces together with steel straps.
6. Leg Shoes:
 - a. Fit laboratory casework legs at bottom with either stainless steel, aluminum, or chromium plated brass shoes, not less than 25 mm (one inch) in height.
 - b. Fit other legs with a movable molded vinyl shoe 100 mm (four inches) high and coved at bottom.
- I. Suspended computer mounting shelves:
 1. Of same construction as counters, except, provide Stainless Steel angles to fabricate shelf support from bottom of counter.
 2. Provide side and back closure plates with open front.
 3. Provide 2-inch diameter holes on side cover facing work station.
- J. Closures and Filler Strips at Pipe Spaces:
 1. Flat steel strips or plates.
 2. Openings less than 200 mm (8 inches) wide: 1.2 mm (0.047 inch) thick.
 3. Openings more than 200 mm (8 inches wide 0.9 mm (0.359 inches) wide.

2.4 ACCESSORIES

- A. Labels Holders for Doors:
 1. Cast or wrought brass or aluminum, 50 mm (2 inch) by 88 mm (3-1/2 inch).
 2. Fasten to casework as recommended by manufacturer.

2.5 HARDWARE

- A. Factory installed.
- B. Exposed hardware, except as specified otherwise, satin finished chromium plated brass or nickel plated brass or anodized aluminum.
- C. Cabinet Locks:
 1. Where locks are shown.

2. Locked pair of hinged door over 900 mm (36 inches) high:
 - a. ANSI/BHMA A156.5, similar to E0261, Key one side.
 - b. On active leaf use three-point locking device, consisting of two steel rods and lever controlled cam at lock, to operate by lever having lock cylinder housed therein.
 - c. On inactive leaf use dummy lever of same design.
 - d. Provide keeper holes for locking device rods and cam.
3. Door: ANSI/BHMA A156.11 cam locks.
 - a. Hinged Door up to 900 mm (36 inches) high: E07261.
 - b. Pin-tumbler, cylinder type lock with not less than four pins. Disc tumbler lock "duo A" with brass working parts and case, as manufactured by Illinois Lock Company are acceptable.
4. Key locks differently for each type casework and master key for each service.
 - a. Key drug locker inner door different from outer door.
 - b. Provide two keys per lock.
 - c. Provide six master keys per service or Nursing Unit.
5. Marking of Locks and Keys:
 - a. Name of manufacturer, or trademark which can readily be identified legibly marked on each lock and key change number marked on exposed face of lock.
 - b. Key change numbers stamped on keys.
 - c. Key change numbers to provide sufficient information for manufacturer to replace key.
- D. Cabinet Hardware: ANSI BHMA A156.9.
 1. Door Pulls: B02011.
 - a. One for drawers up to 575 mm (23 inches) wide.
 - b. Two for drawers over 575 mm (23 inches) wide.
 - c. Sliding door flush pull, each door: B02201.
 2. Door in seismic zones: B03352.
 - a. Do not provide thumb latch on doors equipped with three point locking device.
 - b. Use lever operated two point latching device on paired doors over 900 mm (36 inches) high if three point locking or latching device is not used.
 3. Cabinet Door Catch:
 - a. Install at bottom of wall cabinets, top of base cabinets and top and bottom of full height cabinet doors over 1200 mm (48 inches).
 - b. Omit on doors with locks.
 4. Butt Hinges:

- a. B01351, minimum 1.8 mm (0.072 inch) thick chrome plated steel leaves.
 - b. Minimum 3.5 mm (0.139 inch) diameter stainless steel pins.
 - c. Full mortise type, five knuckle design with 63 mm (2-1/2 inch) high leaves and hospital type tips.
 - d. Two hinges per door except use three hinges on doors 1200 mm (48 inches) and more in height. Use stainless steel leaves for tilting bin doors.
 - f. Do not weld hinges to doors or cabinets.
5. Pivot hinges: ANSI/BHMA A156.1 A875B.
6. Shelf Supports:
- a. install in casework where adjustable shelves are noted.
 - b. Adjustable Shelf Standards: B04061 with shelf rest B04081.
 - c. Vertical Slotted Shelf Standard: B04102 with shelf brackets B04112 sized for shelf depth.
7. Auxiliary Hardware: ANSI A156.16.
8. Door silencers: L03011 or L03031.
- a. Install two rubber bumpers each door.
 - b. Silencers set near top and bottom of jamb.
9. Closet Bar: L03131 chrome finish of required length.

2.6 METAL FINISHES

- A. Comply with NAAMM 500 series and as specified.
- B. Stainless Steel: Mechanical finish No. 4 on sheet except No. 7 on tubing.

2.7 ELECTRICAL FIXTURES

- A. Comply with requirements of Division 26 - ELECTRICAL specifications for fixtures, receptacles, wiring and junction boxes required for fixtures and receptacles, included with casework.
- B. Suitable for use with electrical system specified and shown.
- C. Factory install in casework.

PART 3 - EXECUTION

3.1 COORDINATION

- A. Before installing casework, verify wall and floor surfaces covered by casework have been finished.
- B. Verify location and size of mechanical and electrical services as required.
- C. Verify reinforcement of walls and partitions for support and anchorage of casework.

3.2 FASTENINGS AND ANCHORAGE

- A. Do not anchor to wood ground strips.
- B. Provide hat shape metal spacers where fasteners span gaps or spaces.

- C. Use 6 mm (1/4 inch) diameter toggle or expansion bolts, or other appropriate size and type fastening device for securing casework to walls or floor. Use expansion bolts shields having holding power beyond tensile and shear strength of bolt and breaking strength of bolt head.
- D. Use 6 mm (1/4 inch) diameter hex bolts for securing cabinets together.
- E. Use 6 mm (1/4 inch) by minimum 38 mm (1-1/2 inch) length lag bolt anchorage to wood blocking for concealed fasteners.
- F. Use not less than No. 12 or 14 wood screws with not less than 38 mm (1-1/2 inch) penetration into wood blocking.
- G. Space fastening devices 300 mm (12 inches) on center with minimum of three fasteners in 900 or 1200 mm (three or four foot) unit width.
- H. Anchor floor mounted cabinets with a minimum of four bolts through corner gussets. Anchor bolts may be combined with or separate from leveling device.
- I. Secure cabinets in alignment with hex bolts or other internal fastener devices removable from interior of cabinets without special tools. Do not use fastener devices which require removal of tops for access.
- J. Where units abut end to end anchor together at top and bottom of sides at front and back. Where units are back to back anchor backs together at corners with hex bolts placed inconspicuously inside casework.
- K. Where type, size, or spacing of fastenings is not shown or specified, show on shop drawings proposed fastenings and method of installation.

3.3 CLOSURES AND FILLER PLATES

- A. Close openings larger than 6 mm (1/4 inch) wide between cabinets and adjacent walls with flat, steel closure strips, scribed to required contours, or machined formed steel fillers with returns, and secured with sheet metal screws to tubular or channel members of units, or bolts where exposed on inside.
- B. Where ceilings interfere with installation of sloping tops, omit sloping tops and provide flat steel filler plates.
 - 1. Secure filler plates to casework top members, unless shown otherwise.
 - 2. Secure filler plates more than 150 mm (six inches) in width top edge to a continuous 25 by 25 mm (one by one inch) 0.889 mm thick steel formed steel angle with screws.
 - 3. Anchor angle to ceiling with toggle bolts.
- C. Install closure strips at exposed ends of pipe space and offset opening into concealed space.
- D. Paint closure strips and fillers with same finishes as cabinets.
- E. Caulk and seal furniture as specified in Section 07 92 00, JOINT SEALANTS.

3.4 CABINETS

- A. Install in available space; arranged for safe and convenient operation and maintenance.
- B. Align cabinets for flush joints except where shown otherwise.
- C. Install cabinets level with bottom of wall cabinets in alignment and tops of base cabinets aligned.
- D. Install corner cabinets with hinges on corner side with filler or spacers sufficient to allow opening of drawers.
- E. Plug Buttons:
 - 1. Install plug buttons in predrilled or prepunched perforations not used.
 - 2. Use chromium plate plug buttons or buttons finish to match adjacent surfaces.

3.5 PROTECTION TO FIXTURES, MATERIALS, AND EQUIPMENT

- A. Tightly cover and protect cabinets against dirt, water chemical or mechanical injury.
- B. Thoroughly clean interior and exterior of cabinets, at completion of all work.

- - - E N D - - -

**SECTION 12 32 00
MANUFACTURED WOOD CASEWORK**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies plastic laminate casework as detailed on the drawings, including related components and accessories required to form integral units. Wood casework items shown on the drawings, but not specified below shall be included as part of the work under this section, and applicable portions of the specification shall apply to these items. Each like item of casework shall be of the same design and by one manufacturer.
- B. Where shown, provide plastic laminate casework items as follows:
 - 1. Base and upper cabinets in Conference Room.

1.2 RELATED WORK

- A. Color and Finish of Plastic Laminate: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Lavatories and Plumbing in Casework: Section 22 40 00, PLUMBING FIXTURES.
- C. Anchoring: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.3 MANUFACTURER'S QUALIFICATIONS

The fabrication of casework shall be by a manufacturer who produces casework similar to the casework specified and shown.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - Sinks, trim and fittings.
 - Locks for doors and drawers
 - Adhesive cements
- C. Samples:
 - 1. Counter top, plastic laminate, 150 mm (six inch) square
- D. Shop Drawings (1/2 full size):
 - 1. All casework, showing details of construction, including materials, hardware and accessories.
 - 2. Cabinets and counters showing faucets in connection with sink bowls, and electrical fixtures and receptacles which are mounted on cabinets and counters.
 - 3. Fastenings and method of installation.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
- A167-99 (R2004).....Stainless and Heat-Resisting chromium-Nickel Steel Plate, Sheet and Strip
 - A1008-07.....Steel, Sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy
 - C1036-06.....Flat Glass
- C. Composite Panel Association (CPA):
- A208.1-99.....Particleboard
- D. U.S. Department of Commerce Product Standards (Prod. Std):
- PS1-95.....Construction And Industrial Plywood
- E. Hardwood, Plywood and Veneer Association (HPVA):
- HP.1-04.....Hardwood and Decorative Plywood
- F. Architectural Woodwork Institute (AWI):
- Architectural Woodwork Quality Standards, Guide Specifications Quality Certification Program - 1999
- G. American Society of Mechanical Engineers (ASME):
- A112.18.1-05.....Plumbing Fixture Fittings
- H. National Electrical Manufacturers Association (NEMA):
- LD3-05.....High Pressure Decorative Laminates
 - LD3.1-95.....Performance, Application Fabrication and Installations of High-Pressure Decorative Laminates
- I. Hardwood Plywood and Veneer Association
- HP-1.....Hardwood and Decorative Plywood

PART 2 - PRODUCTS**2.1 PLASTIC LAMINATE:**

- A. NEMA LD-3.
- B. Exposed decorative surfaces including countertops, both sides of cabinet doors, and for items having plastic laminate finish. General purpose Type HGL.
- C. Cabinet Interiors Including Shelving: Both of following options to comply with NEMA, LD3.1 as a minimum.
- 1. Plastic laminate clad plywood or particle board.
- D. Post Forming Fabrication, Decorative Surface: Post forming Type HGP.

2.2 PLYWOOD, SOFTWOOD

Prod. Std. PS1, five ply construction from 13 mm to 28 mm (1/2 inch to 1-1/8 inch) thickness, and seven ply for 31 mm (1 1/4 inch) thickness.

2.3 PARTICLEBOARD

CPA A208.1, Type 1, Grade 1-M-3.

2.4 RUBBER OR VINYL BASE

Straight (for carpet), cove (for resilient floor); 100 mm (4 inch) high, 3 mm (1/8 inch) thick, flexible to conform to irregularities in walls, partitions and floors.

2.5 PLUMBING FIXTURES (SEE PLUMBING DRAWINGS)**2.6 SHEET STEEL**

ASTM A1008.

2.7 STAINLESS STEEL

ASTM A167, with No. 4 finish.

2.8 HARDWARE

A. Where pin tumbler locks are specified, disc tumbler lock "Duo A", with brass working parts and case, as manufactured by the Illinois Lock Company will be an acceptable substitute. Locks for each type casework, shall be keyed differently and shall be master-keyed for each type service, such as Nurses, Psychiatric, and Administration. Provide two keys for each lock. Exposed hardware, except as otherwise specified, shall be satin finished chromium plated brass or nickel plated brass.

B. Marking of Locks and Keys:

1. The name of the manufacturer, or trademark by which manufacturer can readily be identified, legibly marked on each lock.
2. The key change number marked on the exposed face of lock, and also stamped on each key.
3. Key change numbers shall provide sufficient information for replacement of the key by the manufacturer.

C. Hinged Doors:

1. Doors 900 mm (36 inches) and more in height shall have three hinges and doors less than 900 mm (36 inches) in height shall have two hinges. Each door shall close against two rubber bumpers.
2. Hinges: Fabricate hinges with minimum 2 mm (0.072 inch) thick chromium plated steel leaves, and with minimum 3.5 mm (0.139 inch) diameter stainless steel pin. Hinges shall be five knuckle design with 63 mm (2-1/2 inch) high leaves and hospital type tips.
3. Fasteners: Provide full thread wood screws to fasten hinge leaves to door and cabinet frame. Finish screws to match finish of hinges.

D. Door Catches:

1. Friction or Magnetic type, fabricated with metal housing.
2. Provide one catch for cabinet doors 1200 mm (48 inches) high and under, and two for doors over 1200 mm (48 inches) high.

E. Locks:

1. Cylinder type pin tumbler.
2. Equip doors and drawers where shown with locks.

F. Drawer and Door Pulls:

Doors and drawers shall have flush pulls, fabricated of either chromium plated brass, chromium plated steel, stainless steel, or anodized aluminum.

G. Drawer Slides:

1. Full extension steel slides with nylon ball-bearing rollers.
2. Slides shall have positive stop.
3. Equip drawers with rubber bumpers.

H. Shelf Standards (Except For Fixed Shelves):

Bright zinc-plated steel for recessed mounting with screws, 16 mm (5/8 inch) wide by 5 mm (3/16 inch) high providing 13 mm (1/2 inch) adjustment, complete with shelf supports.

2.9 FABRICATION

A. Casework shall be of the flush overlay design and, except as otherwise specified, be of premium grade construction and of component thickness in conformance with AWI Quality Standards.

B. Fabricate casework of plastic laminated covered plywood or particleboard as follows:

1. Where shown, doors, drawers, shelves, and all semi-concealed surfaces shall be plastic laminated.

C. Electrical fixtures, receptacles, wiring and junction boxes required for fixtures and receptacles:

1. Factory installed in casework.
2. For electrical lighting fixtures, see drawings.
3. For electric receptacles and lighting fixtures installed below or adjacent to wall cabinets or above counter tops, see electrical sections or specifications.
4. Install wiring in built-in raceways and terminate at junction box mounted on rear of cabinet and counter.
5. For final hook-up at junction box see electrical sections of specifications.

D. Provide plastic laminated sloping tops for casework where shown. Fasten sloping tops with oval-head screws inserted from interior. Exposed ends

of sloping tops shall have flush closures fastened as recommended by manufacturer.

E. Base:

1. Provide rubber or vinyl base with close, flush joints; set with adhesive.
2. Remove adhesive from exposed surfaces.
3. Install base at floor line after casework has been accurately leveled.
4. Rub base to glossy finish.

F. Countertops:

1. Countertops, and splashbacks shall be solid surface glued to plywood (PS1), or particleboard (CPA A208.1) core (See Section 12 36 00, COUNTERTOPS).
2. Provide cut-outs for plumbing trim where shown.

G. Sink bowls: (See Plumbing Drawings)

H. Plumbing trim and fittings: (See Plumbing Drawings)

I. Faucets: (See Plumbing Drawings)

J. Drain: (See Plumbing Drawings)

K. Traps: (See Plumbing Drawings)

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Set casework in place; level, plumb and accurately scribe and secure to walls, and/or floors.
- B. The installation shall be complete including all trim and hardware. Leave the casework clean and free from defects.

3.2 FASTENINGS

- A. Fastenings for securing casework to adjoining construction shall be as detailed on the drawings or approved shop drawings.
- B. See Section 05 50 00, METAL FABRICATIONS for reinforcement of walls and partitions for casework anchorage.

- - - E N D - - -

**SECTION 12 36 00
COUNTERTOPS**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies casework countertops with integral accessories.
- B. Integral accessories include:
 - 1. Grommet holes and trim.
 - 2. Backsplash

1.2 RELATED WORK

- A. Color and patterns of plastic laminate: SECTION 09 06 00, SCHEDULE FOR FINISHES.
- B. Anchoring: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- C. DIVISION 22, PLUMBING.
- D. DIVISION 26, ELECTRICAL.

1.3 SUBMITTALS

- A. Submit in accordance with SECTION 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings
 - 1. Show dimensions of section and method of assembly.
 - 2. Show details of construction at 1/2 scale.
- C. Samples:
 - 1. 150 mm (6 inch) square samples each top.
 - 2. Front edge, back splash, end splash and core with surface material and booking.

1.4 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American Hardboard Association (AHA):
 - A135.4-95.....Basic Hardboard
- C. Composite Panel Association (CPA):
 - A208.1-09.....Particleboard
- D. American Society of Mechanical Engineers (ASME):
 - A112.18.1-05.....Plumbing Supply Fittings
 - A112.1.2-04.....Air Gaps in Plumbing System
 - A112.19.3-08(R2004).....Stainless Steel Plumbing Fixtures (Designed for Residential Use)
- E. American Society for Testing and Materials (ASTM):

- A167-99 (R2009).....Stainless and Heat-Resisting Chromium-Nickel
Steel Plate, Sheet and Strip
- A1008-09.....Steel, Sheet, Cold-Rolled, Carbon, Structural,
High Strength, Low Alloy
- D256-06.....Pendulum Impact Resistance of Plastic
- D570-98(R2005).....Water Absorption of Plastics
- D638-08.....Tensile Properties of Plastics
- D785-08.....Rockwell Hardness of Plastics and Electrical
Insulating Materials
- D790-07.....Flexural Properties of Unreinforced and
Reinforced Plastics and Electrical Insulating
Materials
- D4690-99(2005).....Urea-Formaldehyde Resin Adhesives
- G21-96 (R2002).....Determining Resistance of Synthetic Polymeric
Materials to Fungi
- F. Federal Specifications (FS):
- A-A-1936.....Adhesive, Contact, Neoprene Rubber
- G. U.S. Department of Commerce, Product Standards (PS):
- PS 1-95.....Construction and Industrial Plywood
- H. National Electrical Manufacturers Association (NEMA):
- LD 3-05.....High Pressure Decorative Laminates
- LD 3.1-95.....Performance, Application, Fabrication, and
Installation of High Pressure Decorative
Laminates

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Stainless Steel: ASTM A167, Type 304.
- B. Particleboard: CPA A208.1, Grade 2-M-2.
- C. Plywood: PS 1, Exterior type, veneer grade AC not less than five ply construction.
- D. Fasteners:
1. Metals used for welding same metal as materials joined.
 2. Use studs, bolts, spaces, threaded rods with nuts or screws suitable for materials being joined with metal splice plates, channels or other supporting shape.
- E. Solid Polymer Material:
1. Filled Methyl Methacrylic Polymer.

2. Performance properties required:

Property	Result	Test
Elongation	0.3% min.	ASTM D638
Hardness	90 Rockwell M	ASTM D785
Gloss (60° Gordon)	5-20	NEMA LD3.1
Color stability	No change	NEMA LD3 except 200 hour
Abrasion resistance	No loss of pattern Max wear depth 0.0762 mm (0.003 in) - 10000 cycles	NEMA LD3
Water absorption weight (5 max)	24 hours 0.9	ASTM D-570
Izod impact	14 N·m/m (0.25 ft-lb/in)	ASTM D256 (Method A)
Impact resistance	No fracture	NEMA LD-3 900 mm (36") drop 1 kg (2 lb.) ball
Boiling water surface resistance	No visible change	NEMA LD3
High temperature resistance	Slight surface dulling	NEMA LD3

3. Color throughout with subtle veining through thickness.
4. Joint adhesive and sealer: Manufacturers silicone adhesive and sealant for joining methyl methacrylic polymer sheet.
5. Bio-based products will be preferred.

2.2 COUNTERTOPS

- A. Fabricate in largest sections practicable.
- B. Fabricate with joints flush on top surface.
- C. Fabricate countertops to overhang front of cabinets and end of assemblies 25 mm (one inch) except where against walls or cabinets.
- D. Provide 1 mm (0.039 inch) thick metal plate connectors or fastening devices (except epoxy resin tops).
- E. Join edges in a chemical resistant waterproof cement or epoxy cement, except weld metal tops.
- F. Fabricate with end splashes where against walls or cabinets.
- G. Splash Backs and End Splashes:
 1. Not less than 19 mm (3/4 inch) thick.
 2. Height 100 mm (4 inches) unless noted otherwise. At counters with sinks, provide 17-inch high minimum backsplash where no vinyl wall covering or other non-porous finish surface occurs.

- a. Coordinate location of any outlets and devices at backsplash for exact cut to fit.
- H. Drill or cutout for sinks, and penetrations.
 1. Accurately cut for size of penetration.
- I. Metal Counter Tops:
 1. Fabricate up to 3600 mm (12 feet) long in one piece, including nosing, backs and ends.
 2. When counter tops exceed 3600 mm (12 feet) in length accurately fitted field joints are acceptable.
 3. Finish thickness at edges 32 mm (1-1/4 inch).
 4. Reinforced with minimum 1.5 mm (0.0598 inch) thick hat channel stiffeners, minimum of two stiffeners for units without sinks and three stiffeners for units with sinks welded or soldered to underside of top full length, except at sink openings.
 5. Apply sound deadening material on underside.
 6. Flange edges of tops down 32 mm (1-1/4 inch) and reinforce with concealed hardwood or with a steel frame.
 7. Grind welds smooth and finished on exposed surfaces to match finish specified.
 8. Stainless Steel Counter:
 - a. Where noted stainless steel except where specified for nourishment unit, unit kitchen, and medicine cabinet.
 - b. Use 1.5 mm (0.0598 inch) thick stainless steel.
 - c. Depth of splash backs and splash ends 25 mm (one inch) and turned down at least 13 mm (1/2 inch) at wall. Where faucets are located in splash backs, fabricate depth of splash backs 50 mm (2 inches) with provision made to receive required fixture.
 - d. Where sinks occur fabricate top with 5 mm (3/16 inch) marine edge and fit flush with adjacent tops of other materials.
 - e. Weld sink flush to counter top and finish to appear seamless.
- J. Methyl Methacrylic Polymer Tops:
 1. Fabricate countertop of methyl methacrylic polymer cast sheet, 19 mm (3/4 inch) thick.
 2. Fabricate back splash and end splash to height shown. Incorporate tight-fit cutouts for any electrical devices or recessed items at backsplash.
 3. Fabricate skirt to depth shown.
 4. Fabricate with marine edge where sinks occur.
 5. Fabricate in one piece for full length from corner to corner up to 3600 mm (12 feet).

6. Join pieces with adhesive sealant.
7. Cut out countertop for lavatories, plumbing trim.
8. Provide concealed fasteners and epoxy cement for anchorage of sinks to countertop.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Before installing countertops verify that wall surfaces have been finished as specified and that mechanical and electrical service locations are as required.
- B. Secure countertops to supporting rails of cabinets with metal fastening devices, or screws through pierced slots in rails.
 1. Where type, size or spacing of fastenings is not shown or specified, submit shop drawings showing proposed fastenings and method of installation.
 2. Use round head bolts or screws.
- C. Sinks (SEE PLUMBING DRAWINGS).
- D. Faucets, Fixtures, and Outlets (SEE PLUMBING DRAWINGS).

3.2 PROTECTION AND CLEANING

- A. Tightly cover and protect against dirt, water, and chemical or mechanical injury.
- B. Clean at completion of work.

- - - E N D - - -

SECTION 13 05 41
SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. Provide seismic restraint in accordance with the requirements of this section in order to maintain the integrity of nonstructural components of the building so that they remain safe and functional in case of seismic event.
- B. Definitions: Non-structural building components are components or systems that are not part of the building's structural system whether inside or outside, above or below grade. Non-structural components of buildings include:
 - 1. Architectural Elements: Facades that are not part of the structural system and its shear resistant elements; cornices and other architectural projections and parapets that do not function structurally; glazing; nonbearing partitions; suspended ceilings; stairs isolated from the basic structure; cabinets; bookshelves; monitors; medical equipment; and storage racks.
 - 2. Electrical Elements: Power and lighting systems; substations; switchgear and switchboards; auxiliary engine-generator sets; transfer switches; motor control centers; motor generators; selector and controller panels; fire protection and alarm systems; special life support systems; and telephone and communication systems.
 - 3. Mechanical Elements: Heating, ventilating, and air-conditioning systems; medical gas systems; plumbing systems; sprinkler systems; boiler equipment and components.
- C. See Structural Drawings for site specific seismic design criteria.

1.2 RELATED WORK:

- A. Section No. 05 50 00, METAL FABRICATIONS
- B. Section No. 07 45 00, EXTERIOR ALUMINUM FACED COMPOSITE PANELS
- C. Section No. 07 71 00, ROOF SPECIALTIES
- D. Section No. 08 51 13, ALUMINUM WINDOWS
- E. Section No. 08 71 13, AUTOMATIC DOOR OPERATORS
- F. Section No. 08 80 00, GLAZING
- G. Section No. 08 90 00, LOUVERS AND VENTS
- H. Section No. 09 22 16, NON-STRUCTURAL METAL FRAMING
- I. Section No. 09 29 00, GYPSUM BOARD
- J. Section No. 09 51 00, ACOUSTICAL CEILINGS
- K. Section No. 10 26 00, WALL AND DOOR PROTECTION
- L. Section No. 10 28 00, TOILET, BATH, AND LAUNDRY ACCESSORIES

M. Section No. 10 44 13, FIRE EXTINGUISHER CABINETS
N. Section No. 11 13 10, FRONT PROJECTION SCREENS
O. Section No. 11 17 36, PACKAGE TRANSFER UNITS
P. Section No. 11 71 01, MEDICAL WASHING AND STERILIZING EQUIPMENT
Q. Section No. 12 31 00, MANUFACTURED METAL CASEWORK
R. Section No. 12 32 00, MANUFACTURED WOOD CASEWORK
S. Section No. 12 36 00, COUNTERTOPS
T. Section No. 21 13 13, WET-PIPE SPRINKLER SYSTEM
U. Section No. 22 05 11, COMMON WORK RESULTS FOR HVAC
V. Section No. 22 11 00, FACILITY WATER DISTRIBUTION
W. Section No. 22 13 00, FACILITY SANITARY AND VENT PIPING
X. Section No. 22 14 00, FACILITY STORM DRAINAGE
Y. Section No. 22 63 00, GAS SYSTEMS FOR LABORATORIES
Z. Section No. 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT
AA. Section No. 23 21 13, HYDRONIC PIPING
BB. Section No. 23 21 23, HYDRONIC PUMPS
CC. Section No. 23 22 13, STEAM AND CONDENSATE HEATING PIPING
DD. Section No. 23 31 00, HVAC DUCTS AND CASINGS
EE. Section No. 23 34 00, HVAC FANS
FF. Section No. 23 36 00, AIR TERMINAL UNITS
GG. Section No. 23 37 00, AIR OUTLETS AND INLETS
HH. Section No. 23 74 13, PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS
II. Section No. 23 82 00, CONVECTION HEATING AND COOLING UNITS
JJ. Section No. 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS
KK. Section No. 26 22 00, LOW-VOLTAGE TRANSFORMERS
LL. Section No. 26 24 11, DISTRIBUTION SWITCHBOARDS
MM. Section No. 26 24 16, PANELBOARDS
NN. Section No. 26 29 21, DISCONNECT SWITCHES
OO. Section No. 26 51 00, INTERIOR LIGHTING
PP. Section No. 26 56 00, EXTERIOR LIGHTING
QQ. Section No. 27 10 00, STRUCTURED CABLING
RR. Section No. 28 13 00, ACCESS CONTROL SYSTEM
SS. Section No. 28 31 00, FIRE ALARM SYSTEM

1.3 QUALITY CONTROL:

A. Shop-Drawing Preparation:

1. Have seismic-force-restraint shop drawings and calculations prepared by a professional structural engineer experienced in the area of

- seismic force restraints. The professional structural engineer shall be registered in the state where the project is located.
2. Submit design tables and information used for the design-force levels, stamped and signed by a professional structural engineer registered in the State where project is located.
- B. Coordination:
1. Do not install seismic restraints until seismic restraint submittals are approved by the COTR.
 2. Coordinate and install trapezes or other multi-pipe hanger systems prior to pipe installation.

1.4 SUBMITTALS:

- A. Submit a coordinated set of equipment anchorage drawings prior to installation including:
1. Description, layout, and location of items to be anchored or braced with anchorage or brace points noted and dimensioned.
 2. Details of anchorage or bracing at large scale with all members, parts brackets shown, together with all connections, bolts, welds etc. clearly identified and specified.
 3. Numerical value of design seismic brace loads.
 4. For expansion bolts, include design load and capacity if different from those specified.
- B. Submit prior to installation, a coordinated set of bracing drawings for seismic protection of piping, with data identifying the various support-to-structure connections and seismic bracing structural connections, include:
1. Single-line piping diagrams on a floor-by-floor basis. Show all suspended piping for a given floor on the same plain.
 2. Type of pipe (Copper, steel, cast iron, insulated, non-insulated, etc.).
 3. Pipe contents.
 4. Structural framing.
 5. Location of all gravity load pipe supports and spacing requirements.
 6. Numerical value of gravity load reactions.
 7. Location of all seismic bracing.
 8. Numerical value of applied seismic brace loads.
 9. Type of connection (Vertical support, vertical support with seismic brace etc.).
 10. Seismic brace reaction type (tension or compression). Details illustrating all support and bracing components, methods of connections, and specific anchors to be used.

- C. Submit prior to installation, bracing drawings for seismic protection of suspended ductwork and suspended electrical and communication cables, include:
 - 1. Details illustrating all support and bracing components, methods of connection, and specific anchors to be used.
 - 2. Numerical value of applied gravity and seismic loads and seismic loads acting on support and bracing components.
 - 3. Maximum spacing of hangers and bracing.
 - 4. Seal of registered structural engineer responsible for design.
- D. Submit design calculations prepared and sealed by the registered structural engineer specified above in paragraph 1.3A.
- E. Submit for concrete anchors, the appropriate ICBC evaluation reports, OSHPD pre-approvals, or lab test reports verifying compliance with OSHPD Interpretation of Regulations 28-6.

1.5 APPLICABLE PUBLICATIONS:

- A. The Publications listed below (including amendments, addenda revisions, supplements and errata) form a part of this specification to the extent referenced. The publications are referenced in text by basic designation only.
- B. American Concrete Institute (ACI):
 - 355.2-07.....Qualification for Post-Installed Mechanical Anchors in Concrete and Commentary
- C. American Institute of Steel Construction (AISC):
 - Load and Resistance Factor Design, Volume 1, Second Edition.
- D. American Society for Testing and Materials (ASTM):
 - A36/A36M-05.....Standard Specification for Carbon Structural Steel.
 - A53/A53M-07.....Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless.
 - A307 (REV A-07).....Standard Specification for Carbon Steel Bolts and Studs; 60,000 PSI Tensile Strength.
 - A325-07.....Standard Specification for Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength.
 - A325M-05.....Standard Specification for High-Strength Bolts for Structural Steel Joints [Metric].
 - A490-06.....Standard Specification for Heat-Treated Steel Structural Bolts, 150 ksi Minimum Tensile Strength.

- A490M (REV A-04).....Standard Specification for High-Strength Steel Bolts, Classes 10.9 and 10.9.3, for Structural Steel Joints [Metric].
- A500/A500M-07.....Standard Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes.
- A501-07.....Specification for Hot-Formed Welded and Seamless Carbon Steel Structural Tubing.
- A615/A615M-07.....Standard Specification for Deformed and Plain Billet-Steel Bars for Concrete Reinforcement.
- A992/A992M (REV A-06)...Standard Specification for Steel for Structural Shapes for Use in Building Framing.
- A996/A996M (REV A-06)...Standard Specification for Rail-Steel and Axel-Steel Deformed Bars for Concrete Reinforcement.
- E488-96(R2003).....Standard Test Method for Strength of Anchors in Concrete and Masonry Elements.
- E. International Building Code (IBC) 2009 Edition.
- F. VA Seismic Design Requirements, H-18-8, December 2010.
- G. National Uniform Seismic Installation Guidelines (NUSIG).
- H. Sheet Metal and Air Conditioning Contractors National Association (SMACNA):
- Seismic Restraint Manual - Guidelines for Mechanical Systems, Latest Edition and Addendum.

1.6 REGULATORY REQUIREMENT:

- A. IBC 2003.
- B. Exceptions: The seismic restraint of the following items may be omitted:
1. Equipment weighing less than 400 pounds, which is supported directly on the floor or roof.
 2. Equipment weighing less than 20 pounds, which is suspended from the roof or floor or hung from a wall.
 3. Piping less than 1-inch inside diameter.
 4. All piping suspended by individual hangers, 12 inches or less in length from the top of pipe to the bottom of the support for the hanger. The hanger shall be detailed to avoid significant bending in the hangers and their attachments.
 5. All electrical conduits, less than 2 ½ inches inside diameter.
 6. All rectangular air handling ducts less than six square feet in cross sectional area.
 7. All round air handling ducts less than 28 inches in diameter.

8. All ducts suspended by hangers 12 inches or less in length from the top of the duct to the bottom of support for the hanger. The hangers shall be detailed to avoid significant bending of the hangers or their attachments.

PART 2 - PRODUCTS

2.1 STEEL:

- A. Structural Steel: ASTM A36.
- B. Structural Tubing: ASTM A500, Grade B.
- C. Structural Tubing: ASTM A501.
- D. Steel Pipe: ASTM A53/A53M, Grade B.
- E. Bolts & Nuts: ASTM A307, A325, and A490.

2.2 CAST-IN-PLACE CONCRETE:

- A. Concrete: 28 day strength, $f'c = 30$ MPa (4,000 psi)
- B. Reinforcing Steel: ASTM A615/615M or ASTM A996/A996M deformed.

PART 3 - EXECUTION

3.1 CONSTRUCTION, GENERAL:

- A. Provide equipment supports and anchoring devices to withstand the seismic design forces, so that when seismic design forces are applied, the equipment cannot displace, overturn, or become inoperable.
- B. Provide anchorages in conformance with recommendations of the equipment manufacturer and as shown on approved shop drawings and calculations.
- C. Construct seismic restraints and anchorage to allow for thermal expansion.
- D. Testing Before Final Inspection:
 1. Test 10-percent of anchors in masonry and concrete per ASTM E488, and ACI 355.2 to determine that they meet the required load capacity. If any anchor fails to meet the required load, test the next 20 consecutive anchors, which are required to have zero failure, before resuming the 10-percent testing frequency.
 2. Before scheduling Final Inspection, submit a report on this testing indicating the number and location of testing, and what anchor-loads were obtained.

3.2 EQUIPMENT RESTRAINT AND BRACING:

- A. See drawings for equipment to be restrained or braced.

3.3 MECHANICAL DUCTWORK AND PIPING; ELECTRICAL BUSWAYS, CONDUITS, AND CABLE TRAYS; AND TELECOMMUNICATION WIRES AND CABLE TRAYS

- A. Support and brace mechanical ductwork and piping; electrical busways, conduits and cable trays; and telecommunication wires and cable trays to resist directional forces (lateral, longitudinal and vertical).
- B. Brace duct and branches with a minimum of 1 brace per branch.

- D. Provide supports and anchoring so that, upon application of seismic forces, piping remains fully connected as operable systems which will not displace sufficiently to damage adjacent or connecting equipment, or building members.
- E. Seismic Restraint of Piping:
 - 1. Design criteria:
 - a. Piping resiliently supported: Restrain to support 120-percent of the weight of the systems and components and contents.
 - b. Piping not resiliently supported: Restrain to support 60-percent of the weight of the system components and contents.
- F. Piping Connections: Provide flexible connections where pipes connect to equipment. Make the connections capable of accommodating relative differential movements between the pipe and equipment under conditions of earthquake shaking.

3.4 PARTITIONS

- A. In buildings with flexible structural frames, anchor partitions to only structural element, such as a floor slab or roof deck, and separate such partition by a physical gap from all other structural elements.
- B. Properly anchor masonry walls to the structure for restraint, so as to carry lateral loads imposed due to earthquake along with their own weight and other lateral forces.

3.5 CEILINGS AND LIGHTING FIXTURES

- A. At regular intervals, laterally brace suspended ceilings against lateral and vertical movements, and provide with a physical separation at the walls.
- B. Independently support and laterally brace all lighting fixtures, access doors, and equipment. Refer to applicable portion of lighting specification, Section 26 51 00, INTERIOR LIGHTING, Section 11 13 10, FRONT PROJECTION SCREENS, and Section 08 31 13, ACCESS DOORS AND FRAMES.

3.6 FACADES AND GLAZING

- A. Do not install concrete masonry unit filler walls in a manner that can restrain the lateral deflection of the building frame. Provide a gap with adequately sized resilient filler to separate the structural frame from the non-structural filler wall.
- B. Tie brick veneers to a separate wall that is independent of the steel frame as shown on construction drawings to ensure strength against applicable seismic forces at the project location.
- C. Install attachments to structure for all façade materials as shown on construction drawings to ensure strength against applicable seismic forces at the project location.

3.7 STORAGE RACKS, CABINETS, AND BOOKCASES

- A. Install storage racks to withstand earthquake forces and anchored to the floor or laterally braced from the top to the structural elements.
- B. Anchor medical supply cabinets to the floor or walls and equip them with properly engaged, lockable latches.
- C. Anchor filing cabinets that are more than 2 drawers high to the floor or walls, and equip all drawers with properly engaged, lockable latches.
- D. Anchor bookcases that are more than 30 inches high to the floor or walls, and equip any doors with properly engaged, lockable latches.
- E. Anchor miscellaneous items to walls and partitions to withstand earthquake forces such as Access Doors, Windows, Louvers, Accessories, Fire Extinguisher Cabinets, Package Transfer Units, Upper and Lower Casework, and built-in counters.

- - - E N D - - -

**SECTION 13 49 00
RADIATION PROTECTION**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies lead radiation shielding.
- B. Construction of products and assemblies used for radiation shielding complying with applicable requirements of NCRP Reports 147 and 102.
- C. This section includes the following items:
 - 1. Lead Sheet and Lead Shielding.
 - 2. Lead Lined Gypsum Wallboard.
 - 3. Floor Lead

1.2 RELATED WORK

- A. Section 09 65 16, RESILIENT SHEET FLOORING.

1.3 MANUFACTURERS QUALIFICATIONS

- A. Approval by Contracting Officer is required of product or service of proposed manufacturer and suppliers, and will be based upon submission by Contractor of certification that:
 - 1. Manufacturer regularly and presently manufactures lead radiation shielding as specified as one of its principal products.
 - 2. Manufacturer's product submitted has been in satisfactory and efficient operation or three installations similar and equivalent to this project for three years.
 - 3. Manufacturer submits list of installations.

1.4 TESTS

- A. Lead radiation shielding will be tested at the expense of the Government after X-ray equipment is installed.
- B. Any additional testing required due to correction and replacement of defective work will be done by the Government at Contractor's expense.

NOTE: Lead lined gypsum wallboard will not be tested prior to installation.

1.5 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Each lead radiation shielding item specified showing thickness of lead, details of construction and installation.
- C. Samples:
 - 1. Lead lined gypsum wallboard.
- D. Manufacturers' Literature and Data: Each lead radiation shielding item specified.

1.6 WARRANTY

- A. Warranty lead lined doors against defects in workmanship and materials subject to terms of "Warranty of Construction" Article in GENERAL CONDITIONS, except that warranty period shall be two years.
- B. Warp or twist of lead lined flush veneered doors may not exceed 6 mm (1/4 inch) in any face dimension of door (including full diagonal), measured not less than six months after doors have been hung and finished.

1.7 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Federal Specifications (Fed. Spec.):
QQ-L-201F(2).....Lead Sheet
- C. American Society for Testing and Materials (ASTM):
A167-99(2009).....Stainless and Heat Resisting Chromium-Nickel
Steel Plate, Sheet and Strip
C1396/C1396M-04.....Gypsum Wallboard/Gypsum Lath
C90-11.....Load-Bearing Concrete Masonry Units
C1002-07.....Steel Drill Screws for the Application of Gypsum
Board or Metal Plaster Bases
D1187-97(R2002).....Asphalt-Base Emulsions for Use as Protective
Coatings for Metal
- D. United States Department of Commerce Product Standard (PS):
FED PSI 83-84.....Construction and Industrial Plywood
- E. Military Specifications (Mil. Spec.):
MIL-C-36373.....Cabinet, Cassette Transfer, Wall Mounted
- F. National Council on Radiation Protection and Measurements (NCRP):
Report 147.....Structural Shielding Design for Medical X-Ray
Imaging Facilities (2004)
Report 102.....Medical X-Ray, Electron Beam and Gamma-Ray
Protection for Energies up to 50 MeV (Equipment
Design, Performance and Use), (1989)

PART 2 - PRODUCTS**2.1 MATERIALS**

- A. Lead Sheet: Fed. Spec. QQ-L-201, Grade C, of thickness shown on drawings.
- B. Lead Lined Gypsum Wallboard:
 - 1. ASTM C1396, Type X, 16 mm (5/8 inch) thick.
 - 2. Factory bond sheet lead to one side of wallboard.

3. Apply sheet lead in thicknesses shown, unpierced and in one piece.
- C. Stainless Steel: ASTM A167.
- D. Thresholds:
 2. Stainless steel thresholds over lead lining as detailed.
- E. Fasteners:
 1. Cadmium or chromium plated steel screws for securing lead louvers.
 2. Standard steel drill screws, ASTM C1002, with lead washers for application of lead lined sheet materials to metal studs and attach washers in accordance with shielding manufacturer's instructions.
 3. Nails:
 - a. Use barbed lead head nails for application of lead lined materials to wood furring strips.
 - b. Long enough to penetrate furring strips not less than 25 mm (one inch).
 - c. Cast-lead head sufficiently thick to equal lead shielding of room provided.
- L. Lead Discs: Same thickness as lead lining, diameter 25 mm (1 inch) larger than fastener.

2.2 FABRICATION

- A. General: Lead lining of other items occurring in partitions shall provide an X-ray absorption equivalent to that of partitions in which they occur.

PART 3 - EXECUTION

3.1 FLOOR LEAD

- A. Concrete floor slabs:
 1. Thoroughly cleaned and smooth, and free of defects that might cause damage to lead.
 2. Floor slab shall be cured a minimum of 90 days.
 3. Before installation of lead, coat concrete surfaces with two coats of asphalt-base emulsion (ASTM D1187).
 4. Lap sheets of floor lead not less than 38 mm (1-1/2 inches).
- B. After installation of sheet lead, apply two coats of Asphalt base emulsion material over the lead and protect from damage until concrete fill and floor topping is installed.
- C. Where lead lined thresholds are not required, continue lead strips under existing thresholds (if any) or across door opening and extend strip 300 mm (12 inches) outside of partition and 300 mm (12 inches) beyond each jamb of door openings.
 1. Lift existing flooring on adjacent room corner as required and re-install over lead sheet.

D. For existing floors:

1. Lay lead sheets with butt joints.
2. Lay lead strip 38 mm (1-1/2 inches) wide and of same thickness as floor lead centered under full length of each butt joint.
3. Lay strips in concrete fill as shown, to same clearances provided in existing floor so that top of strip will be level with existing floor.

3.5 LEAD LINED GYPSUM WALLBOARD PANELS

- A. Apply lead lined gypsum wallboard to metal studs as shown.
- B. Predrill or drill pilot holes for nails or screws as necessary to prevent deformation of the fastener and lead shielding and to prevent distortion of the wallboard.
- C. Apply wallboard vertically with lead linings placed next to supports.
- D. Install sheet lead strips behind joints not less than the thickness used for the wallboard.
 1. The lead strips: 45 mm (1-3/4 inches) wide, except at corner joints, 45 mm by 45 mm (1-3/4 by 1-3/4 inch) lead angles shall be used.
 2. Secure the lead strips to supports at outer edges of strips.
- E. Wallboard:
 1. Fastened to supports with screws and lead washers or discs at approximately 250 mm (ten inches) on centers.
 2. Make provisions for connection with lead lined door frames and for cutouts for vision panels.
 3. Joint treatment of lead lined gypsum board panels and fastening depressions shall be as specified for wallboard in Section 09 29 00, GYPSUM BOARD.

3.2 SUPPLEMENTAL LEAD SHIELDING

- A. Line or cover penetrations of wall lead, pipe chases, columns fasteners and elsewhere where shown with sheet lead. Install sheet lead free of waves, lumps and wrinkles and with as few joints as possible. Joints in sheet lead shall provide X-ray absorption equivalent to adjacent sheet lead finished smooth and neat.
- B. Provide sufficient lead shielding for spaces around outlet boxes, junction boxes, film illuminators, and pipes, to obtain a net radiation protection at these spaces equaling net radiation protection specified for wall or partition in which they occur.

3.3 SIGNS: FURNISH SIGNS AS FOLLOWS:

- A. One for each Operating Room lettered as follows:

THE PARTITIONS, AND THE SHIELD OF THIS ROOM HAVE BEEN INSULATED WITH SHEET LEAD OF 3.12 mm THICKNESS PROVIDING A TOTAL LEAD EQUIVALENT PROTECTION OF 3.12 mm.

B. Signs:

1. Heavy white paper or cardboard.
2. Height of lettering and number not less than 3 mm (1/8 inch).
3. Fill in blank spaces on signs with mm thickness of lead as installed and total mm thickness of lead equivalent (determined by VA Physicist) and height of such insulation where required.
4. Mount in stainless steel or extruded aluminum frames (with acrylic plastic, 3 mm (1/8 inch) thick over sign) and fasten with suitable screws, one to each corner of each frame.
5. Provide manufacturer's standard stainless steel frame, to hold card size 100 mm by 150 mm (four by six inches).

- - - E N D - - -

SECTION 21 13 13
WET-PIPE SPRINKLER SYSTEM

PART 1 - GENERAL

1.1 SCOPE OF WORK

- A. The design and installation of a hydraulically calculated automatic wet-pipe system complete and ready for operation, for the Correct SPD/Surgical Deficiencies project for the Ambulatory Care Building at the VA Healthcare Center in Roseburg, Oregon. The automatic sprinkler system drawings represent design criteria only. The contractor is responsible for all work necessary for a complete, operating system including the preparation of shop drawings and hydraulic calculations. Exposed sprinkler piping in unfinished areas shall be painted.
- B. Work includes extending the existing sprinkler system located on the 1st Floor of the Ambulatory Care Building to protect the new SPD addition on the 2nd Floor, extending the existing system on the 1st Floor to protect the new in-fill area on the 1st Floor, and modify (relocate arm-overs and replace sprinklers) in the OR areas of the 2nd Floor.
- C. The building is of noncombustible construction. Sprinklers shall be provided in accordance with NFPA 13.
- D. The omission of any necessary system component, as required by the authorities having jurisdiction, from the specifications and drawings shall not relieve the Contractor of the responsibility for providing such necessity, without additional cost. Any case of error, omission, discrepancy, or lack of clarity shall be promptly identified for clarifications prior to the bid due date.

1.2 RELATED WORK

- A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- B. Section 07 84 00, FIRESTOPPING.
- C. Section 09 91 00, PAINTING.
- D. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- E. Section 28 31 00, FIRE ALARM SYSTEM.

1.3 QUALITY ASSURANCE

- A. Installer Reliability: The installer shall possess a valid State of Oregon fire sprinkler contractor's license. The installer shall have been actively and successfully engaged in the installation of commercial automatic sprinkler systems for the past three years.

- B. Materials and Equipment: All equipment and devices shall be of a make and type listed by UL, FM, or other nationally recognized testing laboratory for the specific purpose for which it is used. All materials, devices, and equipment shall be approved by the VA.
- C. Submittals: Submit as one package in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. Prepare detailed working drawings that are signed by a NICET Level III or Level IV Sprinkler Technician or stamped by a Registered Professional Engineer practicing in the field of Fire Protection Engineering. As Government review is for technical adequacy only, the installer remains responsible for correcting any conflicts with other trades and building construction that arise during installation. Partial submittals will not be accepted. Material submittals shall be approved prior to the purchase or delivery to the job site. Suitably bind submittals in notebooks or binders and provide index referencing the appropriate specification section. Submittals shall include, but not be limited to, the following:
1. Qualifications
 - a. Provide a copy of the installing contractor's license.
 - b. Provide a copy of the NICET certification for the NICET Level III or Level IV Sprinkler Technician who prepared and signed the detailed working drawings unless the drawings are stamped by a Registered Professional Engineer practicing in the field of Fire Protection Engineering.
 2. Drawings: Submit detailed 1/8 inch scale (minimum) working drawings conforming to NFPA 13. Contractor shall include a site plan showing location of hydrants and underground in the vicinity of the project.
 3. Manufacturers Data Sheets: Provide for materials and equipment proposed for use on the system. Include listing information and installation instructions in data sheets. Where data sheet describes items in addition to that item being submitted, clearly identify proposed item on the sheet.
 4. Calculation Sheets: Submit hydraulic calculation sheets in tabular form conforming to the requirements and recommendations of NFPA 13.
 5. Final Document Submittals: Provide as-built drawings, testing and maintenance instructions in accordance with the requirements in Section 01 33 23. Submittals shall include, but not be limited to, the following:

- a. One complete set of reproducible as-built drawings showing the installed system.
 - b. Provide maintenance instructions on replacing any components of the system including internal parts, periodic cleaning and adjustment of the equipment and components with information as to the address and telephone number of both the manufacturer and the local supplier of each item.
 - c. Material and Testing Certificate: Upon completion of the sprinkler system installation or any partial section of the system, including testing and flushing, provide a copy of a completed Material and Testing Certificate as indicated in NFPA 13.
 - d. Certificates shall document all parts of the installation.
 - e. Instruction Manual: Provide one copy of the instruction manual covering the system in a flexible protective cover and mount in an accessible location adjacent to the riser.
- D. Design Basis Information: Provide design, materials, equipment, installation, inspection, and testing of the automatic sprinkler system in accordance with the requirements of NFPA 13.
- Recommendations in appendices shall be treated as requirements.
- 1. Perform hydraulic calculations in accordance with NFPA 13 utilizing the Area/Density method. Do not restrict design area reductions permitted for using quick response sprinklers throughout by the required use of standard response sprinklers.
 - 2. Sprinkler Protection: To determining spacing and sizing, apply the following coverage classifications:
 - a. Light Hazard Occupancies: Office areas, treatment rooms, exam rooms, bathrooms, corridors, conference rooms, waiting areas, reception areas, SPD rooms and similar areas.
 - b. Ordinary Hazard Group 2 Occupancies: Mechanical room, electrical room, ETO Sterilizer Room, ETO Aerator Room and all other areas.
 - c. Request clarification from the Government for any hazard classification not identified.
 - 3. Hydraulic Calculations: Calculated demand including hose stream requirements shall fall no less than 10 percent below the available water supply curve.
 - 4. Water Supply: Water supply from hydrant west of the Ambulatory Care Building is reported by the VA as having 90 psi static pressure, 50 psi residual pressure flowing 1,186 gpm. Contractor

to confirm available water supply by actual flow test, report flow results to the VA and use the confirmed values for hydraulic calculations.

5. Provide seismic protection in accordance with NFPA 13.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. National Fire Protection Association (NFPA):
 - 13-2010....Installation of Sprinkler Systems
 - 101-2009...Safety to Life from Fire in Buildings and Structures (Life Safety Code)
- C. Underwriters Laboratories, Inc. (UL):
 - Fire Protection Equipment Directory - 2011
- D. Factory Mutual Engineering Corporation (FM): Approval Guide - 2011

PART 2 PRODUCTS

2.1 GENERAL

- A. All components not referenced by NFPA 13 shall be UL listed and/or FM approved. All components shall be new and used in accordance with the manufacturer's recommendations and its UL listing and/or FM approval.
- B. The naming of manufacturers in the specifications shall not be construed as eliminating the materials, products or services of other manufacturers and suppliers providing approved equivalent items.
- C. The substitutions of materials or products other than those named in the specifications are subject to proper approval of the Owner and Engineer granted in writing.

2.1 PIPING & FITTINGS

- A. Schedule 40 piping and cast or malleable iron fittings meeting the requirements of NFPA 13. Thin wall pipe is not permitted.

2.2 VALVES

- A. Valves in accordance with NFPA 13.
- B. Do not use quarter turn ball valves for 2 inch or larger drain valves.
- C. The wet system control valves shall be a listed indicating type valve. Control valve shall be UL Listed and FM Approved for fire protection installations. System control valves shall be rated for normal system pressure but in no case less than 175 PSI. (No Substitutions Allowed).

2.3 FIRE DEPARTMENT SIAMESE CONNECTION

A. Fire department connection is existing.

2.4 SPRINKLERS

- A. Type: Sprinklers shall be UL listed and FM approved. Provide quick response sprinklers in all areas, except where specifically prohibited by their listing. Recessed pendent (k=5.6), chrome finish with chrome escutcheon in finished areas. Upright (k=5.6), brass finish in unfinished areas. Operating rooms shall be provided with quick response, concealed sprinklers with dust guard (k=5.6)
- B. Contractor is responsible for reviewing the drawings and field conditions and providing and installing the actual number of sprinklers required under the referenced codes, standards, and these specifications.
- C. Temperature Ratings: In accordance with NFPA 13.
- D. Provide sprinklers above and below electrical room and closet ceilings.

2.5 SPRINKLER CABINET

- A. Provide sprinkler cabinet with the required number of sprinkler heads of all ratings and types installed, and a sprinkler wrench for each system. Locate as directed by Contracting Officer.

2.6 GAUGES

- A. Listed/approved with range approximately twice maximum pressure at point of connection, 3-1/2-inch diameter, complete with 1/4-inch threaded inlet with shut off valve with 1/4-inch plugged outlet.

2.7 PIPE SUPPORTS

- A. Supports, hangers, etc., of an approved pattern placement to conform to NFPA 13. Provide all required seismic bracing including end of branch line restraints in accordance with NFPA 13.

2.8 WALL, FLOOR AND CEILING PLATES

- A. Provide plated steel escutcheon plates with chrome finish for exposed piping passing through walls, floors or ceilings.

2.9 SIGNS

- A. Valve signs shall indicate purpose and system of each control, test, trim and drain valve. Hydraulic information sign shall meet requirements of NFPA 13.
- B. Provide signs where required by NFPA 13.

2.10 WATERFLOW AND VALVE SUPERVISORY DEVICES

- A. Devices shall be listed/approved for the intended application and compatible with the fire alarm system.

1. Valve supervisory switches shall be provided on all control valves. Switch shall not interfere with the normal operation of the valve.
2. Supervisory switches provided with butterfly/ball valves by the valve manufacturer shall be listed/approved as an assembly.
3. Waterflow alarm indicators shall be vane-type. Switches shall be instantaneously recycling with pneumatic retard. Switches shall be provided with two sets of normally open contacts. Waterflow alarm switch shall be installed before the system has been hydrostatically tested. Water flow switch shall be UL-listed or FM-approved

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Provide a qualified technician, experienced in the installation and operation of the type of system being installed, to supervise the installation and testing of the system.
- B. Installation of Piping: Accurately cut pipe to measurements established by the installer and work into place without springing or forcing. Bending of the pipe is prohibited. Install concealed piping in spaces that have finished ceilings. Install to avoid conflicts with ducts.
- C. Welding: Shop welding shall conform to the requirements and recommendations of NFPA 13. No welding is permitted in building.
- D. Drains: Provide drain in compliance with NFPA 13. Provide auxiliary drains in accordance with NFPA 13.
- E. Inspector's Test Connection: Install inspector' test connection where noted on the drawings. Discharge to the exterior. Inspector's test connection may be combined with a drain valve.
- F. Sleeves: Provide for pipes passing through masonry or concrete. Provide space between the pipe and the sleeve in accordance with NFPA 13. Seal this space with a UL Listed through penetration fire stop material in accordance with Section 07 84 00, FIRESTOPPING. Where core drilling is used in lieu of sleeves, also seal space. Seal penetrations of walls, floors and ceilings of other types of construction, in accordance with Section 07 84 00, FIRESTOPPING.
- G. Repairs: Repair damage to the building or equipment resulting from the installation of the sprinkler system by the installer at no additional expense to the Government.

3.2 INSPECTION AND TEST

- A. Preliminary Testing: Hydrostatically test system, including new and existing sprinkler piping on the floor, as specified in NFPA 13, in the presence of the Contracting Officers Technical Representative (COTR) or the designated representative.
- B. Final Inspection and Testing: Subject system to tests in accordance with NFPA 13, and when all necessary corrections have been accomplished, advise COTR to schedule a final inspection and test. Coordinate water flow test with the fire alarm contractor. Furnish all instruments, labor and materials required for the tests and provide the services of the installation supervisor or other competent representative of the installer to perform the tests. Correct deficiencies and retest system as necessary, prior to the final acceptance. Include the operation of all features of the systems under normal operations in test.
- C. Contractor to complete and sign a Contractor's Material and Test Certificate. Use form provided in NFPA 13.

3.3 INSTRUCTIONS

- A. Furnish the services of a competent instructor for not less than two hours for instructing personnel in the operation and maintenance of the system, on the dates requested by the COTR.

- - - E N D - - -

**SECTION 22 05 11
COMMON WORK RESULTS FOR PLUMBING**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. The requirements of this Section shall apply to all sections of Division 22.
- B. Definitions:
 - 1. Exposed: Piping and equipment exposed to view in finished rooms.
 - 2. Option or optional: Contractor's choice of an alternate material or method.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 03 30 00, CAST-IN-PLACE CONCRETE: Concrete and Grout.
- D. Section 05 31 00, STEEL DECKING: Building Components for Attachment of Hangers.
- E. Section 05 50 00, METAL FABRICATIONS.
- F. Section 07 84 00, FIRESTOPPING.
- G. Section 07 60 00, FLASHING AND SHEET METAL: Flashing for Wall and Roof Penetrations.
- H. Section 07 92 00, JOINT SEALANTS.
- I. Section 09 91 00, PAINTING.
- J. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS
- K. Section 22 07 11, PLUMBING INSULATION.
- L. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS

1.3 QUALITY ASSURANCE

- A. Products Criteria:
 - 1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 3 years. However, digital electronics devices, software and systems such as controls, instruments, computer work station, shall be the current generation of technology and basic design that has a proven satisfactory service record of at least three years.
 - 2. Equipment Service: There shall be permanent service organizations, authorized and trained by manufacturers of the equipment supplied, located within 160 km (100 miles) of the project. These

- organizations shall come to the site and provide acceptable service to restore operations within four hours of receipt of notification by phone, e-mail or fax in event of an emergency, such as the shut-down of equipment; or within 24 hours in a non-emergency. Names, mail and e-mail addresses and phone numbers of service organizations providing service under these conditions for (as applicable to the project): pumps, critical instrumentation, computer workstation and programming shall be submitted for project record and inserted into the operations and maintenance manual.
3. All items furnished shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.
 4. The products and execution of work specified in Division 22 shall conform to the referenced codes and standards as required by the specifications. Local codes and amendments enforced by the local code official shall be enforced, if required by local authorities such as the natural gas supplier. If the local codes are more stringent, then the local code shall apply. Any conflicts shall be brought to the attention of the Contracting Officers Technical Representative (COTR).
 5. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be products of one manufacturer.
 6. Assembled Units: Manufacturers of equipment assemblies, which use components made by others, assume complete responsibility for the final assembled product.
 7. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.
 8. Asbestos products or equipment or materials containing asbestos shall not be used.
- B. Welding: Before any welding is performed, contractor shall submit a certificate certifying that welders comply with the following requirements:
1. Qualify welding processes and operators for piping according to ASME "Boiler and Pressure Vessel Code", Section IX, "Welding and Brazing Qualifications".

2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
 3. Certify that each welder has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.
 4. All welds shall be stamped according to the provisions of the American Welding Society.
- C. Manufacturer's Recommendations: Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the COTR prior to installation. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations can be cause for rejection of the material.
- D. Execution (Installation, Construction) Quality:
1. All items shall be applied and installed in accordance with manufacturer's written instructions. Conflicts between the manufacturer's instructions and the contract drawings and specifications shall be referred to the COTR for resolution. Written hard copies or computer files of manufacturer's installation instructions shall be provided to the COTR at least two weeks prior to commencing installation of any item.
 2. Complete layout drawings shall be required by Paragraph, SUBMITTALS. Construction work shall not start on any system until the layout drawings have been approved.
- E. Guaranty: Warranty of Construction, FAR clause 52.246-21.
- F. Plumbing Systems: IPC, International Plumbing Code.

1.4 SUBMITTALS

- A. Submittals shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 05 11, COMMON WORK RESULTS FOR PLUMBING", with applicable paragraph identification.
- C. Contractor shall make all necessary field measurements and investigations to assure that the equipment and assemblies will meet contract requirements.
- D. If equipment is submitted which differs in arrangement from that shown, provide drawings that show the rearrangement of all associated systems.

Approval will be given only if all features of the equipment and associated systems, including accessibility, are equivalent to that required by the contract.

- E. Prior to submitting shop drawings for approval, contractor shall certify in writing that manufacturers of all major items of equipment have each reviewed drawings and specifications, and have jointly coordinated and properly integrated their equipment and controls to provide a complete and efficient installation.
- F. Upon request by Government, lists of previous installations for selected items of equipment shall be provided. Contact persons who will serve as references, with telephone numbers and e-mail addresses shall be submitted with the references.
- G. Manufacturer's Literature and Data: Manufacturer's literature shall be submitted under the pertinent section rather than under this section.
 - 1. Equipment and materials identification.
 - 2. Fire stopping materials.
 - 3. Hangers, inserts, supports and bracing.
 - 4. Wall, floor, and ceiling plates.
- H. Coordination Drawings: Complete consolidated and coordinated layout drawings shall be submitted for all new systems, and for existing systems that are in the same areas. The drawings shall include plan views, elevations and sections of all systems and shall be on a scale of not less than 1:32 (3/8-inch equal to one foot). Clearly identify and dimension the proposed locations of the principal items of equipment. The drawings shall clearly show the proposed location and adequate clearance for all equipment, piping, pumps, valves and other items. All valves, trap primer valves, water hammer arrestors, strainers, and equipment requiring service shall be provided with an access door sized for the complete removal of plumbing device, component, or equipment. Equipment foundations shall not be installed until equipment or piping until layout drawings have been approved. Detailed layout drawings shall be provided for all piping systems. In addition, details of the following shall be provided.
 - 1. Mechanical equipment rooms.
 - 2. Equipment penetrations of floors, walls, ceilings, or roofs.
- I. Maintenance Data and Operating Instructions:

1. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Article, INSTRUCTIONS, for systems and equipment.
2. Listing of recommended replacement parts for keeping in stock supply, including sources of supply, for equipment shall be provided.

1.5 DELIVERY, STORAGE AND HANDLING

A. Protection of Equipment:

1. Equipment and material placed on the job site shall remain in the custody of the Contractor until phased acceptance, whether or not the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage.
2. Damaged equipment shall be replaced with an identical unit as determined and directed by the COTR. Such replacement shall be at no additional cost to the Government.
3. Interiors of new equipment and piping systems shall be protected against entry of foreign matter. Both inside and outside shall be cleaned before painting or placing equipment in operation.
4. Existing equipment and piping being worked on by the Contractor shall be under the custody and responsibility of the Contractor and shall be protected as required for new work.

B. Cleanliness of Piping and Equipment Systems:

1. Care shall be exercised in the storage and handling of equipment and piping material to be incorporated in the work. Debris arising from cutting, threading and welding of piping shall be removed.
2. Piping systems shall be flushed, blown or pigged as necessary to deliver clean systems.
3. The interior of all tanks shall be cleaned prior to delivery and beneficial use by the Government. All piping shall be tested in accordance with the specifications and the International Plumbing Code (IPC), latest edition. All filters, strainers, fixture faucets shall be flushed of debris prior to final acceptance.
4. Contractor shall be fully responsible for all costs, damage, and delay arising from failure to provide clean systems.

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below shall form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers (ASME):
Boiler and Pressure Vessel Code (BPVC):
SEC IX-2007.....Boiler and Pressure Vessel Code; Section IX,
Welding and Brazing Qualifications.
- C. American Society for Testing and Materials (ASTM):
A36/A36M-2008.....Standard Specification for Carbon Structural
Steel
A575-96 (R 2007).....Standard Specification for Steel Bars, Carbon,
Merchant Quality, M-Grades R (2002)
E84-2005.....Standard Test Method for Surface Burning
Characteristics of Building Materials
E119-2008a.....Standard Test Methods for Fire Tests of
Building Construction and Materials
- D. Manufacturers Standardization Society (MSS) of the Valve and Fittings Industry, Inc:
SP-58-02.....Pipe Hangers and Supports-Materials, Design and
Manufacture
SP 69-2003 (R 2004).....Pipe Hangers and Supports-Selection and
Application
- E. National Electrical Manufacturers Association (NEMA):
MG1-2003, Rev. 1-2007...Motors and Generators
- C. International Code Council, (ICC):
IBC-06, (R 2007).....International Building Code
IPC-06, (R 2007).....International Plumbing Code

PART 2 - PRODUCTS**2.1 FACTORY-ASSEMBLED PRODUCTS**

- A. Standardization of components shall be maximized to reduce spare part requirements.
- B. Manufacturers of equipment assemblies that include components made by others shall assume complete responsibility for final assembled unit.
1. All components of an assembled unit need not be products of same manufacturer.
 2. Constituent parts that are alike shall be products of a single manufacturer.

3. Components shall be compatible with each other and with the total assembly for intended service.
4. Contractor shall guarantee performance of assemblies of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.
- C. Components of equipment shall bear manufacturer's name and trademark, model number, serial number and performance data on a name plate securely affixed in a conspicuous place, or cast integral with, stamped or otherwise permanently marked upon the components of the equipment.
- D. Major items of equipment, which serve the same function, shall be the same make and model

2.2 COMPATIBILITY OF RELATED EQUIPMENT

- A. Equipment and materials installed shall be compatible in all respects with other items being furnished and with existing items so that the result will be a complete and fully operational system that conforms to contract requirements.

2.3 LIFTING ATTACHMENTS

Equipment shall be provided with suitable lifting attachments to enable equipment to be lifted in its normal position. Lifting attachments shall withstand any handling conditions that might be encountered, without bending or distortion of shape, such as rapid lowering and braking of load.

2.4 EQUIPMENT AND MATERIALS IDENTIFICATION

- A. Use symbols, nomenclature and equipment numbers specified, shown on the drawings, or shown in the maintenance manuals. Identification for piping is specified in Section 09 91 00, PAINTING. Use Seton (or approved equal) Setmark pipe markers, cylindrically coiled printed plastic sheets meeting ANSI A13.1-2007.
- B. Interior (Indoor) Equipment: Engraved nameplates, with letters not less than 48 mm (3/16-inch) high of brass with black-filled letters, or rigid black plastic with white letters specified in Section 09 91 00, PAINTING shall be permanently fastened to the equipment. Unit components such as water heaters, tanks, coils, filters, fans, etc. shall be identified.
- C. Valve Tags and Lists:
 1. Plumbing: All valves shall be provided with valve tags and listed on a valve list (Fixture stops not included).

2. Valve tags: Engraved black filled numbers and letters not less than 13 mm (1/2-inch) high for number designation, and not less than 6.4 mm(1/4-inch) for service designation on 19 gage, 38 mm (1-1/2 inches) round brass disc, attached with brass "S" hook or brass chain.
3. Valve lists: Valve lists shall be created using a word processing program and printed on plastic coated cards. The plastic coated valve list card(s), sized 216 mm (8-1/2 inches) by 280 mm (11 inches) shall show valve tag number, valve function and area of control for each service or system. The valve list shall be in a punched 3-ring binder notebook. A copy of the valve list shall be mounted in picture frames for mounting to a wall.
4. A detailed plan for each floor of the building indicating the location and valve number for each valve shall be provided. Each valve location shall be identified with a color coded sticker or thumb tack in ceiling.

2.5 FIRE STOPPING

- A. Section 07 84 00, FIRESTOPPING specifies an effective barrier against the spread of fire, smoke and gases where penetrations occur for piping. Refer to Section 22 07 11, PLUMBING INSULATION, for pipe insulation.

2.6 GALVANIZED REPAIR COMPOUND

- A. Mil. Spec. DOD-P-21035B, paint.

2.7 PIPE AND EQUIPMENT SUPPORTS AND RESTRAINTS

- A. In lieu of the paragraph which follows, suspended equipment support and restraints may be designed and installed in accordance with the International Building Code (IBC), latest edition, and SECTION 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS. Submittals based on the International Building Code (IBC), latest edition, SECTION 13 05 41 requirements, or the following paragraphs of this Section shall be stamped and signed by a professional engineer registered in a state where the project is located. The Support system of suspended equipment over 227 kg (500 pounds) shall be submitted for approval of the COTR in all cases. See these specifications for lateral force design requirements.
- B. Type Numbers Specified: MSS SP-58. For selection and application refer to MSS SP-69. Refer to Section 05 50 00, METAL FABRICATIONS, for miscellaneous metal support materials and prime coat painting.

C. For Attachment to Concrete Construction:

1. Concrete insert: Type 18, MSS SP-58.
2. Self-drilling expansion shields and machine bolt expansion anchors: Permitted in concrete not less than 102 mm (4 inches) thick when approved by the COTR for each job condition.
3. Power-driven fasteners: Permitted in existing concrete or masonry not less than 102 mm (4 inches) thick when approved by the COTR for each job condition.

D. For Attachment to Steel Construction: MSS SP-58.

1. Welded attachment: Type 22.
2. Beam clamps: Types 20, 21, 28 or 29. Type 23 C-clamp may be used for individual copper tubing up to 23 mm (7/8-inch) outside diameter.

E. Attachment to Metal Pan or Deck: As required for materials specified in Section 05 31 00, STEEL DECKING.

F. For Attachment to Wood Construction: Wood screws or lag bolts.

G. Hanger Rods: Hot-rolled steel, ASTM A36 or A575 for allowable load listed in MSS SP-58. For piping, provide adjustment means for controlling level or slope. Types 13 or 15 turn-buckles shall provide 38 mm (1-1/2 inches) minimum of adjustment and incorporate locknuts. All-thread rods are acceptable.

H. Multiple (Trapeze) Hangers: Galvanized, cold formed, lipped steel channel horizontal member, not less than 41 mm by 41 mm (1-5/8 inches by 1-5/8 inches), 2.7 mm (No. 12 gage), designed to accept special spring held, hardened steel nuts. Trapeze hangers are not permitted for steam supply and condensate piping.

1. Allowable hanger load: Manufacturers rating less 91kg (200 pounds).
2. Guide individual pipes on the horizontal member of every other trapeze hanger with 6 mm (1/4-inch) U-bolt fabricated from steel rod. Provide Type 40 insulation shield, secured by two 13 mm (1/2-inch) galvanized steel bands, or insulated calcium silicate shield for insulated piping at each hanger.

I. Pipe Hangers and Supports: (MSS SP-58), use hangers sized to encircle insulation on insulated piping. Refer to Section 22 07 11, PLUMBING INSULATION for insulation thickness. To protect insulation, provide Type 39 saddles for roller type supports or insulated calcium silicate shields. Provide Type 40 insulation shield or insulated calcium silicate shield at all other types of supports and hangers including those for insulated piping.

1. General Types (MSS SP-58):
 - a. Standard clevis hanger: Type 1; provide locknut.
 - b. Riser clamps: Type 8.
 - c. Wall brackets: Types 31, 32 or 33.
 - d. Roller supports: Type 41, 43, 44 and 46.
 - e. Saddle support: Type 36, 37 or 38.
 - f. Turnbuckle: Types 13 or 15.
 - g. U-bolt clamp: Type 24.
 - h. Copper Tube:
 - 1) Hangers, clamps and other support material in contact with tubing shall be painted with copper colored epoxy paint, plastic coated or taped with isolation tape to prevent electrolysis.
 - 2) For vertical runs use epoxy painted or plastic coated riser clamps.
 - 3) For supporting tube to strut: Provide epoxy painted pipe straps for copper tube or plastic inserted vibration isolation clamps.
 - 4) Insulated Lines: Provide pre-insulated calcium silicate shields sized for copper tube.
 - i. Spring hangers are required on all plumbing system pumps one horsepower and greater.
2. Plumbing Piping (Other Than General Types):
 - a. Horizontal piping: Type 1, 5, 7, 9, and 10.
 - b. Chrome plated piping: Chrome plated supports.
 - c. Hangers and supports in pipe chase: Prefabricated system ABS self-extinguishing material, not subject to electrolytic action, to hold piping, prevent vibration and compensate for all static and operational conditions.
 - d. Blocking, stays and bracing: Angle iron or preformed metal channel shapes, 1.3 mm (18 gage) minimum.
- J. Pre-insulated Calcium Silicate Shields:
 1. Provide 360 degree water resistant high density 965 kPa (140 psi) compressive strength calcium silicate shields encased in galvanized metal.
 2. Pre-insulated calcium silicate shields to be installed at the point of support during erection.
 3. Shield thickness shall match the pipe insulation.

4. The type of shield is selected by the temperature of the pipe, the load it must carry, and the type of support it will be used with.
 - a. Shields for supporting cold water shall have insulation that extends a minimum of one inch past the sheet metal.
 - b. The insulated calcium silicate shield shall support the maximum allowable water filled span as indicated in MSS-SP 69. To support the load, the shields shall have one or more of the following features: structural inserts 4138 kPa (600 psi) compressive strength, an extra bottom metal shield, or formed structural steel (ASTM A36) wear plates welded to the bottom sheet metal jacket.
5. Shields may be used on steel clevis hanger type supports, roller supports or flat surfaces.

K. Seismic Restraint of Piping: Refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

2.8 PIPE PENETRATIONS

- A. Pipe penetration sleeves shall be installed for all pipe other than rectangular blocked out floor openings for risers in mechanical bays.
- B. Pipe penetration sleeve materials shall comply with all fire stopping requirements for each penetration.
- C. To prevent accidental liquid spills from passing to a lower level, provide the following:
 1. For sleeves: Extend sleeve 25 mm (1 inch) above finished floor and provide sealant for watertight joint.
 2. For blocked out floor openings: Provide 40 mm (1-1/2 inch) angle set in silicone adhesive around opening.
 3. For drilled penetrations: Provide 40 mm (1-1/2 inch) angle ring or square set in silicone adhesive around penetration.
- C. Penetrations are not allowed through beams or ribs, but may be installed in concrete beam flanges. Any deviation from these requirements must receive prior approval of COTR.
- D. Sheet metal, plastic, or moisture resistant fiber sleeves shall be provided for pipe passing through floors, interior walls, and partitions, unless brass or steel pipe sleeves are specifically called for below.
- E. Cast iron or zinc coated pipe sleeves shall be provided for pipe passing through exterior walls below grade. The space between the

sleeve and pipe shall be made watertight with a modular or link rubber seal. The link seal shall be applied at both ends of the sleeve.

- F. Galvanized steel or an alternate black iron pipe with asphalt coating sleeves shall be for pipe passing through concrete beam flanges, except where brass pipe sleeves are called for. A galvanized steel Sleeve shall be provided for pipe passing through floor of mechanical rooms, laundry work rooms, and animal rooms above basement. Except in mechanical rooms, sleeves shall be connected with a floor plate.
- G. Brass Pipe Sleeves shall be provided for pipe passing through quarry tile, terrazzo or ceramic tile floors. The sleeve shall be connected with a floor plate.
- H. Sleeve clearance through floors, walls, partitions, and beam flanges shall be 25 mm (1 inch) greater in diameter than external diameter of pipe. Sleeve for pipe with insulation shall be large enough to accommodate the insulation plus 25 mm (1 inch) in diameter. Interior openings shall be caulked tight with fire stopping material and sealant to prevent the spread of fire, smoke, and gases.
- I. Sealant and Adhesives: Shall be as specified in Section 07 92 00, JOINT SEALANTS.

2.9 TOOLS AND LUBRICANTS

- A. Furnish, and turn over to the COTR, special tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.

2.10 WALL, FLOOR AND CEILING PLATES

- A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.
- B. Thickness: Not less than 2.4 mm (3/32-inch) for floor plates. For wall and ceiling plates, not less than 0.64 mm (0.025-inch) for up to 80 mm (3 inch) pipe, 0.89 mm (0.035-inch) for larger pipe.
- C. Locations: Use where pipe penetrates floors, walls and ceilings in exposed locations, in finished areas only. Wall plates shall be used where insulation ends on exposed water supply pipe drop from overhead. A watertight joint shall be provided in spaces where brass or steel pipe sleeves are specified.

2.11 ASBESTOS

Materials containing asbestos are not permitted.

PART 3 - EXECUTION**3.1 ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING**

- A. Location of piping, sleeves, inserts, hangers, and equipment, access provisions shall be coordinated with the work of all trades. Piping, sleeves, inserts, hangers, and equipment shall be located clear of windows, doors, openings, light outlets, and other services and utilities. Equipment layout drawings shall be prepared to coordinate proper location and personnel access of all facilities. The drawings shall be submitted for review. Manufacturer's published recommendations shall be followed for installation methods not otherwise specified.
- B. Operating Personnel Access and Observation Provisions: All equipment and systems shall be arranged to provide clear view and easy access, without use of portable ladders, for maintenance and operation of all devices including, but not limited to: all equipment items, valves, filters, strainers, transmitters, sensors, control devices. All gages and indicators shall be clearly visible by personnel standing on the floor or on permanent platforms. Maintenance and operating space and access provisions that are shown on the drawings shall not be changed nor reduced.
- C. Structural systems necessary for pipe and equipment support shall be coordinated to permit proper installation.
- D. Location of pipe sleeves, trenches and chases shall be accurately coordinated with equipment and piping locations.
- E. Cutting Holes:
 - 1. Holes through concrete and masonry shall be cut by rotary core drill. Pneumatic hammer, impact electric, and hand or manual hammer type drill will not be allowed, except as permitted by COTR where working area space is limited.
 - 2. Holes shall be located to avoid interference with structural members such as beams or grade beams. Holes shall be laid out in advance and drilling done only after approval by COTR. If the Contractor considers it necessary to drill through structural members, this matter shall be referred to COTR for approval.
 - 3. Waterproof membrane shall not be penetrated. Pipe floor penetration block outs shall be provided outside the extents of the waterproof membrane.

- F. Interconnection of Instrumentation or Control Devices: Generally, electrical and pneumatic interconnections are not shown but must be provided.
- G. Minor Piping: Generally, small diameter pipe runs from drips and drains, water cooling, and other service are not shown but must be provided.
- H. Protection and Cleaning:
1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during installation, in accordance with the manufacturer's recommendations and as approved by the COTR. Damaged or defective items in the opinion of the COTR, shall be replaced.
 2. Protect all finished parts of equipment, such as shafts and bearings where accessible, from rust prior to operation by means of protective grease coating and wrapping. Close pipe openings with caps or plugs during installation. Pipe openings, equipment, and plumbing fixtures shall be tightly covered against dirt or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials and equipment.
- I. Concrete and Grout: Concrete and shrink compensating grout 25 MPa (3000 psi) minimum, specified in Section 03 30 00, CAST-IN-PLACE CONCRETE, shall be used for all pad or floor mounted equipment. Gages, thermometers, valves and other devices shall be installed with due regard for ease in reading or operating and maintaining said devices. Thermometers and gages shall be located and positioned to be easily read by operator or staff standing on floor or walkway provided. Servicing shall not require dismantling adjacent equipment or pipe work.
- J. Interconnection of Controls and Instruments: Electrical interconnection is generally not shown but shall be provided. This includes interconnections of sensors, transmitters, transducers, control devices, control and instrumentation panels, instruments and computer workstations. Comply with NFPA-70.
- K. Many plumbing systems interface with the HVAC control system. See the HVAC control points list and section 23 09 23 DIRECT DIGITAL CONTROLS FOR HVAC
- L. Work in Existing Building:

1. Perform as specified in Article, OPERATIONS AND STORAGE AREAS, Article, ALTERATIONS, and Article, RESTORATION of the Section 01 00 00, GENERAL REQUIREMENTS for relocation of existing equipment, alterations and restoration of existing building(s).
 2. As specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, OPERATIONS AND STORAGE AREAS, make alterations to existing service piping at times that will cause the least interfere with normal operation of the facility.
- M. Work in bathrooms, restrooms, housekeeping closets: All pipe penetrations behind escutcheons shall be sealed with plumbers putty.
- N. Switchgear Drip Protection: Every effort shall be made to eliminate the installation of pipe above electrical and telephone switchgear. If this is not possible, encase pipe in a second pipe with a minimum of joints.
- O. Inaccessible Equipment:
1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, equipment shall be removed and reinstalled or remedial action performed as directed at no additional cost to the Government.
 2. The term "conveniently accessible" is defined as capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as electrical conduit, motors, fans, pumps, belt guards, transformers, high voltage lines, piping, and ductwork.

3.2 TEMPORARY PIPING AND EQUIPMENT

- A. Continuity of operation of existing facilities may require temporary installation or relocation of equipment and piping. Temporary equipment or pipe installation or relocation shall be provided to maintain continuity of operation of existing facilities.
- B. The Contractor shall provide all required facilities in accordance with the requirements of phased construction and maintenance of service. All piping and equipment shall be properly supported, sloped to drain, operate without excessive stress, and shall be insulated where injury can occur to personnel by contact with operating facilities. The requirements of Para. 3.1 shall apply.
- C. Temporary facilities and piping shall be completely removed and any openings in structures sealed. Necessary blind flanges and caps shall be provided to seal open piping remaining in service.

3.3 RIGGING

- A. Openings in building structures shall be planned to accommodate design scheme.
- B. Alternative methods of equipment delivery may be offered and will be considered by Government under specified restrictions of phasing and service requirements as well as structural integrity of the building.
- C. All openings in the building shall be closed when not required for rigging operations to maintain proper environment in the facility for Government operation and maintenance of service.
- D. Contractor shall provide all facilities required to deliver specified equipment and place on foundations. Attachments to structures for rigging purposes and support of equipment on structures shall be Contractor's full responsibility.
- E. Contractor shall check all clearances, weight limitations and shall provide a rigging plan designed by a Registered Professional Engineer. All modifications to structures, including reinforcement thereof, shall be at Contractor's cost, time and responsibility.
- F. Rigging plan and methods shall be referred to COTR for evaluation prior to actual work.

3.4 PIPE AND EQUIPMENT SUPPORTS

- A. Where hanger spacing does not correspond with joist or rib spacing, use structural steel channels secured directly to joist and rib structure that will correspond to the required hanger spacing, and then suspend the equipment and piping from the channels. Holes shall be drilled or burned in structural steel ONLY with the prior written approval of the COTR.
- B. The use of chain pipe supports, wire or strap hangers; wood for blocking, stays and bracing, or hangers suspended from piping above shall not be permitted. Rusty products shall be replaced.
- C. Hanger rods shall be used that are straight and vertical. Turnbuckles for vertical adjustments may be omitted where limited space prevents use. A minimum of 15 mm (1/2-inch) clearance between pipe or piping covering and adjacent work shall be provided.
- D. For horizontal and vertical plumbing pipe supports, refer to the International Plumbing Code (IPC), latest edition, and these specifications.
- E. Overhead Supports:

1. The basic structural system of the building is designed to sustain the loads imposed by equipment and piping to be supported overhead.
2. Provide steel structural members, in addition to those shown, of adequate capability to support the imposed loads, located in accordance with the final approved layout of equipment and piping.
3. Tubing and capillary systems shall be supported in channel troughs.

F. Floor Supports:

1. Provide concrete bases, concrete anchor blocks and pedestals, and structural steel systems for support of equipment and piping. Concrete bases and structural systems shall be anchored and doweled to resist forces under operating and seismic conditions (if applicable) without excessive displacement or structural failure.
2. Bases and supports shall not be located and installed until equipment mounted thereon has been approved. Bases shall be sized to match equipment mounted thereon plus 50 mm (2 inch) excess on all edges. Structural drawings shall be reviewed for additional requirements. Bases shall be neatly finished and smoothed, shall have chamfered edges at the top, and shall be suitable for painting.
3. All equipment shall be shimmed, leveled, firmly anchored, and grouted with epoxy grout. Anchor bolts shall be placed in sleeves, anchored to the bases. Fill the annular space between sleeves and bolts with a grout material to permit alignment and realignment.
4. For seismic anchoring, refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

3.5 LUBRICATION

- A. All equipment and devices requiring lubrication shall be lubricated prior to initial operation. All devices and equipment shall be field checked for proper lubrication.
- B. All devices and equipment shall be equipped with required lubrication fittings. A minimum of one liter (one quart) of oil and 0.5 kg (one pound) of grease of manufacturer's recommended grade and type for each different application shall be provided. All materials shall be delivered to COTR in unopened containers that are properly identified as to application.
- C. A separate grease gun with attachments for applicable fittings shall be provided for each type of grease applied.
- D. All lubrication points shall be accessible without disassembling equipment, except to remove access plates.

- E. All lubrication points shall be extended to one side of the equipment.

3.6 PLUMBING SYSTEMS DEMOLITION

- A. Rigging access, other than indicated on the drawings, shall be provided after approval for structural integrity by the COTR. Such access shall be provided without additional cost or time to the Government. Where work is in an operating plant, approved protection from dust and debris shall be provided at all times for the safety of plant personnel and maintenance of plant operation and environment of the plant.
- B. In an operating plant, cleanliness and safety shall be maintained. The plant shall be kept in an operating condition. Government personnel will be carrying on their normal duties of operating, cleaning and maintaining equipment and plant operation. Work shall be confined to the immediate area concerned; maintain cleanliness and wet down demolished materials to eliminate dust. Dust and debris shall not be permitted to accumulate in the area to the detriment of plant operation. All flame cutting shall be performed to maintain the fire safety integrity of this plant. Adequate fire extinguishing facilities shall be available at all times. All work shall be performed in accordance with recognized fire protection standards. Inspections will be made by personnel of the VA Medical Center, and the Contractor shall follow all directives of the RE or COTR with regard to rigging, safety, fire safety, and maintenance of operations.
- C. Unless specified otherwise, all piping, wiring, conduit, and other devices associated with the equipment not re-used in the new work shall be completely removed from Government property. This includes all concrete equipment pads, pipe, valves, fittings, insulation, and all hangers including the top connection and any fastenings to building structural systems. All openings shall be sealed after removal of equipment, pipes, ducts, and other penetrations in roof, walls, floors, in an approved manner and in accordance with plans and specifications where specifically covered. Structural integrity of the building system shall be maintained. Reference shall also be made to the drawings and specifications of the other disciplines in the project for additional facilities to be demolished or handled.
- D. All valves including gate, globe, ball, butterfly and check, all pressure gages and thermometers with wells shall remain Government property and shall be removed and delivered to COTR and stored as directed. The Contractor shall remove all other material and equipment,

devices and demolition debris under these plans and specifications. Such material shall be removed from Government property expeditiously and shall not be allowed to accumulate.

3.7 CLEANING AND PAINTING

- A. Prior to final inspection and acceptance of the plant and facilities for beneficial use by the Government, the plant facilities, equipment and systems shall be thoroughly cleaned and painted. Refer to Section 09 91 00, PAINTING.
- B. In addition, the following special conditions apply:
 - 1. Cleaning shall be thorough. Solvents, cleaning materials and methods recommended by the manufacturers shall be used for the specific tasks. All rust shall be removed prior to painting and from surfaces to remain unpainted. Scratches, scuffs, and abrasions shall be repaired prior to applying prime and finish coats.
 - 2. The following Material And Equipment shall NOT be painted:
 - a. Motors, controllers, control switches, and safety switches.
 - b. Control and interlock devices.
 - c. Regulators.
 - d. Pressure reducing valves.
 - e. Control valves and thermostatic elements.
 - f. Lubrication devices and grease fittings.
 - g. Copper, brass, aluminum, stainless steel and bronze surfaces.
 - h. Valve stems and rotating shafts.
 - i. Pressure gages and thermometers.
 - j. Glass.
 - k. Name plates.
 - 3. Control and instrument panels shall be cleaned and damaged surfaces repaired. Touch-up painting shall be made with matching paint obtained from manufacturer or computer matched.
 - 4. Pumps, motors, steel and cast iron bases, and coupling guards shall be cleaned, and shall be touched-up with the same color as utilized by the pump manufacturer
 - 5. Temporary Facilities: Apply paint to surfaces that do not have existing finish coats.
 - 6. The final result shall be a smooth, even-colored, even-textured factory finish on all items. The entire piece of equipment shall be repainted, if necessary, to achieve this.

3.8 IDENTIFICATION SIGNS

- A. Laminated plastic signs, with engraved lettering not less than 5 mm (3/16-inch) high, shall be provided that designates equipment function, for all equipment, switches, motor controllers, relays, meters, control devices, including automatic control valves. Nomenclature and identification symbols shall correspond to that used in maintenance manual, and in diagrams specified elsewhere. Attach by chain, adhesive, or screws.
- B. Factory Built Equipment: Metal plate, securely attached, with name and address of manufacturer, serial number, model number, size, performance shall be placed on factory built equipment.
- C. Pipe Identification: Refer to Section 09 91 00, PAINTING. Install pipe identification at maximum 20 foot intervals, minimum one per room.

3.9 STARTUP AND TEMPORARY OPERATION

- A. Start up of equipment shall be performed as described in the equipment specifications. Vibration within specified tolerance shall be verified prior to extended operation. Temporary use of equipment is specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.

3.10 OPERATING AND PERFORMANCE TESTS

- A. Prior to the final inspection, all required tests shall be performed as specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TESTS and submit the test reports and records to the COTR.
- B. Should evidence of malfunction in any tested system, or piece of equipment or component part thereof, occur during or as a result of tests, make proper corrections, repairs or replacements, and repeat tests at no additional cost to the Government.
- C. When completion of certain work or system occurs at a time when final control settings and adjustments cannot be properly made to make performance tests, then make performance tests such systems respectively during first actual seasonal use of respective systems following completion of work.

3.11 OPERATION AND MAINTENANCE MANUALS

- A. Provide four bound copies. The Operations and maintenance manuals shall be delivered to COTR not less than 30 days prior to completion of a phase or final inspection.
- B. All new and temporary equipment and all elements of each assembly shall be included.

- C. Data sheet on each device listing model, size, capacity, pressure, speed, horsepower, impeller size, and other information shall be included.
- D. Manufacturer's installation, maintenance, repair, and operation instructions for each device shall be included. Assembly drawings and parts lists shall also be included. A summary of operating precautions and reasons for precautions shall be included in the Operations and Maintenance Manual.
- E. Lubrication instructions, type and quantity of lubricant shall be included.
- F. Schematic diagrams and wiring diagrams of all control systems corrected to include all field modifications shall be included.
- G. Set points of all interlock devices shall be listed.
- H. Trouble-shooting guide for the control system troubleshooting guide shall be inserted into the Operations and Maintenance Manual.
- I. Emergency procedures.

3.12 INSTRUCTIONS TO VA PERSONNEL

Instructions shall be provided in accordance with Article,
INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.

- - - E N D - - -

SECTION 22 05 23
GENERAL-DUTY VALVES FOR PLUMBING PIPING

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section describes the requirements for general-duty valves for domestic water and sewer systems.

1.2 RELATED WORK

- A. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
1. Valves.
 2. Backflow Preventers.
 3. Pressure Reducing Valves.
 4. All items listed in Part 2 - Products.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):A536-84(R 2004)
Standard Specification for Ductile Iron Castings
- C. American Society of Sanitary Engineering (ASSE)
ASSE 1003-01 (R 2003)...Performance Requirements for Water Pressure Reducing Valves
ASSE 1012-02.....Backflow Preventer with Intermediate Atmospheric Vent
ASSE 1013-05.....Reduced Pressure Principle Backflow Preventers and Reduced Pressure Fire Protection Principle Backflow Preventers
- D. International Code Council (ICC)
IPC-06 (R 2007).....International Plumbing Code
- E. Manufacturers Standardization Society of the Valve and Fittings Industry, Inc. (MSS):
SP-25-98.....Standard Marking System for Valves, Fittings, Flanges and Unions
SP-67-02a (R 2004) Butterfly Valve of the Single flange Type (Lug Wafer)

SP-70-06.....Cast Iron Gate Valves, Flanged and Threaded
Ends.

SP-72-99.....Ball Valves With Flanged or Butt Welding For
General Purpose

SP-80-03.....Bronze Gate, Globe, Angle and Check Valves.

SP-110-96.....Ball Valve Threaded, Socket Welding, Solder
Joint, Grooved and Flared Ends

1.5 DELIVERY, STORAGE, AND HANDLING

A. Valves shall be prepared for shipping as follows:

1. Protect internal parts against rust and corrosion.
2. Protect threads, flange faces, grooves, and weld ends.
3. Set angle, gate, and globe valves closed to prevent rattling.
4. Set ball and plug valves open to minimize exposure of functional surfaces
5. Set butterfly valves closed or slightly open.
6. Block check valves in either closed or open position.

B. Valves shall be prepared for storage as follows:

1. Maintain valve end protection.
2. Store valves indoors and maintain at higher than ambient dew point temperature.

C. A sling shall be used for large valves. The sling shall be rigged to avoid damage to exposed parts. Hand wheels or stems shall not be used as lifting or rigging points.

PART 2 - PRODUCTS

2.1 VALVES

- A. Asbestos packing and gaskets are prohibited.
- B. Bronze valves shall be made with dezincification resistant materials. Bronze valves made with copper alloy (brass) containing more than 15 percent zinc shall not be permitted.
- C. Valves in insulated piping shall have 50 mm or DN50 (2 inch) stem extensions and extended handles of non-thermal conductive material that allows operating the valve without breaking the vapor seal or disturbing the insulation. Memory stops shall be fully adjustable after insulation is applied.
- D. Exposed Valves over 65 mm or DN65 (2-1/2 inches) installed at an elevation over 3.6 meters (12 feet) shall have a chain-wheel attachment to valve hand-wheel, stem, or other actuator.

E. Ball valves, pressure regulating valves, gate valves, globe valves, and plug valves used to supply potable water shall meet the requirements of NSF 61.

F. Shut-off:

1. Cold, Hot and Re-circulating Hot Water:

a. 50 mm or DN50 (2 inches) and smaller: Ball, MSS SP-72, SP-110, Ball valve shall be full port three piece or two piece with a union design with adjustable stem package. Threaded stem designs are not allowed. The ball valve shall have a SWP rating of 1035 kPa (150 psig) and a CWP rating of 4140 kPa (600 psig). The body material shall be Bronze ASTM B584, Alloy C844. The ends shall be solder,

b. Less than 100 mm DN100 (4 inches): Butterfly shall have an iron body with EPDM seal and aluminum bronze disc. The butterfly valve shall meet MSS SP-67, type I standard. The butterfly valve shall have a SWP rating of 1380 kPa (200 psig). The valve design shall be lug type suitable for bidirectional dead-end service at rated pressure. The body material shall meet ASTM A 536, ductile iron.

2. Reagent Grade Water: Valves for reagent grade, reverse osmosis, or deionized water service shall be ball type of same material as used for pipe.

G. Balancing:

1. Hot Water Re-circulating, 80 mm or DN80 (3 inches) and smaller manual balancing valve shall be of bronze body, brass ball construction with glass and carbon filled TFE seat rings and designed for positive shutoff. The manual balancing valve shall have differential pressure read-out ports across the valve seat area. The read out ports shall be fitting with internal EPT inserts and check valves. The valve body shall have 8 mm or DN8 NPT (¼" NPT) tapped drain and purge port. The valves shall have memory stops that allow the valve to close for service and then reopened to set point without disturbing the balance position. All valves shall have calibrated nameplates to assure specific valve settings.

H. Check:

1. Check valves less than 80 mm or DN80 (3 inches) and smaller) shall be class 125, bronze swing check valves with non metallic Buna-N disc. The check valve shall meet MSS SP-80 Type 4 standard. The

check valve shall have a CWP rating of 1380 kPa (200 psig). The check valve shall have a Y pattern horizontal body design with bronze body material conforming to ASTM B 62, solder joints, and PTFE or TFE disc.

I. Globe:

1. 80 mm or DN80 (3 inches) or smaller: Class 150, bronze globe valve with non metallic disc. The globe valve shall meet MSS SP-80, Type 2 standard. The globe valve shall have a CWP rating of 2070 kPa (300 psig). The valve material shall be bronze with integral seal and union ring bonnet conforming to ASTM B 62 with solder ends, copper-silicon bronze stem, TPTFE or TFE disc, malleable iron hand wheel.

2.2 WATER PRESSURE REDUCING VALVE AND CONNECTIONS

- A. 80 mm or DN80 (3 inches) or smaller: The pressure reducing valve shall consist of a bronze body and bell housing, a separate access cover for the plunger, and a bolt to adjust the downstream pressure. The bronze bell housing and access cap shall be threaded to the body and shall not require the use of ferrous screws. The assembly shall be of the balanced piston design and shall reduce pressure in both flow and no flow conditions. The assembly shall be accessible for maintenance without having to remove the body from the line.
- B. The regulator shall have a tap for pressure gauge.
- C. The regulator shall have a temperature rating of 100° C (210° F) for hot water or hot water return service. Pressure regulators shall have accurate pressure regulation to 6.9-kPa (+/- 1 psig).
- D. Setting: Entering water pressure, discharge pressure, capacity, size, and related measurements shall be as shown on the drawings.
- E. Connections Valves and Strainers: shut off valves shall be installed on each side of reducing valve and a bypass line equal in size to the regulator inlet pipe shall be installed with a normally closed globe valve. A strainer shall be installed on inlet side of, and same size as pressure reducing valve. A pressure gage shall be installed on the low pressure side of the line.

2.3 BACKFLOW PREVENTERS

- A. A backflow prevention assembly shall be installed at any point in the plumbing system where the potable water supply comes in contact with a potential source of contamination. The backflow prevention assembly shall be ASSE 1013 listed and certified.

- B. Reduced pressure backflow preventers shall be installed in the following applications.
1. Deionizers.
 2. Sterilizers.
 3. Stills.
 4. Dialysis, Deionized or Reverse Osmosis Water Systems.
 5. Water make up to heating systems, cooling tower, chilled water system, generators, and similar equipment consuming water.
 6. Atmospheric Vacuum Breaker: ASSE 1001
 - a. Hose bibs and sinks w/threaded outlets.
- C. The reduced pressure principle backflow prevention assembly shall be ASSE listed 1013 with full port OS&Y gate valves and an integral relief monitor switch. The main body and access cover shall be epoxy coated duct iron conforming to ASTM A536 grade 4. The seat ring and check valve shall be Noryl (NSF listed). The stem shall be stainless steel conforming to ASTM A276. The seat disc elastomer shall be EPDM. The checks and the relief valve shall be accessible for maintenance without removing the device from the line. An epoxy coated wye type strainer with flanged connections shall be installed on the inlet.
- D. The atmospheric vacuum breaker shall be ASSE listed 1001. The main body shall be either cast bronze. All internal polymers shall be NSF listed. The seat disc elastomer shall be silicone. The device shall be accessible for maintenance without removing the device from the service line. The installation shall not be in a concealed or inaccessible location or where the venting of water from the device during normal operation is deemed objectionable.
- E. The double check detector backflow prevention assembly shall be ASSE listed 1048 and supply with full port OS&Y gate valves. The main body and access cover shall be epoxy coated ductile iron conforming to ASTM A536 grade. The seat ring and check valve shall be Noryl (NSF listed). The stem shall be stainless steel conforming to ASTM A 276. The seat disc elastomers shall be EPDM. The first and second check valve shall be accessible for maintenance without removing the device from the line.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Valve interior shall be examined for cleanliness, freedom from foreign matter, and corrosion. Special packing materials shall be removed,

such as blocks, used to prevent disc movement during shipping and handling.

- B. Valves shall be operated in positions from fully open to fully closed. Guides and seats shall be examined and made accessible by such operations.
- C. Threads on valve and mating pipe shall be examined for form and cleanliness.
- D. Mating flange faces shall be examined for conditions that might cause leakage. Bolting shall be checked for proper size, length, and material. Gaskets shall be verified for proper size and that its material composition is suitable for service and free from defects and damage.
- E. Do not attempt to repair defective valves; replace with new valves.

3.2 VALVE INSTALLATION

- A. Install valves with unions or flanges at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.
- B. Valves shall be located for easy access and shall be provide with separate support. Valves shall be accessible with access doors when installed inside partitions or above hard ceilings.
- C. Valves shall be installed in horizontal piping with stem at or above center of pipe
- D. Valves shall be installed in a position to allow full stem movement.
- E. Check valves shall be installed for proper direction of flow and as follows:
 - 1. Swing Check Valves: In horizontal position with hinge pin level.

3.3 ADJUSTING

- A. Valve packing shall be adjusted or replaced after piping systems have been tested and put into service but before final adjusting and balancing. Replace valves shall be replaced if persistent leaking occurs.

- - E N D - - -

**SECTION 22 07 11
PLUMBING INSULATION**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Field applied insulation for thermal efficiency and condensation control for
 - 1. Plumbing piping and equipment.
- B. Definitions
 - 1. ASJ: All service jacket, white finish facing or jacket.
 - 2. Air conditioned space: Space having air temperature and/or humidity controlled by mechanical equipment.
 - 3. Cold: Equipment or piping handling media at design temperature of 16 degrees C (60 degrees F) or below.
 - 4. Concealed: Piping above ceilings and in chases, and pipe spaces.
 - 5. Exposed: Piping and equipment exposed to view in finished areas including mechanical equipment rooms or exposed to outdoor weather. Shafts, chases, unfinished attics, crawl spaces and pipe basements are not considered finished areas.
 - 6. FSK: Foil-scrim-kraft facing.
 - 7. Hot: Plumbing equipment or piping handling media above 41 degrees C (105 degrees F).
 - 8. Density: kg/m^3 - kilograms per cubic meter (Pcf - pounds per cubic foot).
 - 9. Thermal conductance: Heat flow rate through materials.
 - a. Flat surface: Watts per square meter (BTU per hour per square foot).
 - b. Pipe or Cylinder: Watts per square meter (BTU per hour per linear foot).
 - 10. Thermal Conductivity (k): Watt per meter, per degree C (BTU per inch thickness, per hour, per square foot, per degree F temperature difference).
 - 11. Vapor Retarder (Vapor Barrier): A material which retards the transmission (migration) of water vapor. Performance of the vapor retarder is rated in terms of permeance (perms). For the purpose of this specification, vapor retarders shall have a maximum published permeance of 0.1 perms and vapor barriers shall have a maximum published permeance of 0.001 perms.
 - 12. R: Pump recirculation.

- 13. CW: Cold water.
- 14. SW: Soft water.
- 15. HW: Hot water.
- 16. PVDC: Polyvinylidene chloride vapor retarder jacketing, white.

1.2 RELATED WORK

- A. Section 07 84 00, FIRESTOPPING: Mineral fiber and bond breaker behind sealant.
- B. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING: General mechanical requirements and items, which are common to more than one section of Division 22.
- C. Section 22 05 19, METERS AND GAGES FOR PLUMBING PIPING and Section 22 05 23, GENERAL-DUTY VALVES FOR PLUMBING PIPING: Hot and cold water piping.

1.3 QUALITY ASSURANCE

- A. Refer to article QUALITY ASSURANCE, in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
- B. Criteria:
 - 1. Comply with NFPA 90A, particularly paragraphs 4.3.3.1 through 4.3.3.6, 4.3.10.2.6, and 5.4.6.4, parts of which are quoted as follows:
 - 4.3.3.1** Pipe insulation and coverings, vapor retarder facings, adhesives, fasteners, tapes, unless otherwise provided for in 4.3.3.1.12 or 4.3.3.1.2, shall have, in the form in which they are used, a maximum flame spread index of 25 without evidence of continued progressive combustion and a maximum smoke developed index of 50 when tested in accordance with NFPA 255, Standard Method of Test of Surface Burning Characteristics of Building Materials.
 - 4.3.3.1.1** Where these products are to be applied with adhesives, they shall be tested with such adhesives applied, or the adhesives used shall have a maximum flame spread index of 25 and a maximum smoke developed index of 50 when in the final dry state. (See 4.2.4.2.)
 - 4.3.3.3** Pipe insulation and coverings shall not flame, glow, smolder, or smoke when tested in accordance with a similar test for pipe covering, ASTM C 411, Standard Test Method for Hot-Surface Performance of High-Temperature Thermal Insulation, at the temperature to which they are exposed in service.
 - 4.3.3.3.1** In no case shall the test temperature be below 121°C (250°F).
 - 4.3.10.2.6.3** Nonferrous fire sprinkler piping shall be listed as having a maximum peak optical density of 0.5 or less, an average optical density of 0.15 or less, and a maximum flame spread distance of 1.5 m (5 ft) or less when tested in accordance with

UL 1887, Standard for Safety Fire Test of Plastic Sprinkler Pipe for Visible Flame and Smoke Characteristics.

4.3.10.2.6.7 Smoke detectors shall not be required to meet the provisions of this section.

2. Test methods: ASTM E84, UL 723, or NFPA 255.
 3. Specified k factors are at 24 degrees C (75 degrees F) mean temperature unless stated otherwise. Where optional thermal insulation material is used, select thickness to provide thermal conductance no greater than that for the specified material. For pipe, use insulation manufacturer's published heat flow tables. For domestic hot water supply and return, run out insulation and condensation control insulation, no thickness adjustment need be made.
 4. All materials shall be compatible and suitable for service temperature, and shall not contribute to corrosion or otherwise attack surface to which applied in either the wet or dry state.
- C. Every package or standard container of insulation or accessories delivered to the job site for use must have a manufacturer's stamp or label giving the name of the manufacturer and description of the material.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
 1. All information, clearly presented, shall be included to determine compliance with drawings and specifications and ASTM, federal and military specifications.
 - a. Insulation materials: Specify each type used and state surface burning characteristics.
 - b. Insulation facings and jackets: Each type used.
 - c. Insulation accessory materials: Each type used.
 - d. Manufacturer's installation and fitting fabrication instructions for flexible unicellular insulation.
 - e. Make reference to applicable specification paragraph numbers for coordination.

1.5 STORAGE AND HANDLING OF MATERIAL

Store materials in clean and dry environment, pipe covering jackets shall be clean and unmarred. Place adhesives in original containers. Maintain ambient temperatures and conditions as required by printed

instructions of manufacturers of adhesives, mastics and finishing cements.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.

B. Federal Specifications (Fed. Spec.):

L-P-535E (2)-91.....Plastic Sheet (Sheeting): Plastic Strip; Poly (Vinyl Chloride) and Poly (Vinyl Chloride - Vinyl Acetate), Rigid.

C. Military Specifications (Mil. Spec.):

MIL-A-3316C (2)-90.....Adhesives, Fire-Resistant, Thermal Insulation

MIL-A-24179A (1)-87.....Adhesive, Flexible Unicellular-Plastic Thermal Insulation

MIL-C-19565C (1)-88.....Coating Compounds, Thermal Insulation, Fire-and Water-Resistant, Vapor-Barrier

MIL-C-20079H-87.....Cloth, Glass; Tape, Textile Glass; and Thread, Glass and Wire-Reinforced Glass

D. American Society for Testing and Materials (ASTM):

A167-04Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

B209-07.....Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate

C411-05.....Standard test method for Hot-Surface Performance of High-Temperature Thermal Insulation

C449-07.....Standard Specification for Mineral Fiber Hydraulic-Setting Thermal Insulating and Finishing Cement

C533-09.....Standard Specification for Calcium Silicate Block and Pipe Thermal Insulation

C534-08Standard Specification for Preformed Flexible Elastomeric Cellular Thermal Insulation in Sheet and Tubular Form

C547-07Standard Specification for Mineral Fiber pipe Insulation

- C552-07Standard Specification for Cellular Glass
Thermal Insulation
- C553-08Standard Specification for Mineral Fiber
Blanket Thermal Insulation for Commercial and
Industrial Applications
- C585-09.....Standard Practice for Inner and Outer Diameters
of Rigid Thermal Insulation for Nominal Sizes
of Pipe and Tubing (NPS System) R (1998)
- C612-10Standard Specification for Mineral Fiber Block
and Board Thermal Insulation
- C1126-10.....Standard Specification for Faced or Unfaced
Rigid Cellular Phenolic Thermal Insulation
- C1136-10Standard Specification for Flexible, Low
Permeance Vapor Retarders for Thermal
Insulation
- D1668-97a (2006).....Standard Specification for Glass Fabrics (Woven
and Treated) for Roofing and Waterproofing
- E84-10Standard Test Method for Surface Burning
Characteristics of Building
Materials
- E119-09C.....Standard Test Method for Fire Tests of Building
Construction and Materials
- E136-09 b.....Standard Test Methods for Behavior of Materials
in a Vertical Tube Furnace at 750 degrees C
(1380 F)
- E. National Fire Protection Association (NFPA):
- 101-09Life Safety Code
- 251-06.....Standard methods of Tests of Fire Endurance of
Building Construction Materials
- 255-06.....Standard Method of tests of Surface Burning
Characteristics of Building Materials
- F. Underwriters Laboratories, Inc (UL):
- 723.....UL Standard for Safety Test for Surface Burning
Characteristics of Building Materials with
Revision of 08/03

- G. Manufacturer's Standardization Society of the Valve and Fitting Industry (MSS):
SP58-2002.....Pipe Hangers and Supports Materials, Design,
and Manufacture

PART 2 - PRODUCTS

2.1 MINERAL FIBER OR FIBER GLASS

- A. ASTM C612 (Board, Block), Class 1 or 2, density 48 kg/m³ (3 pcf), k = 0.037 (.26) at 24 degrees C (75 degrees F), external insulation for temperatures up to 204 degrees C (400 degrees F).
- B. ASTM C553 (Blanket, Flexible) Type I, Class B-5, Density 32 kg/m³ (2 pcf), k = 0.04 (0.27 at 24 degrees C (75 degrees F), for use at temperatures up to 204 degrees C (400 degrees F)
- C. ASTM C547 (Pipe Fitting Insulation and Preformed Pipe Insulation), Class 1, k = 0.037 (0.26) at 24 degrees C (75 degrees F), for use at temperatures up to 230 degrees C (450 degrees F) with an all service vapor retarder jacket with polyvinyl chloride premolded fitting covering.

2.2 INSULATION FACINGS AND JACKETS

- A. Vapor Retarder, higher strength with low water permeance \leq 0.02 or less perm rating, Beach puncture 50 units for insulation facing on pipe insulation jackets. Facings and jackets shall be all service type (ASJ) or PVDC Vapor Retarder jacketing.
- B. ASJ jacket shall be white kraft bonded to 0.025 mm (1 mil) thick aluminum foil, fiberglass reinforced, with pressure sensitive adhesive closure. Comply with ASTM C1136. Beach puncture 50 units, Suitable for painting without sizing. Jackets shall have minimum 40 mm (1-1/2 inch) lap on longitudinal joints and minimum 75mm (3 inch) butt strip on end joints. Butt strip material shall be same as the jacket. Lap and butt strips shall be self-sealing type with factory-applied pressure sensitive adhesive.
- C. Vapor Retarder medium strength with low water vapor permeance of 0.02 or less perm rating), Beach puncture 25 units: Foil-Scrim-Kraft (FSK) or PVDC vapor retarder jacketing type for concealed ductwork and equipment.
- D. Field applied vapor barrier jackets shall be provided, in addition to the specified facings and jackets, on all exterior piping as well as on interior piping exposed to outdoor air (i.e.; in ventilated attics, piping in ventilated (not air conditioned) spaces, etc.) in high

humidity areas. The vapor barrier jacket shall consist of a multi-layer laminated cladding with a maximum water vapor permeance of 0.001 perms. The minimum puncture resistance shall be 35 cm-kg (30 inch-pounds) for interior locations and 92 cm-kg (80 inch-pounds) for exterior or exposed locations or where the insulation is subject to damage.

- E. Glass Cloth Jackets: Presized, minimum 0.18 kg per square meter (7.8 ounces per square yard), 2000 kPa (300 psig) bursting strength with integral vapor retarder where required or specified. Weather proof if utilized for outside service.
- F. Factory composite materials may be used provided
- G. Pipe fitting insulation covering (jackets): Fitting covering shall be premolded to match shape of fitting and shall be polyvinyl chloride (PVC) conforming to Fed Spec L-P-335, composition A, Type II Grade GU, and Type III, minimum thickness 0.7 mm (0.03 inches). Provide color matching vapor retarder pressure sensitive tape.
- H. Aluminum Jacket-Piping systems: ASTM B209, 3003 alloy, H-14 temper, 0.6 mm (0.023 inch) minimum thickness with locking longitudinal joints. Jackets for elbows, tees and other fittings shall be factory-fabricated to match shape of fitting and of 0.6 mm (0.024) inch minimum thickness aluminum. Fittings shall be of same construction as straight run jackets but need not be of the same alloy. Factory-fabricated stainless steel bands shall be installed on all circumferential joints. Bands shall be 13 mm (0.5 inch) wide on 450 mm (18 inch) centers. System shall be weatherproof if utilized for outside service.

2.3 PIPE COVERING PROTECTION SADDLES

- A. Cold pipe support: Premolded pipe insulation 180 degrees (half-shells) on bottom half of pipe at supports. Material shall be cellular glass or high density Polyisocyanurate insulation of the same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 48 kg/m³ (3.0 pcf).

Nominal Pipe Size and Accessories Material (Insert Blocks)	
Nominal Pipe Size mm (inches)	Insert Blocks mm (inches)
Up through 125 (5)	150 (6) long
150 (6)	150 (6) long
200 (8), 250 (10), 300 (12)	225 (9) long
350 (14), 400 (16)	300 (12) long

Nominal Pipe Size and Accessories Material (Insert Blocks)	
Nominal Pipe Size mm (inches)	Insert Blocks mm (inches)
450 through 600 (18 through 24)	350 (14) long

- B. Warm or hot pipe supports: Premolded pipe insulation (180 degree half-shells) on bottom half of pipe at supports. Material shall be high density Polyisocyanurate (for temperatures up to 149 degrees C [300 degrees F]), cellular glass or calcium silicate. Insulation at supports shall have same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 48 kg/m³ (3.0 pcf).

2.4 ADHESIVE, MASTIC, CEMENT

- A. Mil. Spec. MIL-A-3316, Class 1: Jacket and lap adhesive and protective finish coating for insulation.
- B. Mil. Spec. MIL-A-3316, Class 2: Adhesive for laps and for adhering insulation to metal surfaces.
- C. Mil. Spec. MIL-A-24179, Type II Class 1: Adhesive for installing flexible unicellular insulation and for laps and general use.
- D. Mil. Spec. MIL-C-19565, Type I: Protective finish for outdoor use.
- E. Mil. Spec. MIL-C-19565, Type I or Type II: Vapor barrier compound for indoor use.
- F. ASTM C449: Mineral fiber hydraulic-setting thermal insulating and finishing cement.
- G. Other: Insulation manufacturers' published recommendations.

2.5 MECHANICAL FASTENERS

- A. Pins, anchors: Welded pins, or metal or nylon anchors with galvanized steel or fiber washer, or clips. Pin diameter shall be as recommended by the insulation manufacturer.
- B. Staples: Outward clinching galvanized steel
- C. Wire: 1.3 mm thick (18 gage) soft annealed galvanized or 1.9 mm (14 gage) copper clad steel or nickel copper alloy.
- D. Bands: 13 mm (1/2 inch) nominal width, brass, galvanized steel, aluminum or stainless steel.

2.6 REINFORCEMENT AND FINISHES

- A. Glass fabric, open weave: ASTM D1668, Type III (resin treated) and Type I (asphalt treated).
- B. Glass fiber fitting tape: Mil. Spec MIL-C-20079, Type II, Class 1.
- C. Tape for Flexible Elastomeric Cellular Insulation: As recommended by the insulation manufacturer.

- D. Hexagonal wire netting: 25 mm (one inch) mesh, 0.85 mm thick (22 gage) galvanized steel.
- E. Corner beads: 50 mm (2 inch) by 50 mm (2 inch), 0.55 mm thick (26 gage) galvanized steel; or, 25 mm (1 inch) by 25 mm (1 inch), 0.47 mm thick (28 gage) aluminum angle adhered to 50 mm (2 inch) by 50 mm (2 inch) Kraft paper.
- F. PVC fitting cover: Fed. Spec L-P-535, Composition A, 11-86 Type II, Grade GU, with Form B Mineral Fiber insert, for media temperature 4 degrees C (40 degrees F) to 121 degrees C (250 degrees F). Below 4 degrees C (40 degrees F) and above 121 degrees C (250 degrees F). Provide double layer insert. Provide color matching vapor barrier pressure sensitive tape.

2.7 FIRESTOPPING MATERIAL

Other than pipe insulation, refer to Section 07 84 00 FIRESTOPPING.

2.8 FLAME AND SMOKE

Unless shown otherwise all assembled systems shall meet flame spread 25 and smoke developed 50 rating as developed under ASTM, NFPA and UL standards and specifications. See paragraph 1.3 "Quality Assurance".

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS

- A. Required pressure tests of piping joints and connections shall be completed and the work approved by the COTR for application of insulation. Surface shall be clean and dry with all foreign materials, such as dirt, oil, loose scale and rust removed.
- B. Except for specific exceptions, insulate all specified equipment, and piping (pipe, fittings, valves, accessories). Insulate each pipe individually. Do not use scrap pieces of insulation where a full length section will fit.
- C. Insulation materials shall be installed in a first class manner with smooth and even surfaces, with jackets and facings drawn tight and smoothly cemented down at all laps. Insulation shall be continuous through all sleeves and openings, except at fire dampers and duct heaters (NFPA 90A). Vapor retarders shall be continuous and uninterrupted throughout systems with operating temperature 16 degrees C (60 degrees F) and below. Lap and seal vapor barrier over ends and exposed edges of insulation. Anchors, supports and other metal projections through insulation on cold surfaces shall be insulated and vapor sealed for a minimum length of 150 mm (6 inches).

- D. Install vapor stops at all insulation terminations on either side of valves, pumps and equipment and particularly in straight lengths of pipe insulation.
- E. Construct insulation on parts of equipment such as cold water pumps and heat exchangers that must be opened periodically for maintenance or repair, so insulation can be removed and replaced without damage. Install insulation with bolted 1 mm thick (20 gage) galvanized steel or aluminum covers as complete units, or in sections, with all necessary supports, and split to coincide with flange/split of the equipment.
- F. Insulation on hot piping and equipment shall be terminated square at items not to be insulated, access openings and nameplates. Cover all exposed raw insulation with white sealer or jacket material.
- G. Protect all insulations outside of buildings with aluminum jacket using lock joint or other approved system for a continuous weather tight system. Access doors and other items requiring maintenance or access shall be removable and sealable.
- H. Plumbing work not to be insulated:
 - 1. Piping and valves of fire protection system.
 - 2. Chromium plated brass piping.
 - 3. Water piping in contact with earth.
 - 4. Small horizontal cold water branch runs in partitions to individual fixtures may be without insulation for maximum distance of 900 mm (3 feet).
 - 5. Ambient Temperature Distilled water piping.
- I. Apply insulation materials subject to the manufacturer's recommended temperature limits. Apply adhesives, mastic and coatings at the manufacturer's recommended minimum coverage.
- J. Elbows, flanges and other fittings shall be insulated with the same material as is used on the pipe straights.
Use of polyurethane spray-foam to fill a PVC elbow jacket is prohibited on cold applications.
- K. Firestop Pipe insulation:
 - 1. Provide firestopping insulation at fire and smoke barriers through penetrations. Fire stopping insulation shall be UL listed as defines in Section 07 84 00, FIRESTOPPING.
 - 2. Pipe penetrations requiring fire stop insulation including, but not limited to the following:
 - a. Pipe risers through floors

- b. Pipe chase walls and floors
 - c. Smoke partitions
 - d. Fire partitions
- L. Provide metal jackets over insulation as follows:
- a. All plumbing piping exposed to outdoor weather.
 - b. Piping exposed in building, within 1800 mm (6 feet) of the floor, that connects to sterilizers, kitchen and laundry equipment. Jackets may be applied with pop rivets. Provide aluminum angle ring escutcheons at wall, ceiling or floor penetrations.
 - c. A 50 mm (2 inch) overlap is required at longitudinal and circumferential joints.

3.2 INSULATION INSTALLATION

- A. Molded Mineral Fiber Pipe and Tubing Covering:
- 1. Fit insulation to pipe, aligning longitudinal joints. Seal longitudinal joint laps and circumferential butt strips by rubbing hard with a nylon sealing tool to assure a positive seal. Staples may be used to assist in securing insulation. Seal all vapor retarder penetrations on cold piping with a generous application of vapor barrier mastic. Provide inserts and install with metal insulation shields at outside pipe supports. Install freeze protection insulation over heating cable.
 - 2. Contractor's options for fitting, flange and valve insulation:
 - a. Insulating and finishing cement for sizes less than 100 mm (4 inches) operating at surface temperature of 16 degrees C (61 degrees F) or more.
 - b. Factory premolded, one piece PVC covers with mineral fiber, (Form B), inserts. Provide two insert layers for pipe temperatures below 4 degrees C (40 degrees F), or above 121 degrees C (250 degrees F). Secure first layer of insulation with twine. Seal seam edges with vapor barrier mastic and secure with fitting tape.
 - c. Factory molded, ASTM C547 or field mitered sections, joined with adhesive or wired in place. For hot piping finish with a smoothing coat of finishing cement. For cold fittings, 16 degrees C (60 degrees F) or less, vapor seal with a layer of glass fitting tape imbedded between two 2 mm (1/16 inch) coats of vapor barrier mastic.

- d. Fitting tape shall extend over the adjacent pipe insulation and overlap on itself at least 50 mm (2 inches).
3. Nominal thickness in millimeters and inches specified in the schedule at the end of this section.

3.3 PIPE INSULATION SCHEDULE

Provide insulation for piping systems as scheduled below:

Insulation Thickness Millimeters (Inches)					
		Nominal Pipe Size Millimeters (Inches)			
Operating Temperature Range/Service	Insulation Material	Less than 25 (1)	25 - 32 (1 - 1¼)	38 - 75 (1½ - 3)	100 (4) and Above
38-60 degrees C (100-140 degrees F) (Domestic Hot Water Supply and Return)	Mineral Fiber (Above ground piping only)	38 (1.5)	38 (1.5)	50 (2.0)	50 (2.0)

- - - E N D - - -

**SECTION 22 08 00
COMMISSIONING OF PLUMBING SYSTEMS**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. The requirements of this Section apply to all sections of Division 22.
- B. This project will have selected building systems commissioned. The commissioning process, which the Contractor is responsible to execute, is defined in this Section. In addition, the Contractor is responsible to hire an independent, third-party Commissioning Agent (CxA) to manage the commissioning process.

1.2 RELATED WORK

- A. Section 01 00 00 GENERAL REQUIREMENTS.
- B. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

1.3 SUMMARY

- A. This Section includes requirements for commissioning plumbing systems, subsystems and equipment.
- B. The commissioning activities have been developed to support the VA requirements to meet guidelines for Federal Leadership in Environmental, Energy, and Economic Performance.
- C. The commissioning activities have been developed to support the United States Green Building Council (USGBC) LEED™ rating program and to support delivery of project performance in accordance with the Contract Documents developed with the approval of the VA.
 - 1. Commissioning activities and documentation for the LEED™ section on "Energy and Atmosphere" prerequisite of "Fundamental Building Systems Commissioning".
 - 2. Commissioning activities and documentation for the LEED™ section on "Energy and Atmosphere" requirements for the "Enhanced Building System Commissioning" credit.
 - 3. Activities and documentation for the LEED™ section on "Measurement and Verification" requirements for the Measurement and Verification credit.

1.4 COMMISSIONED SYSTEMS

- A. Commissioning of a system or systems specified in this Division is part of the construction process. Documentation and testing of these systems, as well as training of the VA's Operation and Maintenance personnel, is required in cooperation with the VA and the Commissioning Agent.
- B. The following Plumbing systems will be commissioned:

1. Domestic Hot Water Systems (Domestic hot water circulating pumps and motors, controls).
2. Medical Gas Systems (Medical compressed air and air compressor).
3. Process Water Systems (Controls, piping, tanks and casings, gages and instruments, pumps, motors, for reverse osmosis (RO)/ deionized water (DI) systems).
4. Emergency Plumbing Fixtures (Showers, eye wash stations, water tempering valves, instruments and gages)

1.5 SUBMITTALS

- A. The commissioning process requires review of selected Submittals. The Commissioning Agent will provide a list of submittals that will be reviewed by the Commissioning Agent. This list will be reviewed and approved by the VA prior to forwarding to the Contractor. Refer to Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, and SAMPLES for further details.
- B. The commissioning process requires Submittal review simultaneously with engineering review.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 PRE-FUNCTIONAL CHECKLISTS

- A. The Contractor shall complete Pre-Functional Checklists to verify systems, subsystems, and equipment installation is complete and systems are ready for Systems Functional Performance Testing. The Commissioning Agent will prepare Pre-Functional Checklists to be used to document equipment installation. The Contractor shall complete the checklists. Completed checklists shall be submitted to the VA and to the Commissioning Agent for review. The Commissioning Agent may spot check a sample of completed checklists. If the Commissioning Agent determines that the information provided on the checklist is not accurate, the Commissioning Agent will return the marked-up checklist to the Contractor for correction and resubmission. If the Commissioning Agent determines that a significant number of completed checklists for similar equipment are not accurate, the Commissioning Agent will select a broader sample of checklists for review. If the Commissioning Agent determines that a significant number of the broader sample of checklists is also inaccurate, all the checklists for the type of equipment will be returned to the Contractor for correction and resubmission.

3.2 CONTRACTORS TESTS

- A. Contractor tests as required by other sections of Division 22 shall be scheduled and documented in accordance with Section 01 00 00 GENERAL REQUIREMENTS. The Commissioning Agent will witness selected Contractor tests. Contractor tests shall be completed prior to scheduling Systems Functional Performance Testing.

3.3 SYSTEMS FUNCTIONAL PERFORMANCE TESTING:

- A. The Commissioning Process includes Systems Functional Performance Testing that is intended to test systems functional performance under steady state conditions, to test system reaction to changes in operating conditions, and system performance under emergency conditions. The Commissioning Agent will prepare detailed Systems Functional Performance Test procedures for review and approval by the COTR. The Contractor shall review and comment on the tests prior to approval. The Contractor shall provide the required labor, materials, and test equipment identified in the test procedure to perform the tests. The Commissioning Agent will witness and document the testing. The Contractor shall sign the test reports to verify tests were performed.

3.4 TRAINING OF VA PERSONNEL

- A. Training of the VA operation and maintenance personnel is required in cooperation with the COTR and Commissioning Agent. Provide competent, factory authorized personnel to provide instruction to operation and maintenance personnel concerning the location, operation, and troubleshooting of the installed systems. The instruction shall be scheduled in coordination with the COTR after submission and approval of formal training plans. Refer to Division 22 Sections for additional Contractor training requirements.

----- END -----

**SECTION 22 11 00
FACILITY WATER DISTRIBUTION**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Domestic water systems, including piping, equipment and all necessary accessories as designated in this section.

1.2 RELATED WORK

- A. Section 07 84 00, FIRESTOPPING: Penetrations in rated enclosures
- B. Section 09 91 00, PAINTING: Preparation and finish painting and identification of piping systems.
- C. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
- D. Section 22 07 11, PLUMBING INSULATION: Pipe Insulation.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
1. All items listed in Part 2 - Products.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American National Standards Institute (ANSI):
- American Society of Mechanical Engineers (ASME): (Copyrighted Society)
- A13.1-2007.....Scheme for Identification of Piping Systems
- B16.3-2006.....Malleable Iron Threaded Fittings Classes 150 and 300
- B16.9-2007.....Gray Iron Threaded Fittings Classes 125 and 250
- B16.9-2007.....Factory-Made Wrought Butt Welding Fittings
ANSI/ASME
- B16.11-2009.....Forged Fittings, Socket-Welding and Threaded
ANSI/ASME
- B16.12-2009Cast Iron Threaded Drainage Fittings ANSI/ASME
- B16.15-2006Cast Bronze Threaded Fittings Classes 125 and 250 ANSI/ASME
- B16.18-01 (R2005).....Cast Copper Alloy Solder-Joint Pressure
Fittings ANSI/ASME
- B16.22-01 (R2005).....Wrought Copper and Copper Alloy Solder Joint
Pressure Fittings ANSI/ASME Element ANSI/ASME

NSF/ANSI 61.....Drinking Water System Components - Health
Effects

C. American Society for Testing and Materials (ASTM):

A47/A47M-99(2009).....Ferritic Malleable Iron Castings Revision 1989

A53/A53M-07.....Pipe, Steel, Black And Hot-Dipped, Zinc-coated
Welded and Seamless

A183-03(2009).....Carbon Steel Track Bolts and Nuts

A269-10.....Standard Specification for Seamless and Welded
Austenitic Stainless Steel Tubing for General
Service

A312/A312M-09.....Seamless, Welded, and Heavily Cold Worked
Austenitic Stainless Steel Pipes

A403/A403M-10a.....Standard Specification for Wrought Austenitic
Stainless Steel Piping Fittings

A536-84(2009).....Ductile Iron Castings

A733-03(2009).....Welded and Seamless Carbon Steel and Austenitic
Stainless Steel Pipe Nipples

B32-08.....Solder Metal

B61-08.....Steam or Bronze Castings

B62-09.....Composition Bronze or Ounce Metal Castings

B75-02.....Seamless Copper Tube

B88-09.....Seamless Copper Water Tube

B300-10.....AWWA Standard for Hypochlorites

B301-10.....AWWA Standard for Liquid Chlorine

B584-09a.....Copper Alloy Sand Castings for General
Applications Revision A

B687-99(2005) e1.....Brass, Copper, and Chromium-Plated Pipe Nipples

D1785-06.....Standard Specification for Poly (Vinyl
Chloride) (PVC) Plastic Pipe, Schedules 40, 80,
and 120

D2000-08.....Rubber Products in Automotive Applications

D4101-09.....Propylene Plastic Injection and Extrusion
Materials

D2447-03.....Polyethylene (PE) Plastic Pipe, Schedule 40 and
80, Based on Outside Diameter

D2564-04(2009) e1.....Solvent Cements for Poly (Vinyl Chloride) (PVC)
Plastic Pipe and Fittings

- D4101-09.....Propylene Plastic Injection and Extrusion
Materials
- E1120-08.....Standard Specification For Liquid Chlorine
- E1229-08.....Standard Specification For Calcium Hypochlorite
- D. American Water Works Association (AWWA):
- C110-08.....Ductile Iron and Gray Iron Fittings - 75 mm
thru 1200 mm (3 inch thru 48 inches) for Water
and other liquids AWWA/ANSI
- C151/A21.51-09.....Ductile-Iron Pipe, Centrifugally Cast in Metal
Molds or Sand-Lined Molds, for Water or Other
Liquids AWWA/ ANSI
- C153/A21.53-06.....AWWA Standard for Ductile-Iron Compact Fittings
for Water Service AWWA/ANSI
- C203-08.....Coal-Tar Protective Coatings and Linings for
Steel Water Pipelines - Enamel and Tape - Hot
Applied AWWA/ANSI
- C213-07.....Fusion Bonded Epoxy Coating For The Interior &
Exterior Of Steel Water Pipelines
- C651-05.....Disinfecting Water Mains
- E. American Welding Society (AWS):
- A5.8/A5.8M:2004.....Filler Metals for Brazing
- F. International Plumbing Code
- International Plumbing Code - 2009
- G. American Society of Sanitary Engineers (ASSE):
- ANSI/ASSE (Plumbing)
- 1001-2008.....Pipe Applied Atmospheric Type Vacuum Breakers
- ANSI/ASSE 1010-2004.....Water Hammer Arresters
- ANSI/ASSE 1018-2001.....Performance for trap seal primer valves -
potable water supplied.
- ANSI/ASSE (Plumbing)
- 1020-2004.....Pressure Vacuum Breaker Assembly
- H. Plumbing and Drainage Institute (PDI):
- PDI WH-201 2007.....Water Hammer Arrestor

1.5 QUALITY ASSURANCE

- A. Submit prior to welding of steel piping a certificate of Welder's certification. The certificate shall be current and more than one year old.

- B. For mechanical pressed sealed fittings, only tools of fitting manufacture shall be used.
- C. Mechanical pressed fittings shall be installed by factory trained workers.
- D. All grooved joint couplings, fittings, valves, and specialties shall be the products of a single manufacturer. Grooving tools shall be by the same manufacturer as the groove components.
- E. All castings used for coupling housings, fittings, valve bodies, etc., shall be date stamped for quality assurance and traceability.

1.6 SPARE PARTS

- A. For mechanical pressed sealed fittings provide tools required for each pipe size used at the facility.

PART 2 - PRODUCTS

2.1 ABOVE GROUND (INTERIOR) WATER PIPING

- A. Pipe: Copper tube, ASTM B88, Type K or L, drawn. For pipe 150 mm (6 inches) and larger, stainless, steel ASTM A312, schedule 10 may be used.
- B. Fittings for Copper Tube:
 - 1. Wrought copper or bronze castings conforming to ANSI B16.18 and B16.22. Unions shall be bronze, MSS SP72 & SP 110, Solder or braze joints. Use 95/5 tin and antimony for all soldered joints.
 - 2. Grooved fittings, 50 to 150 mm (2 to 6 inch) wrought copper ASTM B75 C12200, 125 to 150 mm (5 to 6 inch) bronze casting ASTM B584, CDA 844. Mechanical grooved couplings, ductile iron, ASTM A536 (Grade 65-45-12), or malleable iron, ASTM A47 (Grade 32510) housing, with EPDM gasket, steel track head bolts, ASTM A183, coated with copper colored alkyd enamel.
 - 3. Mechanical press sealed fittings, 65 mm (2-1/2") in size and smaller. Fittings shall be double pressed type NSF/ANSI 61 approved and utilize EPDM (Ethylene Propylene Diene Monomer) non toxic synthetic rubber sealing elements.
 - 4. Mechanically formed tee connection: Form mechanically extracted collars in a continuous operation by drilling pilot hole and drawing out tube surface to form collar, having a height of not less than three times the thickness of tube wall. Adjustable collaring device shall insure proper tolerance and complete uniformity of the joint. Notch and dimple joining branch tube in a single process to provide

free flow where the branch tube penetrates the fitting. Braze joints.

C. Fittings for Stainless Steel:

1. Stainless steel butt-welded fittings, Type 316, Schedule 10, conforming to ANSI B16.9.
2. Grooved fittings, stainless steel, Type 316, Schedule 10, conforming to ASTM A403. Segmentally fabricated fittings are not allowed. Mechanical grooved couplings, ductile iron, ASTM A536 (Grade 65-45-12), or Malleable iron, ASTM A47 (Grade 32510) housing, with EPDM gasket, steel track head bolts, ASTM A183, coated with copper colored alkyd enamel.

D. Adapters: Provide adapters for joining screwed pipe to copper tubing.

E. Solder: ASTM B32 Composition Sb5 HA or HB. Provide non-corrosive flux.

F. Brazing alloy: AWS A5.8, Classification BCuP.

G. Reagent Grade Water Piping and Dialysis Water Piping:

1. Polypropylene, ASTM D4101, Schedule 80 pressure pipe with dimensions in conformance with ASTM D2447, but without additions of modifiers, plasticizers, colorants, stabilizers or lubricants. This virgin unplasticized pipe and fittings shall transport 10 megohm water with no loss of purity. Provide socket fusion joints.
2. Polyethylene, food and medical grade, capable of transporting 10 megohm water with no loss of purity. Processed by continuous compression molding without the addition of fillers, polymer modifiers or processing aids. Uniform color with no cracks, flaws, blisters or other imperfections in appearance. Provide heat fusion butt welded joints. In accordance with manufacturer's recommendations, provide continuous channel support under all horizontal piping.
3. Reverse Osmosis (RO) Water Piping:
 - a. Low Pressure Feed, Reject and Recycle Piping (75 psi and under): ASTM D 1785, Schedule 80 PVC, socket welded and flanged.
 - b. RO Product Tubing From Each Membrane Housing: ASTM D1785, Schedule 80 PVC, socket welded and flanged.
 - c. Low Pressure Control and Pressure Gage Tubing: Polyethylene.
 - d. High Pressure Reject and Recycle Piping (above 75 psi): ASTM A269, Type 304 schedule 10 stainless steel with butt welded joints.

- e. High Pressure Control and Pressure Gage Tubing: 1000 psi burst nylon.

2.2 EXPOSED WATER PIPING

- A. Finished Room: Use full iron pipe size chrome plated brass piping for exposed water piping connecting fixtures, casework, cabinets, equipment and reagent racks when not concealed by apron including those furnished by the Government or specified in other sections.

- 1. Pipe: Fed. Spec. WW-P-351, standard weight.
- 2. Fittings: ANSI B16.15 cast bronze threaded fittings with chrome finish, (125 and 250).
- 3. Nipples: ASTM B 687, Chromium-plated.
- 4. Unions: Mss SP-72, SP-110, Brass or Bronze with chrome finish. Unions 65 mm (2-1/2 inches) and larger shall be flange type with approved gaskets.

- B. Unfinished Rooms, Mechanical Rooms and Kitchens: Chrome-plated brass piping is not required. Paint piping systems as specified in Section 09 91 00, PAINTING.

2.3 ETO (ETHYLENE OXIDE) STERILIZER WATER SUPPLY PIPING

- A. Stainless steel, ASTM A312, Schedule 10 with stainless steel butt welded fittings. Provide on sterilizer water supply.

2.4 TRAP PRIMER WATER PIPING:

- A. Pipe: Copper tube, ASTM B88, type K, hard drawn.
- B. Fittings: Bronze castings conforming to ANSI B16.18 Solder joints.
- C. Solder: ASTM B32 composition Sb5. Provide non-corrosive flux.

2.5 STRAINERS

- A. Provide on high pressure side of pressure reducing valves, on suction side of pumps, on inlet side of indicating and control instruments and equipment subject to sediment damage and where shown on drawings. Strainer element shall be removable without disconnection of piping.
- B. Water: Basket or "Y" type with easily removable cover and brass strainer basket.
- C. Body: Smaller than 80 mm (3 inches), brass or bronze; 80 mm (3 inches) and larger, cast iron or semi-steel.

2.6 DIELECTRIC FITTINGS

- A. Provide dielectric couplings or unions between ferrous and non-ferrous pipe.

2.7 STERILIZATION CHEMICALS

- A. Hypochlorites ANSI/AWWA B300-10

B. Liquid Chlorine ANSI/AWWA B301-10

2.8 WATER HAMMER ARRESTER:

A. Closed copper tube chamber with permanently sealed 410 kPa (60 psig) air charge above a Double O-ring piston. Two high heat Buna-N O-rings pressure packed and lubricated with FDA approved silicone compound. All units shall be designed in accordance with ASSE 1010 for sealed wall installations without an access panel. Size and install in accordance with Plumbing and Drainage Institute requirements (PDI WH 201). Provide water hammer arrestors at:

1. All solenoid valves.
2. All groups of two or more flush valves.
3. All quick opening or closing valves.
4. All medical washing equipment.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General: Comply with the International Plumbing Code and the following:

1. Install branch piping for water from the piping system and connect to all fixtures, valves, cocks, outlets, casework, cabinets and equipment, including those furnished by the Government or specified in other sections.
2. Pipe shall be round and straight. Cutting shall be done with proper tools. Pipe, except for plastic and glass, shall be reamed to full size after cutting.
3. All pipe runs shall be laid out to avoid interference with other work.
4. Install union and shut-off valve on pressure piping at connections to equipment.
5. Pipe Hangers, Supports and Accessories:
 - a. All piping shall be supported per the International Plumbing Code, Chapter No. 3.
 - b. Shop Painting and Plating: Hangers, supports, rods, inserts and accessories used for pipe supports shall be shop coated with red lead or zinc chromate primer paint. Electroplated copper hanger rods, hangers and accessories may be used with copper tubing.
 - c. Floor, Wall and Ceiling Plates, Supports, Hangers:
 - 1) Solid or split unplated cast iron.
 - 2) All plates shall be provided with set screws.
 - 3) Pipe Hangers: Height adjustable clevis type.

- 4) Adjustable Floor Rests and Base Flanges: Steel.
 - 5) Concrete Inserts: "Universal" or continuous slotted type.
 - 6) Hanger Rods: Mild, low carbon steel, fully threaded or Threaded at each end with two removable nuts at each end for positioning rod and hanger and locking each in place.
 - 7) Riser Clamps: Malleable iron or steel.
 - 8) Rollers: Cast iron.
 - 9) Self-drilling type expansion shields shall be "Phillips" type, with case hardened steel expander plugs.
 - 10) Hangers and supports utilized with insulated pipe and tubing shall have 180 degree (min.) metal protection shield Centered on and welded to the hanger and support. The shield shall be 4 inches in length and be 16 gauge steel. The shield shall be sized for the insulation.
 - 11) Miscellaneous Materials: As specified, required, directed or as noted on the drawings for proper installation of hangers, supports and accessories. If the vertical distance exceeds 6 m (20 feet) for cast iron pipe additional support shall be provided in the center of that span. Provide all necessary auxiliary steel to provide that support.
 - 12) With the installation of each flexible expansion joint, provide piping restraints for the upstream and downstream section of the piping at the flexible expansion joint. Provide calculations supporting the restraint length design and type of selected restraints.
6. Install chrome plated cast brass escutcheon with set screw at each wall, floor and ceiling penetration in exposed finished locations and within cabinets and millwork.
7. Penetrations:
- a. Fire Stopping: Where pipes pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING. Completely fill and seal clearances between raceways and openings with the fire stopping materials.
 - b. Waterproofing: At floor penetrations, completely seal clearances around the pipe and make watertight with sealant as specified in Section 07 92 00, JOINT SEALANTS.

B. Piping shall conform to the following:

1. Domestic Water:

- a. Grade all lines to facilitate drainage. Provide drain valves at bottom of risers and all low points in system. Design domestic hot water circulating lines with no traps.
- b. Connect branch lines at bottom of main serving fixtures below and pitch down so that main may be drained through fixture. Connect branch lines to top of main serving only fixtures located on floor above.

3.2 TESTS

- A. General: Test system either in its entirety or in sections.
- B. Potable Water System: Test after installation of piping and domestic water heaters, but before piping is concealed, before covering is applied, and before plumbing fixtures are connected. Fill systems with water and maintain hydrostatic pressure of 690 kPa (100 psi) gage for two hours. No decrease in pressure is allowed. Provide a pressure gage with a shutoff and bleeder valve at the highest point of the piping being tested.
- C. Reagent Grade Water Systems: Fill system with water and maintain hydrostatic pressure of 690 kPa (100 psi) gage during inspection and prove tight.
- D. All Other Piping Tests: Test new installed piping under 1 1/2 times actual operating conditions and prove tight.

3.3 STERILIZATION

- A. After tests have been successfully completed, thoroughly flush and sterilize the interior domestic water distribution system in accordance with AWWA C651.
- B. Use liquid chlorine or hypochlorites for sterilization.

- - - E N D - - -

**SECTION 22 13 00
FACILITY SANITARY AND VENT PIPING**

PART 1 - GENERAL**1.1 DESCRIPTION**

This section pertains to sanitary sewer and vent systems, including piping, equipment and all necessary accessories as designated in this section.

1.2 RELATED WORK

- A. Section 07 84 00, FIRESTOPPING: Penetrations in rated enclosures.
- B. Section 09 91 00, PAINTING: Preparation and finish painting and identification of piping systems.
- C. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING: Pipe Hangers and Supports, Materials Identification.
- D. Section 22 07 11, PLUMBING INSULATION: Pipe Insulation.
- E. Section 07 92 00 Joint Sealants: Sealant products.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Piping.
 - 2. Floor Drains and Floor sinks.
 - 3. Cleanouts.
 - 4. All items listed in Part 2 - Products.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers (ASME): (Copyrighted Society)
 - A112.6.3-01 (R 2007)....Standard for Floor and Trench Drains
 - A13.1-07.....Scheme for Identification of Piping Systems
 - B16.3-06.....Malleable Iron Threaded Fittings, Classes 150 and 300.
 - B16.4-06.....Standard for Grey Iron Threaded Fittings
Classes 125 and 250
 - B16.12-98 (R 2006).....Cast Iron Threaded Drainage Fittings
 - B16.15-06.....Cast Bronze Threaded Fittings, Classes 125 and 250

C. American Society for Testing and Materials (ASTM):

A47/A47M-99 (R 2004)....Standard Specification for Steel Sheet,
Aluminum Coated, by the Hot Dip Process

A53/A53M-07.....Standard Specification for Pipe, Steel, Black
And Hot-Dipped, Zinc-coated, Welded and
Seamless

A74-06.....Standard Specification for Cast Iron Soil Pipe
and Fittings

A183-03.....Standard Specification for Carbon Steel Track
Bolts and Nuts

A536-84(R 2004).....Standard Specification for Ductile Iron
Castings

B32-08.....Standard Specification for Solder Metal

B75-02.....Standard Specification for Seamless Copper Tube

B306-02.....*Standard Specification for Copper Drainage Tube*
(DWV)

B584-06a.....Standard Specification for Copper Alloy Sand
Castings for General Applications

C564-03a.....Standard Specification for Rubber Gaskets for
Cast Iron Soil Pipe and Fittings

D2000-08.....Standard Classification System for Rubber
Products in Automotive Applications

D2564-04E1.....Standard Specification for Solvent Cements for
Poly (Vinyl Chloride) (PVC) Plastic Pipe and
Fittings

D2665-08.....*Standard Specification for Poly (Vinyl*
Chloride) (PVC) Plastic Drain, Waste, and Vent
Pipe and Fittings

D. International Code Council:

IPC-06.....International Plumbing Code

E. Cast Iron Soil Pipe Institute (CISPI):

301-05.....Hubless Cast Iron Soil Pipe and Fittings for
Sanitary and Storm Drain, Waste, and Vent
Piping Applications

310-04.....Coupling for Use in Connection with Hubless
Cast Iron Soil Pipe and Fittings for Sanitary
and Storm Drain, Waste, and Vent Piping
Applications

F. American Society of Sanitary Engineers (ASSE):

1018-01.....Trap Seal Primer Valves - Potable, Water
Supplied

G. Plumbing and Drainage Institute (PDI):

PDI WH-201.....Water Hammer Arrestor

PART 2 - PRODUCTS**2.1 SANITARY WASTE, DRAIN, AND VENT PIPING**

A. Cast iron waste, drain, and vent pipe and fittings

1. Cast iron waste, drain, and vent pipe and fittings shall be used for the following applications:
 - a. pipe buried in or in contact with earth
 - b. sanitary pipe extensions to a distance of approximately 1500 mm (5 feet) outside of the building.
 - c. interior waste and vent piping above grade.
2. Cast iron Pipe shall be bell and spigot or hubless (plain end or no-hub or hubless).
3. The material for all pipe and fittings shall be cast iron soil pipe and fittings and shall conform to the requirements of CISPI Standard 301, ASTM A-888, or ASTM A-74.
4. Joints for hubless pipe and fittings shall conform to the manufacturer's installation instructions. Couplings for hubless joints shall conform to CISPI 310. Joints for hub and spigot pipe shall be installed with compression gaskets conforming to the requirements of ASTM Standard C-564 or be installed with lead and oakum.

B. Copper Tube, (DWV):

1. Copper DWV tube sanitary waste, drain and vent pipe may be used for piping above ground, except for urinal drains.
2. The copper DWV tube shall be drainage type, drawn temper conforming to ASTM B306.
3. The copper drainage fittings shall be cast copper or wrought copper conforming to ASME B16.23 or ASME 16.29.
4. The joints shall be lead free, using a water flushable flux, and conforming to ASTM B32.

2.2 EXPOSED WASTE PIPING

- A. Full iron pipe size chrome plated brass piping shall be used in finished rooms for exposed waste piping connecting fixtures, casework, cabinets, equipment and reagent racks when not concealed by apron

including those furnished by the Government or specified in other sections.

1. The Pipe shall meet Fed. Spec. WW-P-351, standard weight.
2. The Fittings shall conform to ANSI B16.15, cast bronze threaded fittings with chrome finish, (125 and 250).
3. Nipples shall conform to ASTM B 687, Chromium-plated.
4. Unions shall be brass or bronze with chrome finish. Unions 65 mm (2-1/2 inches) and larger shall be flange type with approved gaskets.

B. In unfinished Rooms such as mechanical Rooms and Kitchens, Chrome-plated brass piping is not required. The pipe materials specified under the paragraph "Sanitary Waste, Drain, and Vent Piping" can be used. The sanitary pipe in unfinished rooms shall be painted as specified in Section 09 91 00, PAINTING.

2.3 SPECIALTY PIPE FITTINGS

- A. Transition pipe couplings shall join piping with small differences in outside diameters or different materials. End connections shall be of the same size and compatible with the pipes being joined. The transition coupling shall be elastomeric, sleeve type reducing or transition pattern and include shear and corrosion resistant metal, tension band and tightening mechanism on each end. The transition coupling sleeve coupling shall be of the following material:
1. For cast iron soil pipes, the sleeve material shall be rubber conforming to ASTM C564.
 2. For PVC soil pipes, the sleeve material shall be elastomeric seal or PVC, conforming to ASTM F 477 or ASTM D5926.
 3. For dissimilar pipes, the sleeve material shall be PVC conforming to ASTM D5926, or other material compatible with the pipe materials being joined.
- B. The dielectric fittings shall conform to ASSE 1079 with a pressure rating of 860 kPa (125 psig) at a minimum temperature of 82°C (180°F). The end connection shall be solder joint copper alloy and threaded ferrous.
- C. Dielectric flange insulating kits shall be of non conducting materials for field assembly of companion flanges with a pressure rating of 1035 kPa (150 psig). The gasket shall be neoprene or phenolic. The bolt sleeves shall be phenolic or polyethylene. The washers shall be phenolic with steel backing washers.

- D. The di-electric nipples shall be electroplated steel nipple complying with ASTM F 1545 with a pressure ratings of 2070 kPa (300 psig) at 107°C (225°F). The end connection shall be male threaded. The lining shall be inert and noncorrosive propylene.

2.4 CLEANOUTS

- A. Cleanouts shall be the same size as the pipe, up to 100 mm (4 inches); and not less than 100 mm (4 inches) for larger pipe. Cleanouts shall be easily accessible and shall be gastight and watertight. Minimum clearance of 600 mm (24 inches) shall be provided for clearing a clogged sanitary line.
- B. Floor cleanouts shall be gray iron housing with clamping device and round, secured, scoriated, gray iron cover conforming to ASME A112.36.2M. A gray iron ferrule with hubless, socket, inside calk or spigot connection and counter sunk, taper-thread, brass or bronze closure plug shall be included. The frame and cover material and finish shall be nickel-bronze copper alloy with a square shape. The cleanout shall be vertically adjustable for a minimum of 50 mm (2 inches). When a waterproof membrane is used in the floor system, clamping collars shall be provided on the cleanouts. Cleanouts shall consist of wye fittings and eighth bends with brass or bronze screw plugs. Cleanouts in the resilient tile floors, quarry tile and ceramic tile floors shall be provided with square top covers recessed for tile insertion. In the carpeted areas, carpet cleanout markers shall be provided. Two way cleanouts shall be provided where indicated on drawings and at every building exit. The loading classification for cleanouts in sidewalk areas or subject to vehicular traffic shall be heavy duty type.
- C. Cleanouts shall be provided at or near the base of the vertical stacks with the cleanout plug located approximately 600 mm (24 inches) above the floor. If there are no fixtures installed on the lowest floor, the cleanout shall be installed at the base of the stack. The cleanouts shall be extended to the wall access cover. Cleanout shall consist of sanitary tees. Nickel-bronze square frame and stainless steel cover with minimum opening of 150 by 150 mm (6 by 6 inches) shall be furnished at each wall cleanout. Where the piping is concealed, a fixture trap or a fixture with integral trap, readily removable without disturbing concealed pipe, shall be accepted as a cleanout equivalent

providing the opening to be used as a cleanout opening is the size required.

- D. In horizontal runs above grade, cleanouts shall consist of cast brass tapered screw plug in fitting or caulked/hubless cast iron ferrule. Plain end (hubless) piping in interstitial space or above ceiling may use plain end (hubless) blind plug and clamp.

2.5 FLOOR DRAINS

- A. P-901 floor drain shall comply with ANSI A112.6.3. The floor drain shall be constructed of CF8 (equivalent to Type 304). Rough finish Stainless Steel body and 7" round adjustable strainer head with satin finished top, flashing clamp with seepage holes. For drains not installed in connection with a waterproof membrane, a 2.2 kg (16-ounce) soft copper membrane, 600 mm (24 inches) square or another approved waterproof membrane shall be provided.
- B. P-903 floor sink shall comply with ANSI A112.6.3. The floor sink shall be constructed from 14-gauge type 304 stainless steel and shall be 300 mm (12 inches) square, and 200 mm (8 inches deep). The interior surface shall be polished. The double drainage flange shall be provided with weep holes, internal stainless steel dome strainer, and heavy duty non-tilting loose set stainless steel grate. A clamping device shall be provided.

2.6 TRAPS

- A. Traps shall be provided on all sanitary branch waste connections from fixtures or equipment not provided with traps. Exposed brass shall be polished brass chromium plated with nipple and set screw escutcheons. Concealed traps may be rough cast brass or same material as pipe connected to. Slip joints are not permitted on sewer side of trap. Traps shall correspond to fittings on cast iron soil pipe or steel pipe respectively, and size shall be as required by connected service or fixture.

2.7 TRAP SEAL PRIMER VALVES AND TRAP SEAL PRIMER SYSTEMS

- A. Trap Primer (TP-1): The trap seal primer valve shall be hydraulic, supply type with a pressure rating of 5.98 kPa (125 psig) and conforming to standard ASSE 1018.
 - 1. The inlet and outlet connections shall be 15 mm or DN15 (NPS ½ inch)
 - 2. The trap seal primer valve shall be fully automatic with an all brass or bronze body.

3. The trap seal primer valve shall be activated by a drop in building water pressure, no adjustment required.
4. The trap seal primer valve shall include a manifold when serving two, three, or four traps.
5. The manifold shall be omitted when serving only one trap.

2.8 WATERPROOFING

- A. A sleeve flashing device shall be provided at points where pipes pass through membrane waterproofed floors or walls. The sleeve flashing device shall be manufactured, cast iron fitting with clamping device that forms a sleeve for the pipe floor penetration of the floor membrane. A galvanized steel pipe extension shall be included in the top of the fitting that will extend 50 mm (2 inches) above finished floor and galvanized steel pipe extension in the bottom of the fitting that will extend through the floor slab. A waterproof caulked joint shall be provided at the top hub.
- B. Walls: See detail shown on drawings.

PART 3 - EXECUTION

3.1 PIPE INSTALLATION

- A. The pipe installation shall comply with the requirements of the International Plumbing Code (IPC) and these specifications.
- B. Branch piping shall be installed for waste from the respective piping systems and connect to all fixtures, valves, cocks, outlets, casework, cabinets and equipment, including those furnished by the Government or specified in other sections.
- C. Pipe shall be round and straight. Cutting shall be done with proper tools. Pipe shall be reamed to full size after cutting.
- D. All pipe runs shall be laid out to avoid interference with other work.
- E. The piping shall be installed above accessible ceilings where possible.
- F. The piping shall be installed to permit valve servicing or operation.
- G. Unless specifically indicated on the drawings, the minimum slope shall be 2% slope.
- H. The piping shall be installed free of sags and bends.
- I. Seismic restraint shall be installed where required by code.
- J. Changes in direction for soil and waste drainage and vent piping shall be made using appropriate branches, bends and long sweep bends. Sanitary tees and short sweep quarter bends may be used on vertical stacks if change in direction of flow is from horizontal to vertical. Long turn double wye branch and eighth bend fittings shall be used if

two fixtures are installed back to back or side by side with common drain pipe. Straight tees, elbows, and crosses may be used on vent lines. Do not change direction of flow more than 90 degrees. Proper size of standard increaser and reducers shall be used if pipes of different sizes are connected. Reducing size of drainage piping in direction of flow is prohibited.

- K. Buried soil and waste drainage and vent piping shall be laid beginning at the low point of each system. Piping shall be installed true to grades and alignment indicated with unbroken continuity of invert. Hub ends shall be placed upstream. Required gaskets shall be installed according to manufacturer's written instruction for use of lubricants, cements, and other installation requirements.
- L. Cast iron piping shall be installed according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook," Chapter IV, "Installation of Cast Iron Soil Pipe and Fittings"
- M. Aboveground copper tubing shall be installed according to CDA's "Copper Tube Handbook".

3.2 JOINT CONSTRUCTION

- A. Hub and spigot, cast iron piping with gasket joints shall be joined in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for compression joints.
- B. Hub and spigot, cast iron piping with calked joints shall be joined in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for lead and oakum calked joints.
- C. Hubless or No-hub, cast iron piping shall be joined in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless piping coupling joints.
- D. For threaded joints, thread pipe with tapered pipe threads according to ASME B1.20.1. The threads shall be cut full and clean using sharp disc cutters. Threaded pipe ends shall be reamed to remove burrs and restored to full pipe inside diameter. Pipe fittings and valves shall be joined as follows:
 - 1. Apply appropriate tape or thread compound to external pipe threads unless dry seal threading is required by the pipe service
 - 2. Pipe sections with damaged threads shall be replaced with new sections of pipe.

- E. Copper tube and fittings with soldered joints shall be joined according to ASTM B828. A water flushable, lead free flux conforming to ASTM B813 and a lead free alloy solder conforming to ASTM B32 shall be used.

3.3 SPECIALTY PIPE FITTINGS

- A. Transition coupling shall be installed at pipe joints with small differences in pipe outside diameters.
- B. Dielectric fittings shall be installed at connections of dissimilar metal piping and tubing.

3.4 PIPE HANGERS, SUPPORTS AND ACCESSORIES:

- A. All piping shall be supported according to the International Plumbing Code (IPC), Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, and these specifications. Where conflicts arise between these the code and Section 22 05 11, the most restrictive or the requirement that specifies supports with highest loading or shortest spacing shall apply.
- B. Hangers, supports, rods, inserts and accessories used for pipe supports shall be shop coated with zinc chromate primer paint. Electroplated copper hanger rods, hangers and accessories may be used with copper tubing.
- C. Horizontal piping and tubing shall be supported within 300 mm (12 inches) of each fitting or coupling.
- D. Horizontal cast iron piping shall be supported with the following maximum horizontal spacing and minimum hanger rod diameters:
1. 40 mm or DN40 to 50 mm or DN50 (NPS 1-1/2 inch to NPS 2 inch): 1500 mm (60 inches) with 10 mm (3/8 inch) rod.
 2. 80 mm or DN 80 (NPS 3 inch): 1500 mm (60 inches) with 13 mm (½ inch) rod.
 3. 100 mm or DN100 to 125 mm or DN125 (NPS 4 to NPS 5): 1500 mm (60 inches) with 16 mm (5/8 inch) rod.
 4. 150 mm or DN150 to 200 mm or DN200 (NPS 6 inch to NPS 8 inch): 1500 mm (60 inches) with 19 mm (¾ inch) rod.
 5. 250 mm or DN250 to 300 mm or DN 300 (NPS 10 inch to NPS 12 inch): 1500 mm (60 inch) with 22 mm (7/8 inch) rod.
- E. The maximum spacing for plastic pipe shall be 1.22 m (4 feet).
- F. Vertical piping and tubing shall be supported at the base, at each floor, and at intervals no greater than 4.57 m (15 feet).

- G. In addition to the requirements in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, floor, Wall and Ceiling Plates, Supports, Hangers shall have the following characteristics:
1. Solid or split unplated cast iron.
 2. All plates shall be provided with set screws.
 3. Height adjustable clevis type pipe hangers.
 4. Adjustable floor rests and base flanges shall be steel.
 5. Hanger rods shall be low carbon steel, fully threaded or threaded at each end with two removable nuts at each end for positioning rod and hanger and locking each in place.
 7. Riser clamps shall be malleable iron or steel.
 8. Rollers shall be cast iron.
 9. See Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, for requirements on insulated pipe protective shields at hanger supports.
- H. Miscellaneous materials shall be provided as specified, required, directed or as noted on the drawings for proper installation of hangers, supports and accessories. If the vertical distance exceeds 6 m (20 feet) for cast iron pipe additional support shall be provided in the center of that span. All necessary auxiliary steel shall be provided to provide that support.
- I. Cast escutcheon with set screw shall be provided at each wall, floor and ceiling penetration in exposed finished locations and within cabinets and millwork.
- J. Penetrations:
1. Fire Stopping: Where pipes pass through fire partitions, fire walls, smoke partitions, or floors, a fire stop shall be installed that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING. Clearances between raceways and openings shall be completely filled and sealed with the fire stopping materials.
 2. Water proofing: At floor penetrations, clearances shall be completely sealed around the pipe and make watertight with sealant as specified in Section 07 92 00, JOINT SEALANTS.
- K. Piping shall conform to the following:
1. Waste and Vent Drain to main stacks:

Pipe Size	Minimum Pitch
-----------	---------------

80 mm or DN 80 (3 inches) and smaller	2%
100 mm or DN 100 (4 inches) and larger	1%

2. Exhaust vents shall be extended separately through roof. Sanitary vents shall not connect to exhaust vents.

3.5 TESTS

- A. Sanitary waste and drain systems shall be tested either in its entirety or in sections.
- B. Waste System tests shall be conducted before trenches are backfilled or fixtures are connected. A water test or air test shall be conducted, as directed.
 1. If entire system is tested for a water test, tightly close all openings in pipes except highest opening, and fill system with water to point of overflow. If the waste system is tested in sections, tightly plug each opening except highest opening of section under test, fill each section with water and test with at least a 3 m (10 foot) head of water. In testing successive sections, test at least upper 3 m (10 feet) of next preceding section so that each joint or pipe except upper most 3 m (10 feet) of system has been submitted to a test of at least a 3 m (10 foot) head of water. Water shall be kept in the system, or in portion under test, for at least 15 minutes before inspection starts. System shall then be tight at all joints.
 2. For an air test, an air pressure of 35 kPa (5 psig) gage shall be maintained for at least 15 minutes without leakage. A force pump and mercury column gage shall be used for the air test.
 3. After installing all fixtures and equipment, open water supply so that all p-traps can be observed. For 15 minutes of operation, all p-traps shall be inspected for leaks and any leaks found shall be corrected.
3. Final Tests: Either one of the following tests may be used.
 - a. Smoke Test: After fixtures are permanently connected and traps are filled with water, fill entire drainage and vent systems with smoke under pressure of 1.3 kPa (1 inch of water) with a smoke machine. Chemical smoke is prohibited.

- b. Peppermint Test: Introduce (2 ounces) of peppermint into each line or stack.

- - - E N D - - -

**SECTION 22 14 00
FACILITY STORM DRAINAGE**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section describes the requirements for storm drainage systems, including piping and all necessary accessories as designated in this section.

1.2 RELATED WORK

- A. Section 07 84 00, FIRESTOPPING: Penetrations in rated enclosures.
- B. Section 09 91 00, PAINTING: Preparation and finish painting and identification of piping systems.
- C. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING: Pipe Hangers and Supports, Materials Identification.
- D. Section 22 07 11, PLUMBING INSULATION: Pipe Insulation.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
1. Piping.
 2. Roof Drains.
 3. Cleanouts.
 4. All items listed in Part 2 - Products.
- C. Detailed shop drawing of clamping device and extensions when required in connection with the waterproofing membrane.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American National Standards Institute (ANSI).
- C. American Society of Mechanical Engineers (ASME): (Copyrighted Society)
- A112.21.2m-83.....Roof Drains
- A13.1-07.....Scheme for Identification of Piping Systems
- B16.3-06.....Malleable Iron Threaded Fittings, Classes 150 and 300. B16.9-07 Factory-Made Wrought Steel Butt welding Fittings
- B16.11-05.....Forged Steel Fittings, Socket-Welding and Threaded B16.12-98 (R 2006) Cast Iron Threaded Drainage Fittings

- B16.15-06).....Cast Bronze Threaded Fittings, Class 125 and
250
- B16.18-01 (R 2005).....Cast Copper Alloy Solder-Joint Pressure
Fittings
- B16.22-01 (R 2005).....Wrought Copper and Copper Alloy Solder Joint
Pressure Fittings
- D. American Society for Testing and Materials (ASTM):
- A47-99 (R 2004).....Standard Specification for Steel Sheet,
Aluminum Coated, by the Hot-Dip Process
- A53-07.....Standard Specification for Pipe, Steel, Black
And Hot-Dipped, Zinc-coated Welded and Seamless
- A74-06.....Standard Specification for Cast Iron Soil Pipe
and Fittings
- A183-03).....Standard Specification for Carbon Steel Track
Bolts and Nuts
- A312-03.....Standard Specification for Seamless and Welded
Austenitic Stainless Steel Pipe
- A536-84(R 2004).....Standard Specification for Ductile Iron
Castings
- A733-03.....Standard Specification for Welded and Seamless
Carbon Steel and Austenitic Stainless Steel
Pipe Nipples
- B32-04.....Standard Specification for Solder Metal
- B61-08.....Standard Specification for Steam or Bronze
Castings
- B62-02.....Standard Specification for Composition Bronze
or Ounce Metal Castings
- B75-02.....Standard Specification for Seamless Copper Tube
- B88-03.....Standard Specification for Seamless Copper
Water Tube
- B306-02.....Standard Specification for Copper Drainage Tube
(DWV)
- B584-08.....Standard Specification for Copper Alloy Sand
Castings for General Applications
- B687-99.....Standard Specification for Brass, Copper, and
Chromium-Plated Pipe Nipples
- C564-06a.....Standard Specification for Rubber Gaskets for
Cast Iron Soil Pipe and Fittings

- D2000-08.....Standard Classification System for Rubber
Products in Automotive Applications
- D4101-07.....Standard Specification for Propylene Plastic
Injection and Extrusion Materials
- D2447-03.....Standard Specification for Polyethylene (PE)
Plastic Pipe, Schedule 40 and 80, Based on
Outside Diameter
- D2564-04e1.....Standard Specification for Solvent Cements for
Poly (Vinyl Chloride) (PVC) Plastic Pipe and
Fittings
- D2665-07.....Standard Specification for Poly (Vinyl
Chloride) (PVC) Plastic Drain, Waste, and Vent
Pipe and Fittings
- E. American Welding Society (AWS):
- A5.8-04.....Specification for Filler Metals for Brazing and
Braze Welding
- F. International Code Council (ICC):
- IPC-06.....International Plumbing Code
- G. Cast Iron Soil Pipe Institute (CISPI):
- 301-05.....Hubless Cast Iron Soil and Fittings for
Sanitary and Storm Drain, Waste, and Vent
Piping Applications
- 310-04.....Couplings for Use in Connection with Hubless
Cast Iron Soil and Fittings for Sanitary and
Storm Drain, Waste, and Vent Piping
Applications
- H. Manufacturers Standardization Society of the Valve and Fittings
Industry, Inc. (MSS):
- SP-72-99.....Standard for Ball Valves with Flanged or Butt
Welding For General Purpose
- SP-110-96.....Ball Valve Threaded, Socket Welding, Solder
Joint, Grooved and Flared Ends

PART 2 - PRODUCTS

2.1 STORM WATER DRAIN PIPING

- A. Cast Iron Storm Pipe and Fittings:
1. Cast iron storm pipe and fittings shall be used for the following applications:
 - a. Pipe buried in or in contact with earth.

- b. Extension of pipe to a distance of approximately 1500 mm (5 feet) outside of building walls.
 - c. Interior storm piping above grade.
 - d. All mechanical equipment rooms or other areas containing mechanical air handling equipment.
- 2. The cast iron storm Pipe shall be bell and spigot, or hubless (plain end or no-hub) as required by selected jointing method.
 - 3. The material for all pipe and fittings shall be cast iron soil pipe and fittings and shall conform to the requirements of CISPI Standard 301, ASTM A-888, or ASTM A-74.
 - 4. Joints for hubless pipe and fittings shall conform to the manufacturer's installation instructions. Couplings for hubless joints shall conform to CISPI 310. Joints for hub and spigot pipe shall be installed with compression gaskets conforming to the requirements of ASTM Standard C-564 or be installed with leak and oakum.
- B. Copper Tube, (DWV): May be used for piping above ground.
- 1. The copper DWV tube shall be drainage type, drawn temper conforming to ASTM B306.
 - 2. The Copper drainage fittings shall be cast copper or wrought copper conforming to ASME B16.23 or ASME 16.29.
 - 3. The joints shall be lead free, using a water flushable flux, and conforming to ASTM B32.
- C. Roof drain piping in locations where the outdoor conditions are subject to freezing shall be insulated.

2.2 SPECIALTY PIPE FITTINGS

- A. Transition pipe couplings shall join piping with small differences in outside diameters or be of different materials. End connections shall be of the same size and compatible with the pipes being joined. The transition coupling shall be elastomeric, sleeve type reducing or transition pattern and include shear erring and corrosion resistant metal tension band and tightening mechanism on each end. The transition coupling sleeve coupling shall be of the following material:
- 1. For cast iron soil pipes, the sleeve material shall be rubber conforming to ASTM C564.
 - 2. For PVC soil pipes, the sleeve material shall be elastomeric seal or PVC, conforming to ASTM F 477 or ASTM D5926.

3. For dissimilar pipes, the sleeve material shall be PVC conforming to ASTM D5926, or other material compatible with the pipe materials being joined.
- B. The dielectric fittings shall conform to ASSE 1079 with a pressure rating of 860 kPa (125 psig) at a minimum temperature of 82°C (180°F). The end connection shall be solder joint copper alloy and threaded ferrous.
- C. Dielectric flange insulating kits shall be of non conducting materials for field assembly of companion flanges with a pressure rating of 1035 kPa (150 psig). The gasket shall be neoprene or phenolic. The bolt sleeves shall be phenolic or polyethylene. The washers shall be phenolic with steel backing washers.
- D. The dielectric nipples shall be electroplated steel nipple comply with ASTM F 1545 with a pressure ratings of 2070 kPa (300 psig) at 107°C (225°F). The end connection shall be male threaded. The lining shall be inert and noncorrosive propylene.

2.3 CLEANOUTS

- A. Cleanouts shall be the same size as the pipe, up to 100 mm (4 inches); not less than 100 mm (4 inches) for larger pipe. Cleanouts shall be easily accessible and shall be gastight and watertight. A minimum clearance of 600 mm (24 inches) shall be provided for clearing a clogged storm sewer line.
- B. Floor cleanouts shall be gray iron housing with clamping device and round, secured, scoriated, gray iron cover conforming to ASME A112.36.2M. A gray iron ferrule with hubless, socket, inside calk or spigot connection and counter sunk, taper-thread, brass or bronze closure plug shall be included. The frame and cover material and finish shall be nickel-bronze copper alloy with a square shape. The cleanout shall be vertically adjustable for a minimum of 50 mm (2 inches). When a waterproof membrane is used in the floor system, clamping collars shall be provided on the cleanouts. Cleanouts shall consist of wye fittings and eighth bends with brass or bronze screw plugs. Cleanouts in the resilient tile floors, quarry tile and ceramic tile floors shall be provided with square top covers recessed for tile insertion. In the carpeted areas, carpet cleanout markers shall be provided. Two way cleanouts where shall be provided where indicated on the drawings and at each building exit. The loading classification for

cleanouts in sidewalk areas or subject to vehicular traffic shall be heavy duty.

- C. Cleanouts shall be provided at or near the base of the vertical stacks with the cleanout plug located approximately 600 mm (24 inches) above the floor. The cleanouts shall be extended to the wall access cover. Cleanout shall consist of sanitary tees. Nickel bronze square frame and stainless steel cover with minimum opening of 150 mm by 150 mm (6 inch by 6 inch) shall be provided at each wall cleanout.
- D. In horizontal runs above grade, cleanouts shall consist of cast brass tapered screw plug in fitting or caulked/no hub cast iron ferrule. Plain end (no-hub) piping in interstitial space or above ceiling may use plain end (no-hub) blind plug and clamp.

2.4 ROOF DRAINS AND CONNECTIONS

- A. Roof Drains: Roof Drains (RD) shall be cast iron with clamping device for making watertight connection. Free openings through strainer shall be twice area of drain outlet. For roof drains not installed in connection with a waterproof membrane, a soft copper membrane shall be provided 300 mm (12 inches) in diameter greater than outside diameter of drain collar. An integral gravel stop shall be provided for drains installed on roofs having built up roofing covered with gravel or slag. Integral no-hub, soil pipe gasket or threaded outlet connection shall be provided.
 - 1. Flat Roofs: The roof drain shall have a beehive or dome shaped strainer with integral flange not less than 300 mm (12 inches) in diameter. For an insulated roof, a roof drain with an adjustable drainage collar shall be provided, which can be raised or lowered to meet required insulation heights, sump receiver and deck clamp. The Bottom section shall serve as roof drain during construction before insulation is installed.
 - 2. Canopy Roofs: The roof drain shall have a beehive or dome shaped strainer with the integral flange not larger than 200 mm (8 inches) in diameter. For an insulated roof, the roof drain shall be provided with an adjustable drainage collar, which can be raised or lowered to meet the required insulation heights, sump receiver and deck clamp. Bottom section shall serve as roof drain during construction before insulation is installed.

3. Promenade Decks: the roof drain shall be the same as for canopy roofs, except decks shall have flat, round, loose, non-slip, bronze grate set in square, non-slip, bronze frame.
4. Portico Roofs and Gutters: Roof drains shall be horizontal angle type drain with flat bottom and horizontal outlet at the same elevation as the pipe to which it is connected. Strainer shall be removable angle grate type.
5. Protective Roof Membrane Insulation Assembly: The roof drain shall have a perforated stainless steel extension filter, non puncturing clamp ring, large sump with extra wide roof flange and deck clamp.
 - a. Non pedestrian Roofs: The roof drain shall have large polypropylene or aluminum locking dome.
 - b. Pedestrian Roof: The roof drain shall have a bronze promenade top 350 mm (14 inches) square, set in square secured frame support collar.
6. Roof Drains, Overflow: Roof Drains identified as overflow drains shall have a 50 mm (2 inch) water dam integral to the drain body.
7. Roof drains in areas subject to freezing shall have heat tape and shall be insulated.
- B. Expansion Joints: Expansions joints shall be heavy cast iron with cast brass or copper expansion sleeve having smooth bearing surface working freely against a packing ring held in place and under pressure of a bolted gland ring, forming a water and air tight flexible joint. Asbestos packing is prohibited.
- C. Interior Downspouts: An expansion joint shall be provided, specified above, at top of run on straight, vertical runs of downspout piping 12 m (40 feet) long or more.
- D. Downspout Nozzle: The downspout nozzle fitting shall be of brass, unfinished, with internal pipe thread for connection to downspout.

2.5 WATERPROOFING

- A. A sleeve flashing device shall be provided at points where pipes pass through membrane waterproofed floors or walls. The sleeve flashing device shall be manufactured, cast iron fitting with clamping device that forms a sleeve for the pipe floor penetration of the floor membrane. A galvanized steel pipe extension shall be included in the top of the fitting that will extend 50 mm (2 inches) above finished floor and galvanized steel pipe extension in the bottom of the fitting

that will extend through the floor slab. A waterproofed caulked joint shall be provided at the top hub.

B. Walls: See detail shown on drawings.

PART 3 - EXECUTION

3.1 PIPE INSTALLATION

- A. The pipe installation shall comply with the requirements of the International code and these specifications.
- B. Branch piping shall be installed from the piping system and connect to all drains and outlets.
- C. Pipe shall be round and straight. Cutting shall be done with proper tools. Pipe shall be reamed to full size after cutting.
- D. All pipe runs shall be laid out to avoid interference with other work.
- E. The piping shall be installed above accessible ceilings to allow for ceiling panel removal.
- F. Unless otherwise stated on the documents, minimum horizontal slope shall be one inch for every 1.22 m (4 feet) of pipe length.
- G. The piping shall be installed free of sags and bends.
- H. Seismic restraint shall be installed where required by code.
- I. Changes in direction for storm drainage piping shall be made using appropriate branches, bends and long sweep bends. Sanitary tees and short sweep $\frac{1}{4}$ bends may be used on vertical stacks if change in direction of flow is from horizontal to vertical. Long turn double wye branch and $\frac{1}{8}$ bend fittings shall be used if two fixtures are installed back to back or side by side with common drain pipe. Do not change direction of flow more than 90 degrees. Proper size of standard increaser and reducers shall be used if pipes of different sizes are connected. Reducing size of drainage piping in direction of flow is prohibited.
- J. Buried storm drainage piping shall be laid beginning at the low point of each system. Piping shall be installed true to grades and alignment indicated with unbroken continuity of invert. Hub ends shall be placed upstream. Required gaskets shall be installed according to manufacturer's written instruction for use of lubricants, cements, and other installation requirements.
- K. Cast iron piping shall be installed according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook," Chapter IV, "Installation of Cast Iron Soil Pipe and Fittings"

- L. Aboveground copper tubing shall be installed according to CDA's "Copper Tube Handbook".

3.2 JOINT CONSTRUCTION

- A. Hub and spigot, cast iron piping with gasket joints shall be joined in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for compression joints.
- B. Hub and spigot, cast iron piping with calked joints shall be joined in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for lead and oakum calked joints.
- C. Hubless, cast iron piping shall be joined in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless piping coupling joints.
- D. For threaded joints, thread pipe with tapered pipe threads according to ASME B1.20.1. The threads shall be cut full and clean using sharp disc cutters. Threaded pipe ends shall be reamed to remove burrs and restored to full pipe inside diameter. Pipe fittings and valves shall be joined as follows:
 - 1. Apply appropriate tape or thread compound to external pipe threads unless dry seal threading is required by the pipe service
 - 2. Pipe sections with damaged threads shall be replaced with new sections of pipe.
- E. Copper tube and fittings with soldered joints shall be joined according to ASTM B828. A water flushable, lead free flux conforming to ASTM B813 and a lead free alloy solder conforming to ASTM B32 shall be used.
- F. for PVC piping, solvent cement joints shall be used for joints. All surfaces shall be cleaned and dry prior to applying the primer and solvent cement. Installation practices shall comply with ASTM F402. The joint shall conform to ASTM D2855 and ASTM D2665 appendixes.

3.3 SPECIALTY PIPE FITTINGS

- A. Transition coupling shall be installed at pipe joints with small differences in pipe outside diameters.
- B. Dielectric fittings shall be installed at connections of dissimilar metal piping and tubing.

3.4 PIPE HANGERS, SUPPORTS AND ACCESSORIES:

- A. All piping shall be supported according to the International plumbing code, Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, and these specifications.

- B. Hangers, supports, rods, inserts and accessories used for Pipe supports shall be shop coated with zinc Chromate primer paint. Electroplated copper hanger rods, hangers and accessories may be used with copper tubing.
- C. Horizontal piping and tubing shall be supported within 300 mm (12 inches) of each fitting or coupling.
- D. Horizontal cast iron piping shall be supported with the following maximum horizontal spacing and minimum hanger rod diameters:
 - 1. NPS 1-1/2 to NPS 2 (DN 40 to DN 50): 1500 mm (60 inches) with 10 mm (3/8 inch) rod.
 - 2. NPS 3 (DN 80): 1500 mm (60 inches) with 13 mm (1/2 inch) rod.
 - 3. NPS 4 to NPS 5 (DN 100 to DN 125): 1500 mm (60 inches) with 16 mm (5/8 inch) rod.
 - 4. NPS 6 to NPS 8 (DN 150 to DN 200): 1500 mm (60 inches) with 19 mm (3/4 inch) rod.
 - 5. NPS 10 to NPS 12 (DN 250 to DN 300): 1500 mm (60 inches) with 22 mm (7/8 inch) rod.
- E. The maximum support spacing for horizontal plastic shall be 1.22 m (4 feet).
- F. Vertical piping and tubing shall be supported at the base, at each floor, and at intervals no greater than 4.57 m (15 feet).
- G. In addition to the requirements in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, floor, Wall and Ceiling Plates shall have the following characteristics:
 - 1. Solid or split unplated cast iron.
 - 2. All plates shall be provided with set screws.
 - 3. Height adjustable clevis type pipe hangers.
 - 4. Adjustable Floor Rests and Base Flanges shall be steel.
 - 5. Hanger Rods shall be low carbon steel, fully threaded or Threaded at each end with two removable nuts at each end for positioning rod and hanger and locking each in place.
 - 6. Riser Clamps shall be malleable iron or steel.
 - 7. Roller shall be cast iron.
 - 8. Hangers and supports utilized with insulated pipe and tubing shall have 180 degree (min.) metal protection shield Centered on and welded to the hanger and support. The shield shall be 4 inches in length and be 16 gage steel. The shield shall be sized for the insulation.

- H. Miscellaneous Materials shall be provided as specified, required, directed or as noted on the drawings for proper installation of hangers, supports and accessories. If the vertical distance exceeds 6 m (20 feet) for cast iron pipe additional support shall be provided in the center of that span. All necessary auxiliary steel shall be provided to provide that support.
- I. Cast escutcheon with set screw shall be installed at each wall, floor and ceiling penetration in exposed finished locations and within cabinets and millwork.
- J. Penetrations:
1. Fire Stopping: Where pipes pass through fire partitions, fire walls, smoke partitions, or floors, a fire stop shall be installed that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING. Clearances between raceways and openings shall be completely filled and sealed with the fire stopping materials.
 2. Water proofing: At floor penetrations, Clearances around the pipe shall be completely sealed and made watertight with sealant as specified in Section 07 92 00, JOINT SEALANTS.
- K. Piping shall conform to the following:
1. Storm Water Drain and Vent Drain to main stacks:

Pipe Size	Minimum Pitch
80 mm (3 inches) and smaller	2%
100 mm (4 inches) (4 inches) and larger	1%

3.5 TESTS

- A. Storm sewer system shall be tested either in its entirety or in sections.
- B. Storm Water Drain tests shall be conducted before trenches are backfilled or fixtures are connected. A water test or air test shall be conducted, as directed.
1. If entire system is tested with water, tightly close all openings in pipes except the highest opening, and fill system with water to point of overflow. If system is tested in sections, tightly plug each opening except highest opening of section under test, fill each

- section with water and test with at least a 3 m (10 foot) head of water. In testing successive sections, test at least upper 3 m (10 feet) of next preceding section so that each joint or pipe except upper most 3 m (10 feet) of system has been submitted to a test of at least a 3 m (10 foot) head of water. Water shall be kept in the system, or in portion under test, for at least 15 minutes before inspection starts. System shall then be tight at all joints.
2. For an air test, an air pressure of 35 kPa (5 psi) gage shall be maintained for at least 15 minutes without leakage. A force pump and mercury column gage shall be used for the test.
 3. Final Tests: Either one of the following tests may be used.
 - a. Smoke Test: After fixtures are permanently connected and traps are filled with water, fill entire drainage and vent systems with smoke under pressure of 1.3 kPa (1 inch of water) with a smoke machine. Chemical smoke is prohibited.
 - b. Peppermint Test: Introduce .06 liters (2 ounces) of peppermint into each line or stack.

- - - E N D - - -

**SECTION 22 40 00
PLUMBING FIXTURES**

PART 1 - GENERAL**1.1 DESCRIPTION**

Plumbing fixtures, associated trim and fittings necessary to make a complete installation from wall or floor connections to rough piping, and certain accessories.

1.2 RELATED WORK

- A. Sealing between fixtures and other finish surfaces: Section 07 92 00, JOINT SEALANTS.
- B. Flush panel access doors: Section 08 31 13, ACCESS DOORS AND FRAMES.
- C. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submit plumbing fixture information in an assembled brochure, showing cuts and full detailed description of each fixture.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American National Standard Institute (ANSI):
The American Society of Mechanical Engineers (ASME):
A112.6.1M-02(R2008).....Floor Affixed Supports for Off-the-Floor
Plumbing Fixtures for Public Use
A112.19.1M-08Enameled Cast Iron Plumbing Fixtures
A112.19.2M-03.....Vitreous China Plumbing Fixtures
A112.19.3-2001(R2008)...Stainless Steel Plumbing Fixtures (Designed for
Residential Use)
- C. American Society for Testing and Materials (ASTM):
A276-2010Stainless and Heat-Resisting Steel Bars and
Shapes
WW-P-541-E/GENPlumbing Fixtures with Amendment 1
- D. National Association of Architectural Metal Manufacturers (NAAMM): NAAMM
AMP 500-505
Metal Finishes Manual (1988)
- E. American Society of Sanitary Engineers (ASSE):
1016-05.....Performance Requirements for Individual
Thermostatic, Pressure Balancing and Combination

Pressure Balancing and Thermostatic Control

Valves for Individual Fixture Fittings

F. National Sanitation Foundation (NSF)/American National Standards Institute (ANSI):

61-2009Drinking Water System Components-Health Effects

G. American with Disabilities Act (A.D.A) Section 4-19.4 Exposed Pipes and Surfaces

H. Environmental Protection Agency EPA PL 93-523 1974; A 1999) Safe Drinking Water Act.

I. International Building Code, ICC IPBC 2009.

PART 2 - PRODUCTS

2.1 STAINLESS STEEL

A. Corrosion-resistant Steel (CRS):

1. Plate, Sheet and Strip: CRS flat products shall conform to chemical composition requirements of any 300 series steel specified in ASTM A276.

2. Finish: Exposed surfaces shall have standard polish (ground and polished) equal to NAAMM finish Number 4.

B. Die-cast zinc alloy products are prohibited.

2.2 STOPS

A. Provide lock-shield loose key or screw driver pattern angle stops, straight stops or stops integral with faucet, with each compression type faucet whether specifically called for or not, including sinks in wood and metal casework, laboratory furniture and pharmacy furniture. Locate stops centrally above or below fixture in accessible location.

B. Furnish keys for lock shield stops to COTR.

C. Supply from stops not integral with faucet shall be chrome plated copper flexible tubing or flexible stainless steel with inner core of non-toxic polymer.

D. Supply pipe from wall to valve stop shall be rigid threaded IPS copper alloy pipe, i.e. red brass pipe nipple, chrome plated where exposed.

2.3 ESCUTCHEONS

Heavy type, chrome plated, with set screws. Provide for piping serving plumbing fixtures and at each wall, ceiling and floor penetrations in exposed finished locations and within cabinets and millwork.

2.4 LAMINAR FLOW CONTROL DEVICE

A. Smooth, bright stainless steel or satin finish, chrome plated metal laminar flow device shall provide non-aeration, clear, coherent laminar flow that will not splash in basin. Device shall also have a flow control restrictor and have vandal resistant housing.

B. Flow Control Restrictor:

1. Capable of restricting flow from 95 ml/s to 110 ml/s (1.5 gpm to 1.7 gpm) for lavatories; 125 ml/s to 140 ml/s (2.0 gpm to 2.2 gpm) for sinks P-505 through P-520, P-524 and P-528; and 170 ml/s to 190 ml/s (2.75 gpm to 3.0 gpm) for dietary food preparation and rinse sinks or as specified.
2. Compensates for pressure fluctuation maintaining flow rate specified above within 10 percent between 170 kPa and 550 kPa (25 psi and 80 psi).
3. Operates by expansion and contraction, eliminates mineral/sediment build-up with self-cleaning action, and is capable of easy manual cleaning.

2.5 CARRIERS

- A. ASME/ANSI A112.6.1M, with adjustable gasket faceplate chair carriers for wall hung closets with auxiliary anchor foot assembly, hanger rod support feet, and rear anchor tie down.
- B. ASME/ANSI A112.6.1M, lavatory, chair carrier for thin wall construction. All lavatory chair carriers shall be capable of supporting the lavatory with a 250-pound vertical load applied at the front of the fixture.
- C. Where water closets, lavatories or sinks are installed back-to-back and carriers are specified, provide one carrier to serve both fixtures in lieu of individual carriers. The drainage fitting of the back to back carrier shall be so constructed that it prevents the discharge from one fixture from flowing into the opposite fixture.

2.6 WATER CLOSETS

- A. (P-103) Water Closet (Wall Hung, ASME/ANSI A112.19.2M, Figure 9) office and industrial, elongated bowl, siphon jet 6 L (1.6 gallons) per flush, wall outlet. Top of rim shall be between 406 mm and 432 mm (16 inches and 17 inches) above finished floor. Handicapped water closet shall have rim set 457 mm (18 inches) above finished floor.
 1. Seat: Institutional/Industrial, extra heavy duty, chemical resistant, solid plastic, open front less cover for elongated bowls, integrally molded bumpers, concealed check hinge with stainless steel post. Seat shall be posture contoured body design. Color shall be white.
 2. Fittings and Accessories: Gaskets - neoprene; bolts with chromium plated caps nuts and washers.
 3. Flush valve: Large chloramines resistant diaphragm, semi-red brass valve body, exposed chrome plated, hard wired active infra-red sensor for automatic operation with courtesy flush button for manual operation sensor operated with manual override water saver design 6 L

(1.6 gallons) per flush with maximum 10 percent variance 25 mm (1 inch) screwdriver back check angle stop with vandal resistant cap, adjustable tailpiece, a high back pressure vacuum breaker, spud coupling for 38 mm (1 1/2 inches) top spud, wall and spud flanges, and sweat solder adapter with cover tube and set screw wall flange. Valve body, cover, tailpiece and control stop shall be in conformance with ASTM alloy classification for semi-red brass. Seat bumpers shall be integral part of flush valve. Set centerline of inlet 292 mm (11 1/2 inches) above rim.

2.7 LAVATORIES

- A. Dimensions for lavatories are specified, Length by width (distance from wall) and depth.
- B. Brass components in contact with water shall contain no more than 3 percent lead content by dry weight.
- C. (P-418) Lavatory (Sensor Control, Gooseneck Spout, ASME/ANSI A112.19.2M, Figure 16) straight back, approximately 533 mm by 457 mm (21 inches by 18 inches) and a 102 mm (4 inches) minimum apron, first quality vitreous china with punching for gooseneck spout. Set rim 864 mm (34 inches) above finished floor, unless otherwise noted in architectural elevations
 - 1. Faucet: Solid cast brass construction, chrome plated, gooseneck spout with outlet 102 mm to 127 mm (4 inches to 5 inches) above rim. Electronic sensor operated, 102 mm (4 inches) center set mounting, wiring box, 120/24 volt solenoid, remote mounted transformer, hard-wired electronic module, back check valves, and inline filter. Provide laminar flow control device. Breaking the light beam shall activate the water flow. Flow shall stop when user moves away from light beam. Provide steel access door with key operated cylinder lock. See Section 08 31 13, ACCESS DOORS AND FRAMES. All connecting wiring between transformer, solenoid valve and sensor shall be cut to length with no excess hanging or wrapped up wiring allowed.
 - 2. Drain: Cast or wrought brass with flat grid strainer with offset tailpiece, brass, chrome plated.
 - 3. Stops: Angle type. See paragraph 2.2.Stops
 - 4. Trap: Cast copper alloy, 38 mm by 32 mm (1 1/2 inches by 1 1/4 inches)P-trap. Adjustable with connected elbow and 17 gage tubing extension to wall. Exposed metal trap surface and connection hardware shall be chrome plated with a smooth bright finish. Set trap parallel to wall.
 - 5. Provide cover for drain, stops and trap per A.D.A 4-19.4.

2.8 SINKS AND LAUNDRY TUBS

- A. Dimensions for sinks and laundry tubs are specified, length by width (distance from wall) and depth.
- B. (P-501) Service Sink (Corner, Floor Mounted) stain resistant terrazzo, 711 mm by 711 mm by 305 mm (28 inches by 28 inches by 12 inches) with 152 mm (6 inches) drop front. Terrazzo, composed of marble chips and white Portland cement, shall develop compressive strength of 20684 kPa (3000 psi) seven days after casting. Provide extruded aluminum cap on front side.
 - 1. Faucet: Solid brass construction, combination faucet with replaceable monel seat, removable replacement unit containing all parts subject to wear, integral stops, mounted on wall above sink. Spout shall have a pail hook, 19 mm (3/4 inch) hose coupling threads, vacuum breaker, and top or bottom brace to wall. Four-arm handles on faucets shall be cast, formed, or drop forged copper alloy. Escutcheons shall be either forged copper alloy or CRS. Exposed metal parts, including exposed part under valve handle when in open position, shall have a smooth bright finish. Provide 914 mm (36 inches) hose with wall hook. Centerline of rough in is 1219 mm (48 inches) above finished floor.
 - 2. Drain: Seventy six millimeter (3 inches) cast brass drain with nickel bronze strainer.
 - 3. Trap: P-trap, drain through floor.
- C. (P-502) Service Sink (square, Floor Mounted) stain resistant terrazzo, 609 mm by 609 mm by 305 mm (24 inches by 24 inches by 12 inches) with 152 mm (6 inches) drop front. Terrazzo, composed of marble chips and white Portland cement, shall develop compressive strength of 20684 kPa (3000 psi) seven days after casting. Provide extruded aluminum cap on front side.
 - 1. Faucet: Solid brass construction, combination faucet with replaceable monel seat, removable replacement unit containing all parts subject to wear, integral stops, mounted on wall above sink. Spout shall have a pail hook, 19 mm (3/4 inch) hose coupling threads, vacuum breaker, and top or bottom brace to wall. Four-arm handles on faucets shall be cast, formed, or drop forged copper alloy. Escutcheons shall be either forged copper alloy or CRS. Exposed metal parts, including exposed part under valve handle when in open position, shall have a smooth bright finish. Provide 914 mm (36 inches) hose with wall hook. Centerline of rough in is 1219 mm (48 inches) above finished floor.
 - 2. Drain: Seventy six millimeter (3 inches) cast brass drain with nickel bronze strainer.

3. Trap: P-trap, drain through floor.
- D. (P-512) Sink (CRS, Single Compartment, Wall Hung, Foot Pedal Control) 14 gage CRS, approximately 508 mm by 457 mm (20 inches by 18 inches) with splash back. Provide rolled rim on front and ends. Corners and edges shall be well rounded. Support sink with 10 gage CRS brackets on ASME/ANSI A112.6.1M, Type I, chair carrier and secure fixture with minimum 10 mm (3/8 inch) all-thread bracket studs and nuts. Set rim of sink 914 mm (36 inches) above finished floor. Provide valve plate for foot pedal control.
1. Drain: Drain plug with cup strainers, stainless steel.
 2. Trap: Cast copper alloy, 38 mm (1 1/2 inches) P-trap. Adjustable with connected elbow and nipple to wall and escutcheon.
 3. HW/CW Faucet: Solid brass construction, single rigid gooseneck spout with outlet 127 mm to 203 mm (5 inches to 8 inches) above flood rim of sink. Provide laminar flow control device. Wall mounted, mechanical pedal mixing valve with self-closing pedal valve with stops, renewable seats, and supply from valve to spout, indexed lift up pedals having clearances of not more than 13 mm (1/2 inch) above the floor and not less than 356 mm (14 inches) from wall when in operation. Supply pipe from wall to valve stop shall be rigid threaded IPS copper alloy pipe. Supply pipe from valve to faucet shall be manufacturer's option. Exposed brass parts shall be chrome plated with a smooth bright finish.
 4. DI Faucet: Wall mounted PVC rigid gooseneck spout with integral serrated hose nozzle, 3-arm PVC handle, PVC valve.
- E. (P-513) Sink (CRS, Single Compartment, Wall Hung, Foot Pedal Control) 14 gage CRS, approximately 585 mm by 470 mm (23 inches by 18 1/2 inches) by 304 mm (12 inches) deep with splash back. Provide rolled rim on front and ends. Corners and edges shall be well rounded. Support sink with 10 gage CRS brackets on ASME/ANSI A112.6.1M, Type I, chair carrier and secure fixture with minimum 10 mm (3/8 inch) all-thread bracket studs and nuts. Set rim of sink 914 mm (36 inches) above finished floor. Provide valve plate for foot pedal control.
1. Drain: Drain plug with cup strainers, stainless steel.
 2. Trap: Cast copper alloy, 38 mm (1 1/2 inches) P-trap. Adjustable with connected elbow and nipple to wall and escutcheon.
 5. Faucet: Solid brass construction, single rigid gooseneck spout with outlet 127 mm to 203 mm (5 inches to 8 inches) above flood rim of sink. Provide laminar flow control device. Wall mounted, mechanical pedal mixing valve with self-closing pedal valve with stops,

- renewable seats, and supply from valve to spout, indexed lift up pedals having clearances of not more than 13 mm (1/2 inch) above the floor and not less than 356 mm (14 inches) from wall when in operation. Supply pipe from wall to valve stop shall be rigid threaded IPS copper alloy pipe. Supply pipe from valve to faucet shall be manufacturer's option. Exposed brass parts shall be chrome plated with a smooth bright finish.
- F. (P-520) Sink (Clinical Service Sink) approximately 622 mm by 508 mm (24 1/2 inches by 20 inches), first quality vitreous china. Support sink with heavy-duty floor mounted carrier. Set rim of sink 762 mm (30 inches) above finished floor.
1. Wall mounted faucet with wrist blade handles.
 2. Exposed service sink flushometer for top spud service sink, 6.5 GPF.
 3. Drain: Strainer with bright finish.
- G. (P-528) Sink (CRS, Single Compartment, Counter Top ASME/ANSI A112.19.2M, Kitchen Sinks, Figure 5) self rimming, back faucet ledge, approximately 533 mm by 483 mm (21 inches by 19 inches) with single compartment. Shall be minimum of 1.3 mm thick (18 gauge) CRS. Corners and edges shall be well rounded:
1. Faucet: Solid brass construction, deck mounted combination faucet with monel or ceramic seats, removable replacement unit containing all parts subject to ware, swivel gooseneck spout with approximately 203 mm (8 inches) reach with spout outlet 152 mm (6 inches above deck and single lever. Faucet shall be polished chrome plated.
 2. Drain: Drain plug with cup strainer, stainless steel.
 3. Trap: Cast copper alloy 38 mm (1 1/2 inches) P-trap with cleanout plug. Provide wall connection and escutcheon.
 4. Provide cover for drain, stops and trap per A.D.A 4-19.4.

2.8 SHOWER BATH FIXTURE

- A. (P-701) Shower Fixture (Wall Mounted, Concealed Supplies, Type T/P Combination Valve):
1. Shower Installation: Wall mounted, shower head connected to shower arm. All external trim shall be chrome plated metal.
 2. Shower Head: Chrome plated metal head, adjustable ball joint, self cleaning with automatic flow control device to limit discharge to not more than 160 ml/s (2.5 gpm). Body, internal parts of shower head and flow control fittings shall be copper alloy or CRS. Install showerhead 1829 mm (72 inches) above finished floor.
 3. Valves: Type T/P combination thermostatic and pressure balancing, with chrome plated metal lever with adjustment for rough-in

variations, type operating handle and chrome plated brass or CRS face plate. Valve body shall be any suitable copper alloy. Internal parts shall be copper, nickel alloy, CRS or thermoplastic material. Valve inlet and outlet shall be 13 mm (1/2 inch) IPS. Provide external screwdriver check stops, and temperature limit stops. Set stops for a maximum temperature of 40 degrees C (105 degrees F). Install valve 1372 mm (54 inches) from bottom of shower receptor. All exposed fasteners shall be vandal resistant. Valve shall provide a minimum of 160 ml/s at 310 kPa (2.5 gpm at 45 psi) pressure drop.

2.9 EMERGENCY FIXTURES

A. (P-706) Emergency Shower:

1. Shower Head: Polished chrome plated, 203 mm (8 inches) in diameter.
2. Installation: Head shall be 2134 mm (84 inches) above floor.
3. Valves: Stay-open ball type, chrome plated, operated by a 610 mm (24 inches) stainless steel pull-rod with triangle handle. Pull-down opens valve push-up closes valve.

B. (P-708) Emergency Eye and Face Wash (Wall Mounted): CRS, wall mounted, foot pedal control. Mount eye and face wash spray heads 1067 mm (42 inches) above finished floor. Pedal shall be wall mounted, entirely clear of floor, and be hinged to permit turning up. Receptor shall be complete with drain plug with perforated strainer, P-trap and waste connection to wall with escutcheon.

2.10 HYDRANT, HOSE BIBB AND MISCELLANEOUS DEVICES

- ### **A. (P-804) Hose Bibb (Combination Faucet, Wall Mounted to Concealed Supply Pipes):** Cast or wrought copper alloy, combination faucet with replaceable monel seat, removable replacement unit containing all parts subject to wear, mounted on wall 914 mm (36 inches) above floor to concealed supply pipes. Provide faucet without top or bottom brace and with 19 mm (3/4 inch) hose coupling threads on spout, integral stops and vacuum breaker. Design valves with valve disc arranged to eliminate rotation on seat. Four-arm handles on faucets shall be cast, formed or drop forged copper alloy. Escutcheons shall be either forged copper alloy or CRS. Exposed metal parts, including exposed part under valve handle when in open position, shall have a bright finish.

PART 3 - EXECUTION

3.1 INSTALLATION

- #### **A. Fixture Setting:** Opening between fixture and floor and wall finish shall be sealed as specified under Section 07 92 00, JOINT SEALANTS.
- #### **B. Supports and Fastening:** Secure all fixtures, equipment and trimmings to partitions, walls and related finish surfaces. Exposed heads of bolts

and nuts in finished rooms shall be hexagonal, polished chrome plated brass with rounded tops.

- C. Toggle Bolts: For hollow masonry units, finished or unfinished.
- D. Expansion Bolts: For brick or concrete or other solid masonry. Shall be 6 mm (1/4 inch) diameter bolts, and to extend at least 76 mm (3 inches) into masonry and be fitted with loose tubing or sleeves extending into masonry. Wood plugs, fiber plugs, lead or other soft metal shields are prohibited.
- E. Power Set Fasteners: May be used for concrete walls, shall be 6 mm (1/4 inch) threaded studs, and shall extend at least 32 mm (1 1/4 inches) into wall.
- F. Tightly cover and protect fixtures and equipment against dirt, water and chemical or mechanical injury.
- G. Where water closet waste pipe has to be offset due to beam interference, provide correct and additional piping necessary to eliminate relocation of water closet.
- H. Do not use aerators on lavatories and sinks.

3.2 CLEANING

At completion of all work, fixtures, exposed materials and equipment shall be thoroughly cleaned.

- - - E N D - - -

SECTION 22 63 00**GAS SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. Central Laboratory and Healthcare Gas Systems: Consisting of non-medical SPD compressed air services; complete, ready for operation, including all necessary piping, fittings, valves, rough-ins, outlets, gages, alarms including low voltage wiring, air compressors, electric motors and starters, air dryers, filters, pressure regulators, dew point, carbon monoxide monitors and all necessary parts, accessories, connections and equipment.
- B. Laboratory and healthcare gas system alarm wiring from equipment to existing building management system.

1.2 RELATED WORK

- A. Sealing around pipe penetrations to maintain the integrity of time rated construction: Section 07 84 00, FIRESTOPPING.
- B. Sealing around pipe penetrations through the floor to prevent moisture migration: Section 07 92 00, JOINT SEALANTS.
- C. General requirements and items common to more than one section of Division 22. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
- D. Alarm interface with ECC. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- E. Conduit: Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS.
- F. Control wiring: Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW).
- G. Electrical wiring and accessories: Section 26 27 26, WIRING DEVICES.
- H. Electric motors: Section 22 05 12, GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT.
- I. Motor starters: Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS.
- J. SECTION 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.
Requirements for commissioning, systems readiness checklist, and training.

1.3 QUALITY ASSURANCE

- A. Materials and Installation: In accordance with NFPA 99, (2005) and as specified.
- B. Equipment Installer: Show technical qualifications and previous experience in installing laboratory and healthcare equipment on three similar projects. Submit names and addresses of referenced projects. Installers shall meet the qualifications of ANSI/ASSE Standard 6010.

- C. Equipment Supplier: Show evidence of equivalent product installed at three installations similar to this project that has been in satisfactory and efficient operation for three years. Submit names and addresses where the product is installed.
- D. Laboratory and healthcare System Testing Organization: The testing shall be conducted by a party technically competent and experienced in the field of laboratory and healthcare pipeline testing. Testing and systems verification shall be performed by personnel meeting the qualifications of ANSI/ASSE Standard 6030. Such testing shall be performed by a party other than the installing contractor.
- E. Provide names of three projects where testing of medical or laboratory gases systems has been performed by the testing agency. Include the name of the project, names of such persons at that project who supervised the work for the project owner, or who accepted the report for the project owner, and a written statement that the projects listed required work of similar scope to that set forth in this specification.
- F. Submit the testing agency's detailed procedure which will be followed in the testing of this project. Include details of the testing sequence, procedures for cross connection tests, outlet function tests, alarm tests, purity tests, etc., as required by this specification. For purity test procedures, include data on test methods, types of equipment to be used, calibration sources and method references.
- G. Certification: Provide documentation prior to submitting request for final inspection to include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and a certification that all results of tests were within limits allowed by this specification.
- H. Installing contractor shall maintain as-built drawings of each completed phases for verification; and, shall provide the complete set at the time of final systems certification testing, for certification by the Third Party Testing Company. As-built drawings shall be provided on prints and in digital format. The digital format shall be in the native CAD system required for the project design. Should the installing contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement.
- I. "Hot taps" are not permitted for operating medical oxygen systems. Methods for connection and extension of active and pressurized medical

gas systems without subsequent medical gas testing and verification are not allowed.

1.4 SUBMITTALS

- A. Submit as one package in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Piping.
 - 2. Valves.
 - 3. Inlet and outlet cocks
 - 4. Gages.
 - 5. Alarm controls and panels.
 - 6. Pressure Switches.
 - 7. Manifolds.
 - 8. Air compressor systems (Provide certified compressor test data at start-up.):
 - a. Compressors: Manufacturer and model.
 - b. Characteristic performance curves.
 - c. Compressor operating speed (RPM).
 - d. Capacity: Free air delivered at indicated pressure (L/s) (SCFM).
 - e. Type of bearing in compressor.
 - f. Type of lubrication.
 - g. Type and adjustment of drive.
 - h. Electric motors: Manufacturer, frame and type.
 - i. Speed of motors (RPM).
 - j. Current characteristics and horsepower of motors.
 - k. Receiver capacity and rating.
 - l. Air silencer: Manufacturer, type and model.
 - m. Air filters: Manufacturer, type, model and capacity.
 - n. Pressure regulators: Manufacturer and capacity.
 - o. Dew point monitor: Manufacturer, type and model.
 - p. Air dryers: Manufacturer, type, model and capacity (L/s) (SCFM).
 - q. Carbon monoxide monitor manufacturer, type and model.
 - r. Aftercoolers.
- C. Certification: The completed systems have been installed, tested, purged, analyzed and verified in accordance with the requirements of this specification.
- D. Completed System Readiness Checklist provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and

dated on the date of completion, in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

1.5 TRAINING

- A. Furnish the services of a competent instructor for not less than two four-hour periods for instructing personnel in the operation and maintenance of the laboratory and healthcare gas systems, on the dates requested by COTR.
- B. Coordinate with other requirements specified in Section 01 00 00, GENERAL REQUIREMENTS.

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the test by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
B819-(R2006).....Seamless Copper Tube for Medical Gas Systems
- C. American Society of Mechanical Engineers (ASME):
A13.1-07.....Scheme for Identification of Piping Systems
B16.22-01(R2005).....Wrought Copper and Bronze Solder-Joint Pressure Fittings
B40.100 (2005)Pressure Gauges and Gauge Attachments Boiler and Pressure Vessel Code -
Section VIII-07.....Pressure Vessels, Division I
Section IX-07.....Welding and Brazing Qualifications
- D. American Welding Society (AWS):
AWS A5.8-04.....Brazing Filler Metal
AWS B2.2-91.....Standard for Brazing Procedure and Performance Qualification (Modified per NFPA 99)
- E. Compressed Gas Association (CGA):
C-9-04.....Standard Color Marking of Compressed Gas Cylinders
G-4.1 (2009).....Cleaning Equipment for Oxygen Service
G-10.1(2008)Nitrogen, Commodity
P-9-01.....Inert Gases Argon, Nitrogen and Helium
V-1-05.....Standard for Compressed Gas Cylinder Valve Outlet and Inlet Connections
- F. National Electrical Manufacturers Association (NEMA):
ICS-6-93(R2006).....Industrial Controls and Systems Enclosures
- G. National Fire Protection Association (NFPA):
99-05.....Health Care Facilities

- H. United States Pharmacopoeia XXI/National Formulary XVI (USP/NF)
- I. Manufacturing Standardization Society (MSS):
 - MSS-SP-72-99.....Ball Valves With Flanged or Butt Welding For
General Purpose
 - MSS-SP-110-96.....Ball Valve Threaded, Socket Welding, Solder
Joint, Grooved and Flared Ends
 - MSS-SP-73-03.....Brazing Joints for Copper and Copper Alloy
Solder Pressure Fittings

PART 2 - PRODUCTS

2.1 PIPING AND FITTINGS

- A. Copper Tubing: Type "K", ASTM B819, seamless copper tube, hard drawn temper, with wrought copper fittings conforming to ASME B16.22 or brazing fittings complying with MSS SP-73. Size designated reflecting nominal inside diameter. All tubing and fittings shall be labeled "ACR/OXY", "OXY", "OXY/MED", "ACR/MED", or "MED".
- B. Brazing Alloy: AWS A5.8, Classification BCuP, greater than 537 °C (1000 °F) melting temperature. Flux is strictly prohibited for copper-to-copper connections.
- C. Screw Joints: Polytetrafluoroethylene (teflon) tape.
- D. Underground Protective Pipe: Polyvinyl Chloride (PVC), ASTM D1785, Schedule 80.
- E. Memory metal couplings: Temperature and pressure rating shall not be less than that of a brazed joint.
- F. Apply piping identification labels at the time of installation in accordance with current NFPA. Apply supplementary color identification in accordance with CGA Pamphlet C-9.
- G. Special Fittings: The following special fittings shall be permitted to be used in lieu of brazed joints:
 - 1. Memory-metal couplings having temperature and pressure ratings joints not less than that of a brazed joint.
 - 2. Listed or approved metallic gas tube fittings that, when made up, provide a permanent joint having the mechanical, thermal, and sealing integrity of a brazed joint.
 - 3. Dielectric fittings where required by the manufacturer of special medical equipment to electrically isolate the equipment from the piping distribution system.
 - 4. Axially swaged, elastic strain preload fittings providing metal to metal seal having pressure and temperature ratings not less than that of a brazed joint and when complete are permanent and non-separable.

2.2 EXPOSED LABORATORY AND HEALTHCARE GASES PIPING

- A. Finished Room: Use full iron pipe size chrome plated brass piping for exposed laboratory and healthcare gas piping connecting fixtures, casework, cabinets, equipment and reagent racks when not concealed by apron including those furnished by the Government or specified in other sections.
1. Pipe: Fed. Spec. WW-P-351, standard weight.
 2. Fittings: ASME B16.15 cast bronze threaded fittings with chrome finish, (125 and 250 PS1 Classes).
 3. Nipples: ASTM B 687, Chromium-plated.
 4. Unions: Mss SP-72, SP-110, Brass or Bronze with chrome finish. Unions 65 mm (2-1/2 inches) and larger shall be flange type with approved gaskets.
 5. Valves: Mss SP-72, SP-110, Brass or bronze with chrome finish.

2.3 VALVES

- A. Ball: In-line, other than zone valves in cabinets:
1. Seventy five millimeter (2 1/2 inches) and smaller: Bronze/ brass body, Fed. Spec. MSS SP72 & SP 110 , Type II, Class 150, Style 1, with tubing extensions for brazed connections, full port, three-piece or double union end connections, teflon seat seals, full flow, 4125 kPa (600 psi) WOG minimum working pressure, with locking type handle, cleaned for oxygen use and labeled for intended service
 2. Eighty to one hundred millimeter (3-4 inches): Bronze/ brass body, Fed. Spec. MSS SP72 & SP 110, Type II, Class 150, Style 1 with tubing extensions brazed to flanges, full ported, three piece, double seal, teflon seals, full flow, 4125 kPa (600 psi) WOG minimum working pressure, with locking type handle, cleaned for oxygen use and labeled for intended service.
- B. Check:
1. Eighty millimeter (3 inches) and smaller: Bronze/brass body, straight through design for minimum pressure drop, spring loaded, self aligning with teflon cone seat, vibration free, silent operation, supplied NPT female threads at each end with flow direction arrow permanently cast into, cleaned for oxygen use and labeled for intended service, 2750 kPa (400 psi) WOG minimum working pressure.
 2. One hundred millimeter (4 inches) and larger: Iron body, bronze trim, swing type, vertical or horizontal installation, flange connection,

with flow direction arrow permanently cast into, cleaned for oxygen use and labeled for intended service, 1025 kPa (150 psi) WSP.

2.4 GAGES

- A. Pressure Gages: Includes gages temporarily supplied for testing purposes.
 - 1. For line pressure use adjacent to source equipment: ASME B40.1, pressure gage, single, size 115 mm (4-1/2 inches), for compressed air, nitrogen and oxygen, accurate to within two percent, with metal case. Range shall be two times operating pressure. Dial graduations and figures shall be black on a white background, or white on a black background. Gage shall be cleaned for oxygen use, labeled for appropriate service, and marked "USE NO OIL". Install with gage cock.
 - 2. For all services downstream of main shutoff valve: Manufactured for oxygen use, labeled for the appropriate service and marked "USE NO OIL", 40 mm (1-1/2 inch) diameter gage with dial range 1-690 kPa (1-100 psi) for air service.

2.5 ALARMS

- A. Provide all low voltage control wiring, except for wiring from alarm relay interface control cabinet to ECC, required for complete, proper functioning system, in conformance with Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Run wiring in conduit, in conformance with Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS.
- B. Local Alarm Functions: Provide individual local air compressor malfunction alarms at each compressor system main control panel.
 - 1. Compressor Malfunction Alarm: Each compressor system receiving any of the following individual signals and sends a single combined "compressor malfunction alarm" signal to master alarm panel.
 - a. Thermal Malfunction Alarm: Functions when discharge air temperature exceeds 177 °C (350 °F), shutting down affected compressor.
 - b. Lead Compressor Fails to Start: Functions when lead compressor fails to start when actuated, causing lag pump to start.
 - c. Lag Compressor in Use: Functions when the primary or lead compressor is incapable of satisfying the demand. When three or more compressors are part of the system, the lag compressor in use alarm shall energize when the last compressor has been signaled to start.
 - d. High Water Level in Receiver. (Liquid ring or water-cooled units)

- e. High Water Level in Separator (if so required). (Liquid ring unit)
- 2. Desiccant Air Dryer Malfunction Alarm: Dryer receives the following individual signals and sends a single consolidated dryer malfunction alarm signal to master alarm panel.
 - a. Dew Point Alarm: Functions when line pressure dew point rises above 4 °C (39 °F) at 380 kPa (55 psi).
- C. Master Alarm Functions: Provide the following individual alarms at the master alarm panel.
 - 1. Compressed Air Alarms:
 - a. Medical air dew point high alarm: Functions when the line pressure dew point rises above 2 °C (35 °F) at 380 kPa (55 psi).
 - b. Carbon Monoxide Alarm: Functions when the carbon monoxide levels rise above 10 parts per million; receives signal from the carbon monoxide monitor.
 - c. Main Bank Filter Set Alarm: Functions when the pressure drop across filter set increases more than 14 kPa (2 psi) over that when filters are clean and new; operates by differential pressure switch or transmitters.
 - d. Desiccant Prefilter Alarm: Functions when pressure across the filter increases more than 21 kPa (3 psi) over that when filters are clean and new; operates by pressure differential switch.
 - e. Desiccant Post Filter Alarm: Functions when pressure drop across filter increases more than 21 kPa (3 psi) over that when filters are clean and new; operates by pressure differential switch.
 - f. Desiccant Dryer Malfunction Alarm: Functions on any combination of failure of tower cycling and/or pressure dew point rise above 60 °C at 690 kPa (140 °F at 100 psi).
 - g. Aftercooler High temperature Alarm: Functions when aftercooler discharge air temperature exceeds 38 °C (100 °F).
 - h. Pressure Abnormal Alarm: Functions when system pressure downstream of main shutoff valve drops below 550 kPa (80 psi) (plus/minus gage or increases above 830 kPa (120 psi) (plus/minus 14 kPa (2 psi) set points; operated by pressure switch.
 - i. Compressor Malfunction Alarm: Functions when compressor system control panel signals compressor thermal malfunction alarm, lead compressor fails to start alarm or high water level in receiver or separator (if so required) receives signal from system control panel.

- j. Low Lubricant Shutdown: For rotary screw compressors. Functions when lubricant level drops to a low point. Receives signal from compressor control panel.
- k. Instrument air dew point high alarm: Functions when the line pressure dew point rises above -30 °C (-22 °F) at 380 kPa (55 psi).

D. Alarm Panels:

1. General: Modular design, easily serviced and maintained; alarms operate on alternative current low voltage control circuit; provide required number of transformers for efficient functioning of complete system.
2. Box: Flush mounted, sectional or one piece, corrosion protected. Size to accommodate required number of service functions for each location, and for one audible signal in each box. Anchor box securely. Provide spare capacity to accommodate 50% of the number of provided alarm points.
3. Cover plate: Designed to accommodate required number of signals, visual and audible, for each location, and containing adequate operating instructions within the operator's view. Bezel shall be extruded aluminum, chromium plated metal, or plastic. Secure to the box with chromium plated or stainless steel countersunk screws.
4. Service indicator lights: Red translucent plastic or LED with proper service identification inscribed thereon. Number of lights and service instruction shall be as required for each location. Provide each panel with a green test button of the same material, inscribed with "PUSH TO TEST" or similar message.
5. Audible signal: Provide one in each alarm panel and connect electrically with all service indicator light functions.
6. Controls:
 - a. Visual signal: When the condition occurs which any individual service indicator light is to report, button for particular service shall give a lighted visual signal which cannot be canceled until such condition is corrected.
 - b. Audible signal: Alarm shall give an audible signal upon circuit energization of any visual signal. Audible signal shall be continuous until silenced by pushing a button. This shall cancel and reset audible only, and not affect the visual signal. After silencing, subsequent alarms shall reactivate the audible alarm.

- c. Signal tester: Test button or separate normal light shall be continuously lighted to indicate electrical circuit serving each individual alarm is energized. Pushing test button shall temporarily activate all visual signals and sound audible signal, thereby providing desired indications of status of system.
- E. Alarm Relay Interface Control Cabinet: Design cabinet to transfer the closed circuit alarm signals through relays to a set of terminals for monitoring signals at the existing ECC without interrupting the closed circuit system. Construct of 1.9 mm (14 gage) steel, conforming with NEMA ICS-6, Type 1, enclosures. Provide both normally open and normally closed contacts for output signals, with number of circuits required for full alarm capability at the ECC. Refer to Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC for compatibility.
- F. Alarm Network Communication: Network communications board shall be installed in local alarm and connected to the facility's Ethernet. Local alarm modules shall send information to the master alarm and the data can be downloaded thru the computer connected to the facility's Ethernet. Master alarm displays the message, sound its alarm and saves the information in an event log. This event log shall be downloaded to a computer file for tracking data and troubleshooting.

2.6 PRESSURE SWITCHES

General purpose, contact or mercury type, allowing both high and low pressure set points, with contact type provided with a protective dust cover; adjustable range set by inside or outside adjustment; switches activate when indicated by alarm requirements. Use one orifice nipple (or DISS demand check valve) for each sensor or pressure switch.

2.7 AIR COMPRESSOR SYSTEMS

- A. System Design: The laboratory air system shall be of a modular base mounted design consisting of multiplexed compressor, dryer/control, and an air receiver. Each unit must be fully compliant with the latest edition of NFPA 99.
- B. Compressor Module: The compressors are continuous duty rated scroll type, single stage and air-cooled. The compressors have one fixed and one orbiting scroll sealed with PTFE tip seals.
 - 1. Field replaceable tip seals.
 - 2. Dust and contamination protection from two part face seal.
 - 3. Orbiting bearing and pin crank bearings are grease filled with maintenance intervals of 10,000 hours for 10 Hp and 8,000 hours for 15 Hp.

4. Heat dissipation maximized by an integral cooling fan.
5. V-belt driven compressor protected by totally enclosed beltguard.
6. Fully adjustable motor mounting base to achieve belt tensioning.
- C. Compressor Motor: The motor is NEMA rated, open dripproof and operates at 3600 RPM with 1.15 service factor suitable for 230/460V or 208V electrical service, as specified in Section 22 05 12, GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT and Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS.
- D. Intake Piping: Provide a pre-piped intake manifold with one "hospital type" inlet air filter with threaded opening for remote intake connection. Isolate filter housing from the intake manifold with a braided 304 stainless steel flex connector.
- E. Discharge Piping: Provide an integral air cooled aftercooler designed for a maximum approach temperature of 12 degrees F complete with moisture separator and timed automatic solenoid drain valve with a manual drain valve by-pass. Provide each cylinder head with a pre-wired high discharge air temperature shutdown switch. Include a flex connector, safety relief valve, and check valve. The compressor discharge line the piping shall be of ASTM B-819 copper tubing, brass, and/or stainless steel. The discharge flex connector shall be braided 304 stainless steel, brass or bronze.
- F. Isolation System: Isolate the compressor and monitor from the main compressor module base by means of a four point, heavy duty, spring isolation system for a minimum of 95% isolation efficiency.
- G. Dryer/Control: The dryer/control shall include a NEMA 12, U.L. labeled control system, duplexed desiccant drying system, duplexed final line filters, duplexed final line regulators, and combination dew point/CO monitor. All of the above shall be pre-wired and pre-piped in accordance with NFPA 99 and include valving to allow complete air receiver by-pass, as well as air sampling port.
- H. Dryer: Size each desiccant dryer for the peak calculated demand and capable of producing 10 °F (-12 °C) pressure dew point. Dryer purge flow shall be minimized through an on-demand purge saving control system. Include a mounted prefilter rated for 0.01 micron with automatic drain and element change indicator on the inlet of each dryer.
- I. Control System: Mounted and pre-wired control system shall be NEMA 12 and U.L. labeled. This control system shall provide automatic lead/lag sequencing with circuit breaker disconnects for each compressor with external operators, one non-fused main disconnect with external

operators, full voltage motor magnetic starters with overload protection, redundant 120V control circuit transformers, visual and audible reserve unit alarm with isolated contacts for remote alarm, hand-off-auto (HOA) lighted selector switches, automatic alternation of both compressors with provisions for simultaneous operation if required, automatic activation of reserve unit if required, visual alarm indication for high discharge air temperature shutdown with isolated contacts for remote alarm, and duplexed run time hour meters.

- J. Final Line Filters and Regulators: Fully duplexed final line filters rated for 0.01 micron with element change indicators shall be factory mounted and pre-piped, along with duplexed factory mounted and pre-piped final line regulators and duplex safety relief valves.
- K. Dew Point Hygrometer/CO Monitor: Mounted, pre-piped and wired, combination dew point hygrometer/CO monitor shall be of the ceramic type with integral chemical type CO sensor. System accuracy shall be $\pm 2^{\circ}\text{F}$ for dew point and 2PPM (at 10 PPM) for carbon monoxide. Dew point alarm shall be factory set at 39°F (4°C) per NFPA 99, and the CO alarm shall be factory set at 10 PPM. Both set points shall be field adjustable.
- L. Air Receiver: Vertical air receiver, galvanized, ASME Coded, National Board Certified, rated for minimum 150 PSIG design pressure and includes a sight gauge glass as well as a timed automatic solenoid drain valve. Provide three valve bypass on supply.
- M. Example of an acceptable product and manufacturer: Beacon Medaes Medical Products "Lifeline Medical Air Systems".

2.8 PRESSURE REGULATORS:

- A. For 690 kPa (100 psi) regulator, provide duplex in parallel, valve for maintenance shut-down without service interruption. For additional pressures, locate regulators remote from compressor near point of use, and provide with isolation valves and valve bypass.
 - 1. For systems 5 L/s (10 scfm) and below: Brass or bronze body and trim, reduced pressure range 170 - 850 kPa (25 - 125 psi) adjustable, spring type, diaphragm operated diaphragm operated, relieving. Delivered pressure shall vary not more than one kPa (0.15psi) for each 10 kPa (1.5psi) variation in inlet pressure.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. In accordance with current NFPA. Run buried oxygen piping in PVC protective pipe for entire length including enclosure of fittings and changes of direction.

- B. Install cast escutcheon with set screw at each wall, floor and ceiling penetration in exposed finished locations and within cabinets and millwork.
- C. Keep open ends of tube capped or plugged at all times or otherwise sealed until final assembly.
- D. Cut piping square and accurately with a tube cutter (sawing not permitted) to measurements determined at place of installation. Ream tube to remove burrs, being careful not to expand tube, and so no chips of copper remain in the tube. Work into place without springing or forcing. Bottom tube in socket so there are no gaps between tube and fitting. Exercise care in handling equipment and tools used in cutting or reaming of tube to prevent oil or grease being introduced into tubing. Where contamination has occurred, material is no longer suitable for oxygen service.
- E. Spacing of hangers: Current NFPA.
- F. Rigidly support valves and other equipment to prevent strain on tube or joints.
- G. While being brazed, joints shall be continuously purged with *oil* free nitrogen. The flow of purged gas shall be maintained until joint is cool to touch.
- H. Do not bend tubing. Use fittings.
- I. Install pressure switches, transmitter and gauges to be easily accessed, and provide access panel where installed above plaster ceiling. Install pressure switch and sensors with orifice nipple between the pipe line and switches/sensors.
- J. Apply pipe labeling during installation process and not after installation is completed. Size of legend letters shall be in accordance with ANSI A13.1.
- K. Pipe compressor intake to a source of clean ambient air as indicated in current NFPA.
- L. After initial leakage testing is completed, allow piping to remain pressurized with testing gas until testing agency performs final tests.
- M. Penetrations:
 - 1. Fire Stopping: Where pipes pass through fire partitions, fire walls, smoked partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING, with intumescent materials only. Completely fill and seal clearances between raceways and openings with the fire stopping material.

2. Waterproofing: At floor penetrations, completely seal clearances around the pipe and make watertight with sealant as specified in Section 07 92 00, JOINT SEALANTS.

N. Provide 40mm (1 1/2 inch) diameter line pressure gage downstream of zone valve in cabinets.

3.2 TESTS

A. Initial Tests: Blow down, and high and low pressure leakage tests as required by current NFPA with documentation.

B. Laboratory and healthcare testing agency shall perform the following:

1. Perform and document all cross connection tests, labeling verification, supply system operation, and valve and alarm operation tests as required by, and in accordance with, current NFPA and the procedures set forth in pre-qualification documentation.
2. Verify that the systems, as installed, meet or exceed the requirements of current NFPA, this specification, and that the systems operate as required.
3. Piping purge test: For each positive pressure gas system, verify cleanliness of piping system. Filter a minimum of 35 cubic feet (1000 liters) of gas through a clean white 0.45 micron filter at a minimum velocity of 3.5 scfm (100 Lpm). Filter shall show no discoloration, and shall accrue no more than 0.1 mg of matter. Test each zone at the outlet most remote from the source. Perform test with the use of an inert gas as described in CGA P-9.
4. Piping purity test: For each positive pressure system, verify purity of piping system. Test each zone at the most remote outlet for dew point, carbon monoxide, total hydrocarbons (as methane), and halogenated hydrocarbons, and compare with source gas. The two tests must in no case exceed variation as specified in Paragraph, Maximum Allowable Variation. Perform test with the use of an inert gas as described in CGA P-9.
5. Outlet and inlet flow test:
 - a. Test all outlets for flow. Perform test with the use of an inert gas as described in CGA P-9.
 - b. Oxygen, nitrous oxide and air outlets must deliver 100 Lpm (3.5 scfm) with a pressure drop of no more than 35 kPa (5 psi), and static pressure of 350 kPa (50 psi).
 - c. Nitrogen outlets must deliver 565 Lpm (20 scfm) with a pressure drop of no more than 35 kPa (5 psi), and static pressure of 1445 kPa (210 psi).

- d. Needle valve air outlets must deliver 1.5 scfm with a pressure drop of no more than five psi, and static pressure of 350 kPa (50 psi).
6. Source Contamination Test: Analyze each pressure gas source for concentration of contaminants, by volume. Take samples for air system test at the intake and at a point immediately downstream of the final filter outlet. The compared tests must in no case exceed variation as specified in Paragraph, Maximum Allowable Variation. Allowable concentrations are below the following:

Dew point, air	4 degrees C (39 degrees F) pressure dew point at 690 kPa (100 psi)
Carbon monoxide, air	10 mg/L (ppm)
Carbon dioxide, air	500 mg/L (ppm)
Gaseous hydrocarbons as methane, air	25 mg/L (ppm)
Halogenated hydrocarbons, air	2 mg/L (ppm)

7. Analysis Test:
- Analyze each pressure gas source and outlet for concentration of gas, by volume.
 - Make analysis with instruments designed to measure the specific gas dispensed.
 - Allowable concentrations are within the following:
 - Laboratory air 19.5 percent to 23.5 percent oxygen.

Medical air	19.5 percent to 23.5 percent oxygen
-------------	-------------------------------------

8. Maximum Allowable Variation: Between comparative test results required are as follows:

Dew point	2 degrees C (36 degrees F)
Carbon monoxide	2 mg/L (ppm)
Total hydrocarbons as methane	1 mg/L (ppm)
Halogenated hydrocarbons	2 mg/L (ppm)

- C. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the COTR and Commissioning Agent. Provide a minimum of 7 days prior to notice.

3.4 COMMISSIONING

- A. Provide commissioning documentation accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS for all inspection, startup, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.5 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for four hours to instruct VA Personnel in operation and maintenance of units.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

- - - E N D - - -

SECTION 22 67 19.16**REVERSE-OSMOSIS WATER EQUIPMENT****PART 1 - GENERAL****1.1 DESCRIPTION**

Provide complete industrial-type packaged reverse osmosis (RO) water treatment system producing high purity water by removal of dissolved minerals, bacteria, particles and organic impurities. Designed for continuous automatic operation. The system shall include pre-filter, product storage tank and all devices necessary for fully operational system. RO system operation will be controlled by the water level in the product storage tank.

1.2 RELATED WORK

- A. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- B. Systems for service other than boiler plant make-up water, Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
- C. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATION

1.3 QUALITY ASSURANCE

Manufacturer shall have been engaged in the manufacture of reverse osmosis systems as a primary product for at least ten years. The ten year requirement supersedes any conflicting requirement in other parts of the project specification.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Catalog cuts, complete description and specifications of all equipment and accessories
 - 2. Accessories including filters, product storage tank, pressure gages and test kit.
 - 3. Performance data including normal and maximum flow and pressure drop. Certification that required performance will be achieved.
 - 4. Piping.
- C. Complete detailed layout, setting, arrangement, and installation drawings including. Drawings shall also show all parts of the apparatus including relative positions, dimensions, and sizes and general arrangement of connecting piping.
- D. Completed System Readiness Checklist provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and

dated on the date of completion, in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

1.5 PROJECT CONDITIONS

A. Design Parameters:

Normal System Flow: 0.63 L/s (10 gpm)

Maximum System Flow: 0.94 L/s (15 gpm)

Daily Water Usage: 3028 liters per day (800 gallons per day)

Daily Hours of Water Demand: 10

Operating Temperature Range: 18-27 degrees C (65 - 80 degrees F)

1.6 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Mechanical Engineers (ASME):

B40.100-2005.....Pressure Gages and Gage Attachments

C. ASTM International (ASTM):

A269-07.....Seamless and Welded Austenitic Stainless Steel
Tubing for General Service.

D1785-06.....Poly (Vinyl Chloride) (PVC) Plastic Pipe,
Schedules 40, 80, and 120.

D. American Water Works Association (AWWA):

B300-04.....Hypochlorites

B301-04.....Liquid Chlorine

C651-05.....Disinfecting Water Mains

E. National Electrical Manufacturers Association (NEMA):

ICS-6-1993(R2001, R2006) Industrial Control and Systems: Enclosures

F. National Fire Protection Association (NFPA):

70- 08National Electrical Code.

G. Department of Health and Human Services, Food and Drug Administration
(FDA):

CFR 21, Chapter 1, Part 175.300, 02 Resinous and Polymeric Coatings

PART 2 - PRODUCTS

2.1 REVERSE OSMOSIS SYSTEM

A. Packaged automatic reverse osmosis system mounted on steel frame, designed for project conditions. Equipment arranged on the frame to allow easy access for operating, maintenance and repair. Unit shall include reverse osmosis membrane, pressure vessels, pre-filtration system, high pressure pump and all required piping, wiring and controls for a fully operational system.

B. Performance Requirements:

1. Membrane reject ratio: 98% minimum. TDS of product is 2% maximum of input TDS.
2. Capture rate: 70% minimum. Maximum amount of water to drain 30% of input.

C. RO Membrane Elements: Thin-film composite with FRP over-wrap, anti-telescoping device, u-cup brine seal. The design salt rejection shall be 98% based on 2000 ppm water at 225 psig at 77 degrees F.

D. RO Element Housings: Type 304 stainless steel with PVC end caps held in place with stainless steel bands. Each housing assembly complete with one set of O-rings and O-ring lubricant. Housings for systems over 9000 gallons per day shall be constructed of fiberglass reinforced polyester (FRP). Provide cleaning connections.

E. High Pressure Pumps and Motors: Duplex vertical multistage high efficiency centrifugal type with Type 304 stainless steel casing, shaft, impellers. Tungsten carbide and ceramic shaft seals. Cast iron frame with flanged piping connections. Premium efficiency TEFC motor selected to be non-overloading on the entire performance curve.

F. Manual Valves:

1. Pump Throttle Valve: Type 316 stainless steel ball valve, socket welded.
2. Concentrate Throttle Valve, Recycle Throttle Valve: In-line needle style, stainless steel, rated for 300 psi minimum.
3. Inlet Isolation Valve, Product and Concentrate Check Valves: PVC with EPDM seats and seals.
4. Feedwater Sample Valve, Product Water Sample Valve: PVC plug valve with EPDM seats and seals.
5. High Pressure Sample Valve: Type 316 stainless steel plug valve.

G. Automatic Valves:

1. Automatic Inlet Shut Off Valve: Solenoid type, diaphragm actuated, normally closed, constructed of glass-filled Noryl thermoplastic.
2. Automatic Membrane Flush Valve: Provide for purging the membranes with fresh water upon machine shut down.

H. Piping:

1. Low Pressure Feed, Reject and Recycle Piping (75 psi and under): ASTM D1785, Schedule 80 PVC, socket welded and flanged.
2. RO Product Tubing From Each Membrane Housing: ASTM D1785, Schedule 80 PVC, socket welded and flanged.
3. Low Pressure Control and Pressure Gage Tubing: Polyethylene.

4. High Pressure Reject and Recycle Piping (above 75 psi): ASTM A269, Type 304 Schedule 10 stainless steel with butt welded joints.
5. High Pressure Control and Pressure Gage Tubing: 1000 psi burst nylon.

I. Controls:

1. Electronic PLC or microprocessor controller providing automatic control for all operating functions. Motor starter panel. All in FRP enclosures rated NEMA 4. All wiring factory-installed and tested. Comply with Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW) and NFPA 70.
2. Autoflush indicator and control to flush RO concentrate at shut down or at predetermined intervals.
3. Warning Alarms: Low quality product, low feed pressure, high feed temperature.
4. Automatic Shutdowns and Alarms: Low feed pressure, low product quality, pretreatment out of service, storage tank full.
5. Status Indicators: Low feed pressure, low quality, flow alarm, high feed water temperature, product divert to drain valve open, pretreatment lockout, storage tank full.
6. Low and High pressure safety switches.
7. Tank water level control switches.
8. Pump Motor Starter: Comply with Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS.
9. Miscellaneous Controls: Elapsed run time indicator, alarm horn, chemical pump receptacles, convenience receptacles, auxiliary contacts.

J. Instrumentation and Displays:

1. All instrumentation readouts panel-mounted in FRP enclosures rated NEMA 4. All factory wiring. Comply with NFPA 70.
2. Digital flow indicators for, product, reject, recycle.
3. Pressure gages for inlet, cartridge filter outlet, RO feed, RO concentrate, and RO product.
4. Conductivity indicator measuring product quality with digital displays, alarm relays and automatic temperature compensation.
5. Conductivity probe mounted in the RO product.

K. Skid and Frame Assembly:

1. RO machine shall be built on a skid and frame constructed of welded structural carbon steel. The entire surface shall be sand-blasted and coated with high solids epoxy coating.

L. Reassembly:

1. Unit shall be shipped to the site completely assembled and tested.

If units or sections are to be disassembled at the site to allow for installation in a limited space, the unit shall be reassembled and tested for intended operation.

2.2 PRE-FILTER

- A. Multi-media filter sized for the RO machine inlet flow rate. Filter designed for suspended solids removal down to 40 microns and automatic backwash cycle.
- B. Media Tank: FRP designed for 150 psi. Pre-piped internal backwash distributor and filtered water collector.
- C. Filter Media: Five separate layers of media. Two underlying layers support the top three active filter layers.
- D. Backwash Cycle: Top-mounted, piston-operated control valve with pre-sized drain line flow control orifice. The cycle shall be initiated by and adjustable seven day electronic time clock. Include RO lockout switch.
- E. Replacement Filter Media: Provide elements for one complete replacement.

2.3 ACTIVATED CARBON FILTER

- A. Single filter sized for the RO machine inlet flow rate. Designed to remove chlorine and prevent RO membrane damage.
- B. Media Tank: FRP designed for 150 psi. Pre-piped internal backwash distributor and filtered water collector.
- C. Filter Media: 12 x 40 mesh bituminous coal-based activated carbon. Install media at job site.
- D. Backwash Cycle: Top-mounted, piston-operated control valve with pre-sized drain line flow control orifice. The cycle shall be initiated by and adjustable seven day electronic time clock. Include RO lockout switch.

2.4 PRESSURE GAGES

- A. ASME B40.100, Grade A, 1% accuracy, 110 mm (4-1/2 inches) diameter, all metal case, bottom connected. White dials, black hands, graduated from 0 to 700 kPa (0 to 100 psi) and identity labeled.

2.5 WATER TESTING EQUIPMENT:

- A. Furnish water testing equipment in a portable cabinet specially made for the installed equipment. Include sufficient materials for 6 months of normal testing procedures.
- B. Silt Density Index (SDI) apparatus to measure degree of suspended solids feeding the RO membranes. Include pressure regulator, pressure gage,

filter holder, 600 mL beaker, sample valve, tubing and 0.45 micron filter papers.

C. Test kit to measure total water hardness, total iron, free chlorine, pH.

PART 3 - EXECUTION

3.1 REQUIRED TECHNICAL SERVICES:

Provide services of a qualified manufacturer's representative to check complete installation for conformance to manufacturer's recommendations, put system into service, make all adjustments required for full conformance to design and specified requirements, and perform all demonstrations and tests.

3.2 FLUSHING AND DISINFECTING:

A. Flush and disinfect new water lines and RO system and tank interiors in accordance with AWWA C651.

B. Material:

1. Liquid chlorine: AWWA B301.
2. Hypochlorite: AWWA B300.

3.3 STARTUP AND TESTING:

A. Operating: Tests shall be run in presence of Contracting Officers Technical Representative (COTR).

B. Procedure:

1. Operate RO system at constant maximum required capacity for one hour after demineralized RO product water is produced. When necessary, waste product water to sewer to maintain above flow rate. Product water production shall begin when a sample shows that demineralization complies with requirements.
2. Demonstrate all features of the control system including diagnostics and flow and cycle indications.

C. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the COTR and Commissioning Agent. Provide a minimum of 7 days prior to notice.

3.5 DEMONSTRATION AND TRAINING:

A. Provide services of manufacturer's technical representative for four hours to instruct VA Personnel in operation and maintenance of units.

- - - E N D - - -

**SECTION 23 05 11
COMMON WORK RESULTS FOR HVAC**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. The requirements of this Section apply to all sections of Division 23.
- B. Definitions:
 - 1. Exposed: Piping, ductwork, and equipment exposed to view in finished rooms.
 - 2. Option or optional: Contractor's choice of an alternate material or method.
 - 3. COTR: Contracting Officer's Technical Representative.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- C. Section 07 84 00, FIRESTOPPING.
- D. Section 07 60 00, FLASHING AND SHEET METAL: Flashing for Wall and Roof Penetrations.
- E. Section 07 92 00, JOINT SEALANTS.
- F. Section 09 91 00, PAINTING.
- G. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- H. Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC and STEAM GENERATION.
- I. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.
- J. Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.
- K. Section 23 07 11, HVAC INSULATION.
- L. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- M. Section 23 11 23, FACILITY NATURAL-GAS PIPING.
- N. Section 23 21 13, HYDRONIC PIPING.
- O. Section 23 21 23, HYDRONIC PUMPS.
- P. Section 23 22 13, STEAM and CONDENSATE HEATING PIPING.
- Q. Section 23 31 00, HVAC DUCTS and CASINGS.
- R. Section 23 34 00, HVAC FANS.
- S. Section 23 36 00, AIR TERMINAL UNITS.
- T. Section 23 37 00, AIR OUTLETS and INLETS.
- U. Section 23 40 00, HVAC AIR CLEANING DEVICES.
- V. Section 23 74 13, PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS.
- W. Section 23 81 00, DECENTRALIZED UNITARY HVAC EQUIPMENT.
- X. Section 23 82 00, CONVECTION HEATING and COOLING UNITS.

Y. Section 23 82 16, AIR COILS.

Z. Section 23 84 00, HUMIDITY CONTROL EQUIPMENT.

AA. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.

BB. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.3 QUALITY ASSURANCE

A. Mechanical, electrical and associated systems shall be safe, reliable, efficient, durable, easily and safely operable and maintainable, easily and safely accessible, and in compliance with applicable codes as specified. The systems shall be comprised of high quality institutional-class and industrial-class products of manufacturers that are experienced specialists in the required product lines. All construction firms and personnel shall be experienced and qualified specialists in industrial and institutional HVAC

B. Flow Rate Tolerance for HVAC Equipment: Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.

C. Equipment Vibration Tolerance:

1. Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT. Equipment shall be factory-balanced to this tolerance and re-balanced on site, as necessary.
2. After HVAC air balance work is completed and permanent drive sheaves are in place, perform field mechanical balancing and adjustments required to meet the specified vibration tolerance.

D. Products Criteria:

1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 3 years (or longer as specified elsewhere). The design, model and size of each item shall have been in satisfactory and efficient operation on at least three installations for approximately three years. However, digital electronics devices, software and systems such as controls, instruments, computer work station, shall be the current generation of technology and basic design that has a proven satisfactory service record of at least three years. See other specification sections for any exceptions and/or additional requirements.
2. All items furnished shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.
3. Conform to codes and standards as required by the specifications. Conform to local codes, if required by local authorities such as the

- natural gas supplier, if the local codes are more stringent than those specified. Refer any conflicts to the COTR.
4. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be products of one manufacturer.
 5. Assembled Units: Manufacturers of equipment assemblies, which use components made by others, assume complete responsibility for the final assembled product.
 6. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.
 7. Asbestos products or equipment or materials containing asbestos shall not be used.
- E. Equipment Service Organizations:
1. HVAC: Products and systems shall be supported by service organizations that maintain a complete inventory of repair parts and are located within 50 miles to the site.
- F. HVAC Mechanical Systems Welding: Before any welding is performed, contractor shall submit a certificate certifying that welders comply with the following requirements:
1. Qualify welding processes and operators for piping according to ASME "Boiler and Pressure Vessel Code", Section IX, "Welding and Brazing Qualifications".
 2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
 3. Certify that each welder has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.
- G. Execution (Installation, Construction) Quality:
1. Apply and install all items in accordance with manufacturer's written instructions. Refer conflicts between the manufacturer's instructions and the contract drawings and specifications to the COTR for resolution. Provide written hard copies or computer files of manufacturer's installation instructions to the COTR at least two weeks prior to commencing installation of any item. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations is a cause for rejection of the material.

2. Provide complete layout drawings required by Paragraph, SUBMITTALS. Do not commence construction work on any system until the layout drawings have been approved.

H. Upon request by Government, provide lists of previous installations for selected items of equipment. Include contact persons who will serve as references, with telephone numbers and e-mail addresses.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, and with requirements in the individual specification sections.

B. Contractor shall make all necessary field measurements and investigations to assure that the equipment and assemblies will meet contract requirements.

C. If equipment is submitted which differs in arrangement from that shown, provide drawings that show the rearrangement of all associated systems. Approval will be given only if all features of the equipment and associated systems, including accessibility, are equivalent to that required by the contract.

D. Prior to submitting shop drawings for approval, contractor shall certify in writing that manufacturers of all major items of equipment have each reviewed drawings and specifications, and have jointly coordinated and properly integrated their equipment and controls to provide a complete and efficient installation.

E. Submittals and shop drawings for interdependent items, containing applicable descriptive information, shall be furnished together and complete in a group. Coordinate and properly integrate materials and equipment in each group to provide a completely compatible and efficient.

F. Layout Drawings:

1. Submit complete consolidated and coordinated layout drawings for all new systems, and for existing systems that are in the same areas.

Refer to Section 00 72 00, GENERAL CONDITIONS, Article, SUBCONTRACTS AND WORK COORDINATION.

2. The drawings shall include plan views, elevations and sections of all systems and shall be on a scale of not less than 1:32 (3/8-inch equal to one foot). Clearly identify and dimension the proposed locations of the principal items of equipment. The drawings shall clearly show locations and adequate clearance for all equipment, piping, valves, control panels and other items. Show the access means for all items

- requiring access for operations and maintenance. Provide detailed layout drawings of all piping and duct systems.
3. Do not install equipment foundations, equipment or piping until layout drawings have been approved.
 4. In addition, for HVAC systems, provide details of the following:
 - a. Mechanical equipment rooms.
 - b. Interstitial space.
 - c. Hangers, inserts, supports, and bracing.
 - d. Pipe sleeves.
 - e. Duct or equipment penetrations of floors, walls, ceilings, or roofs.
- G. Manufacturer's Literature and Data: Submit under the pertinent section rather than under this section.
1. Submit belt drive with the driven equipment. Submit selection data for specific drives when requested by the COTR.
 2. Submit electric motor data and variable speed drive data with the driven equipment.
 3. Equipment and materials identification.
 4. Fire-stopping materials.
 5. Hangers, inserts, supports and bracing. Provide load calculations for variable spring and constant support hangers.
 6. Wall, floor, and ceiling plates.
- H. HVAC Maintenance Data and Operating Instructions:
1. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Article, INSTRUCTIONS, for systems and equipment.
 2. Provide a listing of recommended replacement parts for keeping in stock supply, including sources of supply, for equipment. Include in the listing belts for equipment: Belt manufacturer, model number, size and style, and distinguished whether of multiple belt sets.
- I. Provide copies of approved HVAC equipment submittals to the Testing, Adjusting and Balancing Subcontractor.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Air Conditioning, Heating and Refrigeration Institute (AHRI):
430-2009.....Central Station Air-Handling Units
- C. American National Standard Institute (ANSI):
B31.1-2007.....Power Piping

- D. Rubber Manufacturers Association (ANSI/RMA):
- IP-20-2007.....Specifications for Drives Using Classical
V-Belts and Sheaves
 - IP-21-2009.....Specifications for Drives Using Double-V
(Hexagonal) Belts
 - IP-22-2007.....Specifications for Drives Using Narrow V-Belts
and Sheaves
- E. Air Movement and Control Association (AMCA):
- 410-96.....Recommended Safety Practices for Air Moving
Devices
- F. American Society of Mechanical Engineers (ASME):
- Boiler and Pressure Vessel Code (BPVC):
 - Section IX-2007.....Welding and Brazing Qualifications
Code for Pressure Piping:
 - B31.1-2007.....Power Piping
- G. American Society for Testing and Materials (ASTM):
- A36/A36M-08.....Standard Specification for Carbon Structural
Steel
 - A575-96(2007).....Standard Specification for Steel Bars, Carbon,
Merchant Quality, M-Grades
 - E84-10.....Standard Test Method for Surface Burning
Characteristics of Building Materials
 - E119-09c.....Standard Test Methods for Fire Tests of Building
Construction and Materials
- H. Manufacturers Standardization Society (MSS) of the Valve and Fittings
Industry, Inc:
- SP-58-2009.....Pipe Hangers and Supports-Materials, Design and
Manufacture, Selection, Application, and
Installation
 - SP 69-2003.....Pipe Hangers and Supports-Selection and
Application
 - SP 127-2001.....Bracing for Piping Systems, Seismic - Wind -
Dynamic, Design, Selection, Application
- I. National Electrical Manufacturers Association (NEMA):
- MG-1-2009.....Motors and Generators
- J. National Fire Protection Association (NFPA):
- 31-06.....Standard for Installation of Oil-Burning
Equipment
 - 54-09.....National Fuel Gas Code
 - 70-08.....National Electrical Code

90A-09.....Standard for the Installation of Air
Conditioning and Ventilating Systems
101-09.....Life Safety Code

1.6 DELIVERY, STORAGE AND HANDLING

A. Protection of Equipment:

1. Equipment and material placed on the job site shall remain in the custody of the Contractor until phased acceptance, whether or not the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage.
2. Place damaged equipment in first class, new operating condition; or, replace same as determined and directed by the COTR. Such repair or replacement shall be at no additional cost to the Government.
3. Protect interiors of new equipment and piping systems against entry of foreign matter. Clean both inside and outside before painting or placing equipment in operation.
4. Existing equipment and piping being worked on by the Contractor shall be under the custody and responsibility of the Contractor and shall be protected as required for new work.

B. Cleanliness of Piping and Equipment Systems:

1. Exercise care in storage and handling of equipment and piping material to be incorporated in the work. Remove debris arising from cutting, threading and welding of piping.
2. Piping systems shall be flushed, blown or pigged as necessary to deliver clean systems.
3. Clean interior of all tanks prior to delivery for beneficial use by the Government.
4. Boilers shall be left clean following final internal inspection by Government insurance representative or inspector.
5. Contractor shall be fully responsible for all costs, damage, and delay arising from failure to provide clean systems.

1.7 JOB CONDITIONS - WORK IN EXISTING BUILDING

- A. Building Operation: Government employees will be continuously operating and managing all facilities, including temporary facilities, that serve the medical center.
- B. Maintenance of Service: Schedule all work to permit continuous service as required by the medical center.
- C. Steam and Condensate Service Interruptions: Limited steam and condensate service interruptions, as required for interconnections of new and existing systems, will be permitted by the COTR during periods when the

demands are not critical to the operation of the medical center. These non-critical periods are limited to between 8 pm and 5 am in the appropriate off-season (if applicable). Provide at least one week advance notice to the COTR.

- D. Phasing of Work: Comply with all requirements shown on drawings or specified.
- E. Building Working Environment: Maintain the architectural and structural integrity of the building and the working environment at all times. Maintain the interior of building at 18 degrees C (65 degrees F) minimum. Limit the opening of doors, windows or other access openings to brief periods as necessary for rigging purposes. No storm water or ground water leakage permitted. Provide daily clean-up of construction and demolition debris on all floor surfaces and on all equipment being operated by VA.
- F. Acceptance of Work for Government Operation: As new facilities are made available for operation and these facilities are of beneficial use to the Government, inspections will be made and tests will be performed. Based on the inspections, a list of contract deficiencies will be issued to the Contractor. After correction of deficiencies as necessary for beneficial use, the Contracting Officer will process necessary acceptance and the equipment will then be under the control and operation of Government personnel.
- G. Temporary Facilities: Refer to Article, TEMPORARY PIPING AND EQUIPMENT in this section.

PART 2 - PRODUCTS

2.1 FACTORY-ASSEMBLED PRODUCTS

- A. Provide maximum standardization of components to reduce spare part requirements.
- B. Manufacturers of equipment assemblies that include components made by others shall assume complete responsibility for final assembled unit.
 - 1. All components of an assembled unit need not be products of same manufacturer.
 - 2. Constituent parts that are alike shall be products of a single manufacturer.
 - 3. Components shall be compatible with each other and with the total assembly for intended service.
 - 4. Contractor shall guarantee performance of assemblies of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.

- C. Components of equipment shall bear manufacturer's name and trademark, model number, serial number and performance data on a name plate securely affixed in a conspicuous place, or cast integral with, stamped or otherwise permanently marked upon the components of the equipment.
- D. Major items of equipment, which serve the same function, must be the same make and model. Exceptions will be permitted if performance requirements cannot be met.

2.2 COMPATIBILITY OF RELATED EQUIPMENT

Equipment and materials installed shall be compatible in all respects with other items being furnished and with existing items so that the result will be a complete and fully operational plant that conforms to contract requirements.

2.3 BELT DRIVES

- A. Type: ANSI/RMA standard V-belts with proper motor pulley and driven sheave. Belts shall be constructed of reinforced cord and rubber.
- B. Dimensions, rating and selection standards: ANSI/RMA IP-20 and IP-21.
- C. Minimum Horsepower Rating: Motor horsepower plus recommended ANSI/RMA service factor (not less than 20 percent) in addition to the ANSI/RMA allowances for pitch diameter, center distance, and arc of contact.
- D. Maximum Speed: 25 m/s (5000 feet per minute).
- E. Adjustment Provisions: For alignment and ANSI/RMA standard allowances for installation and take-up.
- F. Drives may utilize a single V-Belt (any cross section) when it is the manufacturer's standard.
- G. Multiple Belts: Matched to ANSI/RMA specified limits by measurement on a belt measuring fixture. Seal matched sets together to prevent mixing or partial loss of sets. Replacement, when necessary, shall be an entire set of new matched belts.
- H. Sheaves and Pulleys:
 - 1. Material: Pressed steel, or close grained cast iron.
 - 2. Bore: Fixed or bushing type for securing to shaft with keys.
 - 3. Balanced: Statically and dynamically.
 - 4. Groove spacing for driving and driven pulleys shall be the same.
- I. Drive Types, Based on ARI 435:
 - 1. Provide adjustable-pitch drive as follows:
 - a. Fan speeds up to 1800 RPM: 7.5 kW (10 horsepower) and smaller.
 - b. Fan speeds over 1800 RPM: 2.2 kW (3 horsepower) and smaller.
 - 2. Provide fixed-pitch drives for drives larger than those listed above.
 - 3. The final fan speeds required to just meet the system CFM and pressure requirements, without throttling, shall be determined by

adjustment of a temporary adjustable-pitch motor sheave or by fan law calculation if a fixed-pitch drive is used initially.

2.4 DRIVE GUARDS

- A. For machinery and equipment, provide guards as shown in AMCA 410 for belts, chains, couplings, pulleys, sheaves, shafts, gears and other moving parts regardless of height above the floor to prevent damage to equipment and injury to personnel. Drive guards may be excluded where motors and drives are inside factory fabricated air handling unit casings.
- B. Pump shafts and couplings shall be fully guarded by a sheet steel guard, covering coupling and shaft but not bearings. Material shall be minimum 16-gage sheet steel; ends shall be braked and drilled and attached to pump base with minimum of four 6 mm (1/4-inch) bolts. Reinforce guard as necessary to prevent side play forcing guard onto couplings.
- C. V-belt and sheave assemblies shall be totally enclosed, firmly mounted, non-resonant. Guard shall be an assembly of minimum 22-gage sheet steel and expanded or perforated metal to permit observation of belts. 25 mm (one-inch) diameter hole shall be provided at each shaft centerline to permit speed measurement.
- D. Materials: Sheet steel, cast iron, expanded metal or wire mesh rigidly secured so as to be removable without disassembling pipe, duct, or electrical connections to equipment.
- E. Access for Speed Measurement: 25 mm (One inch) diameter hole at each shaft center.

2.5 LIFTING ATTACHMENTS

Provide equipment with suitable lifting attachments to enable equipment to be lifted in its normal position. Lifting attachments shall withstand any handling conditions that might be encountered, without bending or distortion of shape, such as rapid lowering and braking of load.

2.6 ELECTRIC MOTORS

- A. All material and equipment furnished and installation methods shall conform to the requirements of Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT; and, Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Provide all electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems. Provide special energy efficient premium efficiency type motors as scheduled.

2.7 VARIABLE SPEED MOTOR CONTROLLERS

- A. Refer to Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

- B. The combination of controller and motor shall be provided by the manufacturer of the driven equipment, such as pumps and fans, and shall be rated for 100 percent output performance. Multiple units of the same class of equipment, i.e. air handlers, fans, pumps, shall be product of a single manufacturer.
- C. Motors shall be premium efficiency type and be approved by the motor controller manufacturer. The controller-motor combination shall be guaranteed to provide full motor nameplate horsepower in variable frequency operation. Both driving and driven motor/fan sheaves shall be fixed pitch.
- D. Controller shall not add any current or voltage transients to the input AC power distribution system, DDC controls, sensitive medical equipment, etc., nor shall be affected from other devices on the AC power system.
- E. Controller shall be provided with the following operating features and accessories:
 - 1. Suitable for variable torque load.
 - 2. Provide thermal magnetic circuit breaker or fused switch with external operator and incoming line fuses. Unit shall be rated for minimum 30,000 AIC. Provide AC input filters on incoming power line. Provide output line reactors on line between drive and motor for motors over 50 HP or where the distance between the breaker and motor exceeds 50 feet.

2.8 EQUIPMENT AND MATERIALS IDENTIFICATION

- A. Use symbols, nomenclature and equipment numbers specified, shown on the drawings and shown in the maintenance manuals. In addition, provide bar code identification nameplate for all equipment which will allow the equipment identification code to be scanned into the system for maintenance and inventory tracking. Identification for piping is specified in Section 09 91 00, PAINTING.
- B. Interior (Indoor) Equipment: Engraved nameplates, with letters not less than 48 mm (3/16-inch) high of brass with black-filled letters, or rigid black plastic with white letters specified in Section 09 91 00, PAINTING permanently fastened to the equipment. Identify unit components such as coils, filters, fans, etc.
- C. Exterior (Outdoor) Equipment: Brass nameplates, with engraved black filled letters, not less than 48 mm (3/16-inch) high riveted or bolted to the equipment.
- D. Control Items: Label all temperature and humidity sensors, controllers and control dampers. Identify and label each item as they appear on the control diagrams.

E. Valve Tags and Lists:

1. HVAC: Provide for all valves other than for equipment in Section 23 82 00, CONVECTION HEATING AND COOLING UNITS.
2. Valve tags: Engraved black filled numbers and letters not less than 13 mm (1/2-inch) high for number designation, and not less than 6.4 mm (1/4-inch) for service designation on 19 gage 38 mm (1-1/2 inches) round brass disc, attached with brass "S" hook or brass chain.
3. Valve lists: Typed or printed plastic coated card(s), sized 216 mm (8-1/2 inches) by 280 mm (11 inches) showing tag number, valve function and area of control, for each service or system. Punch sheets for a 3-ring notebook.
4. Provide detailed plan for each floor of the building indicating the location and valve number for each valve. Identify location of each valve with a color coded thumb tack in ceiling.

2.9 FIRESTOPPING

Section 07 84 00, FIRESTOPPING specifies an effective barrier against the spread of fire, smoke and gases where penetrations occur for piping and ductwork. Refer to Section 23 07 11, HVAC INSULATION, for firestop pipe and duct insulation.

2.10 GALVANIZED REPAIR COMPOUND

Mil. Spec. DOD-P-21035B, paint form.

2.11 HVAC PIPE AND EQUIPMENT SUPPORTS AND RESTRAINTS

- A. Vibration Isolators: Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
- B. Supports for Roof Mounted Items:
 1. Equipment: Equipment rails shall be galvanized steel, minimum 1.3 mm (18 gauge), with integral baseplate, continuous welded corner seams, factory installed 50 mm by 100 mm (2 by 4) treated wood nailer, 1.3 mm (18 gauge) galvanized steel counter flashing cap with screws, built-in cant strip, (except for gypsum or tectum deck), minimum height 280 mm (11 inches). For surface insulated roof deck, provide raised cant strip to start at the upper surface of the insulation.
 2. Pipe/duct pedestals: Provide a galvanized Unistrut channel welded to U-shaped mounting brackets which are secured to side of rail with galvanized lag bolts.
- C. Pipe Supports: Comply with MSS SP-58. Type Numbers specified refer to this standard. For selection and application comply with MSS SP-69. Refer to Section 05 50 00, METAL FABRICATIONS, for miscellaneous metal support materials and prime coat painting requirements.
- D. Attachment to Concrete Building Construction:

1. Concrete insert: MSS SP-58, Type 18.
 2. Self-drilling expansion shields and machine bolt expansion anchors: Permitted in concrete not less than 102 mm (four inches) thick when approved by the COTR for each job condition.
 3. Power-driven fasteners: Permitted in existing concrete or masonry not less than 102 mm (four inches) thick when approved by the COTR for each job condition.
- E. Attachment to Steel Building Construction:
1. Welded attachment: MSS SP-58, Type 22.
 2. Beam clamps: MSS SP-58, Types 20, 21, 28 or 29. Type 23 C-clamp may be used for individual copper tubing up to 23mm (7/8-inch) outside diameter.
- F. Attachment to existing structure: Support from existing floor/roof frame.
- G. Attachment to Wood Construction: Wood screws or lag bolts.
- H. Hanger Rods: Hot-rolled steel, ASTM A36 or A575 for allowable load listed in MSS SP-58. For piping, provide adjustment means for controlling level or slope. Types 13 or 15 turn-buckles shall provide 38 mm (1-1/2 inches) minimum of adjustment and incorporate locknuts. All-thread rods are acceptable.
- I. Hangers Supporting Multiple Pipes (Trapeze Hangers): Galvanized, cold formed, lipped steel channel horizontal member, not less than 41 mm by 41 mm (1-5/8 inches by 1-5/8 inches), 2.7 mm (No. 12 gage), designed to accept special spring held, hardened steel nuts. Not permitted for steam supply and condensate piping.
1. Allowable hanger load: Manufacturers rating less 91kg (200 pounds).
 2. Guide individual pipes on the horizontal member of every other trapeze hanger with 6 mm (1/4-inch) U-bolt fabricated from steel rod. Provide Type 40 insulation shield, secured by two 13mm (1/2-inch) galvanized steel bands, or preinsulated calcium silicate shield for insulated piping at each hanger.
- J. Supports for Piping Systems:
1. Select hangers sized to encircle insulation on insulated piping. Refer to Section 23 07 11, HVAC INSULATION for insulation thickness. To protect insulation, provide Type 39 saddles for roller type supports or preinsulated calcium silicate shields. Provide Type 40 insulation shield or preinsulated calcium silicate shield at all other types of supports and hangers including those for preinsulated piping.
 2. Piping Systems except High and Medium Pressure Steam (MSS SP-58):

- a. Standard clevis hanger: Type 1; provide locknut.
 - b. Riser clamps: Type 8.
 - c. Wall brackets: Types 31, 32 or 33.
 - d. Roller supports: Type 41, 43, 44 and 46.
 - e. Saddle support: Type 36, 37 or 38.
 - f. Turnbuckle: Types 13 or 15. Preinsulate.
 - g. U-bolt clamp: Type 24.
 - h. Copper Tube:
 - 1) Hangers, clamps and other support material in contact with tubing shall be painted with copper colored epoxy paint, plastic coated or taped with non adhesive isolation tape to prevent electrolysis.
 - 2) For vertical runs use epoxy painted or plastic coated riser clamps.
 - 3) For supporting tube to strut: Provide epoxy painted pipe straps for copper tube or plastic inserted vibration isolation clamps.
 - 4) Insulated Lines: Provide pre-insulated calcium silicate shields sized for copper tube.
 - i. Supports for plastic or glass piping: As recommended by the pipe manufacturer with black rubber tape extending one inch beyond steel support or clamp.
3. High and Medium Pressure Steam (MSS SP-58):
- a. Provide eye rod or Type 17 eye nut near the upper attachment.
 - b. Piping 50 mm (2 inches) and larger: Type 43 roller hanger. For roller hangers requiring seismic bracing provide a Type 1 clevis hanger with Type 41 roller attached by flat side bars.
 - c. Piping with Vertical Expansion and Contraction:
 - 1) Movement up to 20 mm (3/4-inch): Type 51 or 52 variable spring unit with integral turn buckle and load indicator.
 - 2) Movement more than 20 mm (3/4-inch): Type 54 or 55 constant support unit with integral adjusting nut, turn buckle and travel position indicator.
4. Convertor and Expansion Tank Hangers: May be Type 1 sized for the shell diameter. Insulation where required will cover the hangers.
- K. Pre-insulated Calcium Silicate Shields:
- 1. Provide 360 degree water resistant high density 965 kPa (140 psi) compressive strength calcium silicate shields encased in galvanized metal.
 - 2. Pre-insulated calcium silicate shields to be installed at the point of support during erection.

3. Shield thickness shall match the pipe insulation.
4. The type of shield is selected by the temperature of the pipe, the load it must carry, and the type of support it will be used with.
 - a. Shields for supporting chilled or cold water shall have insulation that extends a minimum of 1 inch past the sheet metal. Provide for an adequate vapor barrier in chilled lines.
 - b. The pre-insulated calcium silicate shield shall support the maximum allowable water filled span as indicated in MSS-SP 69. To support the load, the shields may have one or more of the following features: structural inserts 4138 kPa (600 psi) compressive strength, an extra bottom metal shield, or formed structural steel (ASTM A36) wear plates welded to the bottom sheet metal jacket.
5. Shields may be used on steel clevis hanger type supports, roller supports or flat surfaces.
- L. Seismic Restraint of Piping and Ductwork: Refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS. Comply with MSS SP-127.

2.12 PIPE PENETRATIONS

- A. Install sleeves during construction for other than blocked out floor openings for risers in mechanical bays.
- B. To prevent accidental liquid spills from passing to a lower level, provide the following:
 1. For sleeves: Extend sleeve 25 mm (one inch) above finished floor and provide sealant for watertight joint.
 2. For blocked out floor openings: Provide 40 mm (1-1/2 inch) angle set in silicone adhesive around opening.
 3. For drilled penetrations: Provide 40 mm (1-1/2 inch) angle ring or square set in silicone adhesive around penetration.
- C. Penetrations are not allowed through beams or ribs, but may be installed in concrete beam flanges. Any deviation from these requirements must receive prior approval of COTR.
- D. Sheet Metal, Plastic, or Moisture-resistant Fiber Sleeves: Provide for pipe passing through floors, interior walls, and partitions, unless brass or steel pipe sleeves are specifically called for below.
- E. Cast Iron or Zinc Coated Pipe Sleeves: Provide for pipe passing through exterior walls below grade. Make space between sleeve and pipe watertight with a modular or link rubber seal. Seal shall be applied at both ends of sleeve.

- F. Galvanized Steel or an alternate Black Iron Pipe with asphalt coating
Sleeves: Provide for pipe passing through concrete beam flanges, except where brass pipe sleeves are called for. Provide sleeve for pipe passing through floor of mechanical rooms, above basement. Except in mechanical rooms, connect sleeve with floor plate.
- G. Brass Pipe Sleeves: Provide for pipe passing through quarry tile, terrazzo or ceramic tile floors. Connect sleeve with floor plate.
- H. Sleeves are not required for wall hydrants for fire department connections or in drywall construction.
- I. Sleeve Clearance: Sleeve through floors, walls, partitions, and beam flanges shall be one inch greater in diameter than external diameter of pipe. Sleeve for pipe with insulation shall be large enough to accommodate the insulation. Interior openings shall be caulked tight with fire stopping material and sealant to prevent the spread of fire, smoke, and gases.
- J. Sealant and Adhesives: Shall be as specified in Section 07 92 00, JOINT SEALANTS.

2.13 DUCT PENETRATIONS

- A. Provide curbs for roof mounted piping, ductwork and equipment. Curbs shall be 14 inches high with continuously welded seams, built-in cant strip, interior baffle with acoustic insulation, curb bottom, hinged curb adapter.
- B. Provide firestopping for openings through fire and smoke barriers, maintaining minimum required rating of floor, ceiling or wall assembly. See section 07 84 00, FIRESTOPPING.

2.14 SPECIAL TOOLS AND LUBRICANTS

- A. Furnish, and turn over to the COTR, tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.
- B. Grease Guns with Attachments for Applicable Fittings: One for each type of grease required for each motor or other equipment.
- C. Refrigerant Tools: Provide system charging/Evacuation equipment, gauges, fittings, and tools required for maintenance of furnished equipment.
- D. Tool Containers: Hardwood or metal, permanently identified for in tended service and mounted, or located, where directed by the COTR.
- E. Lubricants: A minimum of 0.95 L (one quart) of oil, and 0.45 kg (one pound) of grease, of equipment manufacturer's recommended grade and type, in unopened containers and properly identified as to use for each different application.

2.15 WALL, FLOOR AND CEILING PLATES

- A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.
- B. Thickness: Not less than 2.4 mm (3/32-inch) for floor plates. For wall and ceiling plates, not less than 0.64 mm (0.025-inch) for up to 80 mm (3-inch pipe), 0.89 mm (0.035-inch) for larger pipe.
- C. Locations: Use where pipe penetrates floors, walls and ceilings in exposed locations, in finished areas only. Provide a watertight joint in spaces where brass or steel pipe sleeves are specified.

2.16 ASBESTOS

Materials containing asbestos are not permitted.

PART 3 - EXECUTION**3.1 ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING**

- A. Coordinate location of piping, sleeves, inserts, hangers, ductwork and equipment. Locate piping, sleeves, inserts, hangers, ductwork and equipment clear of windows, doors, openings, light outlets, and other services and utilities. Prepare equipment layout drawings to coordinate proper location and personnel access of all facilities. Submit the drawings for review as required by Part 1. Follow manufacturer's published recommendations for installation methods not otherwise specified.
- B. Operating Personnel Access and Observation Provisions: Select and arrange all equipment and systems to provide clear view and easy access, without use of portable ladders, for maintenance and operation of all devices including, but not limited to: all equipment items, valves, filters, strainers, transmitters, sensors, control devices. All gages and indicators shall be clearly visible by personnel standing on the floor or on permanent platforms. Do not reduce or change maintenance and operating space and access provisions that are shown on the drawings.
- C. Equipment and Piping Support: Coordinate structural systems necessary for pipe and equipment support with pipe and equipment locations to permit proper installation.
- D. Location of pipe sleeves, trenches and chases shall be accurately coordinated with equipment and piping locations.
- E. Cutting Holes:
 - 1. Cut holes through concrete and masonry by rotary core drill.
Pneumatic hammer, impact electric, and hand or manual hammer type

- drill will not be allowed, except as permitted by COTR where working area space is limited.
2. Locate holes to avoid interference with structural members such as beams or grade beams. Holes shall be laid out in advance and drilling done only after approval by COTR. If the Contractor considers it necessary to drill through structural members, this matter shall be referred to COTR for approval.
 3. Do not penetrate membrane waterproofing.
- F. Interconnection of Instrumentation or Control Devices: Generally, electrical and pneumatic interconnections are not shown but must be provided.
- G. Minor Piping: Generally, small diameter pipe runs from drips and drains, water cooling, and other service are not shown but must be provided.
- H. Electrical and Pneumatic Interconnection of Controls and Instruments: This generally not shown but must be provided. This includes interconnections of sensors, transmitters, transducers, control devices, control and instrumentation panels, instruments and computer workstations. Comply with NFPA-70.
- I. Protection and Cleaning:
1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during installation, in accordance with the manufacturer's recommendations and as approved by the COTR. Damaged or defective items in the opinion of the COTR, shall be replaced.
 2. Protect all finished parts of equipment, such as shafts and bearings where accessible, from rust prior to operation by means of protective grease coating and wrapping. Close pipe openings with caps or plugs during installation. Tightly cover and protect fixtures and equipment against dirt, water chemical, or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials and equipment.
- J. Concrete and Grout: Use concrete and shrink compensating grout 25 MPa (3000 psi) minimum, specified in Section 03 30 00, CAST-IN-PLACE CONCRETE.
- K. Install gages, thermometers, valves and other devices with due regard for ease in reading or operating and maintaining said devices. Locate and position thermometers and gages to be easily read by operator or staff standing on floor or walkway provided. Servicing shall not require dismantling adjacent equipment or pipe work.
- L. Install steam piping expansion joints as per manufacturer's recommendations.

M. Work in Existing Building:

1. Perform as specified in Article, OPERATIONS AND STORAGE AREAS, Article, ALTERATIONS, and Article, RESTORATION of the Section 01 00 00, GENERAL REQUIREMENTS for relocation of existing equipment, alterations and restoration of existing building(s).
2. As specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, OPERATIONS AND STORAGE AREAS, make alterations to existing service piping at times that will least interfere with normal operation of the facility.
3. Cut required openings through existing masonry and reinforced concrete using diamond core drills. Use of pneumatic hammer type drills, impact type electric drills, and hand or manual hammer type drills, will be permitted only with approval of the COTR. Locate openings that will least effect structural slabs, columns, ribs or beams. Refer to the COTR for determination of proper design for openings through structural sections and opening layouts approval, prior to cutting or drilling into structure. After COTR's approval, carefully cut opening through construction no larger than absolutely necessary for the required installation.

N. Switchgear/Electrical Equipment Drip Protection: Every effort shall be made to eliminate the installation of pipe above electrical and telephone switchgear. If this is not possible, encase pipe in a second pipe with a minimum of joints. Installation of piping, ductwork, leak protection apparatus or other installations foreign to the electrical installation shall be located in the space equal to the width and depth of the equipment and extending from to a height of 1.8 m (6 ft.) above the equipment of to ceiling structure, whichever is lower (NFPA 70).

O. Inaccessible Equipment:

1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, equipment shall be removed and reinstalled or remedial action performed as directed at no additional cost to the Government.
2. The term "conveniently accessible" is defined as capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as motors, fans, pumps, belt guards, transformers, high voltage lines, piping, and ductwork.

3.2 TEMPORARY PIPING AND EQUIPMENT

A. Continuity of operation of existing facilities will generally require temporary installation or relocation of equipment and piping.

- B. The Contractor shall provide all required facilities in accordance with the requirements of phased construction and maintenance of service. All piping and equipment shall be properly supported, sloped to drain, operate without excessive stress, and shall be insulated where injury can occur to personnel by contact with operating facilities. The requirements of Paragraph 3.1 apply.
- C. Temporary facilities and piping shall be completely removed and any openings in structures sealed. Provide necessary blind flanges and caps to seal open piping remaining in service.

3.3 RIGGING

- A. Design is based on application of available equipment. Openings in building structures are planned to accommodate design scheme.
- B. Alternative methods of equipment delivery may be offered by Contractor and will be considered by Government under specified restrictions of phasing and maintenance of service as well as structural integrity of the building.
- C. Close all openings in the building when not required for rigging operations to maintain proper environment in the facility for Government operation and maintenance of service.
- D. Contractor shall provide all facilities required to deliver specified equipment and place on foundations. Attachments to structures for rigging purposes and support of equipment on structures shall be Contractor's full responsibility. Upon request, the Government will check structure adequacy and advise Contractor of recommended restrictions.
- E. Contractor shall check all clearances, weight limitations and shall offer a rigging plan designed by a Registered Professional Engineer. All modifications to structures, including reinforcement thereof, shall be at Contractor's cost, time and responsibility.
- F. Rigging plan and methods shall be referred to COTR for evaluation prior to actual work.
- G. Restore building to original condition upon completion of rigging work.

3.4 PIPE AND EQUIPMENT SUPPORTS

- A. Where hanger spacing does not correspond with joist or rib spacing, use structural steel channels secured directly to joist and rib structure that will correspond to the required hanger spacing, and then suspend the equipment and piping from the channels. Drill or burn holes in structural steel only with the prior approval of the COTR.

- B. Use of chain, wire or strap hangers; wood for blocking, stays and bracing; or, hangers suspended from piping above will not be permitted. Replace or thoroughly clean rusty products and paint with zinc primer.
- C. Use hanger rods that are straight and vertical. Turnbuckles for vertical adjustments may be omitted where limited space prevents use. Provide a minimum of 15 mm (1/2-inch) clearance between pipe or piping covering and adjacent work.
- D. HVAC Horizontal Pipe Support Spacing: Refer to MSS SP-69. Provide additional supports at valves, strainers, in-line pumps and other heavy components. Provide a support within one foot of each elbow.
- E. HVAC Vertical Pipe Supports:
 - 1. Up to 150 mm (6-inch pipe), 9 m (30 feet) long, bolt riser clamps to the pipe below couplings, or welded to the pipe and rests supports securely on the building structure.
 - 2. Vertical pipe larger than the foregoing, support on base elbows or tees, or substantial pipe legs extending to the building structure.
- F. Overhead Supports:
 - 1. The basic structural system of the building is designed to sustain the loads imposed by equipment and piping to be supported overhead.
 - 2. Provide steel structural members, in addition to those shown, of adequate capability to support the imposed loads, located in accordance with the final approved layout of equipment and piping.
 - 3. Tubing and capillary systems shall be supported in channel troughs.
- G. Floor Supports:
 - 1. Provide concrete bases, concrete anchor blocks and pedestals, and structural steel systems for support of equipment and piping. Anchor and dowel concrete bases and structural systems to resist forces under operating and seismic conditions (if applicable) without excessive displacement or structural failure.
 - 2. Do not locate or install bases and supports until equipment mounted thereon has been approved. Size bases to match equipment mounted thereon plus 50 mm (2 inch) excess on all edges. Bases shall be neatly finished and smoothed, shall have chamfered edges at the top, and shall be suitable for painting.
 - 3. All equipment shall be shimmed, leveled, firmly anchored, and grouted with epoxy grout. Anchor bolts shall be placed in sleeves, anchored to the bases. Fill the annular space between sleeves and bolts with a granular material to permit alignment and realignment.
 - 4. For seismic anchoring, refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

3.5 MECHANICAL DEMOLITION

- A. Rigging access, other than indicated on the drawings, shall be provided by the Contractor after approval for structural integrity by the COTR. Such access shall be provided without additional cost or time to the Government. Where work is in an operating plant, provide approved protection from dust and debris at all times for the safety of plant personnel and maintenance of plant operation and environment of the plant.
- B. In an operating facility, maintain the operation, cleanliness and safety. Government personnel will be carrying on their normal duties of operating, cleaning and maintaining equipment and plant operation. Confine the work to the immediate area concerned; maintain cleanliness and wet down demolished materials to eliminate dust. Do not permit debris to accumulate in the area to the detriment of plant operation. Perform all flame cutting to maintain the fire safety integrity of this plant. Adequate fire extinguishing facilities shall be available at all times. Perform all work in accordance with recognized fire protection standards. Inspection will be made by personnel of the VA Medical Center, and Contractor shall follow all directives of the COTR with regard to rigging, safety, fire safety, and maintenance of operations.
- C. Completely remove all piping, wiring, conduit, and other devices associated with the equipment not to be re-used in the new work. This includes all pipe, valves, fittings, insulation, and all hangers including the top connection and any fastenings to building structural systems. Seal all openings, after removal of equipment, pipes, ducts, and other penetrations in roof, walls, floors, in an approved manner and in accordance with plans and specifications where specifically covered. Structural integrity of the building system shall be maintained. Reference shall also be made to the drawings and specifications of the other disciplines in the project for additional facilities to be demolished or handled.
- D. All valves including gate, globe, ball, butterfly and check, all pressure gages and thermometers with wells shall remain Government property and shall be removed and delivered to COTR and stored as directed. The Contractor shall remove all other material and equipment, devices and demolition debris under these plans and specifications. Such material shall be removed from Government property expeditiously and shall not be allowed to accumulate.

3.6 CLEANING AND PAINTING

- A. Prior to final inspection and acceptance of the plant and facilities for beneficial use by the Government, the plant facilities, equipment and systems shall be thoroughly cleaned and painted. Refer to Section 09 91 00, PAINTING.
- B. In addition, the following special conditions apply:
 - 1. Cleaning shall be thorough. Use solvents, cleaning materials and methods recommended by the manufacturers for the specific tasks. Remove all rust prior to painting and from surfaces to remain unpainted. Repair scratches, scuffs, and abrasions prior to applying prime and finish coats.
 - 2. Material And Equipment Not To Be Painted Includes:
 - a. Motors, controllers, control switches, and safety switches.
 - b. Control and interlock devices.
 - c. Regulators.
 - d. Pressure reducing valves.
 - e. Control valves and thermostatic elements.
 - f. Lubrication devices and grease fittings.
 - g. Copper, brass, aluminum, stainless steel and bronze surfaces.
 - h. Valve stems and rotating shafts.
 - i. Pressure gauges and thermometers.
 - j. Glass.
 - k. Name plates.
 - 3. Control and instrument panels shall be cleaned, damaged surfaces repaired, and shall be touched-up with matching paint obtained from panel manufacturer.
 - 4. Pumps, motors, steel and cast iron bases, and coupling guards shall be cleaned, and shall be touched-up with the same color as utilized by the pump manufacturer
 - 5. Temporary Facilities: Apply paint to surfaces that do not have existing finish coats.
 - 6. Paint shall withstand the following temperatures without peeling or discoloration:
 - a. Condensate -- 38 degrees C (100 degrees F) on insulation jacket surface and 120 degrees C (250 degrees F) on metal pipe surface.
 - b. Steam -- 52 degrees C (125 degrees F) on insulation jacket surface and 190 degrees C (375 degrees F) on metal pipe surface.
 - 7. Final result shall be smooth, even-colored, even-textured factory finish on all items. Completely repaint the entire piece of equipment if necessary to achieve this.

3.7 IDENTIFICATION SIGNS

- A. Provide laminated plastic signs, with engraved lettering not less than 5 mm (3/16-inch) high, designating functions, for all equipment, switches, motor controllers, relays, meters, control devices, including automatic control valves. Nomenclature and identification symbols shall correspond to that used in maintenance manual, and in diagrams specified elsewhere. Attach by chain, adhesive, or screws.
- B. Factory Built Equipment: Metal plate, securely attached, with name and address of manufacturer, serial number, model number, size, performance.
- C. Pipe Identification: Refer to Section 09 91 00, PAINTING.

3.8 MOTOR AND DRIVE ALIGNMENT

- A. Belt Drive: Set driving and driven shafts parallel and align so that the corresponding grooves are in the same plane.
- B. Direct-connect Drive: Securely mount motor in accurate alignment so that shafts are free from both angular and parallel misalignment when both motor and driven machine are operating at normal temperatures.

3.9 LUBRICATION

- A. Lubricate all devices requiring lubrication prior to initial operation. Field-check all devices for proper lubrication.
- B. Equip all devices with required lubrication fittings or devices. Provide a minimum of one liter (one quart) of oil and 0.5 kg (one pound) of grease of manufacturer's recommended grade and type for each different application; also provide 12 grease sticks for lubricated plug valves. Deliver all materials to COTR in unopened containers that are properly identified as to application.
- C. Provide a separate grease gun with attachments for applicable fittings for each type of grease applied.
- D. All lubrication points shall be accessible without disassembling equipment, except to remove access plates.

3.10 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specifications will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.11 STARTUP AND TEMPORARY OPERATION

Start up equipment as described in equipment specifications. Verify that vibration is within specified tolerance prior to extended operation.

Temporary use of equipment is specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.

3.12 OPERATING AND PERFORMANCE TESTS

- A. Prior to the final inspection, perform required tests as specified in Section 01 00 00, GENERAL REQUIREMENTS and submit the test reports and records to the COTR.
- B. Should evidence of malfunction in any tested system, or piece of equipment or component part thereof, occur during or as a result of tests, make proper corrections, repairs or replacements, and repeat tests at no additional cost to the Government.
- C. When completion of certain work or system occurs at a time when final control settings and adjustments cannot be properly made to make performance tests, then make performance tests for heating systems and for cooling systems respectively during first actual seasonal use of respective systems following completion of work.

3.13 INSTRUCTIONS TO VA PERSONNEL

Provide in accordance with Article, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.

- - - E N D - - -

SECTION 23 05 12
GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT

PART 1 - GENERAL**1.1 DESCRIPTION:**

This section specifies the furnishing, installation and connection of motors for HVAC and steam generation equipment.

1.2 RELATED WORK:

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements common to more than one Section of Division 26.
- B. Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS: Starters, control and protection for motors.
- C. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- D. Section 23 21 23, HYDRONIC PUMPS.
- E. Section 23 34 00, HVAC FANS.
- F. Section 23 36 00, AIR TERMINAL UNITS.
- G. Section 23 74 13, PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS.
- H. Section 23 82 00, CONVECTION HEATING and COOLING UNITS.
- I. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.

1.3 SUBMITTALS:

- A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
- B. Shop Drawings:
 - 1. Provide documentation to demonstrate compliance with drawings and specifications.
 - 2. Include electrical ratings, efficiency, bearing data, power factor, frame size, dimensions, mounting details, materials, horsepower, voltage, phase, speed (RPM), enclosure, starting characteristics, torque characteristics, code letter, full load and locked rotor current, service factor, and lubrication method.
- C. Manuals:
 - 1. Submit simultaneously with the shop drawings, companion copies of complete installation, maintenance and operating manuals, including technical data sheets and application data.
- D. Certification: Two weeks prior to final inspection, unless otherwise noted, submit four copies of the following certification to the COTR:

1. Certification that the motors have been applied, installed, adjusted, lubricated, and tested according to manufacturer published recommendations.

- E. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.

1.4 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. National Electrical Manufacturers Association (NEMA):
MG 1-2006 Rev. 1 2009 ..Motors and Generators
MG 2-2001 Rev. 1 2007...Safety Standard for Construction and Guide for Selection, Installation and Use of Electric Motors and Generators
- C. National Fire Protection Association (NFPA):
70-2008.....National Electrical Code (NEC)
- D. Institute of Electrical and Electronics Engineers (IEEE):
112-04.....Standard Test Procedure for Polyphase Induction Motors and Generators
- E. American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE):
90.1-2007.....Energy Standard for Buildings Except Low-Rise Residential Buildings

PART 2 - PRODUCTS

2.1 MOTORS:

- A. For alternating current, fractional and integral horsepower motors, NEMA Publications MG 1 and MG 2 shall apply.
- B. All material and equipment furnished and installation methods shall conform to the requirements of Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS; and Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Provide all electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems. Provide premium efficiency type motors as scheduled. Unless otherwise specified for a particular application, use electric motors with the following requirements.
- C. Single-phase Motors: Motors for centrifugal fans and pumps may be split phase or permanent split capacitor (PSC) type. Provide capacitor-start type for hard starting applications.

1. Contractor's Option - Electrically Commutated motor (EC Type): Motor shall be brushless DC type specifically designed for applications with heavy duty ball bearings and electronic commutation. The motor shall be speed controllable down to 20% of full speed and 85% efficient at all speeds.
- D. Poly-phase Motors: NEMA Design B, Squirrel cage, induction type.
 1. Two Speed Motors: Each two-speed motor shall have two separate windings. Provide a time- delay (20 seconds minimum) relay for switching from high to low speed.
- E. Voltage ratings shall be as follows:
 1. Single phase:
 - a. Motors connected to 120-volt systems: 115 volts.
 - b. Motors connected to 208-volt systems: 200 volts.
 - c. Motors connected to 240 volt or 480 volt systems: 230/460 volts, dual connection.
 2. Three phase:
 - a. Motors connected to 208-volt systems: 200 volts.
 - b. Motors, less than 74.6 kW (100 HP), connected to 240 volt or 480 volt systems: 208-230/460 volts, dual connection.
 - c. Motors, 74.6 kW (100 HP) or larger, connected to 240-volt systems: 230 volts.
- F. Number of phases shall be as follows:
 1. Motors, less than 373 W (1/2 HP): Single phase.
 2. Motors, 373 W (1/2 HP) and larger: 3 phase.
 3. Exceptions:
 - a. Hermetically sealed motors.
 - b. Motors for equipment assemblies, less than 746 W (one HP), may be single phase provided the manufacturer of the proposed assemblies cannot supply the assemblies with three phase motors.
- G. Motors shall be designed for operating the connected loads continuously in a 40°C (104°F) environment, where the motors are installed, without exceeding the NEMA standard temperature rises for the motor insulation. If the motors exceed 40°C (104°F), the motors shall be rated for the actual ambient temperatures.
- H. Motor designs, as indicated by the NEMA code letters, shall be coordinated with the connected loads to assure adequate starting and running torque.
- I. Motor Enclosures:
 1. Shall be the NEMA types as specified and/or shown on the drawings.

2. Where the types of motor enclosures are not shown on the drawings, they shall be the NEMA types, which are most suitable for the environmental conditions where the motors are being installed. Enclosure requirements for certain conditions are as follows:
 - a. Motors located outdoors, indoors in wet or high humidity locations, or in unfiltered airstreams shall be totally enclosed type.
 - b. Where motors are located in an NEC 511 classified area, provide TEFC explosion proof motor enclosures.
 - c. Where motors are located in a corrosive environment, provide TEFC enclosures with corrosion resistant finish.
3. Enclosures shall be primed and finish coated at the factory with manufacturer's prime coat and standard finish.

J. Special Requirements:

1. Where motor power requirements of equipment furnished deviate from power shown on plans, provide electrical service designed under the requirements of NFPA 70 without additional time or cost to the Government.
2. Assemblies of motors, starters, controls and interlocks on factory assembled and wired devices shall be in accordance with the requirements of this specification.
3. Wire and cable materials specified in the electrical division of the specifications shall be modified as follows:
 - a. Wiring material located where temperatures can exceed 71 degrees C (160 degrees F) shall be stranded copper with Teflon FEP insulation with jacket. This includes wiring on the boilers.
 - b. Other wiring to control panels shall be NFPA 70 designation THWN.
 - c. Provide shielded conductors or wiring in separate conduits for all instrumentation and control systems where recommended by manufacturer of equipment.
4. Select motor sizes so that the motors do not operate into the service factor at maximum required loads on the driven equipment. Motors on pumps shall be sized for non-overloading at all points on the pump performance curves.
5. Motors utilized with variable frequency drives shall be rated "inverter-duty" per NEMA Standard, MG1, Part 31.4.4.2. Provide motor shaft grounding apparatus that will protect bearings from damage from stray currents.

- K. Additional requirements for specific motors, as indicated in the other sections listed in Article 1.2, shall also apply.

L. Energy-Efficient Motors (Motor Efficiencies): All permanently wired polyphase motors of 746 Watts (1 HP) or more shall meet the minimum full-load efficiencies as indicated in the following table. Motors of 746 Watts or more with open, drip-proof or totally enclosed fan-cooled enclosures shall be NEMA premium efficiency type, unless otherwise indicated. Motors provided as an integral part of motor driven equipment are excluded from this requirement if a minimum seasonal or overall efficiency requirement is indicated for that equipment by the provisions of another section. Motors not specified as "premium efficiency" shall comply with the Energy Policy Act of 2005 (EPACT).

Minimum Premium Efficiencies Open Drip-Proof				Minimum Premium Efficiencies Totally Enclosed Fan-Cooled			
Rating kW (HP)	1200 RPM	1800 RPM	3600 RPM	Rating kW (HP)	1200 RPM	1800 RPM	3600 RPM
0.746 (1)	82.5%	85.5%	77.0%	0.746 (1)	82.5%	85.5%	77.0%
1.12 (1.5)	86.5%	86.5%	84.0%	1.12 (1.5)	87.5%	86.5%	84.0%
1.49 (2)	87.5%	86.5%	85.5%	1.49 (2)	88.5%	86.5%	85.5%
2.24 (3)	88.5%	89.5%	85.5%	2.24 (3)	89.5%	89.5%	86.5%
3.73 (5)	89.5%	89.5%	86.5%	3.73 (5)	89.5%	89.5%	88.5%
5.60 (7.5)	90.2%	91.0%	88.5%	5.60 (7.5)	91.0%	91.7%	89.5%
7.46 (10)	91.7%	91.7%	89.5%	7.46 (10)	91.0%	91.7%	90.2%
11.2 (15)	91.7%	93.0%	90.2%	11.2 (15)	91.7%	92.4%	91.0%
14.9 (20)	92.4%	93.0%	91.0%	14.9 (20)	91.7%	93.0%	91.0%
18.7 (25)	93.0%	93.6%	91.7%	18.7 (25)	93.0%	93.6%	91.7%
22.4 (30)	93.6%	94.1%	91.7%	22.4 (30)	93.0%	93.6%	91.7%
29.8 (40)	94.1%	94.1%	92.4%	29.8 (40)	94.1%	94.1%	92.4%
37.3 (50)	94.1%	94.5%	93.0%	37.3 (50)	94.1%	94.5%	93.0%
44.8 (60)	94.5%	95.0%	93.6%	44.8 (60)	94.5%	95.0%	93.6%
56.9 (75)	94.5%	95.0%	93.6%	56.9 (75)	94.5%	95.4%	93.6%
74.6 (100)	95.0%	95.4%	93.6%	74.6 (100)	95.0%	95.4%	94.1%
93.3 (125)	95.0%	95.4%	94.1%	93.3 (125)	95.0%	95.4%	95.0%
112 (150)	95.4%	95.8%	94.1%	112 (150)	95.8%	95.8%	95.0%
149.2 (200)	95.4%	95.8%	95.0%	149.2 (200)	95.8%	96.2%	95.4%

M. Minimum Power Factor at Full Load and Rated Voltage: 90 percent at 1200 RPM, 1800 RPM and 3600 RPM.

PART 3 - EXECUTION**3.1 INSTALLATION:**

Install motors in accordance with manufacturer's recommendations, the NEC, NEMA, as shown on the drawings and/or as required by other sections of these specifications.

3.2 FIELD TESTS

- A. Perform an electric insulation resistance Test using a megohmmeter on all motors after installation, before start-up. All shall test free from grounds.
- B. Perform Load test in accordance with ANSI/IEEE 112, Test Method B, to determine freedom from electrical or mechanical defects and compliance with performance data.
- C. Insulation Resistance: Not less than one-half meg-ohm between stator conductors and frame, to be determined at the time of final inspection.

3.3 STARTUP AND TESTING

- A. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with COTR and Commissioning Agent. Provide a minimum of 7 days prior notice.

3.4 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.5 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for four hours to instruct VA personnel in operation and maintenance of units.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

SECTION 23 05 41
NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT

PART 1 - GENERAL**1.1 DESCRIPTION**

Noise criteria, seismic restraints for equipment, vibration tolerance and vibration isolation for HVAC and plumbing work.

1.2 RELATED WORK

- A. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Seismic requirements for non-structural equipment
- B. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General mechanical requirements and items, which are common to more than one section of Division 23.
- C. Section 23 22 13, STEAM and CONDENSATE HEATING PIPING: Requirements for flexible pipe connectors to reciprocating and rotating mechanical equipment.
- D. Section 23 31 00, HVAC DUCTS and CASINGS: requirements for flexible duct connectors, sound attenuators and sound absorbing duct lining.
- E. SECTION 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC: requirements for sound and vibration tests.
- F. SECTION 23 37 00, AIR OUTLETS and INLETS: noise requirements for G-grilles.
- G. SECTION 23 21 23, HYDRONIC PUMPS: vibration isolation requirements for pumps.
- H. SECTION 23 34 00, HVAC FANS: sound and vibration isolation requirements for fans.
- I. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.

1.3 QUALITY ASSURANCE

- A. Refer to article, QUALITY ASSURANCE in specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- B. Noise Criteria:
 - 1. Noise levels in all 8 octave bands due to equipment and duct systems shall not exceed following NC levels:

TYPE OF ROOM	NC LEVEL
Bathrooms and Toilet Rooms	40
Conference Rooms	35
Corridors(Public)	40

Laboratories (With Fume Hoods)	45 to 55
Lobbies, Waiting Areas	40
Locker Rooms	45
Offices, Large Open	40
Offices, Small Private	35
Shops	50
SPD (Decontamination and Clean Preparation)	45
General Work Rooms	40

2. For equipment which has no sound power ratings scheduled on the plans, the contractor shall select equipment such that the foregoing noise criteria, local ordinance noise levels, and OSHA requirements are not exceeded. Selection procedure shall be in accordance with ASHRAE Fundamentals Handbook, Chapter 7, Sound and Vibration.
3. An allowance, not to exceed 5db, may be added to the measured value to compensate for the variation of the room attenuating effect between room test condition prior to occupancy and design condition after occupancy which may include the addition of sound absorbing material, such as, furniture. This allowance may not be taken after occupancy. The room attenuating effect is defined as the difference between sound power level emitted to room and sound pressure level in room.
4. In absence of specified measurement requirements, measure equipment noise levels three feet from equipment and at an elevation of maximum noise generation.

C. Seismic Restraint Requirements:

1. Equipment:
 - a. All mechanical equipment not supported with isolators external to the unit shall be securely anchored to the structure. Such mechanical equipment shall be properly supported to resist a horizontal force of 50 percent of the weight of the equipment furnished.
 - b. All mechanical equipment mounted on vibration isolators shall be provided with seismic restraints capable of resisting a horizontal force of 100 percent of the weight of the equipment furnished.

2. Piping: Refer to specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
3. Ductwork: Refer to specification Section 23 31 00, HVAC DUCTS AND CASINGS.
- D. Allowable Vibration Tolerances for Rotating, Non-reciprocating Equipment: Not to exceed a self-excited vibration maximum velocity of 5 mm per second (0.20 inch per second) RMS, filter in, when measured with a vibration meter on bearing caps of machine in vertical, horizontal and axial directions or measured at equipment mounting feet if bearings are concealed. Measurements for internally isolated fans and motors may be made at the mounting feet.

1.4 SUBMITTALS

- A. Submit in accordance with specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 1. Vibration isolators:
 - a. Floor mountings
 - b. Hangers
 - c. Snubbers
 - d. Thrust restraints
 2. Bases.
 3. Seismic restraint provisions and bolting.
- C. Isolator manufacturer shall furnish with submittal load calculations for selection of isolators, including supplemental bases, based on lowest operating speed of equipment supported.
- D. Seismic Requirements: Submittals are required for all equipment anchors, supports and seismic restraints. Submittals shall include weights, dimensions, standard connections, and manufacturer's certification that all specified equipment will withstand seismic Lateral Force requirements as shown on drawings.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc. (ASHRAE):
2009Fundamentals Handbook, Chapter 7, Sound and Vibration

C. American Society for Testing and Materials (ASTM):

A123/A123M-09.....Standard Specification for Zinc (Hot-Dip
Galvanized) Coatings on Iron and Steel Products
A307-07b.....Standard Specification for Carbon Steel Bolts
and Studs, 60,000 PSI Tensile Strength
D2240-05(2010).....Standard Test Method for Rubber Property -
Durometer Hardness

D. Manufacturers Standardization (MSS):

SP-58-2009.....Pipe Hangers and Supports-Materials, Design and
Manufacture

E. Occupational Safety and Health Administration (OSHA):

29 CFR 1910.95.....Occupational Noise Exposure

F. American Society of Civil Engineers (ASCE):

ASCE 7-10Minimum Design Loads for Buildings and Other
Structures.

G. American National Standards Institute / Sheet Metal and Air

Conditioning Contractor's National Association (ANSI/SMACNA):

001-2008.....Seismic Restraint Manual: Guidelines for
Mechanical Systems, Latest Edition and
Addendum.

H. International Code Council (ICC):

2009 IBC.....International Building Code.

I. Department of Veterans Affairs (VA):

H-18-8 2010.....Seismic Design Requirements.

PART 2 - PRODUCTS**2.1 GENERAL REQUIREMENTS**

- A. Type of isolator, base, and minimum static deflection shall be as required for each specific equipment application as recommended by isolator or equipment manufacturer but subject to minimum requirements indicated herein and in the schedule on the drawings.
- B. Elastometric Isolators shall comply with ASTM D2240 and be oil resistant neoprene with a maximum stiffness of 60 durometer and have a straight-line deflection curve.
- C. Exposure to weather: Isolator housings to be either hot dipped galvanized or powder coated to ASTM B117 salt spray testing standards. Springs to be powder coated or electro galvanized. All hardware to be electro galvanized. In addition provide limit stops to resist wind velocity. Velocity pressure established by wind shall be calculated in

accordance with section 1609 of the International Building Code. A minimum wind velocity of 75 mph shall be employed.

- D. Uniform Loading: Select and locate isolators to produce uniform loading and deflection even when equipment weight is not evenly distributed.
- E. Color code isolators by type and size for easy identification of capacity.

2.2 SEISMIC RESTRAINT REQUIREMENTS FOR EQUIPMENTS

- A. Bolt pad mounted equipment, without vibration isolators, to the floor or other support using ASTM A307 standard bolting material.
- B. Floor mounted equipment, with vibration Isolators: Type SS. Where Type N isolators are used provide channel frame base horizontal restraints bolted to the floor, or other support, on all sides of the equipment. Size and material required for the base shall be as recommended by the isolator manufacturer.
- C. On all sides of suspended equipment, provide bracing for rigid supports and provide restraints for resiliently supported equipment.

2.3 VIBRATION ISOLATORS

- A. Floor Mountings:
 - 1. Double Deflection Neoprene (Type N): Shall include neoprene covered steel support plated (top and bottom), friction pads, and necessary bolt holes.
 - 2. Spring Isolators (Type S): Shall be free-standing, laterally stable and include acoustical friction pads and leveling bolts. Isolators shall have a minimum ratio of spring diameter-to-operating spring height of 1.0 and an additional travel to solid equal to 50 percent of rated deflection.
 - 3. Captive Spring Mount for Seismic Restraint (Type SS):
 - a. Design mounts to resiliently resist seismic forces in all directions. Snubbing shall take place in all modes with adjustment to limit upward, downward, and horizontal travel to a maximum of 6 mm (1/4-inch) before contacting snubbers. Mountings shall have a minimum rating of one G coefficient of gravity as calculated and certified by a registered structural engineer.
 - b. All mountings shall have leveling bolts that must be rigidly bolted to the equipment. Spring diameters shall be no less than 0.8 of the compressed height of the spring at rated load. Springs shall have a minimum additional travel to solid equal to 50 percent of the rated deflection. Mountings shall have ports for

spring inspection. Provide an all directional neoprene cushion collar around the equipment bolt.

4. Spring Isolators with Vertical Limit Stops (Type SP): Similar to spring isolators noted above, except include a vertical limit stop to limit upward travel if weight is removed and also to reduce movement and spring extension due to wind loads. Provide clearance around restraining bolts to prevent mechanical short circuiting. Isolators shall have a minimum seismic rating of one G.
 5. Pads (Type D), Washers (Type W), and Bushings (Type L): Pads shall be natural rubber or neoprene waffle, neoprene and steel waffle, or reinforced duck and neoprene. Washers and bushings shall be reinforced duck and neoprene. Washers and bushings shall be reinforced duck and neoprene. Size pads for a maximum load of 345 kPa (50 pounds per square inch).
 6. Seismic Pad (Type DS): Pads shall be natural rubber / neoprene waffle with steel top plate and drilled for an anchor bolt. Washers and bushings shall be reinforced duck and neoprene. Size pads for a maximum load of 345 kPa (50 pounds per square inch).
- B. Hangers: Shall be combination neoprene and springs unless otherwise noted and shall allow for expansion of pipe.
1. Combination Neoprene and Spring (Type H): Vibration hanger shall contain a spring and double deflection neoprene element in series. Spring shall have a diameter not less than 0.8 of compressed operating spring height. Spring shall have a minimum additional travel of 50 percent between design height and solid height. Spring shall permit a 15 degree angular misalignment without rubbing on hanger box.
 2. Spring Position Hanger (Type HP): Similar to combination neoprene and spring hanger except hanger shall hold piping at a fixed elevation during installation and include a secondary adjustment feature to transfer load to spring while maintaining same position.
 3. Neoprene (Type HN): Vibration hanger shall contain a double deflection type neoprene isolation element. Hanger rod shall be separated from contact with hanger bracket by a neoprene grommet.
 4. Spring (Type HS): Vibration hanger shall contain a coiled steel spring in series with a neoprene grommet. Spring shall have a diameter not less than 0.8 of compressed operating spring height. Spring shall have a minimum additional travel of 50 percent between

- design height and solid height. Spring shall permit a 15 degree angular misalignment without rubbing on hanger box.
5. Hanger supports for piping 50 mm (2 inches) and larger shall have a pointer and scale deflection indicator.
 6. Hangers used in seismic applications shall be provided with a neoprene and steel rebound washer installed $\frac{1}{4}$ ' clear of bottom of hanger housing in operation to prevent spring from excessive upward travel
- C. Snubbers: Each spring mounted base shall have a minimum of four all-directional or eight two directional (two per side) seismic snubbers that are double acting. Elastomeric materials shall be shock absorbent neoprene bridge quality bearing pads, maximum 60 durometer, replaceable and have a minimum thickness of 6 mm ($\frac{1}{4}$ inch). Air gap between hard and resilient material shall be not less than 3 mm ($\frac{1}{8}$ inch) nor more than 6 mm ($\frac{1}{4}$ inch). Restraints shall be capable of withstanding design load without permanent deformation.
- D. Thrust Restraints (Type THR): Restraints shall provide a spring element contained in a steel frame with neoprene pads at each end attachment. Restraints shall have factory preset thrust and be field adjustable to allow a maximum movement of 6 mm ($\frac{1}{4}$ inch) when the fan starts and stops. Restraint assemblies shall include rods, angle brackets and other hardware for field installation.

2.4 BASES

- A. Rails (Type R): Design rails with isolator brackets to reduce mounting height of equipment and cradle machines having legs or bases that do not require a complete supplementary base. To assure adequate stiffness, height of members shall be a minimum of $\frac{1}{12}$ of longest base dimension but not less than 100 mm (4 inches). Where rails are used with neoprene mounts for small fans or close coupled pumps, extend rails to compensate overhang of housing.
- B. Integral Structural Steel Base (Type B): Design base with isolator brackets to reduce mounting height of equipment which require a complete supplementary rigid base. To assure adequate stiffness, height of members shall be a minimum of $\frac{1}{12}$ of longest base dimension, but not less than 100 mm (four inches).
- C. Inertia Base (Type I): Base shall be a reinforced concrete inertia base. Pour concrete into a welded steel channel frame, incorporating prelocated equipment anchor bolts and pipe sleeves. Level the concrete

to provide a smooth uniform bearing surface for equipment mounting. Provide grout under uneven supports. Channel depth shall be a minimum of 1/12 of longest dimension of base but not less than 150 mm (six inches). Form shall include 13-mm (1/2-inch) reinforcing bars welded in place on minimum of 203 mm (eight inch) centers running both ways in a layer 40 mm (1-1/2 inches) above bottom. Use height saving brackets in all mounting locations. Weight of inertia base shall be equal to or greater than weight of equipment supported to provide a maximum peak-to-peak displacement of 2 mm (1/16 inch).

- D. Curb Mounted Isolation Base (Type CB): Fabricate from aluminum to fit on top of standard curb with overlap to allow water run-off and have wind and water seals which shall not interfere with spring action. Provide resilient snubbers with 6 mm (1/4 inch) clearance for wind resistance. Top and bottom bearing surfaces shall have sponge type weather seals. Integral spring isolators shall comply with Spring Isolator (Type S) requirements.

2.5 SOUND ATTENUATING UNITS

Refer to specification Section 23 31 00, HVAC DUCTS and CASINGS.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Vibration Isolation:

1. No metal-to-metal contact will be permitted between fixed and floating parts.
2. Connections to Equipment: Allow for deflections equal to or greater than equipment deflections. Electrical, drain, piping connections, and other items made to rotating or reciprocating equipment (pumps, compressors, etc.) which rests on vibration isolators, shall be isolated from building structure for first three hangers or supports with a deflection equal to that used on the corresponding equipment.
3. Common Foundation: Mount each electric motor on same foundation as driven machine. Hold driving motor and driven machine in positive rigid alignment with provision for adjusting motor alignment and belt tension. Bases shall be level throughout length and width. Provide shims to facilitate pipe connections, leveling, and bolting.
4. Provide heat shields where elastomers are subject to temperatures over 38 degrees C (100 degrees F).

5. Extend bases for pipe elbow supports at discharge and suction connections at pumps. Pipe elbow supports shall not short circuit pump vibration to structure.
 6. Non-rotating equipment such as heat exchangers and convertors shall be mounted on isolation units having the same static deflection as the isolation hangers or support of the pipe connected to the equipment.
- B. Inspection and Adjustments: Check for vibration and noise transmission through connections, piping, ductwork, foundations, and walls. Adjust, repair, or replace isolators as required to reduce vibration and noise transmissions to specified levels.

3.2 ADJUSTING

- A. Adjust vibration isolators after piping systems are filled and equipment is at operating weight.
- B. Adjust limit stops on restrained spring isolators to mount equipment at normal operating height. After equipment installation is complete, adjust limit stops so they are out of contact during normal operation.
- C. Attach thrust limits at centerline of thrust and adjust to a maximum of 1/4inch (6-mm) movement during start and stop.
- D. Adjust active height of spring isolators.
- E. Adjust snubbers according to manufacturer's recommendations.
- F. Adjust seismic restraints to permit free movement of equipment within normal mode of operation.
- G. Torque anchor bolts according to equipment manufacturer's recommendations to resist seismic forces.

3.3 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

- - - E N D - - -

SELECTION GUIDE FOR VIBRATION ISOLATORS

EQUIPMENT	ON GRADE			20FT FLOOR SPAN			30FT FLOOR SPAN			40FT FLOOR SPAN			50FT FLOOR SPAN		
	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL
REFRIGERATION MACHINES															
ABSORPTION	---	D	0.3	---	SP	0.8	---	SP	1.5	---	SP	1.5	---	SP	2.0
PACKAGED HERMETIC	---	D	0.3	---	SP	0.8	---	SP	1.5	---	SP	1.5	R	SP	2.5
OPEN CENTRIFUGAL	B	D	0.3	B	SP	0.8	---	SP	1.5	B	SP	1.5	B	SP	3.5
RECIPROCATING:															
ALL	---	D	0.3	---	SP	0.8	R	SP	2.0	R	SP	2.5	R	SP	3.5
COMPRESSORS AND VACUUM PUMPS															
UP THROUGH 1-1/2 HP	---	D,L, W	0.8	----	D,L, W	0.8	---	D,L, W	1.5	---	D,L, W	1.5	---	D,L, W	---
2 HP AND OVER:															
500 - 750 RPM	---	D	0.8	---	S	0.8	---	S	1.5	---	S	1.5	---	S	2.5
750 RPM & OVER	---	D	0.8	---	S	0.8	---	S	1.5	---	S	1.5	---	S	2.5
PUMPS															
CLOSE COUPLED	UP TO 1-1/2 HP	---	---	---	---	D,L, W	---	---	D,L, W	---	---	D,L, W	---	---	D,L, W
	2 HP & OVER	---	---	---	I	S	0.8	I	S	1.5	I	S	1.5	I	S

EQUIPMENT		ON GRADE			20FT FLOOR SPAN			30FT FLOOR SPAN			40FT FLOOR SPAN			50FT FLOOR SPAN		
		BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL
LARGE INLINE	Up to 25 HP	---	---	---	---	S	0.75	---	S	1.50	---	S	1.50	---	---	NA
	26 HP THRU 30 HP	---	---	---	---	S	1.0	---	S	1.50	---	S	2.50	---	---	NA
BASE MOUNTED	UP TO 10 HP	---	---	---	---	D,L, W	---	---	D,L, W	---	---	D,L, W	---	---	D,L, W	---
	15 HP THRU 40 HP	I	S	1.0	I	S	1.0	I	S	2.0	I	S	2.0	I	S	2.0
	50 HP & OVER	I	S	1.0	I	S	1.0	I	S	2.0	I	S	2.5	I	S	2.5
ROOF FANS																
ABOVE OCCUPIED AREAS:																
5 HP & OVER		---	---	---	CB	S	1.0	CB	S	1.0	CB	S	1.0	CB	S	1.0
CENTRIFUGAL FANS																
UP TO 50 HP:																
UP TO 200 RPM		B	N	0.3	B	S	2.5	B	S	2.5	B	S	3.5	B	S	3.5
201 - 300 RPM		B	N	0.3	B	S	2.0	B	S	2.5	B	S	2.5	B	S	3.5
301 - 500 RPM		B	N	0.3	B	S	2.0	B	S	2.0	B	S	2.5	B	S	3.5
501 RPM & OVER		B	N	0.3	B	S	2.0	B	S	2.0	B	S	2.0	B	S	2.5

EQUIPMENT	ON GRADE			20FT FLOOR SPAN			30FT FLOOR SPAN			40FT FLOOR SPAN			50FT FLOOR SPAN		
	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL
60 HP & OVER:															
UP TO 300 RPM	B	S	2.0	I	S	2.5	I	S	3.5	I	S	3.5	I	S	3.5
301 - 500 RPM	B	S	2.0	I	S	2.0	I	S	2.5	I	S	3.5	I	S	3.5
501 RPM & OVER	B	S	1.0	I	S	2.0	I	S	2.0	I	S	2.5	I	S	2.5
COOLING TOWERS															
UP TO 500 RPM	---	---	---	---	SP	2.5	---	SP	2.5	---	SP	2.5	---	SP	3.5
501 RPM & OVER	---	---	---	---	SP	0.75	---	SP	0.75	---	SP	1.5	---	SP	2.5
INTERNAL COMBUSTION ENGINES															
UP TO 25 HP	I	N	0.75	I	N	1.5	I	S	2.5	I	S	3.5	I	S	4.5
30 THRU 100 HP	I	N	0.75	I	N	1.5	I	S	2.5	I	S	3.5	I	S	4.5
125 HP & OVER	I	N	0.75	I	N	1.5	I	S	2.5	I	S	3.5	I	S	4.5
AIR HANDLING UNIT PACKAGES															
SUSPENDED:															
UP THRU 5 HP	---	---	---	---	H	1.0	---	H	1.0	---	H	1.0	---	H	1.0
7-1/2 HP & OVER:															
UP TO 500 RPM	---	---	---	---	H, THR	1.5	---	H, THR	2.5	---	H, THR	2.5	---	H, THR	2.5
501 RPM & OVER	---	---	---	---	H, THR	0.8	---	H, THR	0.8	---	H,TH R	0.8	---	H,TH R	2.0

EQUIPMENT	ON GRADE			20FT FLOOR SPAN			30FT FLOOR SPAN			40FT FLOOR SPAN			50FT FLOOR SPAN		
	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL
FLOOR MOUNTED:															
UP THRU 5 HP	---	D	---	---	S	1.0	---	S	1.0	---	S	1.0	---	S	1.0
7-1/2 HP & OVER:															
UP TO 500 RPM	---	D	---	R	S, THR	1.5	R	S, THR	2.5	R	S, THR	2.5	R	S, THR	2.5
501 RPM & OVER	---	D	---	---	S, THR	0.8	---	S, THR	0.8	R	S, THR	1.5	R	S, THR	2.0
HEAT PUMPS															
ALL	---	S	0.75	---	S	0.75	---	S	0.75	CB	S	1.5	---	---	NA
CONDENSING UNITS															
ALL	---	SS	0.25	---	SS	0.75	---	SS	1.5	CB	SS	1.5	---	---	NA
IN-LINE CENTRIFUGAL AND VANE AXIAL FANS, FLOOR MOUNTED: (APR 9)															
UP THRU 50 HP:															
UP TO 300 RPM	---	D	---	R	S	2.5	R	S	2.5	R	S	2.5	R	S	3.5
301 - 500 RPM	---	D	---	R	S	2.0	R	S	2.0	R	S	2.5	R	S	2.5
501 - & OVER	---	D	---	---	S	1.0	---	S	1.0	R	S	2.0	R	S	2.5
60 HP AND OVER:															
301 - 500 RPM	R	S	1.0	R	S	2.0	R	S	2.0	R	S	2.5	R	S	3.5
501 RPM & OVER	R	S	1.0	R	S	2.0	R	S	2.0	R	S	2.0	R	S	2.5

NOTES:

1. Edit the Table above to suit where isolator, other than those shown, are used, such as for seismic restraints and position limit stops.
2. For suspended floors lighter than 100 mm (4 inch) thick concrete, select deflection requirements from next higher span.
3. For separate chiller building on grade, pump isolators may be omitted.
4. Direct bolt fire pumps to concrete base. Provide pads (D) for domestic water booster pump package.
5. For projects in seismic areas, use only SS & DS type isolators and snubbers.
6. For floor mounted in-line centrifugal blowers (ARR 1): use "B" type in lieu of "R" type base.
7. Suspended: Use "H" isolators of same deflection as floor mounted.

SECTION 23 05 93
TESTING, ADJUSTING, AND BALANCING FOR HVAC

PART 1 - GENERAL**1.1 DESCRIPTION**

A. Testing, adjusting, and balancing (TAB) of heating, ventilating and air conditioning (HVAC) systems. TAB includes the following:

1. Planning systematic TAB procedures.
2. Design Review Report.
3. Systems Inspection report.
4. Duct Air Leakage test report.
5. Systems Readiness Report.
6. Balancing air and water distribution systems; adjustment of total system to provide design performance; and testing performance of equipment and automatic controls.
7. Vibration and sound measurements.
8. Recording and reporting results.
9. Balancing existing air and water distribution systems; adjustment of existing total system to provide design performance; and testing performance of existing equipment and automatic controls.

B. Definitions:

1. Basic TAB used in this Section: Chapter 37, "Testing, Adjusting and Balancing" of 2007 ASHRAE Handbook, "HVAC Applications".
2. TAB: Testing, Adjusting and Balancing; the process of checking and adjusting HVAC systems to meet design objectives.
3. AABC: Associated Air Balance Council.
4. NEBB: National Environmental Balancing Bureau.
5. Hydronic Systems: Includes chilled water, heating hot water, and steam systems.
6. Air Systems: Includes all outside air, supply air, return air, exhaust air and relief air systems.
7. Flow rate tolerance: The allowable percentage variation, minus to plus, of actual flow rate from values (design) in the contract documents.

1.2 RELATED WORK

- A. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General Mechanical Requirements.
- B. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT: Noise and Vibration Requirements.

- C. Section 23 07 11, HVAC INSULATION: Piping and Equipment Insulation.
- D. Section 23 36 00, AIR TERMINAL UNITS: Terminal Units Performance.
- E. Section 23 31 00, HVAC DUCTS AND CASINGS: Duct Leakage.
- F. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC: Controls and Instrumentation Settings.
- G. Section 23 82 16, AIR COILS
- H. Section 23 82 00, CONVECTION HEATING AND COOLING UNITS
- I. Section 23 74 13, PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS
- J. Section 23 34 00, HVAC FANS
- K. Section 23 21 23, HYDRONIC PUMPS
- L. Section 23 37 00, AIR OUTLETS AND INLETS
- M. Section 23 21 13, HYDRONIC PIPING
- N. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS. Requirements for commissioning, systems readiness checklists, and training
- O. Section 23 05 12 GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT

1.3 QUALITY ASSURANCE

- A. Refer to Articles, Quality Assurance and Submittals, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC, and Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- B. Qualifications:
 - 1. TAB Agency: The TAB agency shall be a subcontractor of the General Contractor and shall report to and be paid by the General Contractor.
 - 2. The TAB agency shall be either a certified member of AABC or certified by the NEBB to perform TAB service for HVAC, water balancing and vibrations and sound testing of equipment. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the agency loses subject certification during this period, the General Contractor shall immediately notify the COTR and submit another TAB firm for approval. Any agency that has been the subject of disciplinary action by either the AABC or the NEBB within the five years preceding Contract Award shall not be eligible to perform any work related to the TAB. All work performed in this Section and in other related Sections by the TAB agency shall be considered invalid if the TAB agency loses its certification prior to Contract completion,

- and the successor agency's review shows unsatisfactory work performed by the predecessor agency.
3. TAB Specialist: The TAB specialist shall be either a member of AABC or an experienced technician of the Agency certified by NEBB. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the Specialist loses subject certification during this period, the General Contractor shall immediately notify the COTR and submit another TAB Specialist for approval. Any individual that has been the subject of disciplinary action by either the AABC or the NEBB within the five years preceding Contract Award shall not be eligible to perform any duties related to the HVAC systems, including TAB. All work specified in this Section and in other related Sections performed by the TAB specialist shall be considered invalid if the TAB Specialist loses its certification prior to Contract completion and must be performed by an approved successor.
 4. TAB Specialist shall be identified by the General Contractor within 60 days after the notice to proceed. The TAB specialist will be coordinating, scheduling and reporting all TAB work and related activities and will provide necessary information as required by the COTR. The responsibilities would specifically include:
 - a. Shall directly supervise all TAB work.
 - b. Shall sign the TAB reports that bear the seal of the TAB standard. The reports shall be accompanied by report forms and schematic drawings required by the TAB standard, AABC or NEBB.
 - c. Would follow all TAB work through its satisfactory completion.
 - d. Shall provide final markings of settings of all HVAC adjustment devices.
 - e. Permanently mark location of duct test ports.
 5. All TAB technicians performing actual TAB work shall be experienced and must have done satisfactory work on a minimum of 3 projects comparable in size and complexity to this project. Qualifications must be certified by the TAB agency in writing. The lead technician shall be certified by AABC or NEBB
- C. Test Equipment Criteria: The instrumentation shall meet the accuracy/calibration requirements established by AABC National Standards or by NEBB Procedural Standards for Testing, Adjusting and Balancing of Environmental Systems and instrument manufacturer. Provide

calibration history of the instruments to be used for test and balance purpose.

D. Tab Criteria:

1. One or more of the applicable AABC, NEBB or SMACNA publications, supplemented by ASHRAE Handbook "HVAC Applications" Chapter 36, and requirements stated herein shall be the basis for planning, procedures, and reports.
2. Flow rate tolerance: Following tolerances are allowed. For tolerances not mentioned herein follow ASHRAE Handbook "HVAC Applications", Chapter 36, as a guideline. Air Filter resistance during tests, artificially imposed if necessary, shall be at least 100 percent of manufacturer recommended change over pressure drop values for pre-filters and after-filters.
 - a. Air handling unit and all other fans, cubic meters/min (cubic feet per minute): Minus 0 percent to plus 10 percent.
 - b. Air terminal units (maximum values): Minus 2 percent to plus 10 percent.
 - c. Exhaust hoods/cabinets: 0 percent to plus 10 percent.
 - d. Minimum outside air: 0 percent to plus 10 percent.
 - e. Individual room air outlets and inlets, and air flow rates not mentioned above: Minus 5 percent to plus 10 percent except if the air to a space is 100 CFM or less the tolerance would be minus 5 to plus 5 percent.
 - f. Heating hot water pumps and hot water coils: Minus 5 percent to plus 5 percent.
 - g. Chilled water pumps: Minus 0 percent to plus 5 percent.
 - h. Chilled water coils: Minus 0 percent to plus 5 percent.
3. Systems shall be adjusted for energy efficient operation as described in PART 3.
4. Typical TAB procedures and results shall be demonstrated to the COTR for one air distribution system (including all fans, three terminal units, three rooms randomly selected by the COTR) and one hydronic system (pumps and three coils) as follows:
 - a. When field TAB work begins.
 - b. During each partial final inspection and the final inspection for the project if requested by VA.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Submit names and qualifications of TAB agency and TAB specialists within 60 days after the notice to proceed. Submit information on three recently completed projects and a list of proposed test equipment.
- C. For use by the COTR staff, submit one complete set of applicable AABC or NEBB publications that will be the basis of TAB work.
- D. Submit Following for Review and Approval:
 - 1. Design Review Report within 90 days for conventional design projects after the system layout on air and water side is completed by the Contractor.
 - 2. Systems inspection report on equipment and installation for conformance with design.
 - 3. Duct Air Leakage Test Report.
 - 4. Systems Readiness Report.
 - 5. Intermediate and Final TAB reports covering flow balance and adjustments, performance tests, vibration tests and sound tests.
 - 6. Include in final reports uncorrected installation deficiencies noted during TAB and applicable explanatory comments on test results that differ from design requirements.
- E. Prior to request for Final or Partial Final inspection, submit completed Test and Balance report for the area.

1.5 APPLICABLE PUBLICATIONS

- A. The following publications form a part of this specification to the extent indicated by the reference thereto. In text the publications are referenced to by the acronym of the organization.
- B. American Society of Heating, Refrigerating and Air Conditioning Engineers, Inc. (ASHRAE):
 - 2007HVAC Applications ASHRAE Handbook, Chapter 37, Testing, Adjusting, and Balancing and Chapter 47, Sound and Vibration Control
- C. Associated Air Balance Council (AABC):
 - 2002.....AABC National Standards for Total System Balance
- D. National Environmental Balancing Bureau (NEBB):
 - 7th Edition 2005Procedural Standards for Testing, Adjusting, Balancing of Environmental Systems

2nd Edition 2006Procedural Standards for the Measurement of
Sound and Vibration

3rd Edition 2009Procedural Standards for Whole Building Systems
Commissioning of New Construction

E. Sheet Metal and Air Conditioning Contractors National Association
(SMACNA):

3rd Edition 2002HVAC SYSTEMS Testing, Adjusting and Balancing

PART 2 - PRODUCTS

2.1 PLUGS

Provide plastic plugs to seal holes drilled in ductwork for test purposes.

2.2 INSULATION REPAIR MATERIAL

See Section 23 07 11, HVAC INSULATION Provide for repair of insulation removed or damaged for TAB work.

PART 3 - EXECUTION

3.1 GENERAL

- A. Refer to TAB Criteria in Article, Quality Assurance.
- B. Obtain applicable contract documents and copies of approved submittals for HVAC equipment and automatic control systems.

3.2 DESIGN REVIEW REPORT

The TAB Specialist shall review the Contract Plans and specifications and advise the COTR of any design deficiencies that would prevent the HVAC systems from effectively operating in accordance with the sequence of operation specified or prevent the effective and accurate TAB of the system. The TAB Specialist shall provide a report individually listing each deficiency and the corresponding proposed corrective action necessary for proper system operation.

3.3 SYSTEMS INSPECTION REPORT

- A. Inspect equipment and installation for conformance with design.
- B. The inspection and report is to be done after air distribution equipment is on site and duct installation has begun, but well in advance of performance testing and balancing work. The purpose of the inspection is to identify and report deviations from design and ensure that systems will be ready for TAB at the appropriate time.
- C. Reports: Follow check list format developed by AABC, NEBB or SMACNA, supplemented by narrative comments, with emphasis on air handling units and fans. Check for conformance with submittals. Verify that diffuser

and register sizes are correct. Check air terminal unit installation including their duct sizes and routing.

3.4 DUCT AIR LEAKAGE TEST REPORT

- A. TAB Agency shall perform the leakage test as outlined in "Duct leakage Tests and Repairs" in Section 23 31 00, HVAC DUCTS and CASINGS for TAB agency's role and responsibilities in witnessing, recording and reporting of deficiencies.

3.5 SYSTEM READINESS REPORT

- A. The TAB Contractor shall measure existing air and water flow rates associated with existing systems utilized to serve renovated areas as indicated on drawings. Submit report of findings to the COTR.
- B. Inspect each System to ensure that it is complete including installation and operation of controls. Submit report to the COTR in standard format and forms prepared and or approved by the Commissioning Agent.
- C. Verify that all items such as ductwork piping, ports, terminals, connectors, etc., that is required for TAB are installed. Provide a report to the COTR.

3.6 TAB REPORTS

- A. Submit an intermediate report for 50 percent of systems and equipment tested and balanced to establish satisfactory test results.
- B. The TAB contractor shall provide raw data immediately in writing to the COTR if there is a problem in achieving intended results before submitting a formal report.
- C. If over 20 percent of readings in the intermediate report fall outside the acceptable range, the TAB report shall be considered invalid and all contract TAB work shall be repeated and re-submitted for approval at no additional cost to the owner.
- D. Do not proceed with the remaining systems until intermediate report is approved by the COTR.

3.7 TAB PROCEDURES

- A. Tab shall be performed in accordance with the requirement of the Standard under which TAB agency is certified by either AABC or NEBB.
- B. General: During TAB all related system components shall be in full operation. Fan and pump rotation, motor loads and equipment vibration shall be checked and corrected as necessary before proceeding with TAB. Set controls and/or block off parts of distribution systems to simulate

design operation of variable volume air or water systems for test and balance work.

- C. Coordinate TAB procedures with existing systems and any phased construction completion requirements for the project. Provide TAB reports for pre construction air and water flow rate and for each phase of the project prior to partial final inspections of each phase of the project. Return existing areas outside the work area to pre constructed conditions.
- D. Allow 60 days time in construction schedule for TAB and submission of all reports for an organized and timely correction of deficiencies.
- E. Air Balance and Equipment Test: Include air handling units, fans, terminal units, fan coil units, room diffusers/outlets/inlets, and laboratory fume hoods and biological safety cabinets.
 - 1. Artificially load air filters by partial blanking to produce air pressure drop of manufacturer's recommended pressure drop.
 - 2. Adjust fan speeds to provide design air flow. V-belt drives, including fixed pitch pulley requirements, are specified in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
 - 3. Test and balance systems in all specified modes of operation, including variable volume, economizer, and fire emergency modes. Verify that dampers and other controls function properly.
 - 4. Variable air volume (VAV) systems:
 - a. Coordinate TAB, including system volumetric controls, with Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
 - b. Section 23 36 00, AIR TERMINAL UNITS, specifies that maximum and minimum flow rates for air terminal units (ATU) be factory set. Check and readjust ATU flow rates if necessary. Balance air distribution from ATU on full cooling maximum scheduled cubic meters per minute (cubic feet per minute). Reset room thermostats and check ATU operation from maximum to minimum cooling, to the heating mode, and back to cooling. Record and report the heating coil leaving air temperature when the ATU is in the maximum heating mode. Record and report outdoor air flow rates under all operating conditions (The test shall demonstrate that the minimum outdoor air ventilation rate shall remain constant under all operating conditions).
 - c. Adjust operating pressure control setpoint to maintain the design flow to each space with the lowest setpoint.

5. Record final measurements for air handling equipment performance data sheets.
- F. Water Balance and Equipment Test: Include circulating pumps, convertors, coils, coolers and condensers:
 1. Coordinate chilled flow balancing with Section 23 82 16, AIR COILS.
 2. Adjust flow rates for equipment. Set coils and evaporator to values on equipment submittals, if different from values on contract drawings.
 3. Primary-secondary (variable volume) systems: Coordinate TAB with Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC. Balance systems at design water flow and then verify that variable flow controls function as designed.
 4. Record final measurements for hydronic equipment on performance data sheets. Include entering and leaving water temperatures for heating and cooling coils, and for convertors. Include entering and leaving air temperatures (DB/WB for cooling coils) for air handling units and reheat coils. Make air and water temperature measurements at the same time.

3.8 VIBRATION TESTING

- A. Furnish instruments and perform vibration measurements as specified in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT. Field vibration balancing is specified in Section 23 05 11, COMMON WORK RESULTS FOR HVAC. Provide measurements for all rotating HVAC equipment of 373 watts (1/2 horsepower) and larger, including centrifugal/screw compressors, pumps, fans and motors.
- B. Record initial measurements for each unit of equipment on test forms and submit a report to the COTR. Where vibration readings exceed the allowable tolerance Contractor shall be directed to correct the problem. The TAB agency shall verify that the corrections are done and submit a final report to the COTR.

3.9 SOUND TESTING

- A. Perform and record required sound measurements in accordance with Paragraph, QUALITY ASSURANCE in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.
 1. Take readings in rooms, approximately fifteen (15) percent of all rooms. The COTR may designate the specific rooms to be tested.
- B. Take measurements with a calibrated sound level meter and octave band analyzer of the accuracy required by AABC or NEBB.

C. Sound reference levels, formulas and coefficients shall be according to ASHRAE Handbook, "HVAC Applications", Chapter 46, SOUND AND VIBRATION CONTROL.

D. Determine compliance with specifications as follows:

1. When sound pressure levels are specified, including the NC Criteria in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT:

- a. Reduce the background noise as much as possible by shutting off unrelated audible equipment.
- b. Measure octave band sound pressure levels with specified equipment "off."
- c. Measure octave band sound pressure levels with specified equipment "on."
- d. Use the DIFFERENCE in corresponding readings to determine the sound pressure due to equipment.

DIFFERENCE:	0	1	2	3	4	5 to 9	10 or More
FACTOR:	10	7	4	3	2	1	0

Sound pressure level due to equipment equals sound pressure level with equipment "on" minus FACTOR.

- e. Plot octave bands of sound pressure level due to equipment for typical rooms on a graph which also shows noise criteria (NC) curves.
2. When sound power levels are specified:
- a. Perform steps 1.a. thru 1.d., as above.
 - b. For indoor equipment: Determine room attenuating effect, i.e., difference between sound power level and sound pressure level. Determined sound power level will be the sum of sound pressure level due to equipment plus the room attenuating effect.
 - c. For outdoor equipment: Use directivity factor and distance from noise source to determine distance factor, i.e., difference between sound power level and sound pressure level. Measured sound power level will be the sum of sound pressure level due to equipment plus the distance factor. Use 10 meters (30 feet) for sound level location.

3. Where sound pressure levels are specified in terms of dB(A), measure sound levels using the "A" scale of meter. Single value readings will be used instead of octave band analysis.

- E. Where measured sound levels exceed specified level, the installing contractor or equipment manufacturer shall take remedial action approved by the COTR and the necessary sound tests shall be repeated.
- F. Test readings for sound testing could go higher than 15 percent if determination is made by the COTR based on the recorded sound data.

3.10 MARKING OF SETTINGS

Following approval of Tab final Report, the setting of all HVAC adjustment devices including valves, splitters and dampers shall be permanently marked by the TAB Specialist so that adjustment can be restored if disturbed at any time. Style and colors used for markings shall be coordinated with the COTR.

3.11 IDENTIFICATION OF TEST PORTS

The TAB Specialist shall permanently and legibly identify the location points of duct test ports. If the ductwork has exterior insulation, the identification shall be made on the exterior side of the insulation. All penetrations through ductwork and ductwork insulation shall be sealed to prevent air leaks and maintain integrity of vapor barrier.

3.12 PHASING

- A. Phased Projects: Testing and Balancing Work to follow project with areas shall be completed per the project phasing. Upon completion of the project all areas shall have been tested and balanced per the contract documents.
- B. Existing Areas: Systems that serve areas outside of the project scope shall not be adversely affected. Measure existing parameters where shown to document system capacity.

3.13 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

- - E N D - - -

**SECTION 23 07 11
HVAC INSULATION**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Field applied insulation for thermal efficiency and condensation control for
 - 1. HVAC piping, ductwork and equipment.
 - 2. Re-insulation of HVAC piping, ductwork and equipment, plumbing piping and equipment after demolition.
- B. Definitions
 - 1. ASJ: All service jacket, white finish facing or jacket.
 - 2. Air conditioned space: Space having air temperature and/or humidity controlled by mechanical equipment.
 - 3. Cold: Equipment, ductwork or piping handling media at design temperature of 16 degrees C (60 degrees F) or below.
 - 4. Concealed: Ductwork and piping above ceilings and in chases, interstitial space, and pipe spaces.
 - 5. Exposed: Piping, ductwork, and equipment exposed to view in finished areas including mechanical, and electrical equipment rooms or exposed to outdoor weather. Attics and crawl spaces where air handling units are located are considered to be mechanical rooms. Shafts, chases, interstitial spaces, unfinished attics, crawl spaces and pipe basements are not considered finished areas.
 - 6. FSK: Foil-scrim-kraft facing.
 - 7. Hot: HVAC Ductwork handling air at design temperature above 16 degrees C (60 degrees F); HVAC equipment or piping handling media above 41 degrees C (105 degrees F).
 - 8. Density: kg/m^3 - kilograms per cubic meter (Pcf - pounds per cubic foot).
 - 9. Runouts: Branch pipe connections up to 25-mm (one-inch) nominal size to fan coil units or reheat coils for terminal units.
 - 10. Thermal conductance: Heat flow rate through materials.
 - a. Flat surface: Watt per square meter (BTU per hour per square foot).
 - b. Pipe or Cylinder: Watt per square meter (BTU per hour per linear foot).

11. Thermal Conductivity (k): Watt per meter, per degree C (BTU per inch thickness, per hour, per square foot, per degree F temperature difference).
12. Vapor Retarder (Vapor Barrier): A material which retards the transmission (migration) of water vapor. Performance of the vapor retarder is rated in terms of permeance (perms). For the purpose of this specification, vapor retarders shall have a maximum published permeance of 0.1 perms and vapor barriers shall have a maximum published permeance of 0.001 perms.
13. HPS: High pressure steam (415 kPa [60 psig] and above).
14. HPR: High pressure steam condensate return.
15. MPS: Medium pressure steam (110 kPa [16 psig] thru 414 kPa [59 psig]).
16. MPR: Medium pressure steam condensate return.
17. LPS: Low pressure steam (103 kPa [15 psig] and below).
18. LPR: Low pressure steam condensate gravity return.
19. PC: Pumped condensate.
20. HWH: Hot water heating supply.
21. HWHR: Hot water heating return.
22. VR: Vacuum condensate return.
23. CPD: Condensate pump discharge.
24. R: Pump recirculation.
25. CW: Cold water.
26. SW: Soft water.
27. HW: Hot water.
28. CH: Chilled water supply.
29. CHR: Chilled water return.
30. PVDC: Polyvinylidenechloride vapor retarder jacketing, white.

1.2 RELATED WORK

- A. Section 07 84 00, FIRESTOPPING: Mineral fiber and bond breaker behind sealant.
- B. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General mechanical requirements and items, which are common to more than one section of Division 23.
- C. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT
- D. Section 23 21 23, HYDRONIC PUMPS
- E. Section 23 22 13, STEAM and CONDENSATE HEATING PIPING

- F. Section 23 22 13, STEAM and CONDENSATE HEATING PIPING: Piping and equipment.
- G. Section 23 21 13, HYDRONIC PIPING: Hot water and chilled water piping.
- H. Section 23 31 00, HVAC DUCTS AND CASINGS: Ductwork, plenum and fittings.
- I. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS. Requirements for commissioning, systems readiness checklists, and training.

1.3 QUALITY ASSURANCE

- A. Refer to article QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

- B. Criteria:

- 1. Comply with NFPA 90A, particularly paragraphs 4.3.3.1 through 4.3.3.6, 4.3.10.2.6, and 5.4.6.4, parts of which are quoted as follows:

4.3.3.1 Pipe insulation and coverings, duct coverings, duct linings, vapor retarder facings, adhesives, fasteners, tapes, and supplementary materials added to air ducts, plenums, panels, and duct silencers used in duct systems, unless otherwise provided for in 4.3.3.1.1 or 4.3.3.1.2., shall have, in the form in which they are used, a maximum flame spread index of 25 without evidence of continued progressive combustion and a maximum smoke developed index of 50 when tested in accordance with NFPA 255, Standard Method of Test of Surface Burning Characteristics of Building Materials.

4.3.3.1.1 Where these products are to be applied with adhesives, they shall be tested with such adhesives applied, or the adhesives used shall have a maximum flame spread index of 25 and a maximum smoke developed index of 50 when in the final dry state. (See 4.2.4.2.)

4.3.3.1.2 The flame spread and smoke developed index requirements of 4.3.3.1.1 shall not apply to air duct weatherproof coverings where they are located entirely outside of a building, do not penetrate a wall or roof, and do not create an exposure hazard.

4.3.3.2 Closure systems for use with rigid and flexible air ducts tested in accordance with UL 181, Standard for Safety Factory-Made Air Ducts and Air Connectors, shall have been tested, listed, and used in accordance with the conditions of their listings, in accordance with one of the following:

(1) UL 181A, Standard for Safety Closure Systems for Use with Rigid Air Ducts and Air Connectors

(2) UL 181B, Standard for Safety Closure Systems for Use with Flexible Air Ducts and Air Connectors

4.3.3.3 Air duct, panel, and plenum coverings and linings, and pipe insulation and coverings shall not flame, glow, smolder, or smoke when tested in accordance with a similar test for pipe covering, ASTM C 411, Standard Test Method for Hot-Surface

Performance of High-Temperature Thermal Insulation, at the temperature to which they are exposed in service.

4.3.3.3.1 In no case shall the test temperature be below 121°C (250°F).

4.3.3.3.4 Air duct coverings shall not extend through walls or floors that are required to be fire stopped or required to have a fire resistance rating, unless such coverings meet the requirements of 5.4.6.4.

4.3.3.3.5* Air duct linings shall be interrupted at fire dampers to prevent interference with the operation of devices.

4.3.3.3.6 Air duct coverings shall not be installed so as to conceal or prevent the use of any service opening.

4.3.10.2.6 Materials exposed to the airflow shall be noncombustible or limited combustible and have a maximum smoke developed index of 50 or comply with the following.

4.3.10.2.6.1 Electrical wires and cables and optical fiber cables shall be listed as noncombustible or limited combustible and have a maximum smoke developed index of 50 or shall be listed as having a maximum peak optical density of 0.5 or less, an average optical density of 0.15 or less, and a maximum flame spread distance of 1.5 m (5 ft) or less when tested in accordance with NFPA 262, Standard Method of Test for Flame Travel and Smoke of Wires and Cables for Use in Air-Handling Spaces.

4.3.10.2.6.4 Optical-fiber and communication raceways shall be listed as having a maximum peak optical density of 0.5 or less, an average optical density of 0.15 or less, and a maximum flame spread distance of 1.5 m (5 ft) or less when tested in accordance with UL 2024, Standard for Safety Optical-Fiber Cable Raceway.

4.3.10.2.6.6 Supplementary materials for air distribution systems shall be permitted when complying with the provisions of 4.3.3.

5.4.6.4 Where air ducts pass through walls, floors, or partitions that are required to have a fire resistance rating and where fire dampers are not required, the opening in the construction around the air duct shall be as follows:

(1) Not exceeding a 25.4 mm (1 in.) average clearance on all sides

(2) Filled solid with an approved material capable of preventing the passage of flame and hot gases sufficient to ignite cotton waste when subjected to the time-temperature fire conditions required for fire barrier penetration as specified in NFPA 251, *Standard Methods of Tests of Fire Endurance of Building Construction and Materials*

2. Test methods: ASTM E84, UL 723, or NFPA 255.

3. Specified k factors are at 24 degrees C (75 degrees F) mean temperature unless stated otherwise. Where optional thermal insulation material is used, select thickness to provide thermal conductance no greater than that for the specified material. For pipe, use insulation manufacturer's published heat flow tables. For

domestic hot water supply and return, run out insulation and condensation control insulation, no thickness adjustment need be made.

4. All materials shall be compatible and suitable for service temperature, and shall not contribute to corrosion or otherwise attack surface to which applied in either the wet or dry state.

C. Every package or standard container of insulation or accessories delivered to the job site for use must have a manufacturer's stamp or label giving the name of the manufacturer and description of the material.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Shop Drawings:

1. All information, clearly presented, shall be included to determine compliance with drawings and specifications and ASTM, federal and military specifications.
 - a. Insulation materials: Specify each type used and state surface burning characteristics.
 - b. Insulation facings and jackets: Each type used. Make it clear that white finish will be furnished for exposed ductwork, casings and equipment.
 - c. Insulation accessory materials: Each type used.
 - d. Manufacturer's installation and fitting fabrication instructions for flexible unicellular insulation.
 - e. Make reference to applicable specification paragraph numbers for coordination.

C. Samples:

1. Each type of insulation: Minimum size 100 mm (4 inches) square for board/block/ blanket; 150 mm (6 inches) long, full diameter for round types.
2. Each type of facing and jacket: Minimum size 100 mm (4 inches square).
3. Each accessory material: Minimum 120 ML (4 ounce) liquid container or 120 gram (4 ounce) dry weight for adhesives / cement / mastic.

1.5 STORAGE AND HANDLING OF MATERIAL

Store materials in clean and dry environment, pipe covering jackets shall be clean and unmarred. Place adhesives in original containers.

Maintain ambient temperatures and conditions as required by printed instructions of manufacturers of adhesives, mastics and finishing cements.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.

B. Federal Specifications (Fed. Spec.):

L-P-535E (2)- 99.....Plastic Sheet (Sheeting): Plastic Strip; Poly (Vinyl Chloride) and Poly (Vinyl Chloride - Vinyl Acetate), Rigid.

C. Military Specifications (Mil. Spec.):

MIL-A-3316C (2)-90.....Adhesives, Fire-Resistant, Thermal Insulation

MIL-A-24179A (1)-87.....Adhesive, Flexible Unicellular-Plastic Thermal Insulation

MIL-C-19565C (1)-88.....Coating Compounds, Thermal Insulation, Fire-and Water-Resistant, Vapor-Barrier

MIL-C-20079H-87.....Cloth, Glass; Tape, Textile Glass; and Thread, Glass and Wire-Reinforced Glass

D. American Society for Testing and Materials (ASTM):

A167-99(2004).....Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

B209-07.....Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate

C411-05.....Standard test method for Hot-Surface Performance of High-Temperature Thermal Insulation

C449-07.....Standard Specification for Mineral Fiber Hydraulic-Setting Thermal Insulating and Finishing Cement

C533-09.....Standard Specification for Calcium Silicate Block and Pipe Thermal Insulation

C534-08.....Standard Specification for Preformed Flexible Elastomeric Cellular Thermal Insulation in Sheet and Tubular Form

C547-07.....Standard Specification for Mineral Fiber pipe Insulation

- C552-07.....Standard Specification for Cellular Glass
Thermal Insulation
- C553-08.....Standard Specification for Mineral Fiber
Blanket Thermal Insulation for Commercial and
Industrial Applications
- C585-09.....Standard Practice for Inner and Outer Diameters
of Rigid Thermal Insulation for Nominal Sizes
of Pipe and Tubing (NPS System) R (1998)
- C612-10.....Standard Specification for Mineral Fiber Block
and Board Thermal Insulation
- C1126-04.....Standard Specification for Faced or Unfaced
Rigid Cellular Phenolic Thermal Insulation
- C1136-10.....Standard Specification for Flexible, Low
Permeance Vapor Retarders for Thermal
Insulation
- D1668-97a (2006).....Standard Specification for Glass Fabrics (Woven
and Treated) for Roofing and Waterproofing
- E84-10.....Standard Test Method for Surface Burning
Characteristics of Building
Materials
- E119-09c.....Standard Test Method for Fire Tests of Building
Construction and Materials
- E136-09b.....Standard Test Methods for Behavior of Materials
in a Vertical Tube Furnace at 750 degrees C
(1380 F)
- E. National Fire Protection Association (NFPA):
- 90A-09.....Standard for the Installation of Air
Conditioning and Ventilating Systems
- 101-09.....Life Safety Code
- 251-06.....Standard methods of Tests of Fire Endurance of
Building Construction Materials
- 255-06.....Standard Method of tests of Surface Burning
Characteristics of Building Materials
- F. Underwriters Laboratories, Inc (UL):
- 723.....UL Standard for Safety Test for Surface Burning
Characteristics of Building Materials with
Revision of 09/08

- G. Manufacturer's Standardization Society of the Valve and Fitting Industry (MSS):
SP58-2009.....Pipe Hangers and Supports Materials, Design,
and Manufacture

PART 2 - PRODUCTS

2.1 MINERAL FIBER OR FIBER GLASS

- A. ASTM C612 (Board, Block), Class 1 or 2, density 48 kg/m³ (3 pcf), k = 0.037 (0.26) at 24 degrees C (75 degrees F), external insulation for temperatures up to 204 degrees C (400 degrees F) with foil scrim (FSK) facing.
- B. ASTM C553 (Blanket, Flexible) Type I, Class B-5, Density 32 kg/m³ (2 pcf), k = 0.04 (0.27) at 24 degrees C (75 degrees F), for use at temperatures up to 204 degrees C (400 degrees F) with foil scrim (FSK) facing.
- C. ASTM C547 (Pipe Fitting Insulation and Preformed Pipe Insulation), Class 1, k = 0.037 (0.26) at 24 degrees C (75 degrees F), for use at temperatures up to 230 degrees C (450 degrees F) with an all service vapor retarder jacket with polyvinyl chloride premolded fitting covering.

2.2 MINERAL WOOL OR REFRACTORY FIBER

- A. Comply with Standard ASTM C612, Class 3, 450 degrees C (850 degrees F).

2.3 FLEXIBLE ELASTOMERIC CELLULAR THERMAL

ASTM C177, C518, k = 0.039 (0.27) at 24 degrees C (75 degrees F), flame spread not over 25, smoke developed not over 50, for temperatures from minus 4 degrees C (40 degrees F) to 93 degrees C (200 degrees F). No jacket required.

2.4 CALCIUM SILICATE

- A. Preformed pipe Insulation: ASTM C533, Type I and Type II with indicator denoting asbestos-free material.
- B. Premolded Pipe Fitting Insulation: ASTM C533, Type I and Type II with indicator denoting asbestos-free material.
- C. Equipment Insulation: ASTM C533, Type I and Type II

D. Characteristics:

Insulation Characteristics		
ITEMS	TYPE I	TYPE II
Temperature, maximum degrees C (degrees F)	649 (1200)	927 (1700)
Density (dry), Kg/m ³ (lb/ ft ³)	232 (14.5)	288 (18)
Thermal conductivity: Min W/ m K (Btu in/h ft ² degrees F)@ mean temperature of 93 degrees C (200 degrees F)	0.059 (0.41)	0.078 (0.540)
Surface burning characteristics: Flame spread Index, Maximum	0	0
Smoke Density index, Maximum	0	0

2.5 INSULATION FACINGS AND JACKETS

- A. Vapor Retarder, higher strength with low water permeance \leq 0.02 or less perm rating, Beach puncture 50 units for insulation facing on exposed ductwork, casings and equipment, and for pipe insulation jackets. Facings and jackets shall be all service type (ASJ) or PVDC Vapor Retarder jacketing.
- B. ASJ jacket shall be white kraft bonded to 0.025 mm (1 mil) thick aluminum foil, fiberglass reinforced, with pressure sensitive adhesive closure. Comply with ASTM C1136. Beach puncture 50 units, Suitable for painting without sizing. Jackets shall have minimum 40 mm (1-1/2 inch) lap on longitudinal joints and minimum 75 mm (3 inch) butt strip on end joints. Butt strip material shall be same as the jacket. Lap and butt strips shall be self-sealing type with factory-applied pressure sensitive adhesive.
- C. Vapor Retarder medium strength with low water vapor permeance of 0.02 or less perm rating), Beach puncture 25 units: Foil-Scrim-Kraft (FSK) or PVDC vapor retarder jacketing type for concealed ductwork and equipment.
- D. Field applied vapor barrier jackets shall be provided, in addition to the specified facings and jackets, on all exterior piping and ductwork as well as on interior piping and ductwork exposed to outdoor air (i.e.; in ventilated attics, piping in ventilated (not air conditioned)

spaces, etc.) in high humidity areas conveying fluids below ambient temperature. The vapor barrier jacket shall consist of a multi-layer laminated cladding with a maximum water vapor permeance of 0.001 perms. The minimum puncture resistance shall be 35 cm-kg (30 inch-pounds) for interior locations and 92 cm-kg (80 inch-pounds) for exterior or exposed locations or where the insulation is subject to damage.

- E. Glass Cloth Jackets: Presized, minimum 0.18 kg per square meter (7.8 ounces per square yard), 2000 kPa (300 psig) bursting strength with integral vapor retarder where required or specified. Weather proof if utilized for outside service.
- F. Factory composite materials may be used provided that they have been tested and certified by the manufacturer.
- G. Pipe fitting insulation covering (jackets): Fitting covering shall be premolded to match shape of fitting and shall be polyvinyl chloride (PVC) conforming to Fed Spec L-P-335, composition A, Type II Grade GU, and Type III, minimum thickness 0.7 mm (0.03 inches). Provide color matching vapor retarder pressure sensitive tape.
- H. Aluminum Jacket-Piping systems: ASTM B209, 3003 alloy, H-14 temper, 0.6 mm (0.023 inch) minimum thickness with locking longitudinal joints. Jackets for elbows, tees and other fittings shall be factory-fabricated to match shape of fitting and of 0.6 mm (0.024) inch minimum thickness aluminum. Fittings shall be of same construction as straight run jackets but need not be of the same alloy. Factory-fabricated stainless steel bands shall be installed on all circumferential joints. Bands shall be 13 mm (0.5 inch) wide on 450 mm (18 inch) centers. System shall be weatherproof if utilized for outside service.

2.6 PIPE COVERING PROTECTION SADDLES

- A. Cold pipe support: Premolded pipe insulation 180 degrees (half-shells) on bottom half of pipe at supports. Material shall be cellular glass or high density Polyisocyanurate insulation of the same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 48 kg/m³ (3.0 pcf).

Nominal Pipe Size and Accessories Material (Insert Blocks)	
Nominal Pipe Size mm (inches)	Insert Blocks mm (inches)
Up through 125 (5)	150 (6) long

Nominal Pipe Size and Accessories Material (Insert Blocks)	
Nominal Pipe Size mm (inches)	Insert Blocks mm (inches)
150 (6)	150 (6) long
200 (8), 250 (10), 300 (12)	225 (9) long
350 (14), 400 (16)	300 (12) long
450 through 600 (18 through 24)	350 (14) long

B. Warm or hot pipe supports: Premolded pipe insulation (180 degree half-shells) on bottom half of pipe at supports. Material shall be high density Polyisocyanurate (for temperatures up to 149 degrees C [300 degrees F]), cellular glass or calcium silicate. Insulation at supports shall have same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 48 kg/m³ (3.0 pcf).

2.7 ADHESIVE, MASTIC, CEMENT

- A. Mil. Spec. MIL-A-3316, Class 1: Jacket and lap adhesive and protective finish coating for insulation.
- B. Mil. Spec. MIL-A-3316, Class 2: Adhesive for laps and for adhering insulation to metal surfaces.
- C. Mil. Spec. MIL-A-24179, Type II Class 1: Adhesive for installing flexible unicellular insulation and for laps and general use.
- D. Mil. Spec. MIL-C-19565, Type I: Protective finish for outdoor use.
- E. Mil. Spec. MIL-C-19565, Type I or Type II: Vapor barrier compound for indoor use.
- F. ASTM C449: Mineral fiber hydraulic-setting thermal insulating and finishing cement.
- G. Other: Insulation manufacturers' published recommendations.

2.8 MECHANICAL FASTENERS

- A. Pins, anchors: Welded pins, or metal or nylon anchors with galvanized steel-coated or fiber washer, or clips. Pin diameter shall be as recommended by the insulation manufacturer.
- B. Staples: Outward clinching monel or galvanized steel.
- C. Wire: 1.3 mm thick (18 gage) soft annealed galvanized or 1.9 mm (14 gage) copper clad steel or nickel copper alloy.
- D. Bands: 13 mm (0.5 inch) nominal width, brass, galvanized steel, aluminum or stainless steel.

2.9 REINFORCEMENT AND FINISHES

- A. Glass fabric, open weave: ASTM D1668, Type III (resin treated) and Type I (asphalt treated).

- B. Glass fiber fitting tape: Mil. Spec MIL-C-20079, Type II, Class 1.
- C. Tape for Flexible Elastomeric Cellular Insulation: As recommended by the insulation manufacturer.
- D. Hexagonal wire netting: 25 mm (one inch) mesh, 0.85 mm thick (22 gage) galvanized steel.
- E. Corner beads: 50 mm (2 inch) by 50 mm (2 inch), 0.55 mm thick (26 gage) galvanized steel; or, 25 mm (1 inch) by 25 mm (1 inch), 0.47 mm thick (28 gage) aluminum angle adhered to 50 mm (2 inch) by 50 mm (2 inch) Kraft paper.
- F. PVC fitting cover: Fed. Spec L-P-535, Composition A, 11-86 Type II, Grade GU, with Form B Mineral Fiber insert, for media temperature 4 degrees C (40 degrees F) to 121 degrees C (250 degrees F). Below 4 degrees C (40 degrees F) and above 121 degrees C (250 degrees F). Provide double layer insert. Provide color matching vapor barrier pressure sensitive tape.

2.10 FIRESTOPPING MATERIAL

Other than pipe and duct insulation, refer to Section 07 84 00
FIRESTOPPING.

2.11 FLAME AND SMOKE

Unless shown otherwise all assembled systems shall meet flame spread 25 and smoke developed 50 rating as developed under ASTM, NFPA and UL standards and specifications. See paragraph 1.3 "Quality Assurance".

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS

- A. Required pressure tests of duct and piping joints and connections shall be completed and the work approved by the COTR for application of insulation. Surface shall be clean and dry with all foreign materials, such as dirt, oil, loose scale and rust removed.
- B. Except for specific exceptions, insulate entire specified equipment, piping (pipe, fittings, valves, accessories), and duct systems. Insulate each pipe and duct individually. Do not use scrap pieces of insulation where a full length section will fit.
- C. Insulation materials shall be installed in a first class manner with smooth and even surfaces, with jackets and facings drawn tight and smoothly cemented down at all laps. Insulation shall be continuous through all sleeves and openings, except at fire dampers and duct heaters (NFPA 90A). Vapor retarders shall be continuous and uninterrupted throughout systems with operating temperature 16 degrees

- C (60 degrees F) and below. Lap and seal vapor retarder over ends and exposed edges of insulation. Anchors, supports and other metal projections through insulation on cold surfaces shall be insulated and vapor sealed for a minimum length of 150 mm (6 inches).
- D. Install vapor stops at all insulation terminations on either side of valves, pumps and equipment and particularly in straight lengths of pipe insulation.
- E. Construct insulation on parts of equipment such as chilled water pumps and heads of convertors and heat exchangers that must be opened periodically for maintenance or repair, so insulation can be removed and replaced without damage. Install insulation with bolted 1 mm thick (20 gage) galvanized steel or aluminum covers as complete units, or in sections, with all necessary supports, and split to coincide with flange/split of the equipment.
- F. Insulation on hot piping and equipment shall be terminated square at items not to be insulated, access openings and nameplates. Cover all exposed raw insulation with white sealer or jacket material.
- G. Protect all insulations outside of buildings with aluminum jacket using lock joint or other approved system for a continuous weather tight system. Access doors and other items requiring maintenance or access shall be removable and sealable.
- H. Insulate PRVs, flow meters, and steam traps.
- I. HVAC work not to be insulated:
1. Internally insulated ductwork and air handling units.
 2. Relief air ducts (Economizer cycle exhaust air).
 3. Exhaust air ducts and plenums, and ventilation exhaust air shafts.
 4. Equipment: Expansion tanks, flash tanks, hot water pumps.
 5. In hot piping: Unions, flexible connectors, control valves, PRVs, safety valves and discharge vent piping, vacuum breakers, thermostatic vent valves, steam traps 20 mm (3/4 inch) and smaller. Insulate piping to within approximately 75 mm (3 inches) of uninsulated items.
- J. Apply insulation materials subject to the manufacturer's recommended temperature limits. Apply adhesives, mastic and coatings at the manufacturer's recommended minimum coverage.
- K. Elbows, flanges and other fittings shall be insulated with the same material as is used on the pipe straights. The elbow/ fitting insulation shall be field-fabricated, mitered or factory prefabricated

to the necessary size and shape to fit on the elbow/ fitting. Use of polyurethane spray-foam to fill a PVC elbow jacket is prohibited on cold applications.

L. Firestop Pipe and Duct insulation:

1. Provide firestopping insulation at fire and smoke barriers through penetrations. Fire stopping insulation shall be UL listed as defines in Section 07 84 00, FIRESTOPPING.
2. Pipe and duct penetrations requiring fire stop insulation including, but not limited to the following:
 - a. Pipe risers through floors
 - b. Pipe or duct chase walls and floors
 - c. Smoke partitions
 - d. Fire partitions

M. Freeze protection of above grade outdoor piping (over heat tracing tape): 26 mm (10 inch) thick insulation, for all pipe sizes 75 mm(3 inches) and smaller and 25 mm(1inch) thick insulation for larger pipes. Provide metal jackets for all pipes. Provide for chilled water piping as described in Section 23 21 13, HYDRONIC PIPING (electrical heat tracing systems).

N. Provide vapor barrier jackets over insulation as follows:

1. All piping and ductwork exposed to outdoor weather.
2. All interior piping and ducts conveying fluids exposed to outdoor air (i.e. in attics, ventilated (not air conditioned) spaces, etc.) below ambient air temperature in high humidity areas.

O. Provide metal jackets over insulation as follows:

1. All piping and ducts exposed to outdoor weather.
2. Piping exposed in building, within 1800 mm (6 feet) of the floor, that connects to sterilizers, SPD equipment. Jackets may be applied with pop rivets. Provide aluminum angle ring escutcheons at wall, ceiling or floor penetrations.
3. A 50 mm (2 inch) overlap is required at longitudinal and circumferential joints.

3.2 INSULATION INSTALLATION

A. Mineral Fiber Board:

1. Faced board: Apply board on pins spaced not more than 300 mm (12 inches) on center each way, and not less than 75 mm (3 inches) from each edge of board. In addition to pins, apply insulation bonding adhesive to entire underside of horizontal metal surfaces. Butt

insulation edges tightly and seal all joints with laps and butt strips. After applying speed clips cut pins off flush and apply vapor seal patches over clips.

2. Plain board:

- a. Insulation shall be scored, beveled or mitered to provide tight joints and be secured to equipment with bands spaced 225 mm (9 inches) on center for irregular surfaces or with pins and clips on flat surfaces. Use corner beads to protect edges of insulation.
- b. For hot equipment: Stretch 25 mm (1 inch) mesh wire, with edges wire laced together, over insulation and finish with insulating and finishing cement applied in one coat, 6 mm (1/4 inch) thick, trowel led to a smooth finish.
- c. For cold equipment: Apply meshed glass fabric in a tack coat 1.5 to 1.7 square meter per liter (60 to 70 square feet per gallon) of vapor mastic and finish with mastic at 0.3 to 0.4 square meter per liter (12 to 15 square feet per gallon) over the entire fabric surface.
- d. Chilled water pumps: Insulate with removable and replaceable 1 mm thick (20 gage) aluminum or galvanized steel covers lined with insulation. Seal closure joints/flanges of covers with gasket material. Fill void space in enclosure with flexible mineral fiber insulation.

3. Exposed, unlined ductwork and equipment in unfinished areas, mechanical and electrical equipment rooms and attics, interstitial spaces and duct work exposed to outdoor weather:

- a. 40 mm (1-1/2 inch) thick insulation faced with ASJ (white all service jacket): Supply air duct unlined air handling units and after filter housing.
- b. 40 mm (1-1/2 inch) thick insulation faced with ASJ: Return air duct, mixed air plenums and pre filter housing.
- c. Outside air intake ducts: no insulation required.
- d. Exposed, unlined supply and return ductwork exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with a reinforcing membrane and two coats of vapor barrier mastic or multi-layer vapor barrier with a maximum water vapor permeability of 0.001 perms.

4. Cold equipment: 40 mm (1-1/2inch) thick insulation faced with ASJ.

- a. Chilled water pumps, water filter, chemical feeder pot or tank.
- 5. Hot equipment: 40 mm (1-1/2 inch) thick insulation faced with ASJ.
 - a. Convertors, air separators, steam condensate pump receivers.
 - b. Reheat coil casing and separation chambers on steam humidifiers located above ceilings.
 - c. Domestic water heaters and hot water storage tanks (not factory insulated).

B. Flexible Mineral Fiber Blanket:

- 1. Adhere insulation to metal with 75 mm (3 inch) wide strips of insulation bonding adhesive at 200 mm (8 inches) on center all around duct. Additionally secure insulation to bottom of ducts exceeding 600 mm (24 inches) in width with pins welded or adhered on 450 mm (18 inch) centers. Secure washers on pins. Butt insulation edges and seal joints with laps and butt strips. Staples may be used to assist in securing insulation. Seal all vapor retarder penetrations with mastic. Sagging duct insulation will not be acceptable. Install firestop duct insulation where required.
- 2. Supply air ductwork to be insulated includes main and branch ducts from AHU discharge to room supply outlets, and the bodies of ceiling outlets to prevent condensation. Insulate sound attenuator units, coil casings and damper frames. To prevent condensation insulate trapeze type supports and angle iron hangers for ducts that are in direct contact with metal duct.
- 3. Concealed supply air ductwork.
 - a. Above ceilings at a roof level, in attics, and duct work exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with FSK.
 - b. Above ceilings for other than roof level: 40 mm (1 1/2 inch) thick insulation faced with FSK.
- 4. Concealed return air duct:
 - a. In attics (where not subject to damage) and where exposed to outdoor weather: 50mmmm (2 inch)thick insulation faced with FSK
 - b. Above ceilings at a roof level, unconditioned areas, and in chases with external wall or containing steam piping; 40 mm (1-1/2 inch) thick, insulation faced with FSK.
 - c. In interstitial spaces (where not subject to damage): 40 mm (1-1/2 inch thick insulation faced with FSK.

- d. Concealed return air ductwork in other locations need not be insulated.
 5. Concealed outside air duct: 40 mm (1-1/2 inch) thick insulation faced with FSK.
- C. Molded Mineral Fiber Pipe and Tubing Covering:
1. Fit insulation to pipe or duct, aligning longitudinal joints. Seal longitudinal joint laps and circumferential butt strips by rubbing hard with a nylon sealing tool to assure a positive seal. Staples may be used to assist in securing insulation. Seal all vapor retarder penetrations on cold piping with a generous application of vapor barrier mastic. Provide inserts and install with metal insulation shields at outside pipe supports. Install freeze protection insulation over heating cable.
 2. Contractor's options for fitting, flange and valve insulation:
 - a. Insulating and finishing cement for sizes less than 100 mm (4 inches) operating at surface temperature of 16 degrees C (61 degrees F) or more.
 - b. Factory premolded, one piece PVC covers with mineral fiber, (Form B), inserts. Provide two insert layers for pipe temperatures below 4 degrees C (40 degrees F), or above 121 degrees C (250 degrees F). Secure first layer of insulation with twine. Seal seam edges with vapor barrier mastic and secure with fitting tape.
 - c. Factory molded, ASTM C547 or field mitered sections, joined with adhesive or wired in place. For hot piping finish with a smoothing coat of finishing cement. For cold fittings, 16 degrees C (60 degrees F) or less, vapor seal with a layer of glass fitting tape imbedded between two 2 mm (1/16 inch) coats of vapor barrier mastic.
 - d. Fitting tape shall extend over the adjacent pipe insulation and overlap on itself at least 50 mm (2 inches).
 3. Nominal thickness in millimeters and inches specified in the schedule at the end of this section.
- D. Flexible Elastomeric Cellular Thermal Insulation:
1. Apply insulation and fabricate fittings in accordance with the manufacturer's installation instructions and finish with two coats of weather resistant finish as recommended by the insulation manufacturer.

2. Pipe and tubing insulation:

- a. Use proper size material. Do not stretch or strain insulation.
 - b. To avoid undue compression of insulation, provide cork stoppers or wood inserts at supports as recommended by the insulation manufacturer. Insulation shields are specified under Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
 - c. Where possible, slip insulation over the pipe or tubing prior to connection, and seal the butt joints with adhesive. Where the slip-on technique is not possible, slit the insulation and apply it to the pipe sealing the seam and joints with contact adhesive. Optional tape sealing, as recommended by the manufacturer, may be employed. Make changes from mineral fiber insulation in a straight run of pipe, not at a fitting. Seal joint with tape.
3. Apply sheet insulation to flat or large curved surfaces with 100 percent adhesive coverage. For fittings and large pipe, apply adhesive to seams only.
4. Pipe insulation: nominal thickness in millimeters (inches as specified in the schedule at the end of this section.
5. Minimum 20 mm (0.75 inch) thick insulation for pneumatic control lines for a minimum distance of 6 m (20 feet) from discharge side of the refrigerated dryer.
6. Use Class S (Sheet), 20 mm (3/4 inch) thick for the following:
- a. Chilled water pumps
7. Exposed, unlined supply and return ductwork exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with a multi-layer vapor barrier with a water vapor permeance of 0.00 perms.

E. Calcium Silicate:

1. Minimum thickness in millimeter (inches) specified in the schedule at the end of this section for piping other than in boiler plant.
2. ETO Exhaust (High Temperature): Type II, class D, 65 mm (2.5 inches) nominal thickness. Cover duct for entire length. Provide sheet aluminum jacket for all exterior ductwork.

3.7 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.8 PIPE INSULATION SCHEDULE

Provide insulation for piping systems as scheduled below:

Insulation Thickness Millimeters (Inches)					
		Nominal Pipe Size Millimeters (Inches)			
Operating Temperature Range/Service	Insulation Material	Less than 25 (1)	25 - 32 (1 - 1½)	38 - 75 (1½ - 3)	100 (4) and Above
122-177 degrees C (251-350 degrees F) (HPS, MPS)	Mineral Fiber (Above ground piping only)	75 (3)	100 (4)	113 (4.5)	113 (4.5)
93-260 degrees C (200-500 degrees F) (HPS, HPR)	Calcium Silicate	100 (4)	125 (5)	150 (6)	150 (6)
100-121 degrees C (212-250 degrees F) (HPR, MPR, LPS, vent piping from PRV Safety Valves, Condensate receivers and flash tanks)	Mineral Fiber (Above ground piping only)	62 (2.5)	62 (2.5)	75 (3.0)	75 (3.0)
38-94 degrees C (100-200 degrees F) (LPR, PC, HWH, HWHR, GH and GHR)	Mineral Fiber (Above ground piping only)	38 (1.5)	38 (1.5)	50 (2.0)	50 (2.0)
38-94 degrees C (100-200 degrees F) (LPR, PC, HWH, HWHR)	Flexible Elastomeric Cellular Thermal (Above ground piping only)	38 (1.5)	38 (1.5)	----	----
(40-60degrees F) (CH, CHR)	Flexible Elastomeric Cellular Thermal (Above ground piping only)	38 (1.5)	38 (1.5)	----	----

VA ROSEBURG

CORRECT SPD AND SURGICAL DEFICIENCIES

- - - E N D - - -

SECTION 23 08 00**COMMISSIONING OF HVAC SYSTEMS****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. The requirements of this Section apply to all sections of Division 23.
- B. This project will have selected building systems commissioned. The complete list of equipment and systems to be commissioned are specified under contract drawings. The commissioning process, which the Contractor is responsible to execute, is defined in Whole Building Commissioning Process Manual. A Commissioning Agent (CxA) appointed by the Department of Veterans Affairs will manage the commissioning process.

1.2 RELATED WORK

- A. Section 01 00 00 GENERAL REQUIREMENTS.
- B. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
- D. Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.
- E. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- F. Section 23 21 13, HYDRONIC PIPING.
- G. Section 23 21 23, HYDRONIC PUMPS.
- H. Section 23 22 13, STEAM and CONDENSATE HEATING PIPING.
- I. Section 23 34 00, HVAC FANS.
- J. Section 23 36 00, AIR TERMINAL UNITS.
- K. Section 23 37 00, AIR OUTLETS and INLETS.
- L. Section 23 40 00, HVAC AIR CLEANING DEVICES.
- M. Section 23 74 13, PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS.
- N. Section 23 82 00, CONVECTION HEATING and COOLING UNITS.
- O. Section 23 82 16, AIR COILS.

1.3 SUMMARY

- A. This Section includes requirements for commissioning the HVAC systems, subsystems and equipment. This Section supplements the general requirements specified in Whole Building Commissioning Process Manual.
- B. The commissioning activities have been developed to support the VA requirements to meet guidelines for Federal Leadership in Environmental, Energy, and Economic Performance.

- C. The commissioning activities have been developed to support the United States Green Building Council (USGBC) LEED™ rating program and to support delivery of project performance in accordance with the Contract Documents developed with the approval of the VA.
1. Commissioning activities and documentation for the LEED™ section on "Energy and Atmosphere" prerequisite of "Fundamental Building Systems Commissioning".
 2. Commissioning activities and documentation for the LEED™ section on "Energy and Atmosphere" requirements for the "Enhanced Building System Commissioning" credit.
 3. Activities and documentation for the LEED™ section on "Measurement and Verification" requirements for the Measurement and Verification credit.
- D. Refer to Whole Building Commissioning Process Manual for more specifics regarding processes and procedures as well as roles and responsibilities for all Commissioning Team members.

1.4 DEFINITIONS

- A. Refer to Whole Building Commissioning Process Manual for definitions.

1.5 COMMISSIONED SYSTEMS

- A. Commissioning of a system or systems specified in this Division is part of the construction process. Documentation and testing of these systems, as well as training of the VA's Operation and Maintenance personnel, is required in cooperation with the VA and the Commissioning Agent.
- B. The following HVAC systems will be commissioned:
1. Air Handling Systems (including terminal units and energy recovery units)
 2. Air Handling Systems (Fans, motors, Variable Speed Drives, cooling coils and control valves, heating coils and control valves, filters, dampers, safeties such as smoke detectors or freezestats and damper end switches, controls, gages, and vibration isolation).
 3. Heating Hot Water Systems (Controls, instrumentation and gages, heating water pumps and motors, Variable Speed Drives).
 4. Chilled Water Systems (Chilled water pumps and motors, Variable Speed Drives, controls, instrumentation and safeties, isolation valves).
 5. Exhaust Fans (Fan, motor, Variable Speed Drives, controls and safeties).

6. Steam System (Heat exchangers, controls, gages and instrumentation, safety relief valves, pressure reducing valves).
7. Direct Digital Control System (BACnet or similar Local Area Network (LAN), building controller hardware and software, terminal unit controller hardware and software, all sequences of operation, system accuracy and response time).
8. ETO Exhaust Systems (ETO Sterilizers, pressure controls, system alarms, fans, motors, and Variable Speed Drives).
9. SPD Equipment (see equipment schedule for complete list): Controls, System Alarms, Motors, dampers).
10. Room Pressurization Equipment (Pressure sensors, terminal units/dampers, and controls and alarms).

1.6 SUBMITTALS

- A. The commissioning process requires review of selected Submittals. The Commissioning Agent will provide a list of submittals that will be reviewed by the Commissioning Agent. This list will be reviewed and approved by the VA prior to forwarding to the Contractor. Refer to Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, and SAMPLES for further details.
- B. The commissioning process requires Submittal review simultaneously with engineering review. Specific submittal requirements related to the commissioning process are specified in Whole Building Commissioning Process Manual.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 PRE-FUNCTIONAL CHECKLISTS

- A. The Contractor shall complete Pre-Functional Checklists to verify systems, subsystems, and equipment installation is complete and systems are ready for Systems Functional Performance Testing. The Commissioning Agent will prepare Pre-Functional Checklists to be used to document equipment installation. The Contractor shall complete the checklists. Completed checklists shall be submitted to the VA and to the Commissioning Agent for review. The Commissioning Agent may spot check a sample of completed checklists. If the Commissioning Agent determines that the information provided on the checklist is not accurate, the Commissioning Agent will return the marked-up checklist to the Contractor for correction and resubmission. If the Commissioning Agent determines that a significant number of completed checklists for similar equipment are not accurate, the Commissioning

Agent will select a broader sample of checklists for review. If the Commissioning Agent determines that a significant number of the broader sample of checklists is also inaccurate, all the checklists for the type of equipment will be returned to the Contractor for correction and resubmission. Refer to Whole Building Commissioning Process Manual for submittal requirements for Pre-Functional Checklists, Equipment Startup Reports, and other commissioning documents.

3.2 CONTRACTORS TESTS

- A. Contractor tests as required by other sections of Division 23 shall be scheduled and documented in accordance with Section 01 00 00 GENERAL REQUIREMENTS. The Commissioning Agent will witness selected Contractor tests. Contractor tests shall be completed prior to scheduling Systems Functional Performance Testing.

3.3 SYSTEMS FUNCTIONAL PERFORMANCE TESTING:

- A. The Commissioning Process includes Systems Functional Performance Testing that is intended to test systems functional performance under steady state conditions, to test system reaction to changes in operating conditions, and system performance under emergency conditions. The Commissioning Agent will prepare detailed Systems Functional Performance Test procedures for review and approval by the COTR. The Contractor shall review and comment on the tests prior to approval. The Contractor shall provide the required labor, materials, and test equipment identified in the test procedure to perform the tests. The Commissioning Agent will witness and document the testing. The Contractor shall sign the test reports to verify tests were performed. See Whole Building Commissioning Process Manual, for additional details.

3.4 TRAINING OF VA PERSONNEL

- A. Training of the VA's operation and maintenance personnel is required in cooperation with the COTR and Commissioning Agent. Provide competent, factory authorized personnel to provide instruction to operation and maintenance personnel concerning the location, operation, and troubleshooting of the installed systems. The instruction shall be scheduled in coordination with the COTR after submission and approval of formal training plans. Refer to Whole Building Commissioning Process Manual and Division 23 Sections for additional Contractor training requirements.

----- END -----

SECTION 23 09 23
DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Provide (a) direct-digital control system(s) as indicated on the project documents, points list, interoperability tables, drawings and as described in these specifications. Include a complete and working direct-digital control system. Include all engineering, programming, controls and installation materials, installation labor, commissioning and start-up, training, final project documentation and warranty.
1. The direct-digital control system(s) shall consist of high-speed, peer-to-peer network of DDC controllers, supervisory level Network Automation Engine. Provide a remote user using a standard web browser to access the control system graphics and change adjustable setpoints with the proper password.
 2. The direct-digital control system(s) shall be native BACnet. All new controllers, devices and components shall be listed by BACnet Testing Laboratories. All new controller, devices and components shall be accessible using a Web browser interface and shall communicate exclusively using the ASHRAE Standard 135 BACnet communications protocol without the use of gateways, unless otherwise allowed by this Section of the technical specifications, specifically shown on the design drawings and specifically requested otherwise by the VA.
 - a. If used, gateways shall support the ASHRAE Standard 135 BACnet communications protocol.
 - b. If used, gateways shall provide all object properties and read/write services shown on VA-approved interoperability schedules.
 3. The work administered by this Section of the technical specifications shall include all labor, materials, special tools, equipment, enclosures, power supplies, software, software licenses, Project specific software configurations and database entries, interfaces, wiring, tubing, installation, labeling, engineering, calibration, documentation, submittals, testing, verification, training services, permits and licenses, transportation, shipping, handling, administration, supervision, management, insurance,

Warranty, specified services and items required for complete and fully functional Controls Systems.

4. The control systems shall be designed such that each mechanical system shall operate under stand-alone mode. The contractor administered by this Section of the technical specifications shall provide controllers for each mechanical system. In the event of a network communication failure, or the loss of any other controller, the control system shall continue to operate independently. Failure of the ECC shall have no effect on the field controllers, including those involved with global strategies.
 5. The control system shall tie into the existing Engineering Control Center.
- B. Some products are furnished but not installed by the contractor administered by this Section of the technical specifications. The contractor administered by this Section of the technical specifications shall formally coordinate in writing and receive from other contractors formal acknowledgements in writing prior to submission the installation of the products. These products include the following:
1. Control valves.
 2. Flow switches.
 3. Flow meters.
 4. Sensor wells and sockets in piping.
 5. Terminal unit controllers.
- C. Some products are installed but not furnished by the contractor administered by this Section of the technical specifications. The contractor administered by this Section of the technical specifications shall formally coordinate in writing and receive from other contractors formal acknowledgements in writing prior to submission the procurement of the products. These products include the following:
1. Factory-furnished accessory thermostats and sensors furnished with unitary equipment.
- D. Some products are not provided by, but are nevertheless integrated with the work executed by, the contractor administered by this Section of the technical specifications. The contractor administered by this Section of the technical specifications shall formally coordinate in writing and receive from other contractors formal acknowledgements in writing prior to submission the particulars of the products. These products include the following:

1. Fire alarm systems. If zoned fire alarm is required by the project-specific requirements, this interface shall require multiple relays, which are provided and installed by the fire alarm system contractor, to be monitored.
2. Terminal units' velocity sensors
3. Unitary HVAC equipment (rooftop air conditioning units, split systems, packaged pumping stations) controls. These include:
 - a. Discharge temperature control.
 - b. Economizer control.
 - c. Flowrate control.
 - d. Setpoint reset.
 - e. Time of day indexing.
 - f. Status alarm.
4. Variable frequency drives. These controls, if not native BACnet, will require a BACnet Gateway.
5. The following systems have limited control (as individually noted below) from the ECC:
 - a. Medical and dental vacuum systems: high pressure and status alarms.
 - b. Domestic water heating systems: low temperature, high temperature and status alarms.
 - c. Prep Room, Soiled Decon Room: pressure outside of acceptable limit alarms.

E. Responsibility Table:

Work/Item/System	Furnish	Install	Low Voltage Wiring	Line Power
Control system low voltage and communication wiring	23 09 23	23 09 23	23 09 23	N/A
Terminal units	23	23	N/A	26
Controllers for terminal units	23 09 23	23	23 09 23	16
LAN conduits and raceway	23 09 23	23 09 23	N/A	N/A
Automatic dampers (not furnished with equipment)	23 09 23	23	N/A	N/A
Automatic damper actuators	23 09 23	23 09 23	23 09 23	23 09 23
Manual valves	23	23	N/A	N/A
Automatic valves	23 09 23	23	23 09 23	23 09 23

Work/Item/System	Furnish	Install	Low Voltage Wiring	Line Power
Pipe insertion devices and taps, flow and pressure stations.	23	23	N/A	N/A
Thermowells	23 09 23	23	N/A	N/A
Current Switches	23 09 23	23 09 23	23 09 23	N/A
Control Relays	23 09 23	23 09 23	23 09 23	N/A
Power distribution system monitoring interfaces	23 09 23	23 09 23	23 09 23	26
Interface with Packaged Heat Transfer System controls	23 09 23	23 09 23	23 09 23	26
All control system nodes, equipment, housings, enclosures and panels.	23 09 23	23 09 23	23 09 23	26
Smoke detectors	28 31 00	28 31 00	28 31 00	28 31 00
Fire/Smoke Dampers	23	23	28 31 00	28 31 00
Smoke Dampers	23	23	28 31 00	28 31 00
Fire Dampers	23	23	N/A	N/A
AHU/EF interlock wiring	N/A	N/A	23	26
Chilled Water Flow Switches	23	23	23	N/A
Packaged Heat Transfer System interlock wiring	23	23	23	26
VFDs	23 09 23	26	23 09 23	26
Cart Washer Interlock with Automatic Dampers Controls	23 09 23	23 09 23	23 09 23	26
Fire Alarm shutdown relay interlock wiring	28	28	28	26
Control system monitoring of fire alarm smoke control relay	28	28	23 09 23	28
Fire-fighter's smoke control station (FSCS	28	28	28	28
Fan Coil Unit controls (not furnished with equipment)	23 09 23	23 09 23	23 09 23	26
Unit Heater controls (not furnished with equipment)	23 09 23	23 09 23	23 09 23	26
Packaged RTU space-mounted controls (not furnished	23 09 23	23 09 23	23 09 23	26

Work/Item/System	Furnish	Install	Low Voltage Wiring	Line Power
with equipment)				
Packaged RTU unit-mounted controls (not furnished with equipment)	23 09 23	23 09 23	23 09 23	26
Starters, HOA switches	23	23	N/A	26

F. This facility's existing direct-digital control system is manufactured by Johnson Controls - Metasys, and its ECC is located at Chiller Building. The existing system's top-end communications is via Ethernet. The existing system's ECC and top-end controllers were installed in Circa 1990. The contractor administered by this Section of the technical specifications shall observe the capabilities, communication network, services, spare capacity of the existing control system and its ECC prior to beginning work.

1. Upgrade the existing direct-digital control system's ECC to include all properties and services required by an ASHRAE Standard 135 BACnet B-AWS Profile. The upgraded ECC shall continue to communicate with the existing direct-digital control system's devices. The upgraded ECC shall communicate directly with the new native-BACnet devices over the existing control system's communications network without the use of a gateway. Provide programming converting the existing non-BACnet devices, objects and services to ASHRAE Standard 135 BACnet-complaint BIBBs. The contractor administered by this Section of the technical specifications shall provide all necessary investigation and site-specific programming to execute the interoperability schedules.

a. The performance requirement for the combined system: the combined system shall operate and function as one complete system including one database of control point objects and global control logic capabilities. Facility operators shall have complete operations and control capability over all systems, new and existing including; monitoring, trending, graphing, scheduling, alarm management, global point sharing, global strategy deployment, graphical operations interface and custom reporting as specified.

G. This campus has standardized on an existing standard ASHRAE Standard 135, BACnet/IP Control System supported by a preselected controls service company. This entity is referred to as the "Control System Integrator" in this Section of the technical specifications. The Control system integrator is responsible for ECC system graphics and expansion. It also prescribes control system-specific commissioning/verification procedures to the contractor administered by this Section of the technical specification. It lastly provides limited assistance to the contractor administered by this Section of the technical specification in its commissioning/verification work.

1. The General Contractor of this project shall directly hire the Control System Integrator in a contract separate from the contract procuring the controls contractor administered by this Section of the technical specifications.
2. The contractor administered by this Section of the technical specifications shall coordinate all work with the Control System Integrator. The contractor administered by this Section of the technical specifications shall integrate the ASHRAE Standard 135, BACnet/IP control network(s) with the Control System Integrator's area control through an Ethernet connection provided by the Control System Integrator.
3. The contractor administered by this Section of the technical specifications shall provide a peer-to-peer networked, stand-alone, distributed control system. This direct digital control (DDC) system shall include one portable operator terminal - laptop, one digital display unit, microprocessor-based controllers, instrumentation, end control devices, wiring, piping, software, and related systems. This contractor is responsible for all device mounting and wiring.

4. Responsibility Table:

Item/Task	Section 23 09 23 contractor	Control system integrator	VA
ECC expansion		X	
ECC programming		X	
Devices, controllers, control panels and equipment	X		
Point addressing: all hardware and software points including setpoint, calculated point, data point(analog/binary), and reset schedule point	X		
Point mapping		X	
Network Programming	X		

ECC Graphics		X	
Controller programming and sequences	X		
Integrity of LAN communications	X		
Electrical wiring	X		
Operator system training		X	
LAN connections to devices	X		
LAN connections to ECC		X	
IP addresses			X
Overall system verification		X	
Controller and LAN system verification	X		

H. Unitary standalone systems including Unit Heaters, Fan Coil Units, thermal comfort ventilation fans, and similar units for control of room environment conditions may be equipped with integral controls furnished and installed by the equipment manufacturer or field mounted. Refer to equipment specifications and as indicated in project documents.

Application of standalone unitary controls is limited to at least those systems wherein remote monitoring, alarm and start-up are not necessary. Examples of such systems include:

1. Light-switch-operated toilet exhaust
2. Mechanical or electrical room heating and ventilation.

I. The direct-digital control system shall start and stop equipment, move (position) damper actuators and valve actuators, and vary speed of equipment to execute the mission of the control system. Use electricity as the motive force for all damper and valve actuators, unless use of pneumatics as motive force is specifically granted by the VA.

1.2 RELATED WORK

- A. Section 21 05 11, Common Work Results for Fire Suppression.
- B. Section 22 35 00, Domestic Water Heat Exchangers.
- C. Section 23 21 13, Hydronic Piping.
- D. Section 23 21 23, Hydronic Pumps.
- E. Section 23 22 13, Steam and Condensate Heating Piping.
- F. Section 23 31 00, HVAC Ducts and Casings.
- G. Section 23 34 00, HVAC Fans.
- H. Section 23 36 00, Air Terminal Units.
- I. Section 23 40 00, HVAC Air Cleaning Devices.
- J. Section 23 74 13, Packaged, Outdoor, Central-Station Air-Handling Units.
- K. Section 23 82 00, Convection Heating and Cooling Units.
- L. Section 26 05 11, Requirements for Electrical Installations.

- M. Section 26 05 21, Low-Voltage Electrical Power Conductors and Cables (600 Volts and Below).
- N. Section 26 05 26, Grounding and Bonding for Electrical Systems.
- O. Section 26 05 33, Raceway and Boxes for Electrical Systems.
- P. Section 26 09 23, Lighting Controls.
- Q. Section 26 27 26, Wiring Devices.
- R. Section 27 15 00, Communications Horizontal Cabling
- S. Section 28 31 00, Fire Detection and Alarm.

1.2 DEFINITION

- A. Algorithm: A logical procedure for solving a recurrent mathematical problem; A prescribed set of well-defined rules or processes for the solution of a problem in a finite number of steps.
- B. ARCNET: ANSI/ATA 878.1 - Attached Resource Computer Network. ARCNET is a deterministic LAN technology; meaning it's possible to determine the maximum delay before a device is able to transmit a message.
- C. Analog: A continuously varying signal value (e.g., temperature, current, velocity etc.
- D. BACnet: A Data Communication Protocol for Building Automation and Control Networks , ANSI/ASHRAE Standard 135. This communications protocol allows diverse building automation devices to communicate data over and services over a network.
- E. BACnet/IP: Annex J of Standard 135. It defines and allows for using a reserved UDP socket to transmit BACnet messages over IP networks. A BACnet/IP network is a collection of one or more IP sub-networks that share the same BACnet network number.
- F. BACnet Internetwork: Two or more BACnet networks connected with routers. The two networks may sue different LAN technologies.
- G. BACnet Network: One or more BACnet segments that have the same network address and are interconnected by bridges at the physical and data link layers.
- H. BACnet Segment: One or more physical segments of BACnet devices on a BACnet network, connected at the physical layer by repeaters.
- I. BACnet Broadcast Management Device (BBMD): A communications device which broadcasts BACnet messages to all BACnet/IP devices and other BBMDs connected to the same BACnet/IP network.
- J. BACnet Interoperability Building Blocks (BIBBs): BACnet Interoperability Building Blocks (BIBBs) are collections of one or more

BACnet services. These are prescribed in terms of an "A" and a "B" device. Both of these devices are nodes on a BACnet internetwork.

- K. BACnet Testing Laboratories (BTL). The organization responsible for testing products for compliance with the BACnet standard, operated under the direction of BACnet International.
- L. Baud: It is a signal change in a communication link. One signal change can represent one or more bits of information depending on type of transmission scheme. Simple peripheral communication is normally one bit per Baud. (e.g., Baud rate = 78,000 Baud/sec is 78,000 bits/sec, if one signal change = 1 bit).
- M. Binary: A two-state system where a high signal level represents an "ON" condition and an "OFF" condition is represented by a low signal level.
- N. BMP or bmp: Suffix, computerized image file, used after the period in a DOS-based computer file to show that the file is an image stored as a series of pixels.
- O. Bus Topology: A network topology that physically interconnects workstations and network devices in parallel on a network segment.
- P. Control Unit (CU): Generic term for any controlling unit, stand-alone, microprocessor based, digital controller residing on secondary LAN or Primary LAN, used for local controls or global controls
- Q. Deadband: A temperature range over which no heating or cooling is supplied, i.e., 22-25 degrees C (72-78 degrees F), as opposed to a single point change over or overlap).
- R. Device: a control system component that contains a BACnet Device Object and uses BACnet to communicate with other devices.
- S. Device Object: Every BACnet device requires one Device Object, whose properties represent the network visible properties of that device. Every Device Object requires a unique Object Identifier number on the BACnet internetwork. This number is often referred to as the device instance.
- T. Device Profile: A specific group of services describing BACnet capabilities of a device, as defined in ASHRAE Standard 135-2008, Annex L. Standard device profiles include BACnet Operator Workstations (B-OWS), BACnet Building Controllers (B-BC), BACnet Advanced Application Controllers (B-AAC), BACnet Application Specific Controllers (B-ASC), BACnet Smart Actuator (B-SA), and BACnet Smart Sensor (B-SS). Each device used in new construction is required to have a PICS statement listing which service and BIBBs are supported by the device.

- U. Diagnostic Program: A software test program, which is used to detect and report system or peripheral malfunctions and failures. Generally, this system is performed at the initial startup of the system.
- V. Direct Digital Control (DDC): Microprocessor based control including Analog/Digital conversion and program logic. A control loop or subsystem in which digital and analog information is received and processed by a microprocessor, and digital control signals are generated based on control algorithms and transmitted to field devices in order to achieve a set of predefined conditions.
- W. Distributed Control System: A system in which the processing of system data is decentralized and control decisions can and are made at the subsystem level. System operational programs and information are provided to the remote subsystems and status is reported back to the Engineering Control Center. Upon the loss of communication with the Engineering Control center, the subsystems shall be capable of operating in a stand-alone mode using the last best available data.
- X. Download: The electronic transfer of programs and data files from a central computer or operation workstation with secondary memory devices to remote computers in a network (distributed) system.
- Y. DXF: An AutoCAD 2-D graphics file format. Many CAD systems import and export the DXF format for graphics interchange.
- Z. Electrical Control: A control circuit that operates on line or low voltage and uses a mechanical means, such as a temperature sensitive bimetal or bellows, to perform control functions, such as actuating a switch or positioning a potentiometer.
- AA. Electronic Control: A control circuit that operates on low voltage and uses a solid-state components to amplify input signals and perform control functions, such as operating a relay or providing an output signal to position an actuator.
- BB. Engineering Control Center (ECC): The centralized control point for the intelligent control network. The ECC comprises of personal computer and connected devices to form a single workstation.
- CC. Ethernet: A trademark for a system for exchanging messages between computers on a local area network using coaxial, fiber optic, or twisted-pair cables.
- DD. Firmware: Firmware is software programmed into read only memory (ROM) chips. Software may not be changed without physically altering the chip.

- EE. Gateway: Communication hardware connecting two or more different protocols. It translates one protocol into equivalent concepts for the other protocol. In BACnet applications, a gateway has BACnet on one side and non-BACnet (usually proprietary) protocols on the other side.
- FF. GIF: Abbreviation of Graphic interchange format.
- GG. Graphic Program (GP): Program used to produce images of air handler systems, fans, chillers, pumps, and building spaces. These images can be animated and/or color-coded to indicate operation of the equipment.
- HH. Graphic Sequence of Operation: It is a graphical representation of the sequence of operation, showing all inputs and output logical blocks.
- II. I/O Unit: The section of a digital control system through which information is received and transmitted. I/O refers to analog input (AI, digital input (DI), analog output (AO) and digital output (DO). Analog signals are continuous and represent temperature, pressure, flow rate etc, whereas digital signals convert electronic signals to digital pulses (values), represent motor status, filter status, on-off equipment etc.
- JJ. I/P: a method for conveying and routing packets of information over LAN paths. User Datagram Protocol (UDP) conveys information to "sockets" without confirmation of receipt. Transmission Control Protocol (TCP) establishes "sessions", which have end-to-end confirmation and guaranteed sequence of delivery.
- KK. JPEG: A standardized image compression mechanism stands for Joint Photographic Experts Group, the original name of the committee that wrote the standard.
- LL. Local Area Network (LAN): A communication bus that interconnects operator workstation and digital controllers for peer-to-peer communications, sharing resources and exchanging information.
- MM. Network Repeater: A device that receives data packet from one network and rebroadcasts to another network. No routing information is added to the protocol.
- NN. MS/TP: Master-slave/token-passing (ISO/IEC 8802, Part 3). It is not an acceptable LAN option for VA health-care facilities. It uses twisted-pair wiring for relatively low speed and low cost communication.
- OO. Native BACnet Device: A device that uses BACnet as its primary method of communication with other BACnet devices without intermediary gateways. A system that uses native BACnet devices at all levels is a native BACnet system.

- PP. Network Number: A site-specific number assigned to each network segment to identify for routing. This network number must be unique throughout the BACnet internetwork.
- QQ. Object: The concept of organizing BACnet information into standard components with various associated properties. Examples include analog input objects and binary output objects.
- RR. Object Identifier: An object property used to identify the object, including object type and instance. Object Identifiers must be unique within a device.
- SS. Object Properties: Attributes of an object. Examples include present value and high limit properties of an analog input object. Properties are defined in ASHRAE 135; some are optional and some are required. Objects are controlled by reading from and writing to object properties.
- TT. Operating system (OS): Software, which controls the execution of computer application programs.
- UU. PCX: File type for an image file. When photographs are scanned onto a personal computer they can be saved as PCX files and viewed or changed by a special application program as Photo Shop.
- VV. Peripheral: Different components that make the control system function as one unit. Peripherals include monitor, printer, and I/O unit.
- WW. Peer-to-Peer: A networking architecture that treats all network stations as equal partners- any device can initiate and respond to communication with other devices.
- XX. PICS: Protocol Implementation Conformance Statement, describing the BACnet capabilities of a device. All BACnet devices have published PICS.
- YY. PID: Proportional, integral, and derivative control, used to control modulating equipment to maintain a setpoint.
- ZZ. Repeater: A network component that connects two or more physical segments at the physical layer.
- AAA. Router: a component that joins together two or more networks using different LAN technologies. Examples include joining a BACnet Ethernet LAN to a BACnet MS/TP LAN.
- BBB. Sensors: devices measuring state points or flows, which are then transmitted back to the DDC system.

CCC. Thermostats : devices measuring temperatures, which are used in control of standalone or unitary systems and equipment not attached to the DDC system.

1.4 QUALITY ASSURANCE

A. Criteria:

1. Single Source Responsibility of subcontractor: The Contractor shall obtain hardware and software supplied under this Section and delegate the responsibility to a single source controls installation subcontractor. The controls subcontractor shall be responsible for the complete design, installation, and commissioning of the system. The controls subcontractor shall be in the business of design, installation and service of such building automation control systems similar in size and complexity.
2. Equipment and Materials: Equipment and materials shall be cataloged products of manufacturers regularly engaged in production and installation of HVAC control systems. Products shall be manufacturer's latest standard design and have been tested and proven in actual use.
3. The controls subcontractor shall provide a list of no less than five similar projects which have building control systems as specified in this Section. These projects must be on-line and functional such that the Department of Veterans Affairs (VA) representative would observe the control systems in full operation.
4. The controls subcontractor shall have in-place facility within 50 miles with technical staff, spare parts inventory for the next five (5) years, and necessary test and diagnostic equipment to support the control systems.
5. The controls subcontractor shall have minimum of three years experience in design and installation of building automation systems similar in performance to those specified in this Section. Provide evidence of experience by submitting resumes of the project manager, the local branch manager, project engineer, the application engineering staff, and the electronic technicians who would be involved with the supervision, the engineering, and the installation of the control systems. Training and experience of these personnel shall not be less than three years. Failure to disclose this information will be a ground for disqualification of the supplier.

6. Provide a competent and experienced Project Manager employed by the Controls Contractor. The Project Manager shall be supported as necessary by other Contractor employees in order to provide professional engineering, technical and management service for the work. The Project Manager shall attend scheduled Project Meetings as required and shall be empowered to make technical, scheduling and related decisions on behalf of the Controls Contractor.

B. Codes and Standards:

1. All work shall conform to the applicable Codes and Standards.
2. Electronic equipment shall conform to the requirements of FCC Regulation, Part 15, Governing Radio Frequency Electromagnetic Interference, and be so labeled.

1.5 PERFORMANCE

A. The system shall conform to the following:

1. Performance: Programmable Controllers shall be able to execute DDC PID control loops at a selectable frequency from at least once every one (1) second. The controller shall scan and update the process value and output generated by this calculation at this same frequency.
2. Reporting Accuracy: Listed below are minimum acceptable reporting end-to-end accuracies for all values reported by the specified system:

Measured Variable	Reported Accuracy
Space temperature	$\pm 0.5^{\circ}\text{C}$ ($\pm 1^{\circ}\text{F}$)
Ducted air temperature	$\pm 0.5^{\circ}\text{C}$ [$\pm 1^{\circ}\text{F}$]
Outdoor air temperature	$\pm 1.0^{\circ}\text{C}$ [$\pm 2^{\circ}\text{F}$]
Dew Point	$\pm 1.5^{\circ}\text{C}$ [$\pm 3^{\circ}\text{F}$]
Water temperature	$\pm 0.5^{\circ}\text{C}$ [$\pm 1^{\circ}\text{F}$]
Relative humidity	$\pm 2\%$ RH
Water flow	$\pm 1\%$ of reading
Air flow (terminal)	$\pm 10\%$ of reading
Air flow (measuring stations)	$\pm 5\%$ of reading
Air pressure (ducts)	± 25 Pa [± 0.1 "w.c.]
Air pressure (space)	± 0.3 Pa [± 0.001 "w.c.]
Water pressure	$\pm 2\%$ of full scale *Note 1
Electrical Power	$\pm 0.5\%$ of reading

Note 1: for both absolute and differential pressure

3. Control stability and accuracy: Control sequences shall maintain measured variable at setpoint within the following tolerances:

Controlled Variable	Control Accuracy	Range of Medium
Air Pressure	± 50 Pa (± 0.2 in. w.g.)	0-1.5 kPa (0-6 in. w.g.)
Air Pressure	± 3 Pa (± 0.01 in. w.g.)	-25 to 25 Pa (-0.1 to 0.1 in. w.g.)
Airflow	$\pm 10\%$ of full scale	
Space Temperature	$\pm 1.0^{\circ}\text{C}$ ($\pm 2.0^{\circ}\text{F}$)	
Duct Temperature	$\pm 1.5^{\circ}\text{C}$ ($\pm 3^{\circ}\text{F}$)	
Humidity	$\pm 5\%$ RH	
Fluid Pressure	± 10 kPa (± 1.5 psi)	0-1 MPa (1-150 psi)
Fluid Pressure	± 250 Pa (± 1.0 in. w.g.)	0-12.5 kPa (0-50 in. w.g.) differential

4. Extent of direct digital control: control design shall allow for at least the points indicated on the points lists on the drawings.

1.6 WARRANTY

- A. Labor and materials for control systems shall be warranted for a period as specified under Warranty in FAR clause 52.246-21.
- B. Control system failures during the warranty period shall be adjusted, repaired, or replaced at no cost or reduction in service to the owner. The system includes all computer equipment, transmission equipment, and all sensors and control devices.
- C. The on-line support service shall allow the Controls supplier to dial out over telephone lines to or connect via (through password-limited access) VPN through the internet monitor and control the facility's building automation system. This remote connection to the facility shall be within two (2) hours of the time that the problem is reported. This coverage shall be extended to include normal business hours, after business hours, weekend and holidays. If the problem cannot be resolved with on-line support services, the Controls supplier shall dispatch the qualified personnel to the job site to resolve the problem within 24 hours after the problem is reported.
- D. Controls and Instrumentation subcontractor shall be responsible for temporary operations and maintenance of the control systems during the construction period until final commissioning, training of facility operators and acceptance of the project by VA.

1.7 SUBMITTALS

- A. Submit shop drawings in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's literature and data for all components including the following:
 - 1. A wiring diagram for each type of input device and output device including DDC controllers, modems, repeaters, etc. Diagram shall show how the device is wired and powered, showing typical connections at the digital controllers and each power supply, as well as the device itself. Show for all field connected devices, including but not limited to, control relays, motor starters, electric or electronic actuators, and temperature pressure, flow and humidity sensors and transmitters.
 - 2. A diagram of each terminal strip, including digital controller terminal strips, terminal strip location, termination numbers and the associated point names.
 - 3. Control dampers and control valves schedule, including the size and pressure drop.
 - 4. Catalog cut sheets of all equipment used. This includes, but is not limited to software (by manufacturer and by third parties), DDC controllers, panels, peripherals, airflow measuring stations and associated components, and auxiliary control devices such as sensors, actuators, and control dampers. When manufacturer's cut sheets apply to a product series rather than a specific product, the data specifically applicable to the project shall be highlighted. Each submitted piece of literature and drawings should clearly reference the specification and/or drawings that it supposed to represent.
 - 5. Sequence of operations for each HVAC system and the associated control diagrams. Equipment and control labels shall correspond to those shown on the drawings.
 - 6. Color prints of proposed graphics with a list of points for display.
 - 7. Furnish a BACnet Protocol Implementation Conformance Statement (PICS) for each BACnet-compliant device.
 - 8. Schematic wiring diagrams for all control, communication and power wiring. Provide a schematic drawing of the central system installation. Label all cables and ports with computer

- manufacturers' model numbers and functions. Show all interface wiring to the control system.
9. An instrumentation list for each controlled system. Each element of the controlled system shall be listed in table format. The table shall show element name, type of device, manufacturer, model number, and product data sheet number.
 10. Riser diagrams of wiring between central control unit and all control panels.
 11. Scaled plan drawings showing routing of LAN and locations of control panels, controllers, routers, gateways, ECC, and larger controlled devices.
 12. Construction details for all installed conduit, cabling, raceway, cabinets, and similar. Construction details of all penetrations and their protection.
 13. Quantities of submitted items may be reviewed but are the responsibility of the contractor administered by this Section of the technical specifications.
- C. Product Certificates: Compliance with Article, QUALITY ASSURANCE.
- D. Licenses: Provide licenses for all software residing on and used by the Controls Systems and transfer these licenses to the Owner prior to completion.
- E. As Built Control Drawings:
1. Furnish three (3) copies of as-built drawings for each control system. The documents shall be submitted for approval prior to final completion.
 2. Furnish one (1) stick set of applicable control system prints for each mechanical system for wall mounting. The documents shall be submitted for approval prior to final completion.
 3. Furnish one (1) CD-ROM in CAD DWG and/or .DXF format for the drawings noted in subparagraphs above.
- F. Operation and Maintenance (O/M) Manuals):
1. Submit in accordance with Article, INSTRUCTIONS, in Specification Section 01 00 00, GENERAL REQUIREMENTS.
 2. Include the following documentation:
 - a. General description and specifications for all components, including logging on/off, alarm handling, producing trend reports, overriding computer control, and changing set points and other variables.

- b. Detailed illustrations of all the control systems specified for ease of maintenance and repair/replacement procedures, and complete calibration procedures.
 - c. One copy of the final version of all software provided including operating systems, programming language, operator workstation software, and graphics software.
 - d. Complete troubleshooting procedures and guidelines for all systems.
 - e. Complete operating instructions for all systems.
 - f. Recommended preventive maintenance procedures for all system components including a schedule of tasks for inspection, cleaning and calibration. Provide a list of recommended spare parts needed to minimize downtime.
 - g. Training Manuals: Submit the course outline and training material to the Owner for approval three (3) weeks prior to the training to VA facility personnel. These persons will be responsible for maintaining and the operation of the control systems, including programming. The Owner reserves the right to modify any or all of the course outline and training material.
 - h. Licenses, guaranty, and other pertaining documents for all equipment and systems.
- G. Submit Performance Report to COTR prior to final inspection.

1.8 INSTRUCTIONS

- A. Instructions to VA operations personnel: Perform in accordance with Article, INSTRUCTIONS, in Specification Section 01 00 00, GENERAL REQUIREMENTS, and as noted below.
- 1. First Phase: Formal instructions to the VA facilities personnel for a total of 32 hours, given in multiple training sessions (each no longer than four hours in length), conducted sometime between the completed installation and prior to the performance test period of the control system, at a time mutually agreeable to the Contractor and the VA.
 - 2. Second Phase: This phase of training shall comprise of on the job training during start-up, checkout period, and performance test period. VA facilities personnel will work with the Contractor's installation and test personnel on a daily basis during start-up and checkout period. During the performance test period, controls subcontractor will provide 16 hours of instructions, given in

- multiple training sessions (each no longer than four hours in length), to the VA facilities personnel.
3. The O/M Manuals shall contain approved submittals as outlined in Article 1.7, SUBMITTALS. The Controls subcontractor will review the manual contents with VA facilities personnel during second phase of training.
 4. Training shall be given by direct employees of the controls system subcontractor.

1.9 PROJECT CONDITIONS (ENVIRONMENTAL CONDITIONS OF OPERATION)

- A. The ECC and peripheral devices and system support equipment shall be designed to operate in ambient condition of 20 to 35°C (65 to 90°F) at a relative humidity of 20 to 80% non-condensing.
- B. The CUs used outdoors shall be mounted in NEMA 4 waterproof enclosures, and shall be rated for operation at -40 to 65°C (-40 to 150°F).
- C. All electronic equipment shall operate properly with power fluctuations of plus 10 percent to minus 15 percent of nominal supply voltage.
- D. Sensors and controlling devices shall be designed to operate in the environment, which they are sensing or controlling.

1.10 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Heating, Refrigerating, and Air-Conditioning Engineers (ASHRAE):
Standard 135-08.....BACNET Building Automation and Control Networks
- C. American Society of Mechanical Engineers (ASME):
B16.18-05.....Cast Copper Alloy Solder Joint Pressure Fittings.
B16.22-05.....Wrought Copper and Copper Alloy Solder Joint Pressure Fittings.
- D. American Society of Testing Materials (ASTM):
B32-04.....Standard Specification for Solder Metal
B88-03.....Standard Specifications for Seamless Copper Water Tube
B88M-05.....Standard Specification for Seamless Copper Water Tube (Metric)

- B280-03.....Standard Specification for Seamless Copper Tube
for Air-Conditioning and Refrigeration Field
Service
- D2737-03.....Standard Specification for Polyethylene (PE)
Plastic Tubing
- E. Federal Communication Commission (FCC):
Rules and Regulations Title 47 Chapter 1-2001 Part 15: Radio Frequency
Devices.
- F. Institute of Electrical and Electronic Engineers (IEEE):
802.3-05.....Information Technology-Telecommunications and
Information Exchange between Systems-Local and
Metropolitan Area Networks- Specific
Requirements-Part 3: Carrier Sense Multiple
Access with Collision Detection (CSMA/CD)
Access method and Physical Layer Specifications
- G. National Fire Protection Association (NFPA):
70-08.....National Electric Code
90A-09.....Standard for Installation of Air-Conditioning
and Ventilation Systems
- H. Underwriter Laboratories Inc (UL):
94-06.....Tests for Flammability of Plastic Materials for
Parts and Devices and Appliances
294-05.....Access Control System Units
486A/486B-04-.....Wire Connectors
555S-06.....Standard for Smoke Dampers
916-07.....Energy Management Equipment
1076-05.....Proprietary Burglar Alarm Units and Systems

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Use new products that the manufacturer is currently manufacturing and that have been installed in a minimum of 25 installations. Spare parts shall be available for at least five years after completion of this contract.

2.2 CONTROLS SYSTEM ARCHITECTURE

- A. General
1. The Controls Systems shall consist of multiple Nodes and associated equipment connected by industry standard digital and communication network arrangements.

2. The ECC, building controllers and principal communications network equipment shall be standard products of recognized major manufacturers available through normal PC and computer vendor channels - not "Clones" assembled by a third-party subcontractor.
3. The networks shall, at minimum, comprise, as necessary, the following:
 - a. BACnet-compliant routers, bridges, switches, hubs, modems, gateways, interfaces and similar communication equipment.
 - b. Active processing BACnet-compliant building controllers connected to other BACnet-compliant controllers together with their power supplies and associated equipment.
 - c. Addressable elements, sensors, transducers and end devices.
 - d. Third-party equipment interfaces and gateways as described and required by the Contract Documents.
 - e. Other components required for a complete and working Control Systems as specified.
- B. The Specifications for the individual elements and component subsystems shall be minimum requirements and shall be augmented as necessary by the Contractor to achieve both compliance with all applicable codes, standards and to meet all requirements of the Contract Documents.
- C. Network Architecture
 1. The Controls communication network shall utilize BACnet communications protocol operating over a standard Ethernet LAN and operate at a minimum speed of 100 Mb/sec.
 2. The networks shall utilize only copper and optical fiber communication media as appropriate and shall comply with applicable codes, ordinances and regulations. They may also utilize digital wireless technologies as appropriate to the application and if approved by the VA.
 3. All necessary telephone lines, ISDN lines and internet Service Provider services and connections will be provided by the VA.
- D. Third Party Interfaces:
 1. The contractor administered by this Section of the technical specifications shall include necessary hardware, equipment, software and programming to allow data communications between the controls systems and building systems supplied by other trades.
 2. Other manufacturers and contractors supplying other associated systems and equipment shall provide their necessary hardware,

software and start-up at their cost and shall cooperate fully with the contractor administered by this Section of the technical specifications in a timely manner and at their cost to ensure complete functional integration.

2.3 COMMUNICATION

- A. Control products, communication media, connectors, repeaters, hubs, and routers shall comprise a BACnet internetwork. Controller and operator interface communication shall conform to ANSI/ASHRAE Standard 135-2008, BACnet.
 - 1. The Data link / physical layer protocol (for communication) acceptable to the VA throughout its facilities is Ethernet (ISO 8802-3) and BACnet/IP.
- B. Each controller shall have a communication port for connection to an operator interface.
- C. Project drawings indicate remote buildings or sites to be connected by a nominal 56,000 baud modem over voice-grade telephone lines. In each remote location a modem and field device connection shall allow communication with each controller on the internetwork as specified in Paragraph D.
- D. Internetwork operator interface and value passing shall be transparent to internetwork architecture.
 - 1. An operator interface connected to a controller shall allow the operator to interface with each internetwork controller as if directly connected. Controller information such as data, status, reports, system software, and custom programs shall be viewable and editable from each internetwork controller.
 - 2. Inputs, outputs, and control variables used to integrate control strategies across multiple controllers shall be readable by each controller on the internetwork. Program and test all cross-controller links required to execute specified control system operation. An authorized operator shall be able to edit cross-controller links by typing a standard object address.
- E. System shall be expandable to at least twice the required input and output objects with additional controllers, associated devices, and wiring. Expansion shall not require operator interface hardware additions or software revisions.
- F. Controllers with real-time clocks shall use the BACnet Time Synchronization service. The system shall automatically synchronize

system clocks daily from an operator-designated device via the internetwork. The system shall automatically adjust for daylight savings and standard time as applicable.

2.4 ENGINEERING CONTROL CENTER (ECC)

- A. The ECC shall remain and be reused and tied into as part of this project.

2.5 BACNET PROTOCOL ANALYZER

- A. For ease of troubleshooting and maintenance, provide a BACnet protocol analyzer. Provide its associated fittings, cables and appurtenances, for connection to the communications network. The BACnet protocol analyzer shall be able to, at a minimum: capture and store to a file all data traffic on all network levels; measure bandwidth usage; filter out (ignore) selected traffic.

2.6 NETWORK AND DEVICE NAMING CONVENTION

A. Network Numbers

1. BACnet network numbers shall be based on a "facility code, network" concept. The "facility code" is the VAMC's or VA campus' assigned numeric value assigned to a specific facility or building. The "network" typically corresponds to a "floor" or other logical configuration within the building. BACnet allows 65535 network numbers per BACnet internet work.
2. The network numbers are thus formed as follows: "Net #" = "FFFNN" where:
 - a. FFF = Facility code (see below)
 - b. NN = 00-99 This allows up to 100 networks per facility or building

B. Device Instances

1. BACnet allows 4194305 unique devices instances per BACnet internet work. Using Agency's unique device instances are formed as follows: "Dev #" = "FFFNNDD" where
 - a. FFF and N are as above and
 - b. DD = 00-99, this allows up to 100 devices per network.
2. Note Special cases, where the network architecture of limiting device numbering to DD causes excessive subnet works. The device number can be expanded to DDD and the network number N can become a single digit. In NO case shall the network number N and the device number D exceed 4 digits.
3. Facility code assignments:

4. 000-400 Building/facility number
5. Note that some facilities have a facility code with an alphabetic suffix to denote wings, related structures, etc. The suffix will be ignored. Network numbers for facility codes above 400 will be assigned in the range 000-399.

C. Device Names

1. Name the control devices based on facility name, location within a facility, the system or systems that the device monitors and/or controls, or the area served. The intent of the device naming is to be easily recognized. Names can be up to 254 characters in length, without embedded spaces. Provide the shortest descriptive, but unambiguous, name. For example, in building #123 prefix the number with a "B" followed by the building number, if there is only one chilled water pump "CHWP-1", a valid name would be "B123.CHWP.1.STARTSTOP". If there are two pumps designated "CHWP-1", one in a basement mechanical room (Room 0001) and one in a penthouse mechanical room (Room PH01), the names could be "B123.R0001.CHWP.1.STARTSTOP " or " B123.RPH01.CHWP.1.STARTSTOP". In the case of unitary controllers, for example a VAV box controller, a name might be "B123.R101.VAV". These names should be used for the value of the "Object_Name" property of the BACnet Device objects of the controllers involved so that the BACnet name and the EMCS name are the same.

2.7 BACNET DEVICES

- A. All BACnet Devices - controllers, gateways, routers, actuators and sensors shall conform to BACnet Device Profiles and shall be BACnet Testing Laboratories (BTL) -Listed as conforming to those Device Profiles. Protocol Implementation Conformance Statements (PICSs), describing the BACnet capabilities of the Devices shall be published and available of the Devices through links in the BTL website.
 1. BACnet Building Controllers, historically referred to as NACs, shall conform to the BACnet B-BC Device Profile, and shall be BTL-Listed as conforming to the B-BC Device Profile. The Device's PICS shall be submitted.
 2. BACnet Advanced Application Controllers shall conform to the BACnet B-AAC Device Profile, and shall be BTL-Listed as conforming to the B-AAC Device Profile. The Device's PICS shall be submitted.

3. BACnet Application Specific Controllers shall conform to the BACnet B-ASC Device Profile, and shall be BTL-Listed as conforming to the B-ASC Device Profile. The Device's PICS shall be submitted.
4. BACnet Smart Actuators shall conform to the BACnet B-SA Device Profile, and shall be BTL-Listed as conforming to the B-SA Device Profile. The Device's PICS shall be submitted.
5. BACnet Smart Sensors shall conform to the BACnet B-SS Device Profile, and shall be BTL-Listed as conforming to the B-SS Device Profile. The Device's PICS shall be submitted.
6. BACnet routers and gateways shall conform to the BACnet B-OTH Device Profile, and shall be BTL-Listed as conforming to the B-OTH Device Profile. The Device's PICS shall be submitted.

2.8 CONTROLLERS

- A. General. Provide an adequate number of BTL-Listed B-BC building controllers and an adequate number of BTL-Listed B-AAC advanced application controllers to achieve the performance specified in the Part 1 Article on "System Performance." Each of these controllers shall meet the following requirements.
 1. The controller shall have sufficient memory to support its operating system, database, and programming requirements.
 2. The building controller shall share data with the ECC and the other networked building controllers. The advanced application controller shall share data with its building controller and the other networked advanced application controllers.
 3. The operating system of the controller shall manage the input and output communication signals to allow distributed controllers to share real and virtual object information and allow for central monitoring and alarms.
 4. Controllers that perform scheduling shall have a real-time clock.
 5. The controller shall continually check the status of its processor and memory circuits. If an abnormal operation is detected, the controller shall:
 - a. assume a predetermined failure mode, and
 - b. generate an alarm notification.
 6. The controller shall communicate with other BACnet devices on the internetwork using the BACnet Read (Execute and Initiate) and Write (Execute and Initiate) Property services.
 7. Communication.

- a. Each controller shall reside on a BACnet network using the ISO 8802-3 (Ethernet) Data Link/Physical layer protocol for its communications. Each building controller also shall perform BACnet routing if connected to a network of custom application and application specific controllers.
 - b. The controller shall provide a service communication port using BACnet Data Link/Physical layer protocol for connection to a portable operator's terminal.
8. Keypad. A local keypad and display shall be provided for each controller. The keypad shall be provided for interrogating and editing data. Provide a system security password shall be available to prevent unauthorized use of the keypad and display.
9. Serviceability. Provide diagnostic LEDs for power, communication, and processor. All wiring connections shall be made to field-removable, modular terminal strips or to a termination card connected by a ribbon cable.
10. Memory. The controller shall maintain all BIOS and programming information in the event of a power loss for at least 72 hours.
11. The controller shall be able to operate at 90% to 110% of nominal voltage rating and shall perform an orderly shutdown below 80% nominal voltage. Controller operation shall be protected against electrical noise of 5 to 120 Hz and from keyed radios up to 5 W at 1 m (3 ft).
- B. Provide BTL-Listed B-ASC application specific controllers for each piece of equipment for which they are constructed. Application specific controllers shall communicate with other BACnet devices on the internetwork using the BACnet Read (Execute) Property service.
 1. Each B-ASC shall be capable of stand-alone operation and shall continue to provide control functions without being connected to the network.
 2. Each B-ASC will contain sufficient I/O capacity to control the target system.
 3. Communication.
 - a. Each controller shall reside on a BACnet network using the ISO 8802-3 (Ethernet) Data Link/Physical layer protocol for its communications. Each building controller also shall perform BACnet routing if connected to a network of custom application and application specific controllers.

- b. Each controller shall have a BACnet Data Link/Physical layer compatible connection for a laptop computer or a portable operator's tool. This connection shall be extended to a space temperature sensor port where shown.
 4. Serviceability. Provide diagnostic LEDs for power, communication, and processor. All wiring connections shall be made to field-removable, modular terminal strips or to a termination card connected by a ribbon cable.
 5. Memory. The application specific controller shall use nonvolatile memory and maintain all BIOS and programming information in the event of a power loss.
 6. Immunity to power and noise. Controllers shall be able to operate at 90% to 110% of nominal voltage rating and shall perform an orderly shutdown below 80%. Operation shall be protected against electrical noise of 5-120 Hz and from keyed radios up to 5 W at 1 m (3 ft).
 7. Transformer. Power supply for the ASC must be rated at a minimum of 125% of ASC power consumption and shall be of the fused or current limiting type.
- C. Direct Digital Controller Software
1. The software programs specified in this section shall be commercially available, concurrent, multi-tasking operating system and support the use of software application that operates under DOS or Microsoft Windows.
 2. All points shall be identified by up to 30-character point name and 16-character point descriptor. The same names shall be used at the ECC.
 3. All control functions shall execute within the stand-alone control units via DDC algorithms. The VA shall be able to customize control strategies and sequences of operations defining the appropriate control loop algorithms and choosing the optimum loop parameters.
 4. All controllers shall be capable of being programmed to utilize stored default values for assured fail-safe operation of critical processes. Default values shall be invoked upon sensor failure or, if the primary value is normally provided by the central or another CU, or by loss of bus communication. Individual application software packages shall be structured to assume a fail-safe condition upon loss of input sensors. Loss of an input sensor shall result in output of a sensor-failed message at the ECC. Each ACU and RCU shall

- have capability for local readouts of all functions. The UCUs shall be read remotely.
5. All DDC control loops shall be able to utilize any of the following control modes:
 - a. Two position (on-off, slow-fast) control.
 - b. Proportional control.
 - c. Proportional plus integral (PI) control.
 - d. Proportional plus integral plus derivative (PID) control. All PID programs shall automatically invoke integral wind up prevention routines whenever the controlled unit is off, under manual control of an automation system or time initiated program.
 - e. Automatic tuning of control loops.
 6. System Security: Operator access shall be secured using individual password and operator's name. Passwords shall restrict the operator to the level of object, applications, and system functions assigned to him. A minimum of six (6) levels of security for operator access shall be provided.
 7. Application Software: The controllers shall provide the following programs as a minimum for the purpose of optimizing energy consumption while maintaining comfortable environment for occupants. All application software shall reside and run in the system digital controllers. Editing of the application shall occur at the ECC or via a portable operator's terminal, when it is necessary, to access directly the programmable unit.
 - a. Power Demand Limiting (PDL): Power demand limiting program shall monitor the building power consumption and limit the consumption of electricity to prevent peak demand charges. PDL shall continuously track the electricity consumption from a pulse input generated at the kilowatt-hour/demand electric meter. PDL shall sample the meter data to continuously forecast the electric demand likely to be used during successive time intervals. If the forecast demand indicates that electricity usage will likely to exceed a user preset maximum allowable level, then PDL shall automatically shed electrical loads. Once the demand load has met, loads that have been shed shall be restored and returned to normal mode. Control system shall be capable of demand limiting by resetting the HVAC system set points to reduce load while maintaining indoor air quality.

- b. Night Setback/Morning Warm up Control: The system shall provide the ability to automatically adjust set points for this mode of operation.
- c. Optimum Start/Stop (OSS): Optimum start/stop program shall automatically be coordinated with event scheduling. The OSS program shall start HVAC equipment at the latest possible time that will allow the equipment to achieve the desired zone condition by the time of occupancy, and it shall also shut down HVAC equipment at the earliest possible time before the end of the occupancy period and still maintain desired comfort conditions. The OSS program shall consider both outside weather conditions and inside zone conditions. The program shall automatically assign longer lead times for weekend and holiday shutdowns. The program shall poll all zones served by the associated AHU and shall select the warmest and coolest zones. These shall be used in the start time calculation. It shall be possible to assign occupancy start times on a per air handler unit basis. The program shall meet the local code requirements for minimum outdoor air while the building is occupied. Modification of assigned occupancy start/stop times shall be possible via the ECC.
- d. Event Scheduling: Provide a comprehensive menu driven program to automatically start and stop designated points or a group of points according to a stored time. This program shall provide the capability to individually command a point or group of points. When points are assigned to one common load group it shall be possible to assign variable time advances/delays between each successive start or stop within that group. Scheduling shall be calendar based and advance schedules may be defined up to one year in advance. Advance schedule shall override the day-to-day schedule. The operator shall be able to define the following information:
 - 1) Time, day.
 - 2) Commands such as on, off, auto.
 - 3) Time delays between successive commands.
 - 4) Manual overriding of each schedule.
 - 5) Allow operator intervention.

- e. Alarm Reporting: The operator shall be able to determine the action to be taken in the event of an alarm. Alarms shall be routed to the ECC based on time and events. An alarm shall be able to start programs, login the event, print and display the messages. The system shall allow the operator to prioritize the alarms to minimize nuisance reporting and to speed operator's response to critical alarms. A minimum of six (6) priority levels of alarms shall be provided for each point.
- f. Remote Communications: The system shall have the ability to dial out in the event of an alarm to the ECC and alpha-numeric pagers. The alarm message shall include the name of the calling location, the device that generated the alarm, and the alarm message itself. The operator shall be able to remotely access and operate the system using dial up communications. Remote access shall allow the operator to function the same as local access.
- g. Maintenance Management (PM): The program shall monitor equipment status and generate maintenance messages based upon the operators defined equipment run time, starts, and/or calendar date limits. A preventative maintenance alarm shall be printed indicating maintenance requirements based on pre-defined run time. Each preventive message shall include point description, limit criteria and preventative maintenance instruction assigned to that limit. A minimum of 480-character PM shall be provided for each component of units such as air handling units.

2.9 SPECIAL CONTROLLERS

- A. Room Differential Pressure Controller: The differential pressure in Prep Room, Ante Rooms, Soiled Decontamination Rooms, and ETO and Aerator Rooms shall be monitored for maintain positive or negative space pressurization as directed by space pressurization schedule sheet. A sensor shall measure and control the velocity of air flowing into or out of the room through a sampling tube installed in the wall separating the room from the adjacent space, and display the value on its monitor. The sensor-controller shall meet the following as a minimum:
 - 1. Operating range: -0.25 to +0.25 inches of water column
 - 2. Resolution: 5 percent of reading
 - 3. Accuracy: +/- 10 percent of reading +/- 0.005 inches of water column
 - 4. Analog output: 0-10 VDC or 4-20 ma

5. Operating temperature range: 32°F-120°F

2.10 SENSORS (AIR, WATER AND STEAM)

- A. Sensors' measurements shall be read back to the DDC system, and shall be visible by the ECC.
- B. Temperature and Humidity Sensors shall be electronic, vibration and corrosion resistant for wall, immersion, and/or duct mounting. Provide all remote sensors as required for the systems.
 - 1. Temperature Sensors: thermistor type for terminal units and Resistance Temperature Device (RTD) with an integral transmitter type for all other sensors.
 - a. Duct sensors shall be rigid or averaging type as shown on drawings. Averaging sensor shall be a minimum of 1 linear ft of sensing element for each sq ft of cooling coil face area.
 - b. Immersion sensors shall be provided with a separable well made of stainless steel, bronze or monel material. Pressure rating of well is to be consistent with the system pressure in which it is to be installed.
 - c. Space sensors shall be equipped with in-space User set-point adjustment, override switch, numerical temperature display on sensor cover, and communication port. Match room thermostats. Provide a tooled-access cover.
 - 1) Public space sensor: setpoint adjustment shall be only through the ECC or through the DDC system's diagnostic device/laptop. Do not provide in-space User set-point adjustment. Provide an opaque keyed-entry cover if needed to restrict in-space User set-point adjustment.
 - d. Outdoor air temperature sensors shall have watertight inlet fittings and be shielded from direct sunlight.
 - e. Room security sensors shall have stainless steel cover plate with insulated back and security screws.
 - f. Wire: Twisted, shielded-pair cable.
 - g. Output Signal: 4-20 ma.
 - 2. Humidity Sensors: Bulk polymer sensing element type.
 - a. Duct and room sensors shall have a sensing range of 20 to 80 percent with accuracy of ± 2 to ± 5 percent RH, including hysteresis, linearity, and repeatability.

- b. Outdoor humidity sensors shall be furnished with element guard and mounting plate and have a sensing range of 0 to 100 percent RH.
 - c. 4-20 ma continuous output signal.
 - C. Static Pressure Sensors: Non-directional, temperature compensated.
 - 1. 4-20 ma output signal.
 - 2. 0 to 5 inches wg for duct static pressure range.
 - 3. 0 to 0.25 inch wg for Building static pressure range.
 - D. Water flow sensors:
 - 1. Type: Insertion vortex type with retractable probe assembly and 2 inch full port gate valve.
 - a. Pipe size: 3 to 24 inches.
 - b. Retractor: ASME threaded, non-rising stem type with hand wheel.
 - c. Mounting connection: 2 inch 150 PSI flange.
 - d. Sensor assembly: Design for expected water flow and pipe size.
 - e. Seal: Teflon (PTFE).
 - 2. Controller:
 - a. Integral to unit.
 - b. Locally display flow rate and total.
 - c. Output flow signal to BMCS: Digital pulse type.
 - 3. Performance:
 - a. Turndown: 20:1
 - b. Response time: Adjustable from 1 to 100 seconds.
 - c. Power: 24 volt DC
 - 4. Install flow meters according to manufacturer's recommendations.
Where recommended by manufacturer because of mounting conditions, provide flow rectifier.
 - E. Water Flow Sensors: shall be insertion turbine type with turbine element, retractor and transmitter mounted on a two-inch full port isolation valve; assembly easily removed or installed as a single unit under line pressure through the isolation valve without interference with process flow; calibrated scale shall allow precise positioning of the flow element to the required insertion depth within plus or minus 1 mm (0.05 inch); wetted parts shall be constructed of stainless steel. Operating power shall be nominal 24 VDC. Local instantaneous flow indicator shall be LED type in NEMA 4 enclosure with 3-1/2 digit display, for wall or panel mounting.
 - 1. Performance characteristics:

- a. Ambient conditions: -40°C to 60°C (-40°F to 140°F), 5 to 100% humidity.
 - b. Operating conditions: 850 kPa (125 psig), 0°C to 120°C (30°F to 250°F), 0.15 to 12 m per second (0.5 to 40 feet per second) velocity.
 - c. Nominal range (turn down ratio): 10 to 1.
 - d. Pressure Loss: Maximum 1 percent of the line pressure in line sizes above 100 mm (4 inches).
 - e. Ambient temperature effects, less than 0.005 percent calibrated span per °C (°F) temperature change.
 - f. RFI effect - flow meter shall not be affected by RFI.
 - g. Power supply effect less than 0.02 percent of span for a variation of plus or minus 10 percent power supply.
- F. Steam Flow Sensor/Transmitter:
- 1. Sensor: Vortex shedder incorporating wing type sensor and amplification technology for high signal-to-noise ratio, carbon steel body with 316 stainless steel working parts, 24 VDC power, NEMA 4 enclosure.
 - a. Ambient conditions, -40°C to 80°C (-40°F to 175°F).
 - b. Process conditions, 900 kPa (125 psig) saturated steam.
 - c. Turn down ratio, 20 to 1.
 - d. Output signal, 4-20 ma DC.
 - e. Processor/Transmitter, NEMA 4 enclosure with keypad program selector and six digit LCD output display of instantaneous flow rate or totalized flow, solid state switch closure signal shall be provided to the nearest DDC panel for totalization.
 - 1) Ambient conditions, -20°C to 50°C (0°F-120°F), 0 95 percent non-condensing RH.
 - 2) Power supply, 120 VAC, 60 hertz or 24 VDC.
 - 3) Internal battery, provided for 24-month retention of RAM contents when all other power sources are removed.
 - f. Sensor on all steam lines shall be protected by pigtail siphons installed between the sensor and the line, and shall have an isolation valve installed between the sensor and pressure source.
- G. Flow switches:
- 1. Shall be either paddle or differential pressure type.

- a. Paddle-type switches (liquid service only) shall be UL Listed, SPDT snap-acting, adjustable sensitivity with NEMA 4 enclosure.
 - b. Differential pressure type switches (air or water service) shall be UL listed, SPDT snap acting, NEMA 4 enclosure, with scale range and differential suitable for specified application.
- H. Current Switches: Current operated switches shall be self powered, solid state with adjustable trip current as well as status, power, and relay command status LED indication. The switches shall be selected to match the current of the application and output requirements of the DDC systems.

2.11 CONTROL CABLES

A. General:

1. Ground cable shields, drain conductors, and equipment to eliminate shock hazard and to minimize ground loops, common-mode returns, noise pickup, cross talk, and other impairments. Comply with Section 26 05 26.
2. Cable conductors to provide protection against induction in circuits. Crosstalk attenuation within the System shall be in excess of -80 dB throughout the frequency ranges specified.
3. Minimize the radiation of RF noise generated by the System equipment so as not to interfere with any audio, video, data, computer main distribution frame (MDF), telephone customer service unit (CSU), and electronic private branch exchange (EPBX) equipment the System may service.
4. The as-installed drawings shall identify each cable as labeled, used cable, and bad cable pairs.
5. Label system's cables on each end. Test and certify cables in writing to the VA before conducting proof-of-performance testing. Minimum cable test requirements are for impedance compliance, inductance, capacitance, signal level compliance, opens, shorts, cross talk, noise, and distortion, and split pairs on all cables in the frequency ranges used. Make available all cable installation and test records at demonstration to the VA. All changes (used pair, failed pair, etc.) shall be posted in these records as the change occurs.
6. Power wiring shall not be run in conduit with communications trunk wiring or signal or control wiring operating at 100 volts or less.

- B. Analogue control cabling shall be not less than No. 18 AWG solid, with thermoplastic insulated conductors as specified in Section 26 05 21.
- C. Copper digital communication cable between the ECC and the B-BC and B-AAC controllers shall be 100BASE-TX Ethernet, Category 5e or 6, not less than minimum 24 American Wire Gauge (AWG) solid, Shielded Twisted Pair (STP) or Unshielded Twisted Pair (UTP), with thermoplastic insulated conductors, enclosed in a thermoplastic outer jacket, as specified in Section 27 15 00.
 - 1. Other types of media commonly used within IEEE Std 802.3 LANs (e.g., 10Base-T and 10Base-2) shall be used only in cases to interconnect with existing media.
- D. Optical digital communication fiber, if used, shall be Multimode or Singlemode fiber, 62.5/125 micron for multimode or 10/125 micron for singlemode micron with SC or ST connectors as specified in TIA-568-C.1. Terminations, patch panels, and other hardware shall be compatible with the specified fiber and shall be as specified in Section 27 15 00. Fiber-optic cable shall be suitable for use with the 100Base-FX or the 100Base-SX standard (as applicable) as defined in IEEE Std 802.3.

2.12 THERMOSTATS AND HUMIDISTATS

- A. Room thermostats controlling unitary standalone heating and cooling devices not connected to the DDC system shall have three modes of operation (heating - null or dead band - cooling). Thermostats shall have capability of being adjusted to eliminate null or dead band. Wall mounted thermostats shall have manufacturer's recommendation finish, setpoint range and temperature display and external adjustment:
 - 1. Electronic Thermostats: Solid-state, microprocessor based, programmable to daily, weekend, and holiday schedules.
 - a. Public Space Thermostat: Public space thermostat shall have a thermistor sensor and shall not have a visible means of set point adjustment. Adjustment shall be via the digital controller to which it is connected.
 - b. Battery replacement without program loss.
- B. Strap-on thermostats shall be enclosed in a dirt-and-moisture proof housing with fixed temperature switching point and single pole, double throw switch.
- C. Freezestats shall have a minimum of 300 mm (one linear foot) of sensing element for each 0.093 square meter (one square foot) of coil area. A freezing condition at any increment of 300 mm (one foot) anywhere along

the sensing element shall be sufficient to operate the thermostatic element. Freezestats shall be manually-reset.

- D. Room Humidistats: Provide fully proportioning humidistat with adjustable throttling range for accuracy of settings and conservation. The humidistat shall have set point scales shown in percent of relative humidity located on the instrument. Systems showing moist/dry or high/low are not acceptable.

2.13 FINAL CONTROL ELEMENTS AND OPERATORS

- A. Fail Safe Operation: Control valves and dampers shall provide "fail safe" operation in either the normally open or normally closed position as required for freeze, moisture, and smoke or fire protection.
- B. Spring Ranges: Range as required for system sequencing and to provide tight shut-off.
- C. Power Operated Control Dampers (other than VAV Boxes): Factory fabricated, balanced type dampers. All modulating dampers shall be opposed blade type and gasketed. Blades for two-position, duct-mounted dampers shall be parallel, airfoil (streamlined) type for minimum noise generation and pressure drop.
1. Leakage: Except as specified in subparagraph 2 below, maximum leakage in closed position shall not exceed 7 L/S (15 CFMs) differential pressure for outside air and exhaust dampers and 200 L/S/ square meter (40 CFM/sq. ft.) at 50 mm (2 inches) differential pressure for other dampers.
 2. Frame shall be galvanized steel channel with seals as required to meet leakage criteria.
 3. Blades shall be galvanized steel or aluminum, 200 mm (8 inch) maximum width, with edges sealed as required.
 4. Bearing shall be nylon, bronze sleeve or ball type.
 5. Hardware shall be zinc-plated steel. Connected rods and linkage shall be non-slip. Working parts of joints shall be brass, bronze, nylon or stainless steel.
 6. Maximum air velocity and pressure drop through free area the dampers:
 - a. Smoke damper in air handling unit: 305 meter per minute (1000 fpm).
 - b. Duct mounted damper: 600 meter per minute (2000 fpm).
 - c. Maximum static pressure loss: 50 Pascal (0.20 inches water gage).

- D. Smoke Dampers and Combination Fire/Smoke Dampers: Dampers and operators are specified in Section 23 31 00, HVAC DUCTS AND CASINGS. Control of these dampers is specified under this Section.
- E. Control Valves:
1. Valves shall be rated for a minimum of 150 percent of system operating pressure at the valve location but not less than 900 kPa (125 psig).
 2. Valves 50 mm (2 inches) and smaller shall be bronze body with threaded or flare connections.
 3. Valves 60 mm (2 1/2 inches) and larger shall be bronze or iron body with flanged connections.
 4. Brass or bronze seats except for valves controlling media above 100 degrees C (210 degrees F), which shall have stainless steel seats.
 5. Flow characteristics:
 - a. Three way modulating valves shall be globe pattern. Position versus flow relation shall be linear relation for steam or equal percentage for water flow control.
 - b. Two-way modulating valves shall be globe pattern. Position versus flow relation shall be linear for steam and equal percentage for water flow control.
 - c. Two-way 2-position valves shall be ball, gate or butterfly type.
 6. Maximum pressure drop:
 - a. Two position steam control: 20 percent of inlet gauge pressure.
 - b. Modulating Steam Control: 80 percent of inlet gauge pressure (acoustic velocity limitation).
 - c. Modulating water flow control, greater of 3 meters (10 feet) of water or the pressure drop through the apparatus.
 7. Two position water valves shall be line size.
- F. Damper and Valve Operators and Relays:
1. Pneumatic operators, spring return type with non-ferrous metal bellows or diaphragm of neoprene or other elastomer. Bellows or diaphragm shall be of sufficient size so that a change in operating pressure of not more than two (2) percent of the total motor operating pressure range will be required to start the valve or damper moving. Provide positive positioning or sequencing relays with adjustable operating range and starting point for operators sequenced with other operators to permit adjustment of control sequences, except for control valves in confined spaces in terminal

- units, which may use springs with range selected to provide necessary sequencing. Metal parts shall be aluminum, mill finish galvanized steel, or zinc plated steel or stainless steel.
2. Electric operator shall provide full modulating control of dampers and valves. A linkage and pushrod shall be furnished for mounting the actuator on the damper frame internally in the duct or externally in the duct or externally on the duct wall, or shall be furnished with a direct-coupled design. Metal parts shall be aluminum, mill finish galvanized steel, or zinc plated steel or stainless steel. Provide actuator heads which allow for electrical conduit attachment. The motors shall have sufficient closure torque to allow for complete closure of valve or damper under pressure. Provide multiple motors as required to achieve sufficient closeoff torque.
 - a. Minimum valve closeoff pressure shall be equal to the system pump's dead-head pressure, minimum 50 psig for valves smaller than 4 inches.
 3. Electronic damper operators: Metal parts shall be aluminum, mill finish galvanized steel, or zinc plated steel or stainless steel. Provide actuator heads which allow for electrical conduit attachment. The motors shall have sufficient closure torque to allow for complete closure of valve or damper under pressure. Provide multiple motors as required to achieve sufficient closeoff torque.
 - a. CV Box actuator shall be mounted on the damper axle or shall be of the air valve design, and shall provide complete modulating control of the damper. The motor shall have a closure torque of 35-inch pounds minimum with full torque applied at close off to attain minimum leakage.
 4. See drawings for required control operation.

2.14 AIR FLOW CONTROL

- A. Airflow and static pressure shall be controlled via digital controllers with inputs from airflow control measuring stations and static pressure inputs as specified. Controller outputs shall be analog or pulse width modulating output signals. The controllers shall include the capability to control via simple proportional (P) control, proportional plus integral (PI), proportional plus integral plus derivative (PID), and on-off. The airflow control programs shall be factory-tested

programs that are documented in the literature of the control manufacturer.

B. Air Flow Measuring Station -- Electronic Thermal Type:

1. Air Flow Sensor Probe:

- a. Each air flow sensor shall contain two individual thermal sensing elements. One element shall determine the velocity of the air stream while the other element shall compensate for changes in temperature. Each thermal flow sensor and its associated control circuit and signal conditioning circuit shall be factory calibrated and be interchangeable to allow replacement of a sensor without recalibration of the entire flow station. The sensor in the array shall be located at the center of equal area segment of the duct and the number of sensors shall be adequate to accommodate the expected velocity profile and variation in flow and temperature. The airflow station shall be of the insertion type in which sensor support structures are inserted from the outside of the ducts to make up the complete electronic velocity array.
- b. Thermal flow sensor shall be constructed of hermetically sealed thermistors or nickel chromium or reference grade platinum wire, wound over an epoxy, stainless steel or ceramic mandrel and coated with a material suitable for the conditions to be encountered. Each dual sensor shall be mounted in an extruded aluminum alloy strut.

2. Air Flow Sensor Grid Array:

- a. Each sensor grid shall consist of a lattice network of temperature sensors and linear integral controllers (ICs) situated inside an aluminum casing suitable for mounting in a duct. Each sensor shall be mounted within a strut facing downstream of the airflow and located so that it is protected on the upstream side. All wiring shall be encased (out of the air stream) to protect against mechanical damage.
- b. The casing shall be made of welded aluminum of sufficient strength to prevent structural bending and bowing. Steel or iron composite shall not be acceptable in the casing material.
- c. Pressure drop through the flow station shall not exceed 4 Pascal (0.015" W.G.) at 1,000 meter per minute (3,000 FPM).

3. Electronics Panel:

- a. Electronics Panel shall consist of a surface mounted enclosure complete with solid-state microprocessor and software.
 - b. Electronics Panel shall be A/C powered 120 VAC and shall have the capability to transmit signals of 0-5 VDC, 0-10 VDC or 4-20 ma for use in control of the HVAC Systems. The electronic panel shall have the capability to accept user defined scaling parameters for all output signals.
 - c. Electronics Panel shall have the capability to digitally display airflow in CFM and temperature in degrees F. The displays shall be provided as an integral part of the electronics panel. The electronic panel shall have the capability to totalize the output flow in CFM for two or more systems, as required. A single output signal may be provided which will equal the sum of the systems totalized. Output signals shall be provided for temperature and airflow. Provide remote mounted air flow or temperature displays where indicated on the plans.
 - d. Electronics Panel shall have the following:
 - 1) Minimum of 12-bit A/D conversion.
 - 2) Field adjustable digital primary output offset and gain.
 - 3) Airflow analog output scaling of 100 to 10,000 FPM.
 - 4) Temperature analog output scaling from -45°C to 70°C (-50°F to 160°F).
 - 5) Analog output resolution (full scale output) of 0.025%.
 - e. All readings shall be in I.P. units.
4. Thermal flow sensors and its electronics shall be installed as per manufacturer's instructions. The probe sensor density shall be as follows:

Probe Sensor Density	
Area (sq.ft.)	Qty. Sensors
<=1	2
>1 to <4	4
4 to <8	6
8 to <12	8
12 to <16	12
>=16	16

- a. Complete installation shall not exhibit more than $\pm 2.0\%$ error in airflow measurement output for variations in the angle of flow of

up to 10 percent in any direction from its calibrated orientation. Repeatability of readings shall be within $\pm 0.25\%$.

C. Static Pressure Measuring Station: shall consist of one or more static pressure sensors and transmitters along with relays or auxiliary devices as required for a complete functional system. The span of the transmitter shall not exceed two times the design static pressure at the point of measurement. The output of the transmitter shall be true representation of the input pressure with plus or minus 25 Pascal (0.1 inch) W.G. of the true input pressure:

1. Static pressure sensors shall have the same requirements as Airflow Measuring Devices except that total pressure sensors are optional, and only multiple static pressure sensors positioned on an equal area basis connected to a network of headers are required.
2. For systems with multiple major trunk supply ducts, furnish a static pressure transmitter for each trunk duct. The transmitter signal representing the lowest static pressure shall be selected and this shall be the input signal to the controller.
3. The controller shall receive the static pressure transmitter signal and CU shall provide a control output signal to the supply fan capacity control device. The control mode shall be proportional plus integral (PI) (automatic reset) and where required shall also include derivative mode.
4. In systems with multiple static pressure transmitters, provide a switch located near the fan discharge to prevent excessive pressure during abnormal operating conditions. High-limit switches shall be manually-reset.

D. Constant Volume Control Systems shall consist of an air flow measuring station along with such relays and auxiliary devices as required to produce a complete functional system. The transmitter shall receive its air flow signal and static pressure signal from the flow measuring station and shall have a span not exceeding three times the design flow rate. The CU shall receive the transmitter signal and shall provide an output to the fan volume control device to maintain a constant flow rate. The CU shall provide proportional plus integral (PI) (automatic reset) control mode and where required also inverse derivative mode. Overall system accuracy shall be plus or minus the equivalent of 2 Pascal (0.008 inch) velocity pressure as measured by the flow station.

E. Airflow Synchronization:

1. Systems shall consist of an air flow measuring station for each supply and return duct, the CU and such relays, as required to provide a complete functional system that will maintain a constant flow rate difference between supply and return air to an accuracy of $\pm 10\%$. In systems where there is no suitable location for a flow measuring station that will sense total supply or return flow, provide multiple flow stations with a differential pressure transmitter for each station. Signals from the multiple transmitters shall be added through the CU such that the resultant signal is a true representation of total flow.
2. The total flow signals from supply and return air shall be the input signals to the CU. This CU shall track the return air fan capacity in proportion to the supply air flow under all conditions.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General:

1. Examine project plans for control devices and equipment locations; and report any discrepancies, conflicts, or omissions to COTR for resolution before proceeding for installation.
2. Install equipment, piping, wiring /conduit parallel to or at right angles to building lines.
3. Install all equipment and piping in readily accessible locations. Do not run tubing and conduit concealed under insulation or inside ducts.
4. Mount control devices, tubing and conduit located on ducts and apparatus with external insulation on standoff support to avoid interference with insulation.
5. Provide sufficient slack and flexible connections to allow for vibration of piping and equipment.
6. Run tubing and wire connecting devices on or in control cabinets parallel with the sides of the cabinet neatly racked to permit tracing.
7. Install equipment level and plum.

B. Electrical Wiring Installation:

1. All wiring cabling shall be installed in conduits. Install conduits and wiring in accordance with Specification Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS. Conduits carrying control wiring and cabling shall be dedicated to the control wiring and

- cabling: these conduits shall not carry power wiring. Provide plastic end sleeves at all conduit terminations to protect wiring from burrs.
2. Install analog signal and communication cables in conduit and in accordance with Specification Section 26 05 21. Install digital communication cables in conduit and in accordance with Specification Section 27 15 00, Communications Horizontal Cabling.
 3. Install conduit and wiring between operator workstation(s), digital controllers, electrical panels, indicating devices, instrumentation, miscellaneous alarm points, thermostats, and relays as shown on the drawings or as required under this section.
 4. Install all electrical work required for a fully functional system and not shown on electrical plans or required by electrical specifications. Where low voltage (less than 50 volt) power is required, provide suitable Class B transformers.
 5. Install all system components in accordance with local Building Code and National Electric Code.
 - a. Splices: Splices in shielded and coaxial cables shall consist of terminations and the use of shielded cable couplers. Terminations shall be in accessible locations. Cables shall be harnessed with cable ties.
 - b. Equipment: Fit all equipment contained in cabinets or panels with service loops, each loop being at least 300 mm (12 inches) long. Equipment for fiber optics system shall be rack mounted, as applicable, in ventilated, self-supporting, code gauge steel enclosure. Cables shall be supported for minimum sag.
 - c. Cable Runs: Keep cable runs as short as possible. Allow extra length for connecting to the terminal board. Do not bend flexible coaxial cables in a radius less than ten times the cable outside diameter.
 - d. Use vinyl tape, sleeves, or grommets to protect cables from vibration at points where they pass around sharp corners, through walls, panel cabinets, etc.
 6. Conceal cables, except in mechanical rooms and areas where other conduits and piping are exposed.
 7. Permanently label or code each point of all field terminal strips to show the instrument or item served. Color-coded cable with cable diagrams may be used to accomplish cable identification.

8. Grounding: ground electrical systems per manufacturer's written requirements for proper and safe operation.

C. Install Sensors and Controls:

1. Temperature Sensors:

- a. Install all sensors and instrumentation according to manufacturer's written instructions. Temperature sensor locations shall be readily accessible, permitting quick replacement and servicing of them without special skills and tools.
- b. Calibrate sensors to accuracy specified, if not factory calibrated.
- c. Use of sensors shall be limited to its duty, e.g., duct sensor shall not be used in lieu of room sensor.
- d. Install room sensors permanently supported on wall frame. They shall be mounted at 1.5 meter (5.0 feet) above the finished floor.
- e. Mount sensors rigidly and adequately for the environment within which the sensor operates. Separate extended-bulb sensors from contact with metal casings and coils using insulated standoffs.
- f. Sensors used in mixing plenum, and hot and cold decks shall be of the averaging of type. Averaging sensors shall be installed in a serpentine manner horizontally across duct. Each bend shall be supported with a capillary clip.
- g. All pipe mounted temperature sensors shall be installed in wells.
- h. All wires attached to sensors shall be air sealed in their conduits or in the wall to stop air transmitted from other areas affecting sensor reading.
- i. Permanently mark terminal blocks for identification. Protect all circuits to avoid interruption of service due to short-circuiting or other conditions. Line-protect all wiring that comes from external sources to the site from lightning and static electricity.

2. Pressure Sensors:

- a. Install duct static pressure sensor tips facing directly downstream of airflow.
- b. Install high-pressure side of the differential switch between the pump discharge and the check valve.
- c. Install snubbers and isolation valves on steam pressure sensing devices.

3. Actuators:

- a. Mount and link damper and valve actuators according to manufacturer's written instructions.
- b. Check operation of damper/actuator combination to confirm that actuator modulates damper smoothly throughout stroke to both open and closed position.
- c. Check operation of valve/actuator combination to confirm that actuator modulates valve smoothly in both open and closed position.

4. Flow Switches:

- a. Install flow switch according to manufacturer's written instructions.
- b. Mount flow switch a minimum of 5 pipe diameters up stream and 5 pipe diameters downstream or 600 mm (2 feet) whichever is greater, from fittings and other obstructions.
- c. Assure correct flow direction and alignment.
- d. Mount in horizontal piping-flow switch on top of the pipe.

D. Installation of network:

1. Ethernet:

- a. The network shall employ Ethernet LAN architecture, as defined by IEEE 802.3. The Network Interface shall be fully Internet Protocol (IP) compliant allowing connection to currently installed IEEE 802.3, Compliant Ethernet Networks.
- b. The network shall directly support connectivity to a variety of cabling types. As a minimum provide the following connectivity: 100 Base TX (Category 5e cabling) for the communications between the ECC and the B-BC and the B-AAC controllers.

2. Third party interfaces: Contractor shall integrate real-time data from building systems by other trades and databases originating from other manufacturers as specified and required to make the system work as one system.

E. Installation of digital controllers and programming:

1. Provide a separate digital control panel for each major piece of equipment, such as air handling unit, chiller, pumping unit etc. Points used for control loop reset such as outdoor air, outdoor humidity, or space temperature could be located on any of the remote control units.

2. Provide sufficient internal memory for the specified control sequences and trend logging. There shall be a minimum of 25 percent of available memory free for future use.
3. System point names shall be modular in design, permitting easy operator interface without the use of a written point index.
4. Provide software programming for the applications intended for the systems specified, and adhere to the strategy algorithms provided.
5. Provide graphics for each piece of equipment and floor plan in the building. This includes each chiller, cooling tower, air handling unit, fan, terminal unit, boiler, pumping unit etc. These graphics shall show all points dynamically as specified in the point list.

3.2 SYSTEM VALIDATION AND DEMONSTRATION

- A. As part of final system acceptance, a system demonstration is required (see below). Prior to start of this demonstration, the contractor is to perform a complete validation of all aspects of the controls and instrumentation system.
- B. Validation
 1. Prepare and submit for approval a validation test plan including test procedures for the performance verification tests. Test Plan shall address all specified functions of the ECC and all specified sequences of operation. Explain in detail actions and expected results used to demonstrate compliance with the requirements of this specification. Explain the method for simulating the necessary conditions of operation used to demonstrate performance of the system. Test plan shall include a test check list to be used by the Installer's agent to check and initial that each test has been successfully completed. Deliver test plan documentation for the performance verification tests to the owner's representative 30 days prior to start of performance verification tests. Provide draft copy of operation and maintenance manual with performance verification test.
 2. After approval of the validation test plan, installer shall carry out all tests and procedures therein. Installer shall completely check out, calibrate, and test all connected hardware and software to insure that system performs in accordance with approved specifications and sequences of operation submitted. Installer shall complete and submit Test Check List.
- C. Demonstration

1. System operation and calibration to be demonstrated by the installer in the presence of the Architect or VA's representative on random samples of equipment as dictated by the Architect or VA's representative. Should random sampling indicate improper commissioning, the owner reserves the right to subsequently witness complete calibration of the system at no addition cost to the VA.
2. Demonstrate to authorities that all required safeties and life safety functions are fully functional and complete.
3. Make accessible , personnel to provide necessary adjustments and corrections to systems as directed by balancing agency.
4. The following witnessed demonstrations of field control equipment shall be included:
 - a. Observe HVAC systems in shut down condition. Check dampers and valves for normal position.
 - b. Test application software for its ability to communicate with digital controllers, operator workstation, and uploading and downloading of control programs.
 - c. Demonstrate the software ability to edit the control program off-line.
 - d. Demonstrate reporting of alarm conditions for each alarm and ensure that these alarms are received at the assigned location, including operator workstations.
 - e. Demonstrate ability of software program to function for the intended applications-trend reports, change in status etc.
 - f. Demonstrate via graphed trends to show the sequence of operation is executed in correct manner, and that the HVAC systems operate properly through the complete sequence of operation, e.g., seasonal change, occupied/unoccupied mode, and warm-up condition.
 - g. Demonstrate hardware interlocks and safeties functions, and that the control systems perform the correct sequence of operation after power loss and resumption of power loss.
 - h. Prepare and deliver to the VA graphed trends of all control loops to demonstrate that each control loop is stable and the set points are maintained.
 - i. Demonstrate that each control loop responds to set point adjustment and stabilizes within one (1) minute. Control loop trend data shall be instantaneous and the time between data points shall not be greater than one (1) minute.

5. Witnessed demonstration of ECC functions shall consist of:
 - a. Running each specified report.
 - b. Display and demonstrate each data entry to show site specific customizing capability. Demonstrate parameter changes.
 - c. Step through penetration tree, display all graphics, demonstrate dynamic update, and direct access to graphics.
 - d. Execute digital and analog commands in graphic mode.
 - e. Demonstrate DDC loop precision and stability via trend logs of inputs and outputs (6 loops minimum).
 - f. Demonstrate EMS performance via trend logs and command trace.
 - g. Demonstrate scan, update, and alarm responsiveness.
 - h. Demonstrate spreadsheet/curve plot software, and its integration with database.
 - i. Demonstrate on-line user guide, and help function and mail facility.
 - j. Demonstrate digital system configuration graphics with interactive upline and downline load, and demonstrate specified diagnostics.
 - k. Demonstrate multitasking by showing dynamic curve plot, and graphic construction operating simultaneously via split screen.
 - l. Demonstrate class programming with point options of beep duration, beep rate, alarm archiving, and color banding.

----- END -----

**SECTION 23 21 13
HYDRONIC PIPING**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Water piping to connect HVAC equipment, including the following:
 - 1. Chilled water, heating hot water and drain piping.
 - 2. Extension of domestic water make-up piping.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- C. Section 31 20 00, EARTH MOVING: Excavation and backfill.
- D. Section 03 30 00, CAST-IN-PLACE CONCRETE.
- E. Section 07 12 00, BUILT-UP BITUMINOUS WATERPROOFING.
- F. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Seismic restraints for piping.
- G. Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION: General mechanical requirements and items, which are common to more than one section of Division 23.
- H. Section 23 21 23, HYDRONIC PUMPS: Pumps.
- I. Section 23 07 11, HVAC INSULATION: Piping insulation.
- J. Section 23 82 00, CONVECTION HEATING AND COOLING UNITS: CV units, fan coil units.
- K. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC: Temperature and pressure sensors and valve operators.

1.3 QUALITY ASSURANCE

- A. Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION, which includes welding qualifications.
- B. Submit prior to welding of steel piping a certificate of Welder's certification. The certificate shall be current and not more than one year old.
- C. For mechanical pressed sealed fittings, only tools of fitting manufacturer shall be used.
- D. Mechanical pressed fittings shall be installed by factory trained workers.
- E. All grooved joint couplings, fittings, valves, and specialties shall be the products of a single manufacturer. Grooving tools shall be the same manufacturer as the grooved components.

1. All castings used for coupling housings, fittings, valve bodies, etc., shall be date stamped for quality assurance and traceability.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 1. Pipe and equipment supports. Submit calculations for variable spring and constant support hangers.
 2. Pipe and tubing, with specification, class or type, and schedule.
 3. Pipe fittings, including miscellaneous adapters and special fittings.
 4. Flanges, gaskets and bolting.
 5. Grooved joint couplings and fittings.
 6. Valves of all types.
 7. Strainers.
 8. Flexible connectors for water service.
 9. Pipe alignment guides.
 10. Expansion joints.
 11. Expansion compensators.
 12. All specified hydronic system components.
 13. Water flow measuring devices.
 14. Gages.
 15. Thermometers and test wells.
 16. Seismic bracing details for piping.
- C. Manufacturer's certified data report, Form No. U-1, for ASME pressure vessels:
 1. Air separators.
 2. Expansion tanks.
- D. Submit the welder's qualifications in the form of a current (less than one year old) and formal certificate.
- E. Coordination Drawings: Refer to Article, SUBMITTALS of Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- F. As-Built Piping Diagrams: Provide drawing as follows for chilled water, and heating hot water system and other piping systems and equipment.
 1. One wall-mounted stick file with complete set of prints. Mount stick file in the chiller plant or control room along with control diagram stick file.
 2. One complete set of reproducible drawings.

3. One complete set of drawings in electronic Autocad and pdf format.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. American National Standards Institute, Inc.
- B. American Society of Mechanical Engineers/American National Standards Institute, Inc. (ASME/ANSI):
- B1.20.1-83(R2006).....Pipe Threads, General Purpose (Inch)
- B16.4-06.....Gray Iron Threaded Fittings B16.18-01 Cast
Copper Alloy Solder joint Pressure fittings
- B16.23-02.....Cast Copper Alloy Solder joint Drainage
fittings
- B40.100-05.....Pressure Gauges and Gauge Attachments
- C. American National Standards Institute, Inc./Fluid Controls Institute (ANSI/FCI):
- 70-2-2006.....Control Valve Seat Leakage
- D. American Society of Mechanical Engineers (ASME):
- B16.1-98.....Cast Iron Pipe Flanges and Flanged Fittings
- B16.3-2006.....Malleable Iron Threaded Fittings: Class 150 and
300
- B16.4-2006.....Gray Iron Threaded Fittings: (Class 125 and
250)
- B16.5-2003.....Pipe Flanges and Flanged Fittings: NPS ½
through NPS 24 Metric/Inch Standard
- B16.9-07.....Factory Made Wrought Butt Welding Fittings
- B16.11-05.....Forged Fittings, Socket Welding and Threaded
- B16.18-01.....Cast Copper Alloy Solder Joint Pressure
Fittings
- B16.22-01.....Wrought Copper and Bronze Solder Joint Pressure
Fittings.
- B16.24-06.....Cast Copper Alloy Pipe Flanges and Flanged
Fittings
- B16.39-06.....Malleable Iron Threaded Pipe Unions
- B16.42-06.....Ductile Iron Pipe Flanges and Flanged Fittings
- B31.1-08.....Power Piping
- E. American Society for Testing and Materials (ASTM):
- A47/A47M-99 (2004).....Ferritic Malleable Iron Castings

A53/A53M-07.....Standard Specification for Pipe, Steel, Black
and Hot-Dipped, Zinc-Coated, Welded and
Seamless

A106/A106M-08.....Standard Specification for Seamless Carbon
Steel Pipe for High-Temperature Service

A126-04.....Standard Specification for Gray Iron Castings
for Valves, Flanges, and Pipe Fittings

A183-03 Standard Specification for Carbon Steel Track
Bolts and Nuts

A216/A216M-08 Standard Specification for Steel Castings,
Carbon, Suitable for Fusion Welding, for High
Temperature Service

A234/A234M-07 Piping Fittings of Wrought Carbon Steel and
Alloy Steel for Moderate and High Temperature
Service

A307-07 Standard Specification for Carbon Steel Bolts
and Studs, 60,000 PSI Tensile Strength

A536-84 (2004) Standard Specification for Ductile Iron Castings

A615/A615M-08 Deformed and Plain Carbon Steel Bars for
Concrete Reinforcement

A653/A 653M-08 Steel Sheet, Zinc-Coated (Galvanized) or Zinc-
Iron Alloy Coated (Galvannealed) By the Hot-Dip
Process

B32-08 Standard Specification for Solder Metal

B62-02 Standard Specification for Composition Bronze or
Ounce Metal Castings

B88-03 Standard Specification for Seamless Copper Water
Tube

B209-07 Aluminum and Aluminum Alloy Sheet and Plate

C177-04 Standard Test Method for Steady State Heat Flux
Measurements and Thermal Transmission Properties
by Means of the Guarded Hot Plate Apparatus

C533-07 Calcium Silicate Block and Pipe Thermal
Insulation

C552-07 Cellular Glass Thermal Insulation

D3350-08 Polyethylene Plastics Pipe and Fittings
Materials

- C591-08 Unfaced Preformed Rigid Cellular
Polyisocyanurate Thermal Insulation
- D1784-08 Rigid Poly (Vinyl Chloride) (PVC) Compounds and
Chlorinated Poly (Vinyl Chloride) (CPVC)
Compound
- D1785-06 Poly (Vinyl Chloride) (PVC) Plastic Pipe,
Schedules 40, 80 and 120
- D2241-05 Poly (Vinyl Chloride) (PVC) Pressure Rated Pipe
(SDR Series)
- F439-06 Standard Specification for Chlorinated Poly
(Vinyl Chloride) (CPVC) Plastic Pipe Fittings,
Schedule 80
- F441/F441M-02 Standard Specification for Chlorinated Poly
(Vinyl Chloride) (CPVC) Plastic Pipe, Schedules
40 and 80
- F477-08 Elastomeric Seals Gaskets) for Joining Plastic
Pipe
- F. American Water Works Association (AWWA):
- C110-08.....Ductile Iron and Grey Iron Fittings for Water
- C203-02.....Coal Tar Protective Coatings and Linings for
Steel Water Pipe Lines Enamel and Tape Hot
Applied
- G. American Welding Society (AWS):
- B2.1-02.....Standard Welding Procedure Specification
- H. Copper Development Association, Inc. (CDA):
- CDA A4015-06.....Copper Tube Handbook
- I. Expansion Joint Manufacturer's Association, Inc. (EJMA):
- EMJA-2003.....Expansion Joint Manufacturer's Association
Standards, Ninth Edition
- J. Manufacturers Standardization Society (MSS) of the Valve and Fitting
Industry, Inc.:
- SP-67-02a.....Butterfly Valves
- SP-70-06.....Gray Iron Gate Valves, Flanged and Threaded
Ends
- SP-71-05.....Gray Iron Swing Check Valves, Flanged and
Threaded Ends
- SP-80-08.....Bronze Gate, Globe, Angle and Check Valves

SP-85-02.....Cast Iron Globe and Angle Valves, Flanged and
Threaded Ends

SP-110-96.....Ball Valves Threaded, Socket-Welding, Solder
Joint, Grooved and Flared Ends

SP-125-00.....Gray Iron and Ductile Iron In-line, Spring
Loaded, Center-Guided Check Valves

K. National Sanitation Foundation/American National Standards Institute,
Inc. (NSF/ANSI):

14-06.....Plastic Piping System Components and Related
Materials

1.6 SPARE PARTS

A. For mechanical pressed sealed fittings provide tools required for each
pipe size used at the facility.

PART 2 - PRODUCTS

2.1 PIPE AND EQUIPMENT SUPPORTS, PIPE SLEEVES, AND WALL AND CEILING PLATES

A. Provide in accordance with Section 23 05 11, COMMON WORK RESULTS FOR
HVAC and STEAM GENERATION.

2.2 PIPE AND TUBING

A. Chilled Water, Heating Hot Water, and Vent Piping:

1. Steel: ASTM A53 Grade B, seamless or ERW, Schedule 40.
2. Copper water tube option: ASTM B88, Type K or L, hard drawn.

B. Extension of Domestic Water Make-up Piping: ASTM B88, Type K or L, hard
drawn copper tubing.

C. Cooling Coil Condensate Drain Piping:

1. From air handling units: Copper water tube, ASTM B88, Type M, or
schedule 40 PVC plastic piping.
2. From fan coil or other terminal units: Copper water tube, ASTM B88,
Type L for runouts and Type M for mains.

D. Pipe supports, including insulation shields, for above ground piping:
Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

2.3 FITTINGS FOR STEEL PIPE

A. 50 mm (2 inches) and Smaller: Screwed or welded joints.

1. Butt welding: ASME B16.9 with same wall thickness as connecting
piping.
2. Forged steel, socket welding or threaded: ASME B16.11.
3. Screwed: 150 pound malleable iron, ASME B16.3. 125 pound cast iron,
ASME B16.4, may be used in lieu of malleable iron. Bushing reduction
of a single pipe size, or use of close nipples, is not acceptable.

4. Unions: ASME B16.39.
5. Water hose connection adapter: Brass, pipe thread to 20 mm (3/4 inch) garden hose thread, with hose cap nut.
- B. 65 mm (2-1/2 inches) and Larger: Welded or flanged joints. Contractor's option: Grooved mechanical couplings and fittings are optional.
 1. Butt welding fittings: ASME B16.9 with same wall thickness as connecting piping. Elbows shall be long radius type, unless otherwise noted.
 2. Welding flanges and bolting: ASME B16.5:
 - a. Water service: Weld neck or slip-on, plain face, with 6 mm (1/8 inch) thick full face neoprene gasket suitable for 104 degrees C (220 degrees F).
 - 1) Contractor's option: Convuluted, cold formed 150 pound steel flanges, with teflon gaskets, may be used for water service.
 - b. Flange bolting: Carbon steel machine bolts or studs and nuts, ASTM A307, Grade B.
- C. Welded Branch and Tap Connections: Forged steel weldolets, or branchlets and threadolets may be used for branch connections up to one pipe size smaller than the main. Forged steel half-couplings, ASME B16.11 may be used for drain, vent and gage connections.
- D. Grooved Mechanical Pipe Couplings and Fittings (Contractor's Option): Grooved Mechanical Pipe Couplings and Fittings may be used, with cut or roll grooved pipe, in water service up to 110 degrees C (230 degrees F) in lieu of welded, screwed or flanged connections. All joints must be rigid type.
 1. Grooved mechanical couplings: Malleable iron, ASTM A47 or ductile iron, ASTM A536, fabricated in two or more parts, securely held together by two or more track-head, square, or oval-neck bolts, ASTM A449 and A183.
 2. Gaskets: Rubber product recommended by the coupling manufacturer for the intended service.
 3. Grooved end fittings: Malleable iron, ASTM A47; ductile iron, ASTM A536; or steel, ASTM A53 or A106, designed to accept grooved mechanical couplings. Tap-in type branch connections are acceptable.

2.4 FITTINGS FOR COPPER TUBING

- A. Joints:

1. Solder Joints: Joints shall be made up in accordance with recommended practices of the materials applied. Apply 95/5 tin and antimony on all copper piping.
2. Contractor's Option: Mechanical press sealed fittings, double pressed type, NSF 50/61 approved, with EPDM (ethylene propylene diene monomer) non-toxic synthetic rubber sealing elements for up to 65 mm (2-1/2 inch) and below are optional for above ground water piping only.
3. Mechanically formed tee connection in water and drain piping: Form mechanically extracted collars in a continuous operation by drilling pilot hole and drawing out tube surface to form collar, having a height of not less than three times the thickness of tube wall. Adjustable collaring device shall insure proper tolerance and complete uniformity of the joint. Notch and dimple joining branch tube in a single process to provide free flow where the branch tube penetrates the fitting.

B. Bronze Flanges and Flanged Fittings: ASME B16.24.

C. Fittings: ANSI/ASME B16.18 cast copper or ANSI/ASME B16.22 solder wrought copper.

2.5 FITTINGS FOR PLASTIC PIPING

A. Schedule 40, socket type for solvent welding.

B. Schedule 40 PVC drain piping: Drainage pattern.

2.6 DIELECTRIC FITTINGS

A. Provide where copper tubing and ferrous metal pipe are joined.

B. 50 mm (2 inches) and Smaller: Threaded dielectric union, ASME B16.39.

C. 65 mm (2 1/2 inches) and Larger: Flange union with dielectric gasket and bolt sleeves, ASME B16.42.

D. Temperature Rating, 99 degrees C (210 degrees F).

2.7 SCREWED JOINTS

A. Pipe Thread: ANSI B1.20.

B. Lubricant or Sealant: Oil and graphite or other compound approved for the intended service.

2.8 VALVES

A. Asbestos packing is not acceptable.

B. All valves of the same type shall be products of a single manufacturer.

C. Provide chain operators for valves 150 mm (6 inches) and larger when the centerline is located 2400 mm (8 feet) or more above the floor or operating platform.

D. Shut-Off Valves

1. Ball Valves (Pipe sizes 2" and smaller): MSS-SP 110, screwed or solder connections, brass or bronze body with chrome-plated ball with full port and Teflon seat at 2760 kPa (400 psig) working pressure rating. Provide stem extension to allow operation without interfering with pipe insulation.
2. Butterfly Valves (Pipe Sizes 2-1/2" and larger): Provide stem extension to allow 50 mm (2 inches) of pipe insulation without interfering with valve operation. MSS-SP 67, flange lug type or grooved end rated 1205 kPa (175 psig) working pressure at 93 degrees C (200 degrees F). Valves shall be ANSI Leakage Class VI and rated for bubble tight shut-off to full valve pressure rating. Valve shall be rated for dead end service and bi-directional flow capability to full rated pressure. Not permitted for direct buried pipe applications.
 - a. Body: Cast iron, ASTM A126, Class B. Malleable iron, ASTM A47 electro-plated, or ductile iron, ASTM A536, Grade 65-45-12 electro-plated.
 - b. Trim: Bronze, aluminum bronze, or 300 series stainless steel disc, bronze bearings, 316 stainless steel shaft and manufacturer's recommended resilient seat. Resilient seat shall be field replaceable, and fully line the body to completely isolate the body from the product. A phosphate coated steel shaft or stem is acceptable, if the stem is completely isolated from the product.
 - c. Actuators: Field interchangeable. Valves for balancing service shall have adjustable memory stop to limit open position.
 - 1) Valves 150 mm (6 inches) and smaller: Lever actuator with minimum of seven locking positions, except where chain wheel is required.
 - 2) Valves 200 mm (8 inches) and larger: Enclosed worm gear with handwheel, and where required, chain-wheel operator.
 - 3) Gate Valves (Contractor's Option in lieu of Ball or Butterfly Valves):
 - a) 50 mm (2 inches) and smaller: MSS-SP 80, Bronze, 1034 kPa (150 psig), wedge disc, rising stem, union bonnet.

- b) 65 mm (2 1/2 inches) and larger: Flanged, outside screw and yoke. MSS-SP 70, iron body, bronze mounted, 861 kPa (125 psig) wedge disc.

E. Globe and Angle Valves

1. Globe Valves

- a. 50 mm (2 inches) and smaller: MSS-SP 80, bronze, 1034 kPa (150 lb.) Globe valves shall be union bonnet with metal plug type disc.
- b. 65 mm (2 1/2 inches) and larger: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS-SP-85 for globe valves.

2. Angle Valves:

- a. 50 mm (2 inches) and smaller: MSS-SP 80, bronze, 1034 kPa (150 lb.) Angle valves shall be union bonnet with metal plug type disc.
- b. 65 mm (2 1/2 inches) and larger: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS-SP-85 for angle.

F. Check Valves

1. Swing Check Valves:

- a. 50 mm (2 inches) and smaller: MSS-SP 80, bronze, 1034 kPa (150 lb.), 45 degree swing disc.
- b. 65 mm (2 1/2 inches) and larger: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS-SP-71 for check valves.

2. Non-Slam or Silent Check Valve: Spring loaded double disc swing check or internally guided flat disc lift type check for bubble tight shut-off. Provide where check valves are shown in chilled water and hot water piping. Check valves incorporating a balancing feature may be used.

- a. Body: MSS-SP 125 cast iron, ASTM A126, Class B, or steel, ASTM A216, Class WCB, or ductile iron, ASTM 536, flanged, grooved, or wafer type.
- b. Seat, disc and spring: 18-8 stainless steel, or bronze, ASTM B62. Seats may be elastomer material.

G. Water Flow Balancing Valves: For flow regulation and shut-off. Valves shall be line size rather than reduced to control valve size.

- 1. Ball or Globe style valve.
- 2. A dual purpose flow balancing valve and adjustable flow meter, with bronze or cast iron body, calibrated position pointer, valved

- pressure taps or quick disconnects with integral check valves and preformed polyurethane insulating enclosure.
3. Provide a readout kit including flow meter, readout probes, hoses, flow charts or calculator, and carrying case.
- H. Automatic Balancing Control Valves: Factory calibrated to maintain constant flow (plus or minus five percent) over system pressure fluctuations of at least 10 times the minimum required for control. Provide standard pressure taps and four sets of capacity charts. Valves shall be line size and be one of the following designs:
1. Gray iron (ASTM A126) or brass body rated 1205 kPa (175 psig) at 93 degrees C (200 degrees F), with stainless steel piston and spring.
 2. Brass or ferrous body designed for 2067 kPa (300 psig) service at 121 degrees C (250 degrees F), with corrosion resistant, tamper proof, self-cleaning piston/spring assembly that is easily removable for inspection or replacement.
 3. Combination assemblies containing ball type shut-off valves, unions, flow regulators, strainers with blowdown valves and pressure temperature ports shall be acceptable.
 4. Provide a readout kit including flow meter, probes, hoses, flow charts and carrying case.

2.9 WATER FLOW MEASURING DEVICES

- A. Minimum overall accuracy plus or minus three percent over a range of 70 to 110 percent of design flow. Select devices for not less than 110 percent of design flow rate.
- B. Venturi Type: Bronze, steel, or cast iron with bronze throat, with valved pressure sensing taps upstream and at the throat.
- C. Wafer Type Circuit Sensor: Cast iron wafer-type flow meter equipped with readout valves to facilitate the connecting of a differential pressure meter. Each readout valve shall be fitted with an integral check valve designed to minimize system fluid loss during the monitoring process.
- D. Self-Averaging Annular Sensor Type: Brass or stainless steel metering tube, shutoff valves and quick-coupling pressure connections. Metering tube shall be rotatable so all sensing ports may be pointed down-stream when unit is not in use.
- E. Insertion Turbine Type Sensor: Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- F. Flow Measuring Device Identification:

1. Metal tag attached by chain to the device.
2. Include meter or equipment number, manufacturer's name, meter model, flow rate factor and design flow rate in l/m (gpm).

G. Portable Water Flow Indicating Meters:

1. Minimum 150 mm (6 inch) diameter dial, forged brass body, beryllium-copper bellows, designed for 1205 kPa (175 psig) working pressure at 121 degrees C (250 degrees F).
2. Bleed and equalizing valves.
3. Vent and drain hose and two 3000 mm (10 feet) lengths of hose with quick disconnect connections.
4. Factory fabricated carrying case with hose compartment and a bound set of capacity curves showing flow rate versus pressure differential.
5. Provide one portable meter for each range of differential pressure required for the installed flow devices.

H. Permanently Mounted Water Flow Indicating Meters: Minimum 150 mm (6 inch) diameter, or 450 mm (18 inch) long scale, for 120 percent of design flow rate, direct reading in lps (gpm), with three valve manifold and two shut-off valves.

2.10 STRAINERS

A. Y Type.

1. Screens: Bronze, monel metal or 18-8 stainless steel, free area not less than 2-1/2 times pipe area, with perforations as follows: 1.1 mm (0.045 inch) diameter perforations for 100 mm (4 inches) and larger: 3.2 mm (0.125 inch) diameter perforations.

B. Suction Diffusers: Specified in Section 23 21 23, HYDRONIC PUMPS.

2.11 FLEXIBLE CONNECTORS FOR WATER SERVICE

A. Flanged Spool Connector:

1. Single arch or multiple arch type. Tube and cover shall be constructed of chlorobutyl elastomer with full faced integral flanges to provide a tight seal without gaskets. Connectors shall be internally reinforced with high strength synthetic fibers impregnated with rubber or synthetic compounds as recommended by connector manufacturer, and steel reinforcing rings.
2. Working pressures and temperatures shall be as follows:
 - a. Connector sizes 50 mm to 100 mm (2 inches to 4 inches), 1137 kPa (165psig) at 121 degrees C (250 degrees F).

- b. Connector sizes 125 mm to 300 mm (5 inches to 12 inches), 965 kPa (140 psig) at 121 degrees C (250 degrees F).
- 3. Provide ductile iron retaining rings and control units.
- B. Mechanical Pipe Couplings:
 - See other fittings specified under Part 2, PRODUCTS.

2.12 EXPANSION JOINTS

- A. Factory built devices, inserted in the pipe lines, designed to absorb axial cyclical pipe movement which results from thermal expansion and contraction. This includes factory-built or field-fabricated guides located along the pipe lines to restrain lateral pipe motion and direct the axial pipe movement into the expansion joints.
- B. Manufacturing Quality Assurance: Conform to Expansion Joints Manufacturers Association Standards.
- C. Bellows - Internally Pressurized Type:
 - 1. Multiple corrugations of Type 304 or Type A240-321 stainless steel.
 - 2. Internal stainless steel sleeve entire length of bellows.
 - 3. External cast iron equalizing rings for services exceeding 340 kPa (50 psig).
 - 4. Welded ends.
 - 5. Design shall conform to standards of EJMA and ASME B31.1.
 - 6. External tie rods designed to withstand pressure thrust force upon anchor failure if one or both anchors for the joint are at change in direction of pipeline.
 - 7. Integral external cover.
- D. Bellows - Externally Pressurized Type:
 - 1. Multiple corrugations of Type 304 stainless steel.
 - 2. Internal and external guide integral with joint.
 - 3. Design for external pressurization of bellows to eliminate squirm.
 - 4. Welded ends.
 - 5. Conform to the standards of EJMA and ASME B31.1.
 - 6. Threaded connection at bottom, 25 mm (one inch) minimum, for drain or drip point.
 - 7. Integral external cover and internal sleeve.
- E. Expansion Compensators:
 - 1. Corrugated bellows, externally pressurized, stainless steel or bronze.
 - 2. Internal guides and anti-torque devices.
 - 3. Threaded ends.

- 4. External shroud.
- 5. Conform to standards of EJMA.
- F. Expansion Joint (Contractor's Option): 2415 kPa (350 psig) maximum working pressure, steel pipe fitting consisting of telescoping body and slip-pipe sections, PTFE modified polyphenylene sulfide coated slide section, with grooved ends, suitable for axial end movement to 75 mm (3 inch).
- G. Expansion Joint Identification: Provide stamped brass or stainless steel nameplate on each expansion joint listing the manufacturer, the allowable movement, flow direction, design pressure and temperature, date of manufacture, and identifying the expansion joint by the identification number on the contract drawings.
- H. Guides: Provide factory-built guides along the pipe line to permit axial movement only and to restrain lateral and angular movement. Guides must be designed to withstand a minimum of 15 percent of the axial force which will be imposed on the expansion joints and anchors. Field-built guides may be used if detailed on the contract drawings.
- I. Supports: Provide saddle supports and frame or hangers for heat exchanger. Mounting height shall be adjusted to facilitate gravity return of steam condensate. Construct supports from steel, weld joints.

2.13 HYDRONIC SYSTEM COMPONENTS

- A. Automatic Air Vent Valves (where shown): Cast iron or semi-steel body, 1034 kPa (150 psig) working pressure, stainless steel float, valve, valve seat and mechanism, minimum 15 mm (1/2 inch) water connection and 6 mm (1/4 inch) air outlet. Air outlet shall be piped to the nearest floor drain.

2.14 GAGES, PRESSURE AND COMPOUND

- A. ASME B40.100, Accuracy Grade 1A, (pressure, vacuum, or compound for air, oil or water), initial mid-scale accuracy 1 percent of scale (Qualify grade), metal or phenolic case, 115 mm (4-1/2 inches) in diameter, 6 mm (1/4 inch) NPT bottom connection, white dial with black graduations and pointer, clear glass or acrylic plastic window, suitable for board mounting. Provide red "set hand" to indicate normal working pressure.
- B. Provide brass lever handle union cock. Provide brass/bronze pressure snubber for gages in water service.

- C. Range of Gages: Provide range equal to at least 130 percent of normal operating range.

2.15 PRESSURE/TEMPERATURE TEST PROVISIONS

- A. Pete's Plug: 6 mm (1/4 inch) MPT by 75 mm (3 inches) long, brass body and cap, with retained safety cap, nordel self-closing valve cores, permanently installed in piping where shown, or in lieu of pressure gage test connections shown on the drawings.
- B. Provide one each of the following test items to the COTR:
1. 6 mm (1/4 inch) FPT by 3 mm (1/8 inch) diameter stainless steel pressure gage adapter probe for extra long test plug. PETE'S 500 XL is an example.
 2. 90 mm (3-1/2 inch) diameter, one percent accuracy, compound gage, -- 100 kPa (30 inches) Hg to 700 kPa (100 psig) range.
 3. 0 - 104 degrees C (220 degrees F) pocket thermometer one-half degree accuracy, 25 mm (one inch) dial, 125 mm (5 inch) long stainless steel stem, plastic case.

2.16 THERMOMETERS

- A. Mercury or organic liquid filled type, red or blue column, clear plastic window, with 150 mm (6 inch) brass stem, straight, fixed or adjustable angle as required for each in reading.
- B. Case: Chrome plated brass or aluminum with enamel finish.
- C. Scale: Not less than 225 mm (9 inches), range as described below, two degree graduations.
- D. Separable Socket (Well): Brass, extension neck type to clear pipe insulation.
- E. Scale ranges:
1. Chilled Water: 0-38 degrees C (32-100 degrees F).
 2. Heating Hot Water: -1 - 116 degrees C (30-240 degrees F).

2.17 FIRESTOPPING MATERIAL

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

PART 3 - EXECUTION

3.1 GENERAL

- A. The drawings show the general arrangement of pipe and equipment but do not show all required fittings and offsets that may be necessary to connect pipes to equipment, fan-coils, coils, etc., and to coordinate with other trades. Provide all necessary fittings, offsets and pipe runs based on field measurements and at no additional cost to the

government. Coordinate with other trades for space available and relative location of HVAC equipment and accessories to be connected on ceiling grid. Pipe location on the drawings shall be altered by contractor where necessary to avoid interferences and clearance difficulties.

- B. Store materials to avoid excessive exposure to weather or foreign materials. Keep inside of piping relatively clean during installation and protect open ends when work is not in progress.
- C. Support piping securely. Refer to PART 3, Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION. Install heat exchangers at height sufficient to provide gravity flow of condensate to the receiver tank and condensate pump.
- D. Install piping generally parallel to walls and column center lines, unless shown otherwise on the drawings. Space piping, including insulation, to provide 25 mm (one inch) minimum clearance between adjacent piping or other surface. Unless shown otherwise, slope drain piping down in the direction of flow not less than 25 mm (one inch) in 12 m (40 feet). Provide eccentric reducers to keep bottom of sloped piping flat.
- E. Locate and orient valves to permit proper operation and access for maintenance of packing, seat and disc. Generally locate valve stems in overhead piping in horizontal position. Provide a union adjacent to one end of all threaded end valves. Control valves usually require reducers to connect to pipe sizes shown on the drawing. Install butterfly valves with the valve open as recommended by the manufacturer to prevent binding of the disc in the seat.
- F. Offset equipment connections to allow valving off for maintenance and repair with minimal removal of piping. Provide flexibility in equipment connections and branch line take-offs with 3-elbow swing joints where noted on the drawings.
- G. Tee water piping runouts or branches into the side of mains or other branches. Avoid bull-head tees, which are two return lines entering opposite ends of a tee and exiting out the common side.
- H. Provide manual or automatic air vent at all piping system high points and drain valves at all low points. Install piping to floor drains from all automatic air vents.
- I. Connect piping to equipment as shown on the drawings. Install components furnished by others such as:

1. Flow elements (orifice unions), control valve bodies, flow switches, pressure taps with valve, and wells for sensors.
- J. Thermometer Wells: In pipes 65 mm (2-1/2 inches) and smaller increase the pipe size to provide free area equal to the upstream pipe area.
- K. Firestopping: Fill openings around uninsulated piping penetrating floors or fire walls, with firestop material. For firestopping insulated piping refer to Section 23 07 11, HVAC INSULATION.
- L. Where copper piping is connected to steel piping, provide dielectric connections.

3.2 PIPE JOINTS

- A. Welded: Beveling, spacing and other details shall conform to ASME B31.1 and AWS B2.1. See Welder's qualification requirements under "Quality Assurance" in Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- B. Screwed: Threads shall conform to ASME B1.20; joint compound shall be applied to male threads only and joints made up so no more than three threads show. Coat exposed threads on steel pipe with joint compound, or red lead paint for corrosion protection.
- C. Mechanical Joint: Pipe grooving shall be in accordance with joint manufacturer's specifications. Lubricate gasket exterior including lips, pipe ends and housing interiors to prevent pinching the gasket during installation. Lubricant shall be as recommended by coupling manufacturer.
- D. 125 Pound Cast Iron Flange (Plain Face): Mating flange shall have raised face, if any, removed to avoid overstressing the cast iron flange.
- E. Solvent Welded Joints: As recommended by the manufacturer.

3.3 EXPANSION JOINTS (BELLOWS AND SLIP TYPE)

- A. Anchors and Guides: Provide type, quantity and spacing as recommended by manufacturer of expansion joint and as shown. A professional engineer shall verify in writing that anchors and guides are properly designed for forces and moments which will be imposed.
- B. Cold Set: Provide setting of joint travel at installation as recommended by the manufacturer for the ambient temperature during the installation.
- C. Preparation for Service: Remove all apparatus provided to restrain joint during shipping or installation. Representative of manufacturer shall visit the site and verify that installation is proper.

- D. Access: Expansion joints must be located in readily accessible space. Locate joints to permit access without removing piping or other devices. Allow clear space to permit replacement of joints and to permit access to devices for inspection of all surfaces and for adding.

3.4 SEISMIC BRACING ABOVEGROUND PIPING

Provide in accordance with Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

3.5 LEAK TESTING ABOVEGROUND PIPING

- A. Inspect all joints and connections for leaks and workmanship and make corrections as necessary, to the satisfaction of the COTR. Tests may be either of those below, or a combination, as approved by the COTR.
- B. An operating test at design pressure, and for hot systems, design maximum temperature.
- C. A hydrostatic test at 1.5 times design pressure. For water systems the design maximum pressure would usually be the static head, or expansion tank maximum pressure, plus pump head. Factory tested equipment (convertors, exchangers, coils, etc.) need not be field tested. Isolate equipment where necessary to avoid excessive pressure on mechanical seals and safety devices.

3.6 FLUSHING AND CLEANING PIPING SYSTEMS

- A. Water Piping: Clean systems as recommended by the VA.
1. Initial flushing: Remove loose dirt, mill scale, metal chips, weld beads, rust, and like deleterious substances without damage to any system component. Provide temporary piping or hose to bypass coils, control valves, exchangers and other factory cleaned equipment unless acceptable means of protection are provided and subsequent inspection of hide-out areas takes place. Isolate or protect clean system components, including pumps and pressure vessels, and remove any component which may be damaged. Open all valves, drains, vents and strainers at all system levels. Remove plugs, caps, spool pieces, and components to facilitate early debris discharge from system. Sectionalize system to obtain debris carrying velocity of 1.8 m/S (6 feet per second), if possible. Connect dead-end supply and return headers as necessary. Flush bottoms of risers. Install temporary strainers where necessary to protect down-stream equipment. Supply and remove flushing water and drainage by various type hose, temporary and permanent piping and Contractor's booster pumps. Flush until clean as approved by the COTR.

2. Cleaning: Using products supplied by the VA. Circulate systems at normal temperature to remove adherent organic soil, hydrocarbons, flux, pipe mill varnish, pipe joint compounds, iron oxide, and like deleterious substances not removed by flushing, without chemical or mechanical damage to any system component. Removal of tightly adherent mill scale is not required. Keep isolated equipment which is "clean" and where dead-end debris accumulation cannot occur. Sectionalize system if possible, to circulate at velocities not less than 1.8 m/S (6 feet per second). Circulate each section for not less than four hours. Blow-down all strainers, or remove and clean as frequently as necessary. Drain and prepare for final flushing.
3. Final Flushing: Return systems to conditions required by initial flushing after all cleaning solution has been displaced by clean make-up. Flush all dead ends and isolated clean equipment. Gently operate all valves to dislodge any debris in valve body by throttling velocity. Flush for not less than one hour.

3.7 OPERATING AND PERFORMANCE TEST AND INSTRUCTION

- A. Refer to PART 3, Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- B. Adjust red set hand on pressure gages to normal working pressure.

- - - E N D - - -

RORSECTION 23 21 23**HYDRONIC PUMPS****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. Hydronic pumps for Heating, Ventilating and Air Conditioning.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- C. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- D. Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- E. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.
- F. Section 23 21 13, HYDRONIC PIPING.
- G. Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC and STEAM GENERATION EQUIPMENT.

1.3 QUALITY ASSURANCE

- A. Refer to Paragraph, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- B. Design Criteria:
1. Pumps design and manufacturer shall conform to Hydraulic Institute Standards.
 2. Pump sizes, capacities, pressures, operating characteristics and efficiency shall be as scheduled.
 3. Head-capacity curves shall slope up to maximum head at shut-off. Curves shall be relatively flat for closed systems. Select pumps near the midrange of the curve, so the design capacity falls to the left of the best efficiency point, to allow a cushion for the usual drift to the right in operation, without approaching the pump curve end point and possible cavitation and unstable operation. Select pumps for open systems so that required net positive suction head (NPSHR) does not exceed the net positive head available (NPSHA).
 4. Pump Driver: Furnish with pump. Size shall be non-overloading at any point on the head-capacity curve, including in a parallel or series pumping installation with one pump in operation.
 5. Provide all pumps with motors, impellers, drive assemblies, bearings, coupling guard and other accessories specified. Statically and dynamically balance all rotating parts.
 6. Furnish each pump and motor with a nameplate giving the manufacturers name, serial number of pump, capacity in GPM and head in feet at

design condition, horsepower, voltage, frequency, speed and full load current and motor efficiency.

7. Test all pumps before shipment. The manufacturer shall certify all pump ratings.

8. After completion of balancing, provide replacement of impellers or trim impellers to provide specified flow at actual pumping head, as installed.

C. Allowable Vibration Tolerance for Pump Units: Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturer's Literature and Data:

1. Pumps and accessories.
2. Motors and drives.
3. Variable speed motor controllers.

C. Manufacturer's installation, maintenance and operating instructions, in accordance with Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

D. Characteristic Curves: Head-capacity, efficiency-capacity, brake horsepower-capacity, and NPSHR-capacity for each pump and for combined pumps in parallel or series service. Identify pump and show fluid pumped, specific gravity, pump speed and curves plotted from zero flow to maximum for the impeller being furnished and at least the maximum diameter impeller that can be used with the casing.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only:

B. American Iron and Steel Institute (AISI):

AISI 1045.....Cold Drawn Carbon Steel Bar, Type 1045

AISI 416.....Type 416 Stainless Steel

C. American National Standards Institute (ANSI):

ANSI B15.1-00(R2008)..... Safety Standard for Mechanical Power
Transmission Apparatus

ANSI B16.1-05.....Cast Iron Pipe Flanges and Flanged Fittings,
Class 25, 125, 250 and 800

D. American Society for Testing and Materials (ASTM):

A48-03 (2008).....Standard Specification for Gray Iron Castings

B62-2009.....Standard Specification for Composition Bronze or
Ounce Metal Castings

E. Maintenance and Operating Manuals in accordance with Section 01 00 00,
General Requirements.

1.6 DEFINITIONS

- A. Capacity: Liters per second (L/s) (Gallons per minute (GPM) of the fluid pumped.
- B. Head: Total dynamic head in kPa (feet) of the fluid pumped.
- C. Flat head-capacity curve: Where the shutoff head is less than 1.16 times the head at the best efficiency point.

1.7 SPARE MATERIALS

- A. Furnish one spare seal and casing gasket for each pump to the COTR.

PART 2 - PRODUCTS

2.1 CENTRIFUGAL PUMPS, BRONZE FITTED

A. General:

1. Provide pumps that will operate continuously without overheating bearings or motors at every condition of operation on the pump curve, or produce noise audible outside the room or space in which installed.
2. Provide pumps of size, type and capacity as indicated, complete with electric motor and drive assembly, unless otherwise indicated. Design pump casings for the indicated working pressure and factory test at 1½ times the designed pressure.
3. Provide pumps of the same type, the product of a single manufacturer, with pump parts of the same size and type interchangeable.
4. General Construction Requirements
 - a. Balance: Rotating parts, statically and dynamically.
 - b. Construction: To permit servicing without breaking piping or motor connections.
 - c. Pump Motors: Provide high efficiency motors, inverter duty for variable speed service. Refer to Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC and STEAM GENERATION EQUIPMENT. Motors shall be Open Drip Proof and operate at 1750 rpm unless noted otherwise.
 - d. Heating pumps shall be suitable for handling water to 225°F.
 - e. Provide coupling guards that meet ANSI B15.1, Section 8 and OSHA requirements.
 - f. Pump Connections: Flanged.
 - g. Pump shall be factory tested.
 - h. Performance: As scheduled on the Contract Drawings.
5. Variable Speed Pumps:

- a. The pumps shall be the type shown on the drawings and specified herein flex coupled to an open drip-proof motor.
 - b. Variable Speed Motor Controllers: Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION paragraph, Variable Speed Motor Controllers. Furnish controllers with pumps and motors.
 - c. Pump operation and speed control shall be as shown on the drawings.
- B. In-Line Type, Base Mounted End Suction:
1. Casing and Bearing Housing: Close-grained cast iron, ASTM A48.
 2. Casing Wear Rings: Bronze.
 3. Suction and Discharge: Plain face flange, 850 kPa (125 psig), ANSI B16.1.
 4. Casing Vent: Manual brass cock at high point.
 5. Casing Drain and Gage Taps: 15 mm (1/2-inch) plugged connections minimum size.
 6. Impeller: Bronze, ASTM B62, enclosed type, keyed to shaft.
 7. Shaft: Steel, AISI Type 1045 or stainless steel.
 8. Shaft Seal: Manufacturer's standard mechanical type to suit pressure and temperature and fluid pumped.
 9. Shaft Sleeve: Bronze or stainless steel.
 10. Motor: Furnish with pump. Refer to Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT.
 11. Base Mounted Pumps:
 - a. Designed for disassembling for service or repair without disturbing the piping or removing the motor.
 - b. Impeller Wear Rings: Bronze.
 - c. Shaft Coupling: Non-lubricated steel flexible type or spacer type with coupling guard, ANSI B15.1, bolted to the baseplate.
 - d. Base: Cast iron or fabricated steel for common mounting to a concrete base.
 12. Provide line sized shut-off valve and suction strainer, maintain manufacturer recommended straight pipe length on pump suction (with blow down valve). Contractor option: Provide suction diffuser as follows:
 - a. Body: Cast iron with steel inlet vanes and combination diffuser-strainer-orifice cylinder with 5 mm (3/16-inch) diameter openings for pump protection. Provide taps for strainer blowdown and gage connections.
 - b. Provide adjustable foot support for suction piping.

- c. Strainer free area: Not less than five times the suction piping.
- d. Provide disposable start-up strainer.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Follow manufacturer's written instructions for pump mounting and start-up. Access/Service space around pumps shall not be less than minimum space recommended by pumps manufacturer.
- B. Provide drains for bases and seals for base mounted pumps, piped to and discharging into floor drains.
- C. Coordinate location of thermometer and pressure gauges as per Section 23 21 13, HYDRONIC PIPING.

3.2 START-UP

- A. Verify that the piping system has been flushed, cleaned and filled.
- B. Lubricate pumps before start-up.
- C. Prime the pump, vent all air from the casing and verify that the rotation is correct. To avoid damage to mechanical seals, never start or run the pump in dry condition.
- D. Verify that correct size heaters-motor over-load devices are installed for each pump controller unit.
- E. Field modifications to the bearings and or impeller (including trimming) are not permitted. If the pump does not meet the specified vibration tolerance send the pump back to the manufacturer for a replacement pump. All modifications to the pump shall be performed at the factory.
- F. Ensure the disposable strainer is free of debris prior to testing and balancing of the hydronic system.
- G. After several days of operation, replace the disposable start-up strainer with a regular strainer in the suction diffuser.

- - - E N D - - -

SECTION 23 22 13
STEAM AND CONDENSATE HEATING PIPING

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Steam, condensate and vent piping inside buildings.

1.2 RELATED WORK

- A. Seismic restraints for piping: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- B. General mechanical requirements and items, which are common to more than one section of Division 23: Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.
- C. Piping insulation: Section 23 07 11, HVAC INSULATION.
- D. Heating Coils and Humidifiers: Section 23 74 13, PACKAGED OUTDOOR CENTRAL-STATION AIR-HANDLING UNITS and SECTION 23 31 00, HVAC DUCTS AND CASING.
- E. Heating coils: Section 23 82 16, AIR COILS.
- F. Temperature and pressure sensors and valve operators: Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

1.3 QUALITY ASSURANCE

- A. Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION, which includes welding qualifications.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
1. Pipe and equipment supports. Submit calculations for variable spring and constant support hangers.
 2. Pipe and tubing, with specification, class or type, and schedule.
 3. Pipe fittings, including miscellaneous adapters and special fittings.
 4. Flanges, gaskets and bolting.
 5. Valves of all types.
 6. Strainers.
 7. Pipe alignment guides.
 8. Expansion joints.
 9. Expansion compensators.
 10. Flexible ball joints: Catalog sheets, performance charts, schematic drawings, specifications and installation instructions.
 11. All specified steam system components.
 12. Gages.

13. Thermometers and test wells.
14. Seismic bracing details for piping.
- C. Manufacturer's certified data report, Form No. U-1, for ASME pressure vessels:
 1. Heat Exchangers (Steam-to-Hot Water).
- D. Coordination Drawings: Refer to Article, SUBMITTALS of Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.
- E. As-Built Piping Diagrams: Provide drawing as follows for steam and steam condensate piping and other central plant equipment.
 1. One wall-mounted stick file for prints. Mount stick file in the chiller plant or adjacent control room along with control diagram stick file.
 2. One set of reproducible drawings.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers/American National Standards Institute (ASME/ANSI):
 - B1.20.1-83(R2006).....Pipe Threads, General Purpose (Inch)
 - B16.4-2006.....Gray Iron Threaded Fittings
- C. American Society of Mechanical Engineers (ASME):
 - B16.1-2005.....Gray Iron Pipe Flanges and Flanged Fittings
 - B16.3-2006.....Malleable Iron Threaded Fittings
 - B16.9-2007.....Factory-Made Wrought Buttwelding Fittings
 - B16.11-2005.....Forged Fittings, Socket-Welding and Threaded
 - B16.14-91.....Ferrous Pipe Plugs, Bushings, and Locknuts with
Pipe Threads
 - B16.22-2001.....Wrought Copper and Copper Alloy Solder-Joint
Pressure Fittings
 - B16.23-2002.....Cast Copper Alloy Solder Joint Drainage Fittings
 - B16.24-2006.....Cast Copper Alloy Pipe Flanges and Flanged
Fittings, Class 150, 300, 400, 600, 900, 1500
and 2500
 - B16.39-98.....Malleable Iron Threaded Pipe Unions, Classes
150, 250, and 300
 - B31.1-2007.....Power Piping
 - B31.9-2008.....Building Services Piping
 - B40.100-2005.....Pressure Gauges and Gauge Attachments

Boiler and Pressure Vessel Code: SEC VIII D1-2001, Pressure Vessels,
Division 1

D. American Society for Testing and Materials (ASTM):

A47-99.....Ferritic Malleable Iron Castings
A53-2007.....Pipe, Steel, Black and Hot-Dipped, Zinc-Coated,
Welded and Seamless
A106-2008.....Seamless Carbon Steel Pipe for High-Temperature
Service
A126-2004.....Standard Specification for Gray Iron Castings
for Valves, Flanges, and Pipe Fittings
A181-2006.....Carbon Steel Forgings, for General-Purpose
Piping
A183-2003 Carbon Steel Track Bolts and Nuts
A216-2008 Standard Specification for Steel Castings,
Carbon, Suitable for Fusion Welding, for High
Temperature Service
A285-01 Pressure Vessel Plates, Carbon Steel, Low-and-
Intermediate-Tensile Strength
A307-2007 Carbon Steel Bolts and Studs, 60,000 PSI Tensile
Strength
A516-2006 Pressure Vessel Plates, Carbon Steel, for
Moderate-and- Lower Temperature Service
A536-84(2004)e1 Standard Specification for Ductile Iron Castings
B32-2008 Solder Metal
B61-2008 Steam or Valve Bronze Castings
B62-2009 Composition Bronze or Ounce Metal Castings
B88-2003 Seamless Copper Water Tube
F439-06 Socket-Type Chlorinated Poly (Vinyl Chloride)
(CPVC) Plastic Pipe Fittings, Schedule 80
F441-02(2008) Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic
Pipe, Schedules 40 and 80

E. American Welding Society (AWS):

A5.8-2004.....Filler Metals for Brazing and Braze Welding
B2.1-00.....Welding Procedure and Performance Qualifications

F. Manufacturers Standardization Society (MSS) of the Valve and Fitting
Industry, Inc.:

SP-67-95.....Butterfly Valves
SP-70-98.....Cast Iron Gate Valves, Flanged and Threaded Ends
SP-71-97.....Gray Iron Swing Check Valves, Flanged and
Threaded Ends

SP-72-99.....Ball Valves with Flanged or Butt-Welding Ends
for General Service

SP-78-98.....Cast Iron Plug Valves, Flanged and Threaded Ends

SP-80-97.....Bronze Gate, Globe, Angle and Check Valves

SP-85-94.....Cast Iron Globe and Angle Valves, Flanged and
Threaded Ends

G. Military Specifications (Mil. Spec.):

MIL-S-901D-1989.....Shock Tests, H.I. (High Impact) Shipboard
Machinery, Equipment, and Systems

H. National Board of Boiler and Pressure Vessel Inspectors (NB): Relieving
Capacities of Safety Valves and Relief Valves

I. Tubular Exchanger Manufacturers Association: TEMA 18th Edition, 2000

PART 2 - PRODUCTS

2.1 PIPE AND EQUIPMENT SUPPORTS, PIPE SLEEVES, AND WALL AND CEILING PLATES

A. Provide in accordance with Section 23 05 11, COMMON WORK RESULTS FOR
HVAC AND STEAM GENERATION.

2.2 PIPE AND TUBING

A. Steam Piping: Steel, ASTM A53, Grade B, seamless or ERW; A106 Grade B,
Seamless; Schedule 40.

B. Steam Condensate and Pumped Condensate Piping:

1. Concealed above ceiling, in wall or chase: Copper water tube ASTM
B88, Type K, hard drawn.

2. All other locations: Copper water tube ASTM B88, Type K, hard drawn;
or steel, ASTM A53, Grade B, Seamless or ERW, or A106 Grade B
Seamless, Schedule 80.

C. Vent Piping: Steel, ASTM A53, Grade B, seamless or ERW; A106 Grade B,
Seamless; Schedule 40, galvanized.

2.3 FITTINGS FOR STEEL PIPE

A. 50 mm (2 inches) and Smaller: Screwed or welded.

1. Butt welding: ASME B16.9 with same wall thickness as connecting
piping.

2. Forged steel, socket welding or threaded: ASME B16.11.

3. Screwed: 150 pound malleable iron, ASME B16.3. 125 pound cast iron,
ASME B16.4, may be used in lieu of malleable iron, except for steam
and steam condensate piping. Provide 300 pound malleable iron, ASME
B16.3 for steam and steam condensate piping. Cast iron fittings or
piping is not acceptable for steam and steam condensate piping.
Bushing reduction of a single pipe size, or use of close nipples, is
not acceptable.

4. Unions: ASME B16.39.

5. Steam line drip station and strainer quick-couple blowdown hose connection: Straight through, plug and socket, screw or cam locking type for 15 mm (1/2 inch) ID hose. No integral shut-off is required.
- B. 65 mm (2-1/2 inches) and Larger: Welded or flanged joints.
 1. Butt welding fittings: ASME B16.9 with same wall thickness as connecting piping. Elbows shall be long radius type, unless otherwise noted.
 2. Welding flanges and bolting: ASME B16.5:
 - a. Steam service: Weld neck or slip-on, raised face, with non-asbestos gasket. Non-asbestos gasket shall either be stainless steel spiral wound strip with flexible graphite filler or compressed inorganic fiber with nitrile binder rated for saturated and superheated steam service 750 degrees F and 1500 psi.
 - b. Flange bolting: Carbon steel machine bolts or studs and nuts, ASTM A307, Grade B.
- C. Welded Branch and Tap Connections: Forged steel weldolets, or branchlets and threadolets may be used for branch connections up to one pipe size smaller than the main. Forged steel half-couplings, ASME B16.11 may be used for drain, vent and gage connections.

2.4 FITTINGS FOR COPPER TUBING

- A. Solder Joint:
 1. Joints shall be made up in accordance with recommended practices of the materials applied. Apply 95/5 tin and antimony on all copper piping.
- B. Bronze Flanges and Flanged Fittings: ASME B16.24.
- C. Fittings: ANSI/ASME B16.18 cast copper or ANSI/ASME B16.22 solder wrought copper.

2.5 DIELECTRIC FITTINGS

- A. Provide where copper tubing and ferrous metal pipe are joined.
- B. 50 mm (2 inches) and Smaller: Threaded dielectric union, ASME B16.39.
- C. 65 mm (2 1/2 inches) and Larger: Flange union with dielectric gasket and bolt sleeves, ASME B16.42.
- D. Temperature Rating, 121 degrees C (250 degrees F) for steam condensate and as required for steam service.
- E. Contractor's option: On pipe sizes 2" and smaller, screwed end brass gate valves or dielectric nipples may be used in lieu of dielectric unions.

2.6 SCREWED JOINTS

- A. Pipe Thread: ANSI B1.20.

- B. Lubricant or Sealant: Oil and graphite or other compound approved for the intended service.

2.7 VALVES

- A. Asbestos packing is not acceptable.
- B. All valves of the same type shall be products of a single manufacturer.
- C. Provide chain operators for valves 150 mm (6 inches) and larger when the centerline is located 2100 mm (7 feet) or more above the floor or operating platform.
- D. Shut-Off Valves

1. Gate Valves:

- a. 50 mm (2 inches) and smaller: MSS-SP80, Bronze, 1034 kPa (150 lb.), wedge disc, rising stem, union bonnet.
- b. 65 mm (2 1/2 inches) and larger: Flanged, outside screw and yoke.
 - 1) High pressure steam 413 kPa (60 psig) and above nominal MPS system): Cast steel body, ASTM A216 grade WCB, 1034 kPa (150 psig) at 260 degrees C (500 degrees F), 11-1/2 to 13 percent chrome stainless steel solid disc and seats. Provide 25 mm (1 inch) factory installed bypass with globe valve on valves 100 mm (4 inches) and larger.
 - 2) All other services: MSS-SP 70, iron body, bronze mounted, 861 kPa (125 psig) wedge disc.

E. Globe and Angle Valves:

1. Globe Valves:

- a. 50 mm (2 inches) and smaller: MSS-SP 80, bronze, 1034 kPa (150 lb.) Globe valves shall be union bonnet with metal plug type disc.
- b. 65 mm (2 1/2 inches) and larger:
 - 1) Globe valves for high pressure steam 413 kPa (60 psig) and above nominal MPS system): Cast steel body, ASTM A216 grade WCB, flanged, OS&Y, 1034 kPa (150 psig) at 260 degrees C (500 degrees F), 11-1/2 to 13 percent chrome stainless steel disc and renewable seat rings.
 - 2) All other services: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS-SP-85 for globe valves.

2. Angle Valves

- a. 50 mm (2 inches) and smaller: MSS-SP 80, bronze, 1034 kPa (150 lb.) Angle valves shall be union bonnet with metal plug type disc.
- b. 65 mm (2 1/2 inches) and larger:
 - 1) Angle valves for high pressure steam 413 kPa (60 psig) and above nominal MPS system): Cast steel body, ASTM A216 grade WCB, flanged, OS&Y, 1034 kPa (150 psig) at 260 degrees C (500

degrees F), 11-1/2 to 13 percent chrome stainless steel disc and renewable seat rings.

- 2) All other services: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS-SP-85 for angle valves.

F. Swing Check Valves

1. 50 mm (2 inches) and smaller: MSS-SP 80, bronze, 1034 kPa (150 psig), 45 degree swing disc.
2. 65 mm (2-1/2 inches) and Larger:
 - a Check valves for high pressure steam 413 kPa (60 psig) and above nominal MPS system: Cast steel body, ASTM A216 grade WCB, flanged, OS&Y, 1034 kPa (150 psig) at 260 degrees C (500 degrees F), 11-1/2 to 13 percent chrome stainless steel disc and renewable seat rings.
 - b. All other services: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS-SP-71 for check valves.

2.8 STRAINERS

- A. Y Type. Tee type is acceptable for gravity flow and pumped steam condensate service.
- B. High Pressure Steam: Rated 1034 kPa (150 psig) saturated steam.
 1. 50 mm (2 inches) and smaller: Iron, ASTM A116 Grade B, or bronze, ASTM B-62 body with screwed connections (250 psig).
 2. 65 mm (2-1/2 inches) and larger: Flanged cast steel or 1723 kPa (250 psig) cast iron.
- C. All Other Services: Rated 861 kPa (125 psig) saturated steam.
 1. 50 mm (2 inches) and smaller: Cast iron or bronze.
 2. 65 mm (2-1/2 inches) and larger: Flanged, iron body.
- D. Screens: Bronze, monel metal or 18-8 stainless steel, free area not less than 2-1/2 times pipe area, with perforations as follows:
 1. 75 mm (3 inches) and smaller: 20 mesh for steam and 1.1 mm (0.045 inch) diameter perforations for liquids.
 2. 100 mm (4 inches) and larger: 1.1 mm (0.045) inch diameter perforations for steam and 3.2 mm (0.125 inch) diameter perforations for liquids.

2.9 PIPE ALIGNMENT

- A. Guides: Provide factory-built guides along the pipe line to permit axial movement only and to restrain lateral and angular movement. Guides must be designed to withstand a minimum of 15 percent of the axial force which will be imposed on the expansion joints and anchors. Field-built guides may be used if detailed on the contract drawings.

2.10 EXPANSION JOINTS

- A. Factory built devices, inserted in the pipe lines, designed to absorb axial cyclical pipe movement which results from thermal expansion and contraction. This includes factory-built or field-fabricated guides located along the pipe lines to restrain lateral pipe motion and direct the axial pipe movement into the expansion joints.
- B. Minimum Service Requirements:
 - 1. Pressure Containment:
 - a. Steam Service 35-200 kPa (5-30 psig): Rated 345 kPa (50 psig) at 148 degrees C (298 degrees F).
 - b. Steam Service 214-850 kPa (31-125 psig): Rated 1025 kPa (150 psig) at 186 degrees C (366 degrees F).
 - c. Steam Service 869-1025 kPa (126-150 psig): Rated 1375 kPa (200 psig) at 194 degrees C (382 degrees F).
 - d. Condensate Service: Rated 690 kPa (100 psig) at 154 degrees C (310 degrees F).
 - 2. Number of Full Reverse Cycles without failure: Minimum 1000.
 - 3. Movement: As shown on drawings plus recommended safety factor of manufacturer.
- C. Manufacturing Quality Assurance: Conform to Expansion Joints Manufacturers Association Standards.
- D. Bellows - Internally Pressurized Type:
 - 1. Multiple corrugations of Type 304 or Type A240-321 stainless steel.
 - 2. Internal stainless steel sleeve entire length of bellows.
 - 3. External cast iron equalizing rings for services exceeding 340 kPa (50 psig).
 - 4. Welded ends.
 - 5. Design shall conform to standards of EJMA and ASME B31.1.
 - 6. External tie rods designed to withstand pressure thrust force upon anchor failure if one or both anchors for the joint are at change in direction of pipeline.
 - 7. Integral external cover.
- E. Bellows - Externally Pressurized Type:
 - 1. Multiple corrugations of Type 304 stainless steel.
 - 2. Internal and external guide integral with joint.
 - 3. Design for external pressurization of bellows to eliminate squirm.
 - 4. Welded ends.
 - 5. Conform to the standards of EJMA and ASME B31.1.
 - 6. Threaded connection at bottom, 25 mm (one inch) minimum, for drain or drip point.

7. Integral external cover and internal sleeve.

F. Expansion Joint Identification: Provide stamped brass or stainless steel nameplate on each expansion joint listing the manufacturer, the allowable movement, flow direction, design pressure and temperature, date of manufacture, and identifying the expansion joint by the identification number on the contract drawings.

2.11 FLEXIBLE BALL JOINTS

A. Design and Fabrication: One piece component construction, fabricated from steel with welded ends, designed for a working steam pressure of 1720 kPa (250 psig) and a temperature of 232 degrees C (450 degrees F). Each joint shall provide for 360 degrees rotation in addition to a minimum angular flexible movement of 30 degrees for sizes 6 mm (1/4 inch) to 150 mm (6 inch) inclusive, and 15 degrees for sizes 65 mm (2-1/2 inches) to 750 mm (30 inches). Joints through 350 mm (14 inches) shall have forged pressure retaining members; while size 400 mm (16 inches) through 760 mm (30 inches) shall be of one piece construction.

B. Material:

1. Cast or forged steel pressure containing parts and bolting in accordance with Section II of the ASME Boiler Code or ASME B31.1. Retainer may be ductile iron ASTM A536, Grade 65-45-12, or ASME Section II SA 515, Grade 70.
2. Gaskets: Steam pressure molded composition design for a temperature range of from minus 10 degrees C (50 degrees F) to plus 274 degrees C (525 degrees F).

C. Certificates: Submit qualifications of ball joints in accordance with the following test data:

1. Low pressure leakage test: 41 kPa (6psig) saturated steam for 60 days.
2. Flex cycling: 800 Flex cycles at 3445 kPa (500 psig) saturated steam.
3. Thermal cycling: 100 saturated steam pressure cycles from atmospheric pressure to operating pressure and back to atmospheric pressure.
4. Environmental shock tests: Forward certificate from a recognized test laboratory, that ball joints of the type submitted has passed shock testing in accordance with Mil. Spec MIL-S-901.
5. Vibration: 170 hours on each of three mutually perpendicular axis at 25 to 125 Hz; 1.3 mm to 2.5 mm (0.05 inch to 0.1 inch) double amplitude on a single ball joint and 3 ball joint off set.

2.12 STEAM SYSTEM COMPONENTS

- A. Heat Exchanger (Steam to Hot Water): Shell and tube type, U-bend removable tube bundle, steam in shell, water in tubes, equipped with support cradles.
 - 1. Maximum tube velocity: 2.3 m/s (7.5 feet per second).
 - 2. Tube fouling factor: TEMA Standards, but not less than $0.00018 \text{ m}^2\text{K/W}$ ($0.001 \text{ ft}^2\text{hrF/Btu}$).
 - 3. Materials:
 - a. Shell: Steel.
 - b. Tube sheet and tube supports: Steel or brass.
 - c. Tubes: 20 mm (3/4 inch) OD copper.
 - d. Head or bonnet: Cast iron or steel.
 - 4. Construction: In accordance with ASME Pressure Vessel Code for 861 kPa (125 psig) working pressure for shell and tubes. Provide manufacturer's certified data report, Form No. U-1.
- B. Optional Heat Transfer Package: In lieu of field erected individual components, the Contractor may provide a factory or shop assembled package of heat exchangers, pumps, and other components supported on a welded steel frame.
- C. Steam Pressure Reducing Valves in PRV Stations:
 - 1. Type: Single-seated, diaphragm operated, spring-loaded, external or internal steam pilot-controlled, normally closed, adjustable set pressure. Pilot shall sense controlled pressure downstream of main valve.
 - 2. Service: Provide controlled reduced pressure to steam piping systems.
 - 3. Pressure control shall be smooth and continuous with maximum drop of 10 percent. Maximum flow capability of each valve shall not exceed capacity of downstream safety valve(s).
 - 4. Main valve and pilot valve shall have replaceable valve plug and seat of stainless steel, monel, or similar durable material.
 - a. Pressure rating for high pressure steam: Not less than 1034 kPa (150 psig) saturated steam.
 - b. Connections: Flanged for valves 65 mm (2-1/2 inches) and larger; flanged or threaded ends for smaller valves.
 - 5. Select pressure reducing valves to develop less than 85 dbA at 1500 mm (5 feet) elevation above adjacent floor, and 1500 mm (5 feet) distance in any direction. Inlet and outlet piping for steam pressure reducing valves shall be Schedule 80 minimum for required distance to achieve required levels or sound attenuators shall be applied.

- D. Safety Valves and Accessories: Comply with ASME Boiler and Pressure Vessel Code, Section VIII. Capacities shall be certified by National Board of Boiler and Pressure Vessel Inspectors, maximum accumulation 10 percent. Provide lifting lever. Provide drip pan elbow where shown.
- E. Steam PRV for Individual Equipment: Cast iron or bronze body, screwed or flanged ends, rated 861 kPa (125 psig) working pressure. Single-seated, diaphragm operated, spring loaded, adjustable range, all parts renewable.
- F. Steam Trap: Each type of trap shall be the product of a single manufacturer. Provide trap sets at all low points and at 61 m (200 feet) intervals on the horizontal main lines.
1. Floats and linkages shall provide sufficient force to open trap valve over full operating pressure range available to the system. Unless otherwise indicated on the drawings, traps shall be sized for capacities indicated at minimum pressure drop as follows:
 - a. For equipment with modulating control valve: 1.7 kPa (1/4 psig), based on a condensate leg of 300 mm (12 inches) at the trap inlet and gravity flow to the receiver.
 - b. For main line drip trap sets and other trap sets at steam pressure: Up to 70 percent of design differential pressure. Condensate may be lifted to the return line.
 2. Trap bodies: Bronze, cast iron, or semi-steel, constructed to permit ease of removal and servicing working parts without disturbing connecting piping. For systems without relief valve traps shall be 5. Mechanism: Brass, stainless steel or corrosion resistant alloy. rated for the pressure upstream of the PRV supplying the system.
 3. Balanced pressure thermostatic elements: Phosphor bronze, stainless steel or monel metal.
 4. Valves and seats: Suitable hardened corrosion resistant alloy.
 6. Floats: Stainless steel.
 7. Inverted bucket traps: Provide bi-metallic thermostatic element for rapid release of non-condensables.
- G. Thermostatic Air Vent (Steam): Brass or iron body, balanced pressure bellows, stainless steel (renewable) valve and seat, rated 861 kPa (125 psig) working pressure, 20 mm (3/4 inch) screwed connections. Air vents shall be balanced pressure type that responds to steam pressure-temperature curve and vents air at any pressure.
- H. Steam Humidifiers:
1. Steam separator type that discharges steam into the air stream through a steam jacketed distribution manifold or dispersion tube.

- Humidifiers shall be complete with Y-type steam supply strainer; modulating, normally closed steam control valve; normally closed condensate temperature switch; and manufacturer's standard steam trap.
2. Steam separator: Stainless steel or cast iron.
 3. Distribution manifold: Stainless steel, composed of dispersion pipe and surrounding steam jacket, manifold shall span the width of duct or air handler, and shall be multiple manifold type under any of the following conditions:
 - a. Duct section height exceeds 900 mm (36 inches).
 - b. Duct air velocity exceeds 5.1 m/s (1000 feet per minute).
 - b. If within 900 mm (3 feet) upstream of fan, damper or pre-filter.
 - d. If within 3000 mm (10 feet) upstream of after-filter.
- I. Unfired clean steam generator
1. Provide a packaged factory assembled, pre-piped unfired steam generator consisting of stainless steel shell, stainless steel tube coil, stainless steel steam piping, valves and controls All stainless steel piping shall be type //304//316 factory-fabricated and provided as a part of the complete package.
 2. Shell: Stainless steel ASME code construction with flanged piping connections. 345 kPa (50 psig) maximum WSP.
 3. Tubes: Copper tubes suitable for 862 kPa (125 psig) working pressure.
 4. Design: Heated fluid in shell and heating fluid (higher pressure steam) in tubes.
 5. Each steam generator shall be furnished with the following accessories:
 - a. Resilient insulation.
 - b. Pilot operated modulating control valve with pressure controller.
 - c. Control pilot to maintain constant steam output.
 - d. Pressure relief valve.
 - e. Vessel and tube side pressure gages.
 - f. Liquid level controller with brass feed water solenoid valve, in check valve and strainer.
 - g. Over-pressure limit system with auto-reset.
 - h. Factory packaging.
 - i. Dual F&T condensate traps.
 - j. Manual blow down valve.
 - k. //Time based//TDS based// automatic blow down
 - l. Low water cut-off and high pressure cut-off.
 - m. Fully wired control box.

- n. Automatic drain solenoid valve.
- 6. Provide solid state control module with LED backlit LCD display and LED pilot lights to indicate on-off, high pressure, low pressure, low water and water feed. Control module shall allow the local adjustment of pressure limits on display screen. Control module shall have alarm light and alarm horn with built in alarm silence relay. Control module shall be supplied with dry contact closure outputs to indicate to building automation controls (BAC) the occurrence of power on, high pressure, low pressure, low water and water feed. The control module shall allow the BAC to turn the unfired steam generator on or off through a remote relay suitable for 24 VAC, 1 amp. The control module shall allow the BAC to remotely monitor the operating pressure. Control module shall be supplied with an on-off switch and shall be mounted in a NEMA 1 panel. All solenoids and limits shall be 24 VAC.
- K. Steam Gun Set: Furnish for ready coupling to building steam and cold water and designed for rinsing equipment (such as carts and racks) with hot or cold water, cleaning such articles with detergent-laden hot water or steam, or alternately sanitizing the articles with only live steam.
 - 1. Gun: Fit gun for finger-tip release of steam. Design so siphoning action will automatically mix detergent with gun effluent. Equip gun with hardwood front and rear handgrips. Include a 25 mm (15/16-inch) diameter, double tube butyl hose reinforced with braid and designed for 1034 kPa (150 psig) pressure. Hose shall be 3600 mm (12 feet) long.
 - 2. Detergent Tank: Furnish 9.5 L (2-1/2 gallon) polyethylene or fiberglass storage tank and fit for wall mounting. Also provide 13 mm (1/2 inch) diameter neoprene double wall detergent hose of the same length as steam hose. Fit hose-to-tank connection with strainer. Fit other end of hose with valve to regulate amount of detergent to be mixed with steam.
 - 3. Steam/Water Selector: Furnish manifold for wall mounting; design manifold to deliver only steam or water, or steam and water mix to gun. Construct mounting panel of stainless steel. Valves and piping located in panel shall be brass.
 - 4. Accessories: Provide one pair of protective gloves and three 50 mm (2 inch) diameter brushes, one nylon and two stainless-steel.
- L. Steam Hose and Accessories: Hose shall be sufficiently flexible to be placed in a 100 mm (4 feet) diameter coil.

1. Furnish and install in the mechanical room housing each PRV station a 7500 mm (25 feet) length of 13 mm (1/2 inch) ID steam hose, rated 861 kPa (125 psig) and a hose rack. In one end of the hose install a quick-couple device, suitable for steam service, to match corresponding devices in the PRV blowdown connections.
2. Hose storage rack: Wall-mounted, steel, iron or aluminum, semi-circular shape, with capacity to store 7500 mm (25 feet) of 13 mm (1/2 inch) ID steam hose.

M. Steam Flow Meter/Recorder: Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

2.13 GAGES, PRESSURE AND COMPOUND

- A. ASME B40.1, Accuracy Grade 1A, (pressure, vacuum, or compound), initial mid-scale accuracy 1 percent of scale (Qualify grade), metal or phenolic case, 115 mm (4-1/2 inches) in diameter, 6 mm (1/4 inch) NPT bottom connection, white dial with black graduations and pointer, clear glass or acrylic plastic window, suitable for board mounting. Provide red "set hand" to indicate normal working pressure.
- B. Provide brass, lever handle union cock. Provide brass/bronze pressure snubber for gages in water service. Provide brass pigtail syphon for steam gages.
- C. Range of Gages: For services not listed provide range equal to at least 130 percent of normal operating range:

Low pressure steam and steam condensate to 103 kPa(15 psig)	0 to 207 kPa (30 psig).
Medium pressure steam and steam condensate nominal 413 kPa (60 psig)	0 to 689 kPa (100 psig).
High pressure steam and steam condensate nominal 620 kPa to 861 kPa (90 to 125 psig)	0 to 1378 kPa (200 psig).
Pumped condensate, steam condensate, gravity or vacuum (30" HG to 30 psig)	0 to 415 kPa (60 psig)

2.14 PRESSURE/TEMPERATURE TEST PROVISIONS

- A. Provide one each of the following test items to the COTR:
 1. 6 mm (1/4 inch) FPT by 3 mm (1/8 inch) diameter stainless steel pressure gage adapter probe for extra long test plug. PETE'S 500 XL is an example.
 2. 90 mm (3-1/2 inch) diameter, one percent accuracy, compound gage, 762 mm (30 inches) Hg to 689 kPa (100 psig) range.

3. 0 - 104 degrees C (32-220 degrees F) pocket thermometer one-half degree accuracy, 25 mm (one inch) dial, 125 mm (5 inch) long stainless steel stem, plastic case.

2.15 FIRESTOPPING MATERIAL

- A. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

PART 3 - EXECUTION

3.1 GENERAL

- A. The drawings show the general arrangement of pipe and equipment but do not show all required fittings and offsets that may be necessary to connect pipes to equipment, fan-coils, coils, etc., and to coordinate with other trades. Provide all necessary fittings, offsets and pipe runs based on field measurements and at no additional cost to the government. Coordinate with other trades for space available and relative location of HVAC equipment and accessories to be connected on ceiling grid. Pipe location on the drawings shall be altered by contractor where necessary to avoid interferences and clearance difficulties.
- B. Store materials to avoid excessive exposure to weather or foreign materials. Keep inside of piping relatively clean during installation and protect open ends when work is not in progress.
- C. Support piping securely. Refer to PART 3, Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION. Install convertors and other heat exchangers at height sufficient to provide gravity flow of condensate to the receiver and condensate pump.
- D. Install piping generally parallel to walls and column center lines, unless shown otherwise on the drawings. Space piping, including insulation, to provide 25 mm (one inch) minimum clearance between adjacent piping or other surface. Unless shown otherwise, slope steam, condensate and drain piping down in the direction of flow not less than 25 mm (one inch) in 12 m (40 feet). Provide eccentric reducers to keep bottom of sloped piping flat.
- E. Locate and orient valves to permit proper operation and access for maintenance of packing, seat and disc. Generally locate valve stems in overhead piping in horizontal position. Provide a union adjacent to one end of all threaded end valves. Control valves usually require reducers to connect to pipe sizes shown on the drawing. Install butterfly valves with the valve open as recommended by the manufacturer to prevent binding of the disc in the seat.

- F. Offset equipment connections to allow valving off for maintenance and repair with minimal removal of piping. Provide flexibility in equipment connections and branch line take-offs with 3-elbow swing joints where noted on the drawings.
- G. Tee water piping runouts or branches into the side of mains or other branches. Avoid bull-head tees, which are two return lines entering opposite ends of a tee and exiting out the common side.
- H. Connect piping to equipment as shown on the drawings. Install components furnished by others such as:
 - 1. Flow elements (orifice unions), control valve bodies, flow switches, pressure taps with valve, and wells for sensors.
- I. Firestopping: Fill openings around uninsulated piping penetrating floors or fire walls, with firestop material. For firestopping insulated piping refer to Section 23 07 11, HVAC INSULATION.
- J. Where copper piping is connected to steel piping, provide dielectric connections.
- K. Pipe vents to the exterior. Where a combined vent is provided, the cross sectional area of the combined vent shall be equal to sum of individual vent areas. Slope vent piping one inch in 40 feet (0.25 percent) in direction of flow. Provide a drip trap elbow on relief valve outlets if the vent rises to prevent backpressure. Terminate vent minimum 0.3 M (12 inches) above the roof or through the wall minimum 2.5 M (8 feet) above grade with down turned elbow.

3.2 PIPE JOINTS

- A. Welded: Beveling, spacing and other details shall conform to ASME B31.1 and AWS B2.1. See Welder's qualification requirements under "Quality Assurance" in Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- B. Screwed: Threads shall conform to ASME B1.20; joint compound shall be applied to male threads only and joints made up so no more than three threads show. Coat exposed threads on steel pipe with joint compound, or red lead paint for corrosion protection.
- C. 125 Pound Cast Iron Flange (Plain Face): Mating flange shall have raised face, if any, removed to avoid overstressing the cast iron flange.

3.3 EXPANSION JOINTS (BELLOWS AND SLIP TYPE)

- A. Anchors and Guides: Provide type, quantity and spacing as recommended by manufacturer of expansion joint and as shown. A professional engineer shall verify in writing that anchors and guides are properly designed for forces and moments which will be imposed.

- B. Cold Set: Provide setting of joint travel at installation as recommended by the manufacturer for the ambient temperature during the installation.
- C. Preparation for Service: Remove all apparatus provided to restrain joint during shipping or installation. Representative of manufacturer shall visit the site and verify that installation is proper.
- D. Access: Expansion joints must be located in readily accessible space. Locate joints to permit access without removing piping or other devices. Allow clear space to permit replacement of joints and to permit access to devices for inspection of all surfaces and for adding packing.

3.4 STEAM TRAP PIPING

- A. Install to permit gravity flow to the trap. Provide gravity flow (avoid lifting condensate) from the trap where modulating control valves are used. Support traps weighing over 11 kg (25 pounds) independently of connecting piping.

3.5 SEISMIC BRACING

- A. Provide in accordance with Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

3.6 LEAK TESTING

- A. Inspect all joints and connections for leaks and workmanship and make corrections as necessary, to the satisfaction of the COTR in accordance with the specified requirements. Testing shall be performed in accordance with the specification requirements.
- B. An operating test at design pressure, and for hot systems, design maximum temperature.
- C. A hydrostatic test at 1.5 times design pressure. For water systems the design maximum pressure would usually be the static head, or expansion tank maximum pressure, plus pump head. Factory tested equipment (convertors, exchangers, coils, etc.) need not be field tested. Avoid excessive pressure on mechanical seals and safety devices.

3.7 FLUSHING AND CLEANING PIPING SYSTEMS

- A. Steam, Condensate and Vent Piping: No flushing or chemical cleaning required. Accomplish cleaning by pulling all strainer screens and cleaning all scale/dirt legs during start-up operation.

3.8 OPERATING AND PERFORMANCE TEST AND INSTRUCTION

- A. Refer to PART 3, Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- B. Adjust red set hand on pressure gages to normal working pressure.

- - - E N D - - -

**SECTION 23 31 00
HVAC DUCTS AND CASINGS**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Ductwork and accessories for HVAC including the following:
 - 1. Supply air, return air, outside air, exhaust, make-up air, and relief systems.
 - 2. Exhaust duct with HEPA filters for Negative Pressure Isolation Room.
 - 3. Exhaust duct for "wet exhaust" systems.
- B. Definitions:
 - 1. SMACNA Standards as used in this specification means the HVAC Duct Construction Standards, Metal and Flexible.
 - 2. Seal or Sealing: Use of liquid or mastic sealant, with or without compatible tape overlay, or gasketing of flanged joints, to keep air leakage at duct joints, seams and connections to an acceptable minimum.
 - 3. Duct Pressure Classification: SMACNA HVAC Duct Construction Standards, Metal and Flexible.
 - 4. Exposed Duct: Exposed to view in a finished room, exposed to weather.

1.2 RELATED WORK

- A. Fire Stopping Material: Section 07 84 00, FIRESTOPPING.
- B. Outdoor and Exhaust Louvers: Section 08 90 00, LOUVERS and VENTS.
- C. Seismic Reinforcing: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- D. General Mechanical Requirements: Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- E. Noise Level Requirements: Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.
- F. Duct Insulation: Section 23 07 11, HVAC INSULATION
- G. Plumbing Connections: Section 22 11 00, FACILITY WATER DISTRIBUTION
- H. Air Flow Control Valves and Terminal Units: Section 23 36 00, AIR TERMINAL UNITS.
- I. Duct Mounted Coils: Section 23 82 16, AIR COILS.
- J. Return Air and Exhaust Air Fans: Section 23 34 00, HVAC FANS.
- K. Air Filters and Filters' Efficiencies: Section 23 40 00, HVAC AIR CLEANING DEVICES.
- L. Duct Mounted Instrumentation: Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

M. Testing and Balancing of Air Flows: Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

N. Smoke Detectors: Section 28 31 00, FIRE DETECTION and ALARM.

1.3 QUALITY ASSURANCE

- A. Refer to article, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- B. Fire Safety Code: Comply with NFPA 90A.
- C. Duct System Construction and Installation: Referenced SMACNA Standards are the minimum acceptable quality.
- D. Duct Sealing, Air Leakage Criteria, and Air Leakage Tests: Ducts shall be sealed as per duct sealing requirements of SMACNA HVAC Air Duct Leakage Test Manual for duct pressure classes shown on the drawings.
- E. Duct accessories exposed to the air stream, such as dampers of all types (except smoke dampers) and access openings, shall be of the same material as the duct or provide at least the same level of corrosion resistance.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Rectangular ducts:
 - a. Schedules of duct systems, materials and selected SMACNA construction alternatives for joints, sealing, gage and reinforcement.
 - b. Sealants and gaskets.
 - c. Access doors.
 - 2. Round and flat oval duct construction details:
 - a. Manufacturer's details for duct fittings.
 - b. Sealants and gaskets.
 - c. Access sections.
 - d. Installation instructions.
 - 3. Volume dampers, back draft dampers.
 - 4. Upper hanger attachments.
 - 5. Fire dampers, and smoke dampers with installation instructions.
 - 6. Sound attenuators, including pressure drop and acoustic performance.
 - 7. Flexible ducts and clamps, with manufacturer's installation instructions.
 - 8. Flexible connections.
 - 9. Instrument test fittings.
 - 10 Details and design analysis of alternate or optional duct systems.

11 COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

C. Coordination Drawings: Refer to article, SUBMITTALS, in Section 23 05

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Civil Engineers (ASCE):

ASCE7-05.....Minimum Design Loads for Buildings and Other Structures

C. American Society for Testing and Materials (ASTM):

A167-99(2009).....Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

A653-09.....Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy coated (Galvannealed) by the Hot-Dip process

A1011-09a.....Standard Specification for Steel, Sheet and Strip, Hot rolled, Carbon, structural, High-Strength Low-Alloy, High Strength Low-Alloy with Improved Formability, and Ultra-High Strength

B209-07.....Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate

C1071-05e1.....Standard Specification for Fibrous Glass Duct Lining Insulation (Thermal and Sound Absorbing Material)

E84-09a.....Standard Test Method for Surface Burning Characteristics of Building Materials

D. National Fire Protection Association (NFPA):

90A-09.....Standard for the Installation of Air Conditioning and Ventilating Systems

E. Sheet Metal and Air Conditioning Contractors National Association (SMACNA):

2nd Edition - 2005.....HVAC Duct Construction Standards, Metal and Flexible

1st Edition - 1985.....HVAC Air Duct Leakage Test Manual

6th Edition - 2003.....Fibrous Glass Duct Construction Standards

F. Underwriters Laboratories, Inc. (UL):

181-08.....Factory-Made Air Ducts and Air Connectors

555-06Standard for Fire Dampers

555S-06Standard for Smoke Dampers

PART 2 - PRODUCTS**2.1 DUCT MATERIALS AND SEALANTS**

- A. General: Except for systems specified otherwise, construct ducts, casings, and accessories of galvanized sheet steel, ASTM A653, coating G90; or, aluminum sheet, ASTM B209, alloy 1100, 3003 or 5052.
- B. Specified Corrosion Resistant Systems: Stainless steel sheet, ASTM A167, Class 302 or 304, Condition A (annealed) Finish No. 4 for exposed ducts and Finish No. 2B for concealed duct or ducts located in mechanical rooms.
- C. Joint Sealing: Refer to SMACNA HVAC Duct Construction Standards, paragraph S1.9.
 - 1. Sealant: Elastomeric compound, gun or brush grade, maximum 25 flame spread and 50 smoke developed (dry state) compounded specifically for sealing ductwork as recommended by the manufacturer. Generally provide liquid sealant, with or without compatible tape, for low clearance slip joints and heavy, permanently elastic, mastic type where clearances are larger. Oil base caulking and glazing compounds are not acceptable because they do not retain elasticity and bond.
 - 2. Tape: Use only tape specifically designated by the sealant manufacturer and apply only over wet sealant. Pressure sensitive tape shall not be used on bare metal or on dry sealant.
 - 3. Gaskets in Flanged Joints: Soft neoprene.
- D. Approved factory made joints may be used.

2.2 DUCT CONSTRUCTION AND INSTALLATION

- A. Regardless of the pressure classifications outlined in the SMACNA Standards, fabricate and seal the ductwork in accordance with the following pressure classifications:
- B. Duct Pressure Classification:
 - 0 to 50 mm (2 inch)
 - > 50 mm to 75 mm (2 inch to 3 inch)
 - > 75 mm to 100 mm (3 inch to 4 inch)Show pressure classifications on the floor plans.
- C. Seal Class: All ductwork shall receive Class A Seal
- D. Operating Room Supply Air: All supply air ductwork on the downstream side of the terminal final HEPA filter serving an operating room shall be fabricated from welded stainless steel, including all components of the air distribution system up to and including the supply air outlet.
- E. Wet Air Exhaust Ducts and Accessories: Ducts for dishwashers, scullery hood, cart washers, manual cart washers, cage washers, steam sterilizer hoods and orthotics hoods shall be 1.3 mm (18 gage) stainless steel made

liquid tight with continuous external weld for all seams and joints. Provide neoprene gaskets at flanged connections. Where ducts are not self draining back to the equipment, provide low point drain pocket with copper drain pipe to sanitary sewer. Provide access door in side of duct at drain pockets.

- F. Provide a welded stainless steel duct section for housing the duct-mounted terminal humidifiers. Ductwork shall be at least 3 feet long on the upstream side and 6 feet long on the downstream side. Slope the ductwork against the direction of airflow and provide drain connections.
- G. Laboratory Hood, Exhaust and Associated Ductwork: 1.3 mm (18 gage) all welded Stainless steel.
- H. Duct for Negative Pressure Up to 750 Pa (3 inch W.G.): Provide for exhaust duct between HEPA filters and exhaust fan inlet.
 - 1. Round Duct: Galvanized steel, spiral lock seam construction with standard slip joints.
 - 2. Rectangular Duct: Galvanized steel, minimum 1.0 mm (20 gage), Pittsburgh lock seam, companion angle joints 32 mm by 3.2 mm (1-1/4 by 1/8 inch) minimum at not more than 2.4 m (8 feet) spacing. Approved pre-manufactured joints are acceptable in lieu of companion angles.
- I. Round and Flat Oval Ducts: Furnish duct and fittings made by the same manufacturer to insure good fit of slip joints. When submitted and approved in advance, round and flat oval duct, with size converted on the basis of equal pressure drop, may be furnished in lieu of rectangular duct design shown on the drawings.
 - 1. Elbows: Diameters 80 through 200 mm (3 through 8 inches) shall be two sections die stamped, all others shall be gored construction, maximum 18 degree angle, with all seams continuously welded or standing seam. Coat galvanized areas of fittings damaged by welding with corrosion resistant aluminum paint or galvanized repair compound.
 - 2. Provide bell mouth, conical tees or taps, laterals, reducers, and other low loss fittings as shown in SMACNA HVAC Duct Construction Standards.
 - 3. Ribbed Duct Option: Lighter gage round/oval duct and fittings may be furnished provided certified tests indicating that the rigidity and performance is equivalent to SMACNA standard gage ducts are submitted.
 - a. Ducts: Manufacturer's published standard gage, G90 coating, spiral lock seam construction with an intermediate standing rib.

- b. Fittings: May be manufacturer's standard as shown in published catalogs, fabricated by spot welding and bonding with neoprene base cement or machine formed seam in lieu of continuous welded seams.
- 4. Provide flat side reinforcement of oval ducts as recommended by the manufacturer and SMACNA HVAC Duct Construction Standard S3.13.
Because of high pressure loss, do not use internal tie-rod reinforcement unless approved by the COTR.
- J. Casings and Plenums: Construct in accordance with SMACNA HVAC Duct Construction Standards Section 6, including curbs, access doors, pipe penetrations, eliminators and drain pans. Access doors shall be hollow metal, insulated, with latches and door pulls, 500 mm (20 inches) wide by 1200 - 1350 mm (48 - 54 inches) high. Provide view port in the doors where shown. Provide drain for outside air louver plenum. Outside air plenum shall have exterior insulation. Drain piping shall be routed to the nearest floor drain.
- K. Volume Dampers: Single blade or opposed blade, multi-louver type as detailed in SMACNA Standards. Refer to SMACNA Detail Figure 2-12 for Single Blade and Figure 2.13 for Multi-blade Volume Dampers.
- L. Duct Hangers and Supports: Refer to SMACNA Standards Section IV. Avoid use of trapeze hangers for round duct.
- M. Ductwork in excess of 620 cm² (96 square inches) shall be protected unless the duct has one dimension less than 150 mm (6 inches) if it passes through the areas listed below. Refer to the Mission Critical Physical Design Manual for VA Facilities. This applies to the following:
 - 1. Agent cashier spaces
 - 2. Perimeter partitions of caches
 - 3. Perimeter partitions of computer rooms
 - 4. Perimeter of a COOP sites
 - 5. Perimeter partitions of Entrances
 - 6. Security control centers (SCC)

2.3 DUCT ACCESS DOORS, PANELS AND SECTIONS

- A. Provide access doors, sized and located for maintenance work, upstream, in the following locations:
 - 1. Each duct mounted coil and humidifier.
 - 2. Each fire damper (for link service), smoke damper and automatic control damper.
 - 3. Each duct mounted smoke detector.

4. For cleaning operating room supply air duct and kitchen hood exhaust duct, locate access doors at 6 m (20 feet) intervals and at each change in duct direction.
- B. Openings shall be as large as feasible in small ducts, 300 mm by 300 mm (12 inch by 12 inch) minimum where possible. Access sections in insulated ducts shall be double-wall, insulated. Transparent shatterproof covers are preferred for uninsulated ducts.
 1. For rectangular ducts: Refer to SMACNA HVAC Duct Construction Standards (Figure 2-12).
 2. For round and flat oval duct: Refer to SMACNA HVAC duct Construction Standards (Figure 2-11).

2.4 FIRE DAMPERS

- A. Galvanized steel, interlocking blade type, UL listing and label, 1-1/2 hour rating, 70 degrees C (160 degrees F) fusible line, 100 percent free opening with no part of the blade stack or damper frame in the air stream.
- B. Fire dampers in wet air exhaust shall be of stainless steel construction, all others may be galvanized steel.
- C. Minimum requirements for fire dampers:
 1. The damper frame may be of design and length as to function as the mounting sleeve, thus eliminating the need for a separate sleeve, as allowed by UL 555. Otherwise provide sleeves and mounting angles, minimum 1.9 mm (14 gage), required to provide installation equivalent to the damper manufacturer's UL test installation.
 2. Submit manufacturer's installation instructions conforming to UL rating test.

2.5 SMOKE DAMPERS

- A. Maximum air velocity, through free area of open damper, and pressure loss: Low pressure and medium pressure duct (supply, return, exhaust, outside air): 450 m/min (1500 fpm). Maximum static pressure loss: 32 Pa (0.13 inch W.G.).
- B. Maximum air leakage, closed damper: 0.32 cubic meters /min/square meter (4.0 CFM per square foot) at 750 Pa (3 inch W.G.) differential pressure.
- C. Minimum requirements for dampers:
 1. Shall comply with requirements of Table 6-1 of UL 555S, except for the Fire Endurance and Hose Stream Test.
 2. Frame: Galvanized steel channel with side, top and bottom stops or seals.
 3. Blades: Galvanized steel, parallel type preferably, 300 mm (12 inch) maximum width, edges sealed with neoprene, rubber or felt, if

required to meet minimum leakage. Airfoil (streamlined) type for minimum noise generation and pressure drop are preferred for duct mounted dampers.

4. Shafts: Galvanized steel.

5. Bearings: Nylon, bronze sleeve or ball type.

6. Hardware: Zinc plated.

7. Operation: Automatic open/close. No smoke damper that requires manual reset or link replacement after actuation is acceptable. See drawings for required control operation.

D. Motor operator (actuator): Provide pneumatic or electric as required by the automatic control system, externally mounted on stand-offs to allow complete insulation coverage.

2.6 COMBINATION FIRE AND SMOKE DAMPERS

Combination fire and smoke dampers: Multi-blade type units meeting all requirements of both fire dampers and smoke dampers shall be used where shown and may be used at the Contractor's option where applicable.

2.7 FIRE DOORS

Galvanized steel, interlocking blade type, UL listing and label, 71 degrees C (160 degrees F) fusible link, 3 hour rating and approved for openings in Class A fire walls with rating up to 4 hours, 100 percent free opening with no part of the blade stack or damper frame in the air stream.

2.8 FLEXIBLE AIR DUCT

A. General: Factory fabricated, complying with NFPA 90A for connectors not passing through floors of buildings. Flexible ducts shall not penetrate any fire or smoke barrier which is required to have a fire resistance rating of one hour or more. Flexible duct length shall not exceed 1.5 m (5 feet). Provide insulated acoustical air duct connectors in supply air duct systems and elsewhere as shown.

B. Flexible ducts shall be listed by Underwriters Laboratories, Inc., complying with UL 181. Ducts larger than 200 mm (8 inches) in diameter shall be Class 1. Ducts 200 mm (8 inches) in diameter and smaller may be Class 1 or Class 2.

C. Insulated Flexible Air Duct: Factory made including mineral fiber insulation with maximum C factor of 0.25 at 24 degrees C (75 degrees F) mean temperature, encased with a low permeability moisture barrier outer jacket, having a puncture resistance of not less than 50 Beach Units. Acoustic insertion loss shall not be less than 3 dB per 300 mm (foot) of straight duct, at 500 Hz, based on 150 mm (6 inch) duct, of 750 m/min (2500 fpm).

D. Application Criteria:

1. Temperature range: -18 to 93 degrees C (0 to 200 degrees F) internal.
2. Maximum working velocity: 1200 m/min (4000 feet per minute).
3. Minimum working pressure, inches of water gage: 2500 Pa (10 inches) positive, 500 Pa (2 inches) negative.

- E. Duct Clamps: 100 percent nylon strap, 80 kg (175 pounds) minimum loop tensile strength manufactured for this purpose or stainless steel strap with cadmium plated worm gear tightening device. Apply clamps with sealant and as approved for UL 181, Class 1 installation.

2.9 FLEXIBLE DUCT CONNECTIONS

Where duct connections are made to fans, air terminal units, and air handling units, install a non-combustible flexible connection of 822 g (29 ounce) neoprene coated fiberglass fabric approximately 150 mm (6 inches) wide. For connections exposed to sun and weather provide hypalon coating in lieu of neoprene. Burning characteristics shall conform to NFPA 90A. Securely fasten flexible connections to round ducts with stainless steel or zinc-coated iron draw bands with worm gear fastener. For rectangular connections, crimp fabric to sheet metal and fasten sheet metal to ducts by screws 50 mm (2 inches) on center. Fabric shall not be stressed other than by air pressure. Allow at least 25 mm (one inch) slack to insure that no vibration is transmitted.

2.10 SOUND ATTENUATING UNITS

- A. Casing, not less than 1.0 mm (20 gage) galvanized sheet steel, or 1.3 mm (18 gage) aluminum fitted with suitable flanges to make clean airtight connections to ductwork. Sound-absorbent material faced with glass fiber cloth and covered with not less than 0.6 mm (24 gage) or heavier galvanized perforated sheet steel, or 0.85 mm (22 gage) or heavier perforated aluminum. Perforations shall not exceed 4 mm (5/32-inch) diameter, approximately 25 percent free area. Sound absorbent material shall be long glass fiber acoustic blanket meeting requirements of NFPA 90A.
- B. Entire unit shall be completely air tight and free of vibration and buckling at internal static pressures up to 2000 Pa (8 inches W.G.) at operating velocities.
- C. Pressure drop through each unit: Not to exceed indicated value at design air quantities indicated.
- D. Submit complete independent laboratory test data showing pressure drop and acoustical performance.
- E. Cap open ends of attenuators at factory with plastic, heavy duty paper, cardboard, or other appropriate material to prevent entrance of dirt,

water, or any other foreign matter to inside of attenuator. Caps shall not be removed until attenuator is installed in duct system.

2.11 PREFABRICATED ROOF CURBS

Galvanized steel or extruded aluminum 300 mm (12 inches) above finish roof service, continuous welded corner seams, treated wood nailer, 40 mm (1-1/2 inch) thick, 48 kg/cubic meter (3 pound/cubic feet) density rigid mineral fiberboard insulation with metal liner, built-in cant strip (except for gypsum or tectum decks). For surface insulated roof deck, provide raised cant strip (recessed mounting flange) to start at the upper surface of the insulation. Curbs shall be constructed for pitched roof or ridge mounting as required to keep top of curb level.

2.12 FIRESTOPPING MATERIAL

Refer to Section 07 84 00, FIRESTOPPING.

2.13 SEISMIC RESTRAINT FOR DUCTWORK

Refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

2.14 DUCT MOUNTED THERMOMETER (AIR)

- A. Stem Type Thermometers: ASTM E1, 7 inch scale, red appearing mercury, lens front tube, cast aluminum case with enamel finish and clear glass or polycarbonate window, brass stem, 2 percent of scale accuracy to ASTM E77 scale calibrated in degrees Fahrenheit.
- B. Thermometer Supports:
 - 1. Socket: Brass separable sockets for thermometer stems with or without extensions as required, and with cap and chain.
 - 2. Flange: 3 inch outside diameter reversible flange, designed to fasten to sheet metal air ducts, with brass perforated stem.

2.15 DUCT MOUNTED TEMPERATURE SENSOR (AIR)

Refer to Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

2.16 INSTRUMENT TEST FITTINGS

- A. Manufactured type with a minimum 50 mm (two inch) length for insulated duct, and a minimum 25 mm (one inch) length for duct not insulated. Test hole shall have a flat gasket for rectangular ducts and a concave gasket for round ducts at the base, and a screw cap to prevent air leakage.
- B. Provide instrument test holes at each duct or casing mounted temperature sensor or transmitter, and at entering and leaving side of each heating coil, cooling coil, and heat recovery unit.

2.17 AIR FLOW CONTROL VALVES (AFCV)

Refer to Section 23 36 00 / 23 82 00, AIR TERMINAL UNITS / CONVECTION HEATING and COOLING UNITS.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Comply with provisions of Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION, particularly regarding coordination with other trades and work in existing buildings.
- B. Fabricate and install ductwork and accessories in accordance with referenced SMACNA Standards:
 - 1. Drawings show the general layout of ductwork and accessories but do not show all required fittings and offsets that may be necessary to connect ducts to equipment, boxes, diffusers, grilles, etc., and to coordinate with other trades. Fabricate ductwork based on field measurements. Provide all necessary fittings and offsets at no additional cost to the government. Coordinate with other trades for space available and relative location of HVAC equipment and accessories on ceiling grid. Duct sizes on the drawings are inside dimensions which shall be altered by Contractor to other dimensions with the same air handling characteristics where necessary to avoid interferences and clearance difficulties.
 - 2. Provide duct transitions, offsets and connections to dampers, coils, and other equipment in accordance with SMACNA Standards, Section II. Provide streamliner, when an obstruction cannot be avoided and must be taken in by a duct. Repair galvanized areas with galvanizing repair compound.
 - 3. Provide bolted construction and tie-rod reinforcement in accordance with SMACNA Standards.
 - 4. Construct casings, eliminators, and pipe penetrations in accordance with SMACNA Standards, Chapter 6. Design casing access doors to swing against air pressure so that pressure helps to maintain a tight seal.
- C. Install duct hangers and supports in accordance with SMACNA Standards, Chapter 4.
- D. Install fire dampers, smoke dampers and combination fire/smoke dampers in accordance with the manufacturer's instructions to conform to the installation used for the rating test. Install fire dampers, smoke dampers and combination fire/smoke dampers at locations indicated and where ducts penetrate fire rated and/or smoke rated walls, shafts and where required by the COTR. Install with required perimeter mounting angles, sleeves, breakaway duct connections, corrosion resistant springs, bearings, bushings and hinges per UL and NFPA. Demonstrate re-setting of fire dampers and operation of smoke dampers to the COTR.

- E. Seal openings around duct penetrations of floors and fire rated partitions with fire stop material as required by NFPA 90A.
- F. Flexible duct installation: Refer to SMACNA Standards, Chapter 3. Ducts shall be continuous, single pieces not over 1.5 m (5 feet) long (NFPA 90A), as straight and short as feasible, adequately supported. Centerline radius of bends shall be not less than two duct diameters. Make connections with clamps as recommended by SMACNA. Clamp per SMACNA with one clamp on the core duct and one on the insulation jacket. Flexible ducts shall not penetrate floors, or any chase or partition designated as a fire or smoke barrier, including corridor partitions fire rated one hour or two hour. Support ducts SMACNA Standards.
- G. Where diffusers, registers and grilles cannot be installed to avoid seeing inside the duct, paint the inside of the duct with flat black paint to reduce visibility.
- H. Control Damper Installation:
 - 1. Provide necessary blank-off plates required to install dampers that are smaller than duct size. Provide necessary transitions required to install dampers larger than duct size.
 - 2. Assemble multiple sections dampers with required interconnecting linkage and extend required number of shafts through duct for external mounting of damper motors.
 - 3. Provide necessary sheet metal baffle plates to eliminate stratification and provide air volumes specified. Locate baffles by experimentation, and affix and seal permanently in place, only after stratification problem has been eliminated.
 - 4. Install all damper control/adjustment devices on stand-offs to allow complete coverage of insulation.
- I. Air Flow Measuring Devices (AFMD): Install units with minimum straight run distances, upstream and downstream as recommended by the manufacturer.
- J. Low Pressure Duct Liner: Install in accordance with SMACNA, Duct Liner Application Standard.
- K. Protection and Cleaning: Adequately protect equipment and materials against physical damage. Place equipment in first class operating condition, or return to source of supply for repair or replacement, as determined by COTR. Protect equipment and ducts during construction against entry of foreign matter to the inside and clean both inside and outside before operation and painting. When new ducts are connected to existing ductwork, clean both new and existing ductwork by mopping and vacuum cleaning inside and outside before operation.

3.2 DUCT LEAKAGE TESTS AND REPAIR

- A. Ductwork leakage testing shall be performed by the Testing and Balancing Contractor directly contracted by the General Contractor and independent of the Sheet Metal Contractor.
- B. Ductwork leakage testing shall be performed for the entire air distribution system (including all supply, return, exhaust and relief ductwork), section by section, including fans, coils and filter sections. Based upon satisfactory initial duct leakage test results, the scope of the testing may be reduced by the COTR on ductwork constructed to the 500 Pa (2" WG) duct pressure classification. In no case shall the leakage testing of ductwork constructed above the 500 Pa (2" WG) duct pressure classification or ductwork located in shafts or other inaccessible areas be eliminated.
- C. Test procedure, apparatus and report shall conform to SMACNA Leakage Test manual. The maximum leakage rate allowed is 4 percent of the design air flow rate.
- D. All ductwork shall be leak tested first before enclosed in a shaft or covered in other inaccessible areas.
- E. All tests shall be performed in the presence of the COTR and the Test and Balance agency. The Test and Balance agency shall measure and record duct leakage and report to the COTR and identify leakage source with excessive leakage.
- F. If any portion of the duct system tested fails to meet the permissible leakage level, the Contractor shall rectify sealing of ductwork to bring it into compliance and shall retest it until acceptable leakage is demonstrated to the COTR.
- G. All tests and necessary repairs shall be completed prior to insulation or concealment of ductwork.
- H. Make sure all openings used for testing flow and temperatures by TAB Contractor are sealed properly.

3.3 DUCTWORK EXPOSED TO WIND VELOCITY

Provide additional support and bracing to all exposed ductwork installed on the roof or outside the building to withstand wind velocity of (_90_mph).

3.4 TESTING, ADJUSTING AND BALANCING (TAB)

Refer to Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

3.5 OPERATING AND PERFORMANCE TESTS

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION

- - - E N D - - -

SECTION 23 34 00
HVAC FANS

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Fans for heating, ventilating and air conditioning.
- B. Product Definitions: AMCA Publication 99, Standard 1-66.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- D. Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.
- E. Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT.
- F. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
- G. Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.
- H. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- I. Section 23 74 13, PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS.
- J. Section 23 82 16, AIR COILS.

1.3 QUALITY ASSURANCE

- A. Refer to paragraph, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.
- B. Fans and power ventilators shall be listed in the current edition of AMCA 261, and shall bear the AMCA performance seal.
- C. Operating Limits for Centrifugal Fans: AMCA 99 (Class I, II, and III).
- D. Fans and power ventilators shall comply with the following standards:
 - 1. Testing and Rating: AMCA 210.
 - 2. Sound Rating: AMCA 300.
- E. Vibration Tolerance for Fans and Power Ventilators: Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
- F. Performance Criteria:
 - 1. The fan schedule shall show the design air volume and static pressure. Select the fan motor HP by increasing the fan BHP by 10 percent to account for the drive losses and field conditions.
 - 2. Select the fan operating point as follows:
 - a. Forward Curve and Axial Flow Fans: Right hand side of peak pressure point

- b. Air Foil, Backward Inclined, or Tubular: At or near the peak static efficiency
- G. Safety Criteria: Provide manufacturer's standard screen on fan inlet and discharge where exposed to operating and maintenance personnel.
- H. Corrosion Protection:
 - 1. Except for fans in fume hood exhaust service, all steel shall be mill-galvanized, or phosphatized and coated with minimum two coats, corrosion resistant enamel paint. Manufacturers paint and paint system shall meet the minimum specifications of: ASTM D1735 water fog; ASTM B117 salt spray; ASTM D3359 adhesion; and ASTM G152 and G153 for carbon arc light apparatus for exposure of non-metallic material.
 - 2. Fans for general purpose fume hoods, shall be constructed of materials compatible with the chemicals being transported in the air through the fan.
- I. Spark resistant construction: If flammable gas, vapor or combustible dust is present in concentrations above 20% of the Lower Explosive Limit (LEL), the fan construction shall be as recommended by AMCA's Classification for Spark Resistant Construction. Drive set shall be comprised of non-static belts for use in an explosive.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturers Literature and Data:
 - 1. Fan sections, motors and drives.
 - 2. Centrifugal fans, motors, drives, accessories and coatings.
 - a. In-line centrifugal fans.
 - b. Industrial fans.
 - c. Utility fans and vent sets.
 - 3. Prefabricated roof curbs.
 - 4. Power roof and wall ventilators.
- C. Certified Sound power levels for each fan.
- D. Motor ratings types, electrical characteristics and accessories.
- E. Roof curbs.
- F. Belt guards.
- G. Maintenance and Operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS.
- H. Certified fan performance curves for each fan showing cubic feet per minute (CFM) versus static pressure, efficiency, and horsepower for design point of operation.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Air Movement and Control Association International, Inc. (AMCA):
- 99-86.....Standards Handbook
 - 210-06.....Laboratory Methods of Testing Fans for
Aerodynamic Performance Rating
 - 261-09.....Directory of Products Licensed to bear the AMCA
Certified Ratings Seal - Published Annually
 - 300-08.....Reverberant Room Method for Sound Testing of
Fans
- C. American Society for Testing and Materials (ASTM):
- B117-07a.....Standard Practice for Operating Salt Spray (Fog)
Apparatus
 - D1735-08.....Standard Practice for Testing Water Resistance
of Coatings Using Water Fog Apparatus
 - D3359-08.....Standard Test Methods for Measuring Adhesion by
Tape Test
 - G152-06.....Standard Practice for Operating Open Flame
Carbon Arc Light Apparatus for Exposure of Non-
Metallic Materials
 - G153-04.....Standard Practice for Operating Enclosed Carbon
Arc Light Apparatus for Exposure of Non-Metallic
Materials
- D. Underwriters Laboratories, Inc. (UL):
- 181-2005.....Factory Made Air Ducts and Air Connectors

1.6 EXTRA MATERIALS

- A. Provide one additional set of belts for all belt-driven fans.

PART 2 - PRODUCTS**2.1 FAN SECTION (CABINET FAN)**

Refer to specification Section 23 74 13, PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS.

2.2 CENTRIFUGAL FANS

- A. Standards and Performance Criteria: Refer to Paragraph, QUALITY ASSURANCE. Record factory vibration test results on the fan or furnish to the Contractor.
- B. Fan arrangement, unless noted or approved otherwise:
- 1. DWD1 fans: Arrangement 3.
 - 2. SWS1 fans: Arrangement 1, 3, 9 or 10.

- C. Construction: Wheel diameters and outlet areas shall be in accordance with AMCA standards.
1. Housing: Low carbon steel, arc welded throughout, braced and supported by structural channel or angle iron to prevent vibration or pulsation, flanged outlet, inlet fully streamlined. Provide lifting clips, and casing drain. Provide manufacturer's standard access door. Provide 12.5 mm (1/2 inches) wire mesh screens for fan inlets without duct connections.
 2. Wheel: Steel plate with die formed blades welded or riveted in place, factory balanced statically and dynamically.
 3. Shaft: Designed to operate at no more than 70 percent of the first critical speed at the top of the speed range of the fans class.
 4. Bearings: Heavy duty ball or roller type sized to produce a B10 life of not less than 50,000 hours, and an average fatigue life of 200,000 hours. Extend filled lubrication tubes for interior bearings or ducted units to outside of housing.
 5. Belts: Oil resistant, non-sparking and non-static.
 6. Belt Drives: Factory installed with final alignment belt adjustment made after installation.
 7. Motors and Fan Wheel Pulleys: Adjustable pitch for use with motors through 15HP, fixed pitch for use with motors larger than 15HP. Select pulleys so that pitch adjustment is at the middle of the adjustment range at fan design conditions.
 8. Motor, adjustable motor base, drive and guard: Furnish from factory with fan. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION for specifications. Provide protective sheet metal enclosure for fans located outdoors.
 9. Furnish variable speed fan motor controllers where shown on the drawings. Refer to Section, MOTOR STARTERS. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION for controller/motor combination requirements.
- D. In-line Centrifugal Fans: In addition to the requirements of paragraphs A and 2.2.C3 thru 2.2.C9, provide minimum 18 Gauge galvanized steel housing with inlet and outlet flanges, backward inclined aluminum centrifugal fan wheel, bolted access door and supports as required. Motors shall be factory pre-wired to an external junction box. Provide factory wired disconnect switch.
- E. Industrial Fans: Use where scheduled or in lieu of centrifugal fans for low volume high static service. Construction specifications paragraphs A

and C for centrifugal fans shall apply. Provide material handling flat blade type fan wheel.

- F. Utility Fans, Vent Sets and Small Capacity Fans: Class 1 design, arc welded housing, spun intake cone. Applicable construction specification, paragraphs A and C, for centrifugal fans shall apply for wheel diameters 300 mm (12 inches) and larger. Requirement for AMCA seal is waived for wheel diameters less than 300 mm (12 inches) and housings may be cast iron.
- G. Spark Resistant/Explosion Proof Fans: If flammable gas, vapor or combustible dust is present in concentrations above 20% of the Lower Explosive Limit (LEL), provide AMCA construction option: A, B or C as indicated. Drive set shall be comprised of non-static belts for use in an explosive atmosphere. Motor shall be explosion proof type if located in air stream.

2.3 POWER ROOF VENTILATOR

- A. Standards and Performance Criteria: Refer to Paragraph, QUALITY ASSURANCE.
- B. Type: Centrifugal fan, backward inclined blades. Provide down-blast or up-blast type as indicated.
- C. Construction: Steel or aluminum, completely weatherproof, for curb mounting, exhaust cowl or entire drive assembly readily removable for servicing, aluminum bird screen on discharge, UL approved safety disconnect switch, conduit for wiring, vibration isolators for wheel, motor and drive assembly. Provide self acting back draft damper. Provide electric motor operated damper where indicated.
- D. Motor and Drive: Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION. Bearings shall be pillow block ball type with a minimum L-50 life of 200,000 hours. Motor shall be located out of air stream.
- E. Prefabricated Roof Curb: As specified in paragraph 2.3 of this section.
- F. Up-blast Type: Top discharge exhauster, motor out of air stream.

2.4 POWER WALL VENTILATOR

- A. Standards and Performance Criteria: Refer to Paragraph, QUALITY ASSURANCE.
- B. Type: Centrifugal fan, backward inclined blades.
- C. Construction: Steel or aluminum, completely weatherproof, for wall mounting, exhaust cowl or entire drive assembly readily removable for servicing, aluminum bird screen on discharge, UL approved safety disconnect switch, conduit for wiring, vibration isolators for wheel, motor and drive assembly. Provide self acting back draft damper.

- D. Motor and Drive: Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION. Bearings shall be pillow block ball type with a minimum L-50 life of 200,000 hours. Motor shall be located out of air stream.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install fan, motor and drive in accordance with manufacturer's instructions.
- B. Align fan and motor sheaves to allow belts to run true and straight.
- C. Bolt equipment to curbs with galvanized lag bolts.
- D. Install vibration control devices as shown on drawings and specified in Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.

3.2 PRE-OPERATION MAINTENANCE

- A. Lubricate bearings, pulleys, belts and other moving parts with manufacturer recommended lubricants.
- B. Rotate impeller by hand and check for shifting during shipment and check all bolts, collars, and other parts for tightness.
- C. Clean fan interiors to remove foreign material and construction dirt and dust.

3.3 START-UP AND INSTRUCTIONS

- A. Verify operation of motor, drive system and fan wheel according to the drawings and specifications.
- B. Check vibration and correct as necessary for air balance work.
- C. After air balancing is complete and permanent sheaves are in place perform necessary field mechanical balancing to meet vibration tolerance in Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.

- - - E N D - - -

**SECTION 23 36 00
AIR TERMINAL UNITS**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Air terminal units, air flow control valves.

1.2 RELATED WORK

- A. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Seismic restraints for equipment.
- B. Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION: General mechanical requirements and items, which are common to more than one section of Division 23.
- C. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT: Noise requirements.
- D. Section 23 31 00, HVAC DUCTS AND CASINGS: Ducts and flexible connectors.
- E. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC: Valve operators.
- F. Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC: Flow rates adjusting and balancing.
- G. Section 23 82 16, AIR COILS: Heating and Cooling Coils pressure ratings.

1.3 QUALITY ASSURANCE

- A. Refer to Paragraph, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
1. Air Terminal Units: Submit test data.
 2. Air flow control valves.
- C. Samples: Provide one typical air terminal unit for approval by the COTR. This unit will be returned to the Contractor after all similar units have been shipped and deemed acceptable at the job site.
- D. Certificates:
1. Compliance with paragraph, QUALITY ASSURANCE.
 2. Compliance with specified standards.
- E. Operation and Maintenance Manuals: Submit in accordance with paragraph, INSTRUCTIONS, in Section 01 00 00, GENERAL REQUIREMENTS.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Air Conditioning and Refrigeration Institute (AHRI)/(ARI):
880-08.....Air Terminals Addendum to ARI 888-98
incorporated into standard posted 15th December
2002
- C. National Fire Protection Association (NFPA):
90A-09.....Standard for the Installation of Air
Conditioning and Ventilating Systems
- D. Underwriters Laboratories, Inc. (UL):
181-08.....Standard for Factory-Made Air Ducts and Air
Connectors
- E. American Society for Testing and Materials (ASTM):
C 665-06.....Standard Specification for Mineral-Fiber
Blanket Thermal Insulation for Light Frame
Construction and Manufactured Housing

1.6 GUARANTY

In accordance with the GENERAL CONDITIONS

PART 2 - PRODUCTS**2.1 GENERAL**

- A. Coils:
1. Surgical Suite AHU: Provide copper fins and copper coils for all hot water reheat coils serving surgical suite.
 2. All Air-Handling Units: Provide aluminum fins and copper coils for all hot water reheat coils.
 3. Water Heating Coils:
 - a. ARI certified, continuous plate or spiral fin type, leak tested at 2070 kPa (300 PSI).
 - b. Capacity: As indicated, based on scheduled entering water temperature.
 - c. Headers: Copper or Brass.
 - d. Fins: Aluminum, maximum 315 fins per meter (8 fins per inch).
 - e. Tubes: Copper, arrange for counter-flow of heating water.
 - f. Water Flow Rate: Minimum 0.032 Liters/second (0.5 GPM).
 - g. Provide vent and drain connection at high and low point, respectively of each coil.
 - h. Coils shall be guaranteed to drain.

- B. Labeling: Control box shall be clearly marked with an identification label that lists such information as nominal CFM, maximum and minimum factory-set airflow limits, coil type and coil connection orientation, where applicable.
- C. Factory calibrate air terminal units to air flow rate indicated. All settings including maximum and minimum air flow shall be field adjustable.
- D. Dampers with internal air volume control: See section 23 31 00 HVAC DUCTS and CASINGS.

2.2 AIR TERMINAL UNITS (BOXES)

- A. General: Factory built, pressure independent units, factory set-field adjustable air flow rate, suitable for single duct applications. Use of dual-duct air terminal units is not permitted. Clearly show on each unit the unit number and factory set air volumes corresponding to the contract drawings. Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC work assumes factory set air volumes. Coordinate flow controller sequence and damper operation details with the drawings and Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC. All air terminal units shall be brand new products of the same manufacturer.
- B. Capacity and Performance: The Maximum Capacity of a single terminal unit shall not exceed 566 Liters/second (1,200 CFM) with the exception of operating rooms, which shall be served by a single air terminal unit at a maximum of 1,250 Liters/second (3,000 CFM).
- C. Sound Power Levels:
Acoustic performance of the air terminal units shall be based on the design noise levels for the spaces stipulated in Section 23 05 41 (Noise and Vibration Control for HVAC Piping and Equipment). Equipment schedule (...) shall show the sound power levels in all octave bands.
- D. Casing: Unit casing shall be constructed of galvanized steel no lighter than 0.85 mm (22 Gauge). Air terminal units serving the operating rooms shall be fabricated without lining. Provide hanger brackets for attachment of supports.
 - 1. Lining material: Suitable to provide required acoustic performance, thermal insulation and prevent sweating. Meet the requirements of NFPA 90A and comply with UL 181 for erosion as well as ASTM C 665 antimicrobial requirements. Insulation shall consist of 13 mm (1/2 IN) thick non-porous foil faced rigid fiberglass insulation of 4-lb/cu.ft, secured by full length galvanized steel z-strips which enclose and seal all edges. Tape and adhesives shall not be used.

- Materials shall be non-friable and with surfaces, including all edges, fully encapsulated and faced with perforated metal or coated so that the air stream will not detach material. No lining material is permitted in the boxes serving operating rooms.
2. Access panels (or doors): Provide panels large enough for inspection, adjustment and maintenance without disconnecting ducts, and for cleaning heating coils attached to unit, even if there are no moving parts. Panels shall be insulated to same standards as the rest of the casing and shall be secured and gasketed airtight. It shall require no tool other than a screwdriver to remove.
 3. Total leakage from casing: Not to exceed 2 percent of the nominal capacity of the unit when subjected to a static pressure of 750 Pa (3 inch WG), with all outlets sealed shut and inlets fully open.
- E. Construct dampers and other internal devices of corrosion resisting materials which do not require lubrication or other periodic maintenance.
1. Damper Leakage: Not greater than 2 percent of maximum rated capacity, when closed against inlet static pressure of 1 kPa (4 inch WG).
- F. Provide multi-point velocity pressure sensors with external pressure taps.
1. Provide direct reading air flow rate table pasted to box.
- G. Provide static pressure tubes.
- H. Externally powered DDC variable air volume controller and damper actuator to be furnished under Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC for factory mounting on air terminal units. The DDC controller shall be electrically actuated.

2.3 AIR FLOW CONTROL VALVE (AFCV)

- A. Airflow control device shall be a venturi valve type air flow control valve.
- B. Pressure independent over a 150 Pa-750 Pa (0.6 inch WG - 3.0 inch WG) drop across valve.
- C. Volume control accurate to plus or minus 5% of airflow over an airflow turndown range of 16 to 1. No minimum entrance or exit duct diameters shall be required to ensure accuracy or pressure independence.
- D. Response time to change in command signal and duct static pressure within three seconds.
- E. 16 gauge spun aluminum valve body and control device with continuous welded seam and 316 stainless steel shaft and shaft support brackets.

Pressure independent springs shall be stainless steel. Shaft bearing surfaces shall be Teflon or polyester.

- F. 316 stainless steel continuous welded seam valve body, control device, shaft, shaft support bracket, pivot arm and internal mounting link. The control device shall have a baked on corrosion resistant phenolic coating. The shaft shall have a Teflon coating and all shaft bearing surfaces shall be made of Teflon. The pressure independent springs shall be made of stainless steel.
- G. The airflow device shall have no exposed aluminum or stainless steel components. The shaft support brackets, pivot arm, internal mounting link, and pressure independent springs shall have a baked-on corrosion resistant phenolic coating. Internal nuts, bolts, and rivets shall be titanium or phenolic coated stainless steel.
- H. Constant volume units:
 - 1. Actuator to be factory mounted to the valve.
 - 2. Closed loop control of airflow by way of flow feedback signal with less than 1 second response time.
 - 3. Shaft positioned using direct potentiometer measurement to produce a linear factory calibrated feedback.
 - 4. The maximum and minimum airflows shall be as scheduled.
- I. Variable volume units:
 - 1. Actuator to be factory mounted to the valve.
 - 2. Closed loop control of airflow by way of flow feedback signal with less than 1 second response time.
 - 3. Shaft positioned using direct potentiometer measurement to produce a linear factory calibrated feedback.
- J. Certification:
 - 1. Control device: factory calibrated to airflows detailed on plans using NIST traceable air stations and instrumentation having a combined accuracy of plus or minus 1% of signal over the entire range of measurement.
 - 2. Electronic airflow control devices: further calibrated and their accuracy verified to plus or minus 5% of signal at a minimum of eight different airflows across the full operating range of the device.
 - 3. All airflow control devices: individually marked with device specific, factory calibration data to include: tag number, serial number, model number, eight point characterization information (for electronic devices), and quality control inspection numbers.

K. Airflow measuring devices and airflow control devices that are not venturi valves (e.g., Pitot tube, flow cross, air bar, orifice ring, vortex shedder, etc.) are acceptable, provided the following conditions are met:

1. They meet the performance and construction characteristics stated throughout this section of the specification.
2. Suppliers of airflow control devices or airflow measuring devices requiring minimum duct diameters: provide revised duct layouts showing the required straight duct runs upstream and downstream of these devices.
3. Supplier of the airflow control system: submit coordination drawings reflecting these changes and include static pressure loss calculations as part of submittal.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Work shall be installed as shown and according to the manufacturer's diagrams and recommendations.
- B. Handle and install units in accordance with manufacturer's written instructions.
- C. Support units rigidly so they remain stationary at all times. Cross-bracing or other means of stiffening shall be provided as necessary. Method of support shall be such that distortion and malfunction of units cannot occur.
- D. Locate air terminal units to provide a straight section of inlet duct for proper functioning of volume controls. See VA Standard Detail.

3.2 OPERATIONAL TEST

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

- - - E N D - - -

**SECTION 23 37 00
AIR OUTLETS AND INLETS**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Gravity Ventilators for intake and exhaust application.
- B. Air Outlets and Inlets: Diffusers, Registers, and Grilles.

1.2 RELATED WORK

- A. Outdoor and Exhaust Louvers: Section 08 90 00, LOUVERS AND VENTS.
- B. Seismic Reinforcing: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- C. General Mechanical Requirements: Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- D. Noise Level Requirements: Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
- E. Testing and Balancing of Air Flows: Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.

1.3 QUALITY ASSURANCE

- A. Refer to article, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- B. Fire Safety Code: Comply with NFPA 90A.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Air intake/exhaust hoods.
 - 2. Diffusers, registers, grilles and accessories.
- C. Coordination Drawings: Refer to article, SUBMITTALS, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Air Diffusion Council Test Code:
 - 1062 GRD-84.....Certification, Rating, and Test Manual 4th Edition
- C. American Society of Civil Engineers (ASCE):
 - ASCE7-05.....Minimum Design Loads for Buildings and Other Structures
- D. American Society for Testing and Materials (ASTM):

- A167-99 (2004).....Standard Specification for Stainless and
Heat-Resisting Chromium-Nickel Steel Plate,
Sheet and Strip
- B209-07.....Standard Specification for Aluminum and
Aluminum-Alloy Sheet and Plate
- E. National Fire Protection Association (NFPA):
- 90A-09.....Standard for the Installation of Air
Conditioning and Ventilating Systems
- F. Underwriters Laboratories, Inc. (UL):
- 181-08.....UL Standard for Safety Factory-Made Air Ducts
and Connectors

PART 2 - PRODUCTS

2.1 GRAVITY INTAKE/EXHAUST VENTILATORS (ROOF MOUNTED)

- A. Aluminum, ASTM B209, louvered, spun, or fabricated using panel sections with roll-formed edges, 13 mm (1/2 inch) mesh aluminum welded wire bird screen, with gravity or motorized dampers where shown, accessible interior, designed for wind velocity specified in Paragraph 3.3.
1. Spun Intake/Exhaust Ventilators: Spun aluminum structural components shall be constructed of minimum 1.3 mm (16 Gauge) marine alloy aluminum, bolted to a rigid aluminum support structure. The aluminum base shall have continuously welded curb cap corners for maximum leak protection. The spun aluminum baffle shall have a rolled bead for added strength.
 2. Louvered Intake/Exhaust Hoods: Louvered hood constructed from 0.081 Gauge extruded aluminum tiers welded to a minimum 3.3 mm (8 Gauge) aluminum support structure. The aluminum hood shall be constructed of a minimum 0.064 marine alloy aluminum and provided with a layer of anti-condensate coating. The aluminum base shall have continuously welded curb cap corners for maximum leak protection.
 3. Low Silhouette Intake/Exhaust Ventilator: The unit shall be of bolted and welded construction utilizing corrosion resistant fasteners. The aluminum hood shall be constructed of minimum 1.60 mm (14 Gauge) marine alloy aluminum, bolted to a minimum 3.25 mm (8 Gauge) aluminum support structure. The aluminum base shall have continuously welded curb cap corners for maximum leak protection. Birdscreen constructed of 13 mm (1/2 inch) mesh shall be mounted across the relief opening.
- B. See ventilator schedule on the drawings. Sizes shown on the drawings designate throat size. Area of ventilator perimeter opening shall be not less than the throat area.

- C. Dampers for Gravity Ventilators without Duct Connection: Construct damper of the same material as the ventilator and of the design to completely close opening or remain wide open. Hold damper in closed position by a brass chain and catch. Extend chains 300 mm (12 inches) below and engage catch when damper is closed.
- D. See paragraph 3.3 for Intake/Exhaust exposed to high wind velocities.
- E. Provide Roof Curb by unit manufacturer. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC for additional requirements.

2.2 EQUIPMENT SUPPORTS

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

2.3 AIR OUTLETS AND INLETS

A. Materials:

- 1. Steel or aluminum except that all supply air outlets installed in operating rooms (see Article 2.3C.3) shall be stainless steel. Use aluminum air outlets and inlets for facilities located in high-humidity areas. Exhaust air registers located in combination toilets and shower stalls shall be constructed from aluminum. Provide manufacturer's standard gasket.
- 2. Exposed Fastenings: The same material as the respective inlet or outlet. Fasteners for aluminum may be stainless steel.
- 3. Contractor shall review all ceiling drawings and details and provide all ceiling mounted devices with appropriate dimensions and trim for the specific locations.

B. Performance Test Data: In accordance with Air Diffusion Council Code 1062GRD. Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT for NC criteria.

C. Air Supply Outlets:

- 1. Ceiling Diffusers: Suitable for surface mounting, exposed T-bar or special tile ceilings, off-white finish, square or round neck connection as shown on the drawings. Provide plaster frame for units in plaster ceilings.
 - a. Square, louver, fully adjustable pattern: Round neck, surface mounting unless shown otherwise on the drawings. Provide equalizing or control grid and volume control damper.
 - b. Louver face type: Square or rectangular, removable core for 1, 2, 3, or 4 way directional pattern. Provide equalizing or control grid and opposed blade damper.
 - c. Perforated face type: Manual adjustment for one-, two-, three-, or four-way horizontal air distribution pattern without change of air volume or pressure. Provide equalizing or control grid and opposed

blade over overlapping blade damper. Perforated face diffusers for VAV systems shall have the pattern controller on the inner face, rather than in the neck and designed to discharge air horizontally at the ceiling maintaining a Coanda effect.

2. Operating Room Air Distribution Devices:

- a. Devices shall consist of a non-aspirating perforated panel center air supply providing downward airflow over the operating table and fixed nonadjustable multiple slot perimeter panels surrounding the operating table area to provide an air curtain which shall be projected outward from the operating table area at not less than a five degree angle nor more than a 15 degree angle. Velocity of air distribution at operating table height shall not exceed 12 m/min (40 feet per minute) for the center supply or 15 m/min (50 feet per minute) for the air curtain. Perforated pressure plates shall be provided over the perimeter and center air distribution faces to equalize pressure and airflow throughout the system.
 - b. All components of the system inside the operating room shall be fabricated of 1.0 mm (20 Gauge) thick 18-8 stainless steel (ASTM A167), No. 4 finish, and outside the operating room shall be of the manufacturer's standard aluminum finish. All distribution components and pressure plates shall be attached to the face panels at both the perimeter and center. The face panels shall be retained with 1/4 turn fasteners. Plenums shall be supplied by the manufacturer and shall be sized to permit them to be easily wiped out by hand with germicidal solution for sterilization purposes and all horizontal corners of the plenums shall have a minimum radius of 20 mm (3/4 inch). Connecting elbows shall be radialized and be sized to permit manual sterilization of the plenums.
3. Supply Registers: Double deflection type with horizontal face bars.
- a. Margin: Flat, 30 mm (1-1/4 inches) wide.
 - b. Bar spacing: 20 mm (3/4 inch) maximum.
 - c. Finish: Off white baked enamel for ceiling mounted units. Wall units shall have a prime coat for field painting, or shall be extruded with manufacturer's standard finish.
4. Supply Grilles: Same as registers.
- D. Return and Exhaust Registers and Grilles:
1. Finish: Off-white baked enamel for ceiling mounted units. Wall units shall have a prime coat for field painting, or shall be extruded aluminum with manufacturer's standard aluminum finish.

2. Standard Type: Fixed horizontal face bars set at 30 to 45 degrees, approximately 30 mm (1-1/4 inch) margin.
3. Perforated Face Type: To match supply units.
4. Grid Core Type: 13 mm by 13 mm (1/2 inch by 1/2 inch) core with 30 mm (1-1/4 inch) margin.
5. Linear Type: To match supply units.
6. Door Grilles: Are furnished with the doors.
7. Egg Crate Grilles: Aluminum or Painted Steel 1/2 by 1/2 by 1/2 inch grid providing 90% free area.
 - a. Heavy extruded aluminum frame shall have countersunk screw mounting. Unless otherwise indicated, register blades and frame shall have factory applied white finish.
 - b. Grille shall be suitable for duct or surface mounting as indicated on drawings. All necessary appurtenances shall be provided to allow for mounting.
- E. Acoustic Transfer Grille: Aluminum, suitable for partition or wall mounting.

2.4 WIRE MESH GRILLE

- A. Fabricate grille with 2 x 2 mesh 13 mm (1/2 inch) galvanized steel or aluminum hardware cloth in a spot welded galvanized steel frame with approximately 40 mm (1-1/2 inch) margin.
- B. Use grilles where shown in unfinished areas such as mechanical rooms.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Comply with provisions of Section 23 05 11, COMMON WORK RESULTS FOR HVAC, particularly regarding coordination with other trades and work in existing buildings.
- B. Protection and Cleaning: Protect equipment and materials against physical damage. Place equipment in first class operating condition, or return to source of supply for repair or replacement, as determined by COTR. Protect equipment during construction against entry of foreign matter to the inside and clean both inside and outside before operation and painting.

3.2 INTAKE/ EXHAUST HOODS EXPOSED TO WIND VELOCITY

Provide additional support and bracing to all exposed ductwork installed on the roof or outside the building to withstand wind velocity of (90 mph), as defined in ASCE 7 Fig. 1.

3.3 TESTING, ADJUSTING AND BALANCING (TAB)

Refer to Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.

3.4 OPERATING AND PERFORMANCE TESTS

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

- - - E N D - - -

SECTION 23 40 00
HVAC AIR CLEANING DEVICES

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Air filters for heating, ventilating and air conditioning.
- B. Definitions: Refer to ASHRAE Standard 52.2 for definitions of face velocity, net effective filtering area, media velocity, initial resistance (pressure drop), MERV (Minimum Efficiency Reporting Value), PSE (Particle Size Efficiency), particle size ranges for each MERV number, dust holding capacity and explanation of electrostatic media based filtration products versus mechanical filtration products. Refer to ASHRAE Standard 52.2 Appendix J for definition of MERV-A.

1.2 RELATED WORK

- A. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General mechanical requirements and items, which are common to more than one section of Division 23.
- C. Section 23 74 13, PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS: Filter housing and racks.
- D. Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.

1.3 QUALITY ASSURANCE

- A. Air Filter Performance Report for Extended Surface Filters:
 - 1. Submit a test report for each Grade of filter being offered. The report shall not be more than three (3) years old and prepared by using test equipment, method and duct section as specified by ASHRAE Standard 52.2 for type filter under test and acceptable to COTR, indicating that filters comply with the requirements of this specification. Filters utilizing partial or complete synthetic media will be tested in compliance with pre-conditioning steps as stated in Appendix J. All testing is to be conducted on filters with a nominal 24 inch by 24 inch face dimension. Test for 150 m/min (500 fpm) will be accepted for lower velocity rated filters provided the test report of an independent testing laboratory complies with all the requirements of this specification.
 - 2. Government Option: The Government at its option may take one of the filters for each different type submitted and run an independent test to determine if the filter meets the requirements of this specification. When the filter meets the requirements, the Government will pay for the test. When the filter does not meet the specification requirements, the manufacturer will be required to pay

for the test and replace the filters with filters that will perform as required by the specifications.

3. Guarantee Performance: The manufacturer shall supply ASHRAE 52.2 test reports on each filter type submitted. Any filter supplied will be required to maintain the minimum efficiency shown on the ASHRAE Standard 52.2 report throughout the time the filter is in service. Within the first 6-12 weeks of service a filter may be pulled out of service and sent to an independent laboratory for ASHRAE Standard 52.2 testing for initial efficiency only. If this filter fails to meet the minimum level of efficiency shown in the previously submitted reports, the filter manufacturer/distributor shall take back all filters and refund the owner all monies paid for the filters, cost of installation, cost of freight and cost of testing.
- B. Filter Warranty for Extended Surface Filters: Guarantee the filters against leakage, blow-outs, and other deficiencies during their normal useful life, up to the time that the filter reaches the final pressure drop. Defective filters shall be replaced at no cost to the Government.
- C. Comply with UL Standard 900 for flame test.
- D. Nameplates: Each filter shall bear a label or name plate indicating manufacturer's name, filter size, rated efficiency, UL classification, and file number.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 1. Extended surface filters.
 2. Holding frames. Identify locations.
 3. Side access housings. Identify locations, verify insulated doors.
 4. HEPA filters.
 5. Magnehelic gages.
- C. Air Filter performance reports.
- D. Suppliers warranty.
- E. Field test results for HEPA filters as per paragraph 2.3.E.3.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.

- B. American Society of Heating, Refrigerating and Air-conditioning Engineers, Inc. (ASHRAE):
 52.2-2007.....Method of Testing General Ventilation Air-Cleaning Devices for Removal Efficiency by Particle Size, including Appendix J
- C. Underwriters Laboratories, Inc. (UL):
 900; Revision 15 July 2009 Test Performance of Air Filter Units

PART 2 - PRODUCTS

2.1 REPLACEMENT FILTER ELEMENTS TO BE FURNISHED

- A. To allow temporary use of HVAC systems for testing and in accordance with Paragraph, TEMPORARY USE OF MECHANICAL AND ELECTRICAL SYSTEMS in Section 01 00 00, GENERAL REQUIREMENTS, provide one complete set of spare filters to the COTR.
- B. The COTR will direct whether these additional filters will either be installed as replacements for dirty units or turned over to VA for future use as replacements.

2.2 EXTENDED SURFACE AIR FILTERS

- A. Use factory assembled air filters of the extended surface type with supported or non-supported cartridges for removal of particulate matter in air conditioning, heating and ventilating systems. Filter units shall be of the extended surface type fabricated for disposal when the contaminant load limit is reached as indicated by maximum (final) pressure drop.
- B. Filter Classification: UL listed and approved conforming to UL Standard 900.
- C. HVAC Filter Types

HVAC Filter Types Table 2.2C				
MERV Value ASHRAE 52.2	MERV-A Value ASHRAE 62.2 Appendix J	Application	Particle Size	Thickness /Type
8	8-A	Pre-Filter	3 to 10 Microns	50 mm (2-inch) Throwaway
11	11-A	After-Filter	1 to 3 Microns	150 mm (6-inch) or 300 mm (12-inch) Rigid Cartridge
14	14-A	After-Filter	0.3 to 1 Microns	150 mm (6-inch) or 300 mm (12-inch) Rigid Cartridge

D. HEPA Filters

HEPA Filters Table 2.2D				
Efficiency at 0.3 Micron	Application	Initial Resistance (inches w.g.)	Rated CFM	Construction
99.97	Final Filter	1.35	1100	Galvanized Frame X-Body
99.97	Final Filter	1.00	2000	Aluminum Frame V-Bank

2.3 MEDIUM EFFICIENCY PLEATED PANEL PRE-FILTERS (2"; MERV 8; UL 900 CLASS 2):

- A. Construction: Air filters shall be medium efficiency ASHRAE pleated panels consisting of cotton and synthetic or 100% virgin synthetic media, self supporting media with required media stabilizers, and beverage board enclosing frame. Filter media shall be lofted to a uniform depth and formed into a uniform radial pleat. The media stabilizers shall be bonded to the downstream side of the media to maintain radial pleats and prevent media oscillation. An enclosing frame of no less than 28-point high wet-strength beverage board shall provide a rigid and durable enclosure. The frame shall be bonded to the media on all sides to prevent air bypass. Integral diagonal support members on the air entering and air exiting side shall be bonded to the apex of each pleat to maintain uniform pleat spacing in varying airflows.
- B. Performance: The filter shall have a Minimum Efficiency Reporting Value of MERV 8 when evaluated under the guidelines of ASHRAE Standard 52.2. It shall also have a MERV-A of 8 when tested per Appendix J of the same standard. The media shall maintain or increase in efficiency over the life of the filter. Pertinent tolerances specified in Section 7.4 of the Air-Conditioning and Refrigeration Institute (ARI) Standard 850-93 shall apply to the performance ratings. All testing is to be conducted on filters with a nominal 24" x 24" face dimension.

Minimum Efficiency Reporting (MERV)	8
Dust Holding Capacity (Grams)	105
Nominal Size (Width x Height x Depth)	24x24x2
Rated Air Flow Capacity (Cubic Feet per Minute)	2,000
Rated Air Flow Rate (Feet per Minute)	500
Final Resistance (Inches w.g.)	1.0
Maximum Recommended Change-Out Resistance (Inches w.g.)	0.66
Rated Initial Resistance (Inches w.g.)	0.33

- C. The filters shall be approved and listed by Underwriters' Laboratories, Inc. as Class 2 when tested according to U. L. Standard 900 and CAN 4-5111.

2.4 HIGH EFFICIENCY EXTENDED SURFACE (INTERMEDIATE/AFTER (FINAL)) CARTRIDGE FILTERS (12"; MERV 14/11; UL 900 CLASS 2):

- A. Construction: Air filters shall consist of 8 pleated media packs assembled into 4 V-banks within a totally plastic frame. The filters shall be capable of operating at temperatures up to 80 degrees C (176 degrees F). The filters must either fit without modification or be adaptable to the existing holding frames. The molded end panels are to be made of high impact polystyrene plastic. The center support members shall be made of ABS plastic. No metal components are to be used.
- B. Media: The media shall be made of micro glass fibers with a water repellent binder. The media shall be a dual density construction, with coarser fibers on the air entering side and finer fibers on the air leaving side. The media shall be pleated using separators made of continuous beads of low profile thermoplastic material. The media packs shall be bonded to the structural support members at all points of contact, this improves the rigidity as well as eliminates potential air bypass in the filter
- C. Performance: Filters of the size, air flow capacity and nominal efficiency (MERV) shall meet the following rated performance specifications based on the ASHRAE 52.2-1999 test method. Where applicable, performance tolerance specified in Section 7.4 of the Air-Conditioning and Refrigeration Institute (ARI) Standard 850-93 shall apply to the performance ratings. All testing is to be conducted on filters with a nominal 24"x24" header dimension.

Minimum Efficiency Reporting Value (MERV)	14	11
Gross Media Area (Sq. Ft.)	197	197
Dust Holding Capacity (Grams)	486	465
Nominal Size (Width x Height x Depth)	24x24x12	24x24x12
Rated Air Flow Capacity (cubic feet per minute)	2,000	2,000
Rated Air Flow Rate (feet per minute)	500	500
Final Resistance (inches w.g.)	2.0	2.0
Maximum Recommended Change-Out Resistance (Inches w.g.)	0.74	0.54
Rated Initial Resistance (inches w.g.)	0.37	0.27

2.5 HIGH EFFICIENCY PARTICULATE AIR (HEPA) FILTERS STANDARD CAPACITY (FINAL FILTER APPLICATION)

- A. Air filters shall be HEPA grade standard capacity air filters with waterproof micro glass fiber media, corrugated aluminum separators, urethane sealant, 16-gauge steel enclosing frame and fluid sealing gasket. Sizes shall be as noted on drawings or other supporting materials.
- B. Construction: Filter media shall be one continuous pleating of microfine glass fiber media. Pleats shall be uniformly separated by corrugated aluminum separators incorporating a hemmed edge to prevent damage to the media. The media pack shall be potted into the enclosing frame with a fire-retardant urethane sealant. The enclosing frame shall be of 16-gauge steel, with a zinc aluminum alloy finish, and shall be bonded to the media pack to form a rugged and durable enclosure. The filter shall be assembled without the use of fasteners to ensure no frame penetrations. Overall dimensional tolerance shall be correct within $\pm 1/8"$, and square within $1/8"$. A poured-in-place seamless sealing gasket shall be included on the downstream side of the enclosing frame to form a positive seal upon installation.
- C. Performance: The filter shall have a tested efficiency of 99.97% when evaluated according to IEST Recommended Practice. Initial resistance to airflow shall not exceed 1.0" w.g. at rated capacity. Filter shall be listed by Underwriters Laboratories as UL 900. The filter shall be capable of withstanding 10" w.g. without failure of the media pack. Manufacturer shall provide evidence of facility certification to ISO 9001:2000.

HEPA Performance (Standard Capacity) Table 2.5A		
Nominal Size (inches)	Airflow Capacity (cfm)	Media Area (Square Feet)
24H by 24W by 12D	1080 at 1.0" w.g.	153
24H by 12W by 12D	500 at 1.0" w.g.	33
Follow manufacturers' recommendation for change out resistance, typically double the initial.		

- D. Supporting Data: The filter shall be labeled as to tested efficiency, rated/tested cfm, pressure drop and shall be serialized for identification. The manufacturer shall supply a Certificate of Conformance for each HEPA filter supplied to the facility.

2.6 HEPA FILTERS HIGH CAPACITY V-BANK HIGH CAPACITY FILTERS (FINAL FILTER APPLICATION)

- A. Air filters shall be absolute grade HEPA filters consisting of pleated media packs assembled in a V-bank configuration, polyurethane sealant,

anodized aluminum enclosure and seamless fluid sealing gasket. Sizes shall be as noted on enclosed drawings or other supporting materials.

- B. Construction: Filter media shall be micro fiber glass formed into mini-pleat pleat-in-pleat V-bank design. The media packs shall be potted into the enclosing frame with fire retardant polyurethane sealant. An enclosing frame of anodized extruded aluminum shall form a rugged and durable enclosure. A seamless sealing gasket shall be included on the downstream side of the filter to form a positive seal upon installation.
- C. Performance: Filter efficiency at 0.3 micron shall be 99.99% when evaluated according to the IEST Recommended Practice for applicable type. Each filter shall be labeled as to tested performance. Initial resistance target shall not exceed 1.0" w.g. at rated airflow.

HEPA Performance V-Bank Style (High Capacity) Table 2.5B		
Nominal Size (inches)	Airflow Capacity (cfm)	Media Area (Square Feet)
24H by 24W by 12D	2000 at 1.0" w.g.	390
24H by 12W by 12D	900 at 1.0" w.g.	174
Follow manufacturers' recommendation for change out resistance, typically double the initial.		

- D. Supporting Data: The filter shall be labeled as to tested efficiency, rated/tested cfm, pressure drop and shall be serialized for identification. The manufacturer shall supply a Certificate of Conformance for each HEPA filter supplied to the facility.
- E. Filter must be listed as UL 586 and UL 900 per Underwriters Laboratories. Manufacturer shall provide evidence of facility certification to ISO 9001:2000.

2.7 FILTER HOUSINGS/SUPPORT FRAMES

- A. Side Servicing Housings (HVAC Grade)
- Filter housing shall be two-stage filter system consisting of 16-gauge galvanized steel enclosure, aluminum filter mounting track, universal filter holding frame, insulated dual-access doors, static pressure tap, filter gaskets and seals. In-line housing depth shall not exceed 21". Sizes shall be as noted on enclosed drawings or other supporting materials.
 - Construction: The housing shall be constructed of 16-gauge galvanized steel with pre-drilled standing flanges to facilitate attachment to other system components. Corner posts of Z-channel construction shall ensure dimensional adherence. Where installed outdoors, the housing shall be weatherproof and suitable for rooftop/outdoor installation. The housing shall incorporate the capability of two stages of filtration without modification to the housing. A filter track, of

- aluminum construction shall be an integral component of housing construction. The track shall accommodate a 2" deep prefilter, a 6" or 12" deep rigid final filter, or a pocket filter with header. Insulated dual access doors, swing-open type, shall include high-memory sponge neoprene gasket to facilitate a door-to-filter seal. Each door shall be equipped with adjustable and replaceable positive sealing UV-resistant star-style knobs and replaceable door hinges. A universal holding frame constructed of 18-gauge galvanized steel, equipped with centering dimples, multiple fastener lances, and polyurethane filter sealing gasket, shall be included to facilitate installation of high-efficiency filters. The housing shall include a pneumatic fitting to allow the installation of a static pressure gauge to evaluate pressure drop across a single filter or any combination of installed filters.
3. Performance: Leakage at rated airflow, upstream to downstream of filter, holding frame, and slide mechanism shall be less than 1% at 3.0" w.g. Leakage in to or out of the housing shall be less than one half of 1% at 3.0" w.g. Accuracy of pneumatic pressure fitting, when to evaluate a single-stage, or multiple filter stages, shall be accurate within $\pm 3\%$ at 0.6" w.g.
 4. Manufacturer shall provide evidence of facility certification to ISO 9001:2000.
- B. Holding Frame System (HVAC Grade):
1. Air filter-holding frames shall be 16-gauge galvanized steel with filter sealing flange, centering dimples, sealing gasket and lances for appropriate air filter fasteners. Sizes shall be noted on drawings or other supporting materials.
 2. Construction: Filter holding frame shall be constructed of 16-gauge galvanized steel. The frame shall be assembled from two corner sections and welded to assure a rigid and durable frame assembly. The frame shall include a variety of pre-punched lances for filter fastener attachment. Fastener shall be capable of being installed without the use of tools, nuts or bolts. Lance penetrations shall be upstream of filter flange to assure leak-free integrity. The frame shall include filter-centering dimples on each frame wall to facilitate ease of filter installation and assure filter centering against filter sealing flange. A 3/4" filter-sealing flange shall be an integral component of the holding frame. All corners shall be flush mitered and a permanently mounted polyurethane foam gasket shall be mounted on the sealing flange to assure filter to frame sealing integrity.

3. Manufacturer shall provide evidence of facility certification to ISO 9001:2000.

2.8 INSTRUMENTATION

- A. Magnehelic Differential Pressure Filter Gages: Nominal 100 mm (four inch) diameter, zero to 500 Pa (zero to two inch water gage), except for MERV 17 HEPA Final Filters, where the range shall be zero to 750 Pa (zero to three inch water gage). Gauges shall be flush-mounted in aluminum panel board, complete with static tips, copper or aluminum tubing, and accessory items to provide zero adjustment.
- B. DDC static (differential) air pressure measuring station. Refer to Specification Section 23 09 23 DIRECT DIGITAL CONTROL SYSTEM FOR HVAC
- C. Provide one DDC sensor across each extended surface filter. Provide Petcocks for each gauge or sensor.
- D. Provide one common filter gauge for two-stage filter banks with isolation valves to allow differential pressure measurement.

2.9 HVAC EQUIPMENT FACTORY FILTERS

- A. Manufacturer standard filters within fabricated packaged equipment should be specified with the equipment and should adhere to industry standard.
- B. Cleanable filters are not permitted.
- C. Automatic Roll Type filters are not permitted.

2.10 FILTER RETURN GRILLES

Refer to Section 23 37 00 AIR OUTLETS AND INLETS.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install supports, filters and gages in accordance with manufacturer's instructions.
- B. Label clearly with words "Contaminated Air" on exhaust ducts leading to the HEPA filter housing.

3.2 START-UP AND TEMPORARY USE

- A. Clean and vacuum air handling units and plenums prior to starting air handling systems.
- B. Install or deliver replacement filter units as directed by the COTR.

3.3 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 -

COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

- - E N D - - -

SECTION 23 74 13
PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Roof top air handling units including integral components specified herein.
- B. Definitions: Roof Top Air Handling Unit(Roof Top Units, RTU): A factory fabricated assembly consisting of fan, coils, filters, and other necessary equipment to perform one or more of the following functions of circulating, cleaning, heating, cooling, humidifying, dehumidifying, energy recovery (heat pipe), and mixing of air. Design capacities of units shall be as scheduled on the drawings.

1.2 RELATED WORK

- A. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Seismic restraints for equipment.
- B. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General mechanical requirements and items, which are common to more than one section of Division 23.
- C. Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT: Sound and vibration requirements.
- D. Section 23 21 13, HYDRONIC PIPING and Section 23 22 13, STEAM and CONDENSATE HEATING PIPING: Piping and valves.
- E. Section 23 82 16, AIR COILS: Heating and cooling coils and pressure requirements.
- F. Section 23 34 00, HVAC FANS: Return and exhaust fans.
- G. Section 23 31 00, HVAC DUCTS and CASINGS: Requirements for flexible duct connectors, sound attenuators and sound absorbing duct lining.
- H. Section 23 40 00, HVAC AIR CLEANING DEVICES: Air filters and filters' efficiency.
- I. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC: HVAC controls.
- J. Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC: Testing, adjusting and balancing of air and water flows.
- K. Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC and STEAM GENERATION EQUIPMENT: Types of motors.
- L. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS:
- M. Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.

1.3 QUALITY ASSURANCE

- A. Refer to Article, Quality Assurance, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- B. Air Handling Units Certification
 - 1. Air Handling Units with Housed Centrifugal Fans: The air handling units shall be certified in accordance with AHRI 430 and tested/rated in accordance with AHRI 260.
 - 2. Air Handling Units with Plenum Fans:
 - a. Air Handling Units with a single Plenum Fan shall be certified in accordance with AHRI 430 and tested/rated in accordance with AHRI 260.
 - b. Air handling Units with Multiple Fans in an Array shall be tested and rated in accordance with AHRI 430 and AHRI 260.
- C. Heating, Cooling, and Air Handling Capacity and Performance Standards: AHRI 430, AHRI 410, ASHRAE 51, and AMCA 210.
- D. Performance Criteria:
 - 1. The fan BHP shall include all system effects for all fans and v-belt drive losses for housed centrifugal fans.
 - 2. The fan motor shall be selected within the rated nameplate capacity, without relying upon NEMA Standard Service Factor.
 - 3. Select the fan operating point as follows:
 - a. Forward Curve and Axial Flow Fans: Right hand side of peak pressure point.
 - b. Air Foil, Backward Inclined, or Tubular Fans Including Plenum Fans: At or near the peak static efficiency but at an appropriate distance from the stall line.
 - 4. Operating Limits: AMCA 99 and Manufacturer's Recommendations.
- E. Units shall be factory-fabricated, assembled, and tested by a manufacturer, in business of manufacturing similar air-handling units for at least five (5) years.

1.4 SUBMITTALS:

- A. The contractor shall, in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish a complete submission for all roof top units covered in the project. The submission shall include all information listed below. Partial and incomplete submissions shall be rejected without reviews.
- B. Manufacturer's Literature and Data:
 - 1. Submittals for RTUs shall include fans, drives, motors, coils, humidifiers, mixing box with outside/return air dampers, filter housings, and all other related accessories. The contractor shall

- provide custom drawings showing total air handling unit assembly including dimensions, operating weight, access sections, flexible connections, door swings, controls penetrations, electrical disconnect, lights, duplex receptacles, switches, wiring, utility connection points, unit support system, vibration isolators, drain pan, pressure drops through each component (filter, coil etc) and rigging points.
2. Submittal drawings of section or component only, will not be acceptable. Contractor shall also submit performance data including performance test results, charts, curves or certified computer selection data; data sheets; fabrication and insulation details; if the unit cannot be shipped in one piece, the contractor shall indicate the number of pieces that each unit will have to be broken into to meet shipping and job site rigging requirements. This data shall be submitted in hard copies and in electronic version compatible to AutoCAD version used by the VA at the time of submission.
 3. Submit sound power levels in each octave band for fan and at entrance and discharge of RTUs at scheduled conditions. Include sound attenuator capacities and itemized internal component attenuation. Internal lining of supply air ductwork with sound absorbing material is not permitted. In absence of sound power ratings refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
 4. Provide fan curves showing Liters/Second (cubic feet per minute), static pressure, efficiency, and horsepower for design point of operation and at maximum design Liters/Second (cubic feet per minute) and 110 percent of design static pressure.
 5. Submit total fan static pressure, external static pressure, for RTU including total, inlet and discharge pressures, and itemized specified internal losses and unspecified internal losses. Refer to air handling unit schedule on drawings.
 6. Provide energy recovery (heat pipe) performance data for outgoing and incoming airstreams including CFM, pressure drop, efficiency, temperatures, and BTU. Refer to Air Handling Unit schedule on drawings.
- C. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS. Include instructions for lubrication, filter replacement, motor and drive replacement, spare part lists, and wiring diagrams.

- D. Submit written test procedures two weeks prior to factory testing.
Submit written results of factory tests for approval prior to shipping.
- E. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.
- F. Submit shipping information that clearly indicates how the units will be shipped in compliance with the descriptions below.
1. Units shall be shipped in one (1) piece where possible and in shrink wrapping to protect the unit from dirt, moisture and/or road salt.
 2. If not shipped in one (1) piece, provide manufacturer approved shipping splits where required for installation or to meet shipping and/or job site rigging requirements in modular sections. Indicate clearly that the shipping splits shown in the submittals have been verified to accommodate the construction constraints for rigging as required to complete installation and removal of any section for replacement through available access without adversely affecting other sections.
 3. If shipping splits are provided, each component shall be individually shrink wrapped to protect the unit and all necessary hardware (e.g. bolts, gaskets etc.) will be included to assemble unit on site (see section 2.1.A4).
 4. Lifting lugs will be provided to facilitate rigging on shipping splits and joining of segments. If the unit cannot be shipped in one piece, the contractor shall indicate the number of pieces that each unit will have to be broken into to meet shipping and job site rigging requirements.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Air-Conditioning, Heating, and Refrigeration Institute (AHRI):
- 260-01.....Sound Rating of Ducted Air Moving and
Conditioning Equipment
- 410-01.....Standard for Forced-Circulation Air-Heating and
Air-Cooling Coils
- 430-09.....Standard for Central Station Air Handling Units
- AHRI-DCAACP.....Directory of Certified Applied Air Conditioning
Products

- C. Air Moving and Conditioning Association (AMCA):
210-07.....Laboratory Methods of Testing Fans for Rating
- D. Anti-Friction Bearing Manufacturer's Association, Inc. (AFBMA):
9-90 (R2008).....Load Ratings and Fatigue life for Ball Bearings
- E. American Society of Heating, Refrigerating and Air Conditioning
Engineers (ASHRAE):
51-2007.....Laboratory Methods of Testing Fans for Rating
- F. American Society for Testing and Materials (ASTM):
A653/653M-02.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-
Iron Alloy-Coated (Galvannealed) by the Hot-Dip
Process
B117-07a.....Salt Spray (Fog) Testing
C1071-05e1.....Standard Specification for Fibrous Glass Duct
Lining Insulation (Thermal and Sound Absorbing
Material)
D1654-08.....Standard Method for Evaluation of Painted or
Coated Specimens Subjected to Corrosive
Environments
D1735-08.....Water Resistance of Coatings Using Water Fog
Apparatus
D3359-08.....Standard Test Methods for Measuring Adhesion by
Tape Test
E84-10.....Standard Test Method for Surface Burning
Characteristics of Building Materials
- G. Anti-Friction Bearing Manufacturer's Association, Inc. (AFBMA):
9-90.....Load Ratings and Fatigue life for Ball Bearings
- H. Military Specifications (Mil. Spec.):
DOD-P-21035A-2003.....Paint, High Zinc Dust Content, Galvanizing
Repair
- I. National Fire Protection Association (NFPA):
NFPA 90A.....Standard for Installation of Air Conditioning
and Ventilating Systems, 2009
- J. Energy Policy Act of 2005 (P.L.109-58)

PART 2 - PRODUCTS

2.1 ROOF TOP AIR HANDLING UNITS

- A. General:
1. Roof top units (RTU) shall be fabricated from insulated, solid double-wall galvanized steel without any perforations in draw-through configuration. Casing is specified in paragraph 2.1.C. Galvanizing shall be hot dipped conforming to ASTM A525 and shall provide a

- minimum of 0.275 kg of zinc per square meter (0.90 oz. of zinc per square foot) (G90). Aluminum constructed units may be provided subject to VA approval and documentation that structural rigidity is equal or greater than the galvanized steel specified.
2. The contractor and the RTU manufacturer shall be responsible for insuring that the unit will not exceed the allocated space shown on the drawings, including required clearances for service and future overhaul or removal of unit components. All structural, piping, wiring, and ductwork alterations of units, which are dimensionally different than those specified, shall be the responsibility of the contractor at no additional cost to the government.
 3. RTUs shall be fully assembled by the manufacturer in the factory in accordance with the arrangement shown on the drawings. The unit shall be assembled into the largest sections possible subject to shipping and rigging restrictions. The correct fit of all components and casing sections shall be verified in the factory for all units prior to shipment. All units shall be fully assembled, tested and then split to accommodate shipment and job site rigging. On units not shipped fully assembled, the manufacturer shall tag each section and include air flow direction to facilitate assembly at the job site. Lifting lugs or shipping skids shall be provided for each section to allow for field rigging and final placement of unit.
 4. The RTU manufacturer shall provide the necessary gasketing, caulking, and all screws, nuts, and bolts required for assembly. The manufacturer shall provide a local representative at the job site to supervise the assembly and to assure the units are assembled to meet manufacturer's recommendations and requirements noted on the drawings. Provide documentation that this representative has provided this service on similar jobs to the Contracting Officer. If a local representative cannot be provided, the manufacturer shall provide a factory representative.
 5. Gaskets: All door and casing and panel gaskets and gaskets between air handling unit components, if joined in the field, shall be high quality which seal air tight and retain their structural integrity and sealing capability after repeated assembly and disassembly of bolted panels and opening and closing of hinged components. Bolted sections may use a more permanent gasketing method provided they are not disassembled.
 6. Structural Rigidity: Provide structural reinforcement when required by span or loading so that the deflection of the assembled structure

shall not exceed 1/200 of the span based on a differential static pressure of 1991 Pa (8 inches water gage) or higher.

7. Corrosion Protection:

a. Coil Treatment: Epoxy Immersion Coating-Electrically Deposited:

The multi-stage corrosion-resistant coating application comprises of cleaning (heated alkaline immersion bath) and reverse-osmosis immersion rinse prior to the start of the coating process. The coating thickness shall be maintained between 0.6-mil and 1.2-mil.

Before the coils are subjected to high-temperature oven cure, they are treated to permeate immersion rinse and spray. Where the coils are subject to UV exposure, UV protection spray treatment comprising of UV-resistant urethane mastic topcoat shall be applied. Provide complete coating process traceability for each coil and minimum five years of limited warranty. The coating process shall such that uniform coating thickness is maintained at the fin edges. The quality control shall be maintained by ensuring compliance to the applicable ASTM Standards for the following:

- 1) Salt Spray Resistance (Minimum 6,000 Hours)
- 2) Humidity Resistance (Minimum 1,000 Hours)
- 3) Water Immersion (Minimum 260 Hours)
- 4) Cross-Hatch Adhesion (Minimum 4B-5B Rating)
- 5) Impact Resistance (Up to 160 Inch/Pound)

b. Casing Surfaces (Exterior and Interior): All exposed and accessible exterior and interior metal surfaces shall be protected with a water-reducible acrylic with stainless steel pigment spray-applied over the manufacturer's standard finish. The spray coating thickness shall be 2-4 mils and provide minimum salt-spray resistance of 1,000 hours (ASTM B117) and 500 hours UV resistance (ASTM D4587).

B. Base:

1. Provide a heavy duty steel base for supporting all major RTU components. Bases shall be constructed of wide-flange steel I-beams, channels, or minimum 125 mm (5 inch) high 3.5 mm (10 Gauge) steel base rails. Welded or bolted cross members shall be provided as required for lateral stability. Contractor shall provide supplemental steel supports as required to obtain proper operation heights for cooling coil condensate drain trap and steam coil condensate return trap as shown on drawings.

2. RTUs shall be completely self supporting for installation on roof curb or steel support pedestals.
 3. The RTU bases not constructed of galvanized material shall be cleaned, primed with a rust inhibiting primer, and finished with rust inhibiting exterior enamel.
- C. Casing (including wall, floor and roof):
1. General: RTU casing shall be entirely double wall insulated panels, integral of or attached to a structural frame. Construction shall be such that removal of any panel shall not affect the structural integrity of the unit. Casing finished shall meet salt-spray test as specified in paragraph 2.1.C.10. All casing and panel sections shall be tightly butted and gasketed. No gaps of double wall construction will be allowed where panels bolt to air handling unit structural member. Structural members, not covered by the double wall panels, shall have equivalent insulated double wall construction.
 2. Double wall galvanized steel panels, minimum 51 mm (2 inches) thick, constructed of minimum 1.3 mm (18 gauge) outer skin and 1.0 mm (20 gauge) solid or perforated inner skin to limit wall, roof and floor deflection to not exceed an L/240 ratio when the unit casing is pressurized to (± 1245 Pa (± 5 in. w.g.)). Deflection shall be measured at the midpoint of the panel height. Total housing leakage shall not exceed 1% of rated cfm when the unit casing is pressurized to ± 5 in. w.g. (± 1245 Pa). The outer (skin) and inner panels shall be solid.
 3. Blank-Off: Provide blank-offs as required to prevent air bypass between the AHU sections, around coils, and filters.
 4. Insulation: Insulation shall be injected CFC free polyurethane foam encased in double-wall casing between exterior and interior panels such that no insulation can erode to the air stream. Insulation shall be 50 mm (2 inch) thick, and 48 kg/m^3 (3.0 lb/ft^3) density with a total thermal resistance (R-value) of approximately 2.3 m.K/W ($13.0 \text{ hr-ft}^2 \text{ }^\circ\text{F/BTU}$). Units with less than 50 mm (2 inch) of insulation in any part of the walls, floor, roof or drain pan shall not be acceptable. The insulation shall comply with NFPA 90-A for the flame and smoke generation requirements. Also, refer to specification Section 23 07 11, HVAC INSULATION.

Table 2.1.C.4

Outer Panel	0.8 mm (22 Gage) Minimum
Inner Panel	0.8 mm (22 Gage) Minimum
Insulation	Foam

Thickness	50 mm (2 inch) Minimum
Density	48 kg/m ³ (3.0 lb/ft ³) Minimum
Total R Value	2.3 m ² .K/W (13.0 ft ² .OF.hr/Btu) Minimum

5. The thickness of insulation, mode of application, and thermal breaks shall be such that there is no visible condensation on the exterior panels of the AHU.
6. Casing panels shall be secured to the support structure with stainless steel or zinc-chromate plated screws and gaskets installed around the panel perimeter. Panels shall be completely removable to allow removal of fan, coils, and other internal components for future maintenance, repair, or modifications. Welded exterior panels are not acceptable.
7. Access Doors: Provide in each access section and where shown on drawings. Show single-sided and double-sided access doors with door swings on the floor plans. Doors shall be a minimum of 50 mm (2 inches) thick with same double wall construction as the unit casing. Doors shall be a minimum of 600 mm (24 inches) wide, unless shown of different size on drawings, and shall be the full casing height up to a maximum of 1850 mm (6 feet). Doors shall be gasketed, hinged, and latched to provide an airtight seal. The access doors for fan section, mixing box, humidifier coil section shall include a minimum 150 mm x 150 mm (6 inch x 6 inch) double thickness, with air space between glass panes tightly sealed, reinforced glass or Plexiglas window in a gasketed frame.
 - a. Hinges: Manufacturers standard, designed for door size, weight and pressure classifications. Hinges shall hold door completely rigid with minimum 45 kg (100 pound) weight hung on latch side of door.
 - b. Latches: Non-corrosive alloy construction, with operating levers for positive cam action, operable from either inside or outside. Doors that do not open against unit operating pressure shall allow the door to ajar and then require approximately 0.785 radian (45 degrees) further movement of the handle for complete opening. Latch shall be capable of restraining explosive opening of door with a force not less than 1991 Pa (8 inches water gage).
 - c. Gaskets: Neoprene, continuous around door, positioned for direct compression with no sliding action between the door and gasket. Secure with high quality mastic to eliminate possibility of gasket slipping or coming loose.

8. Provide sealed sleeves, metal or plastic escutcheons or grommets for penetrations through casing for power and temperature control wiring and pneumatic tubing. Coordinate with electrical and temperature control subcontractors for number and location of penetrations. Coordinate lights, switches, and duplex receptacles and disconnect switch location and mounting. All penetrations and equipment mounting may be provided in the factory or in the field. All field penetrations shall be performed neatly by drilling or saw cutting. No cutting by torches will be allowed. Neatly seal all openings airtight.
 9. Roof of the unit shall be sloped to have a minimum pitch of 1/4 inch per foot. The roof shall overhang the side panels by a minimum of three inches to prevent precipitation drainage from streaming down the unit side panels.
 10. Casing finished shall meet ASTM B117, 500-hour salt spray test, using 20 percent sodium chloride solution. Immediately after completion of the test, the coating shall show no sign of blistering, wrinkling, or cracking, no loss of adhesion, and the specimen shall show no sign of rust creepage beyond 1/8-inch on either side of scratch mark.
- D. Unit floor shall be level without offset space or gap and designed to support a minimum of 488 kg/square meter (100 pounds per square foot) distributed load without permanent deformation or crushing of internal insulation. Provide adequate structural base members beneath floor in service access sections to support typical service foot traffic and to prevent damage to unit floor or internal insulation. Unit floors in casing sections, which may contain water or condensate, shall be watertight with drain pan.
- E. Condensate Drain Pan: Drain pan shall be designed to extend entire length of cooling coils including headers and return bends. Depth of drain pan shall be at least 43 mm (1.7 inches) and shall handle all condensate without overflowing. Drain pan shall be double wall construction, Type 304 stainless steel and have a minimum of 50 mm (2 inch) insulation, and shall be sloped to drain. Drain pan shall be continuous metal or welded watertight. No mastic sealing of joints exposed to water will be permitted. Drain pan shall be placed on top of casing floor or integrated into casing floor assembly. Drain pan shall be pitched in all directions to drain line.
1. An intermediate condensate drip pan shall be provided on stacked cooling coils and shall be constructed of type 304 stainless steel with copper downspouts factory piped to main condensate pan. Use of

intermediate condensate drain channel on upper casing of lower coil is permissible provided it is readily cleanable. Design of intermediate condensate drain shall prevent upper coil condensate from flowing across face of lower coil.

2. Drain pan shall be piped to the exterior of the unit. Drain pan shall be readily cleanable.
3. Installation, including frame, shall be designed and sealed to prevent blow-by.

F. Housed Centrifugal Fan Sections:

1. Fans shall be minimum Class II construction, double width, double inlet centrifugal, air foil or backward inclined or forward curved type as indicated on drawings, factory balanced and rated in accordance with AMCA 210 or ASHRAE 51. Provide self-aligning, pillow block, regreasable ball-type bearings selected for a B(10) life of not less than 40,000 hours and an L(50) average fatigue life of 200,000 hours per AFBMA Standard 9. Extend bearing grease lines to motor and drive side of fan section. Fan shall be located in airstream to assure proper air flow.
2. Provide internally vibration isolated fan, motor and drive, mounted on a common integral bolted or welded structural steel base with adjustable motor slide rail with locking device. Provide vibration isolators and flexible duct connections at fan discharge to completely isolate fan assembly. Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT, for additional requirements. Allowable vibration tolerances for fan shall not exceed a self-excited vibration maximum velocity of 0.005 m/s (0.20 inch per second) RMS, filter in, when measured with a vibration meter on bearing caps of machine in vertical, horizontal and axial directions or measured at equipment mounting feet if bearings are concealed. After field installation, compliance to this requirement shall be demonstrated with field test in accordance with Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT and Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC. Following fan assembly, the complete fan assembly balance shall be tested using an electronic balance analyzer with a tunable filter and stroboscope. Vibration measurements shall be taken on each motor bearing housing in the vertical, horizontal, and axial planes (5 total measurements, 2 each motor bearing and 1 axial).

G. Fan Motor, Drive, and Mounting Assembly (Housed Centrifugal Fans):

1. Fan Motor and Drive: Motors shall be premium energy efficient type, as mandated by the Energy Policy Act of 2005, with efficiencies as shown in the Specifications Section 23 05 12 (General Motor Requirements For HVAC and Steam Equipment), on drawings and suitable for use in variable frequency drive applications on AHUs where this type of drive is indicated. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION, for additional motor and drive specifications.
2. Fan drive and belts shall be factory mounted with final alignment and belt adjustment to be made by the Contractor after installation. Drive and belts shall be as specified in Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION. Provide additional drive(s) if required during balancing, to achieve desired airflow.

H. Plenum Fans - Single and/or Multiple Fans in an Array

1. General: Fans shall be Class II (minimum) construction with single inlet, aluminum wheel and stamped air-foil aluminum bladed. The fan wheel shall be mounted on the directly-driven motor shaft in AMCA Arrangement 4. Fans shall be dynamically balanced and internally isolated to minimize the vibrations. Provide a steel inlet cone for each wheel to match with the fan inlet. Locate fan in the air stream to assure proper flow. The fan performance shall be rated in accordance with AMCA 210 or ASHRAE 51.
2. Allowable vibration tolerances for fan shall not exceed a self-excited vibration maximum velocity of 0.005 m/s (0.20 inch per second) RMS, filter in, when measured with a vibration meter on bearing caps of machine in vertical, horizontal and axial directions. After field installation, compliance to this requirement shall be demonstrated with field test in accordance with Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT and Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC. The fan wheel shall meet or exceed guidelines in AMCA 801-92 for dynamic balancing requirements. The complete fan assembly balance shall be tested using an electronic balance analyzer with a tunable filter and stroboscope. Vibration measurements shall be taken on each motor bearing housing in the vertical, horizontal, and axial planes (5 total measurements, 2 each motor bearing and 1 axial).
3. The plenum fans shall be driven by variable speed drives with at least one back-up drive as shown in the design documents. Use of a drive with bypass is not permitted.

4. Multiple fans shall be installed in a pre-engineered structural frame to facilitate fan stacking. All fans shall modulate in unison, above or below the synchronous speed within the limits specified by the manufacturer, by a common control sequence. Staging of the fans is not permitted. Redundancy requirement shall be met by all operating fans in an array and without the provision of an idle standby fan.
5. Fan Accessories
 - a. Fan Isolation: Provide an actuator-controlled damper to isolate the fan not in operation due to failure.
 - b. Fan Airflow Measurement: Provide an airflow measuring device integral to the fan to measure air volume within +/- 5 percent accuracy. The probing device shall not be placed in the airflow path to stay clear of turbulence and avoid loss of performance.
6. Fan Motor, Drive and Mounting Assembly: Fan Motors shall be premium energy efficient type, as mandated by the Energy Policy Act of 2005, with efficiencies as shown in the Specifications Section 23 05 12 (General Motor Requirements For HVAC and Steam Equipment), on drawings and suitable for use in variable frequency drive applications. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION, for additional motor and drive specifications.
- I. Mixing Boxes: Mixing box shall consist of casing and outdoor air and return air dampers in opposed blade arrangement with damper linkage for automatic operation. Coordinate damper operator with Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC. Dampers shall be of ultra-low leak design with metal compressible bronze jamb seals and extruded vinyl edge seals on all blades. Blades shall rotate on stainless steel sleeve bearings or bronze bushings. Leakage rate shall not exceed 1.6 cubic meters/min/square meter (5 cfm per square foot) at 250 Pa (1 inch water gage) and 2.8 cubic meters/min/square meter (9 cfm per square foot) at 995 Pa (4 inches water gage) Electronic damper operators shall be furnished and mounted in an accessible and easily serviceable location by the air handling unit manufacturer at the factory. Damper operators shall be of same manufacturer as controls furnished under Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- J. Filter Section: Refer to Section 23 40 00, HVAC AIR CLEANING DEVICES, for filter requirements.
 1. Filters including one complete set for temporary use at site shall be provided independent of the RTU. The RTU manufacturer shall install filter housings and racks in filter section compatible with filters

- furnished. The RTU manufacturer shall be responsible for furnishing temporary filters (pre-filters and after-filters, as shown on drawings) required for RTU testing.
2. Factory-fabricated filter section shall be of the same construction and finish as the RTU casing including filter racks and hinged double wall access doors. Filter housings shall be constructed in accordance with side service or holding frame housing requirements in Section 23 40 00, HVAC AIR CLEANING DEVICES.
- K. Coils: Coils shall be mounted on hot dipped galvanized steel supports to assure proper anchoring of coil and future maintenance. Coils shall be face or side removable for future replacement thru the access doors or removable panels. Each coil shall be removable without disturbing adjacent coil. Cooling coils shall be designed and installed to insure no condensate carry over. Provide factory installed extended supply, return, drain, and vent piping connections. For air handling units serving surgical suites, provide copper fins for all coils. Refer to Drawings and Section 23 82 16, AIR COILS, for additional coil requirements.
1. Water Coils.
 2. Steam Distributing Tube Coils.
- L. Humidifier: When included in design, coordinate the humidification requirements with section 23 84 13 Humidifiers. Provide humidification section with stainless steel drain pan of adequate length to allow complete absorption of water vapor. Provide stainless steel dispersion panel or distributors as indicated, with stainless steel supports and hardware.
- M. Sound Attenuators: Refer to Drawings, Specification Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT, and Section 23 31 00, HVAC DUCTS AND CASINGS, for additional unit mounted sound attenuator requirements. RTU sound attenuators shall be factory installed as an integral part of RTU.
- N. Discharge Section: Provide aerodynamically designed framed discharge openings or spun bellmouth fittings to minimize pressure loss.
- O. Electrical and Lighting: Wiring and equipment specifications shall conform to Division 26, ELECTRICAL.
1. Vapor-proof lights using cast aluminum base style with glass globe and cast aluminum guard shall be installed in access sections for fan, mixing box, humidifier and any section over 300mm (12 inch) wide. A switch shall control the lights in each compartment with pilot light mounted outside the respective compartment access door.

- Wiring between switches and lights shall be factory installed. All wiring shall run in neatly installed electrical conduits and terminate in a junction box for field connection to the building system. Provide single point 115 volt - one phase connection at junction box.
2. Install compatible 100 watt bulb in each light fixture.
 3. Provide a convenience duplex weatherproof receptacle next to the light switch.
 4. Disconnect switch and power wiring: Provide factory or field mounted disconnect switch. Coordinate with Division 26, ELECTRICAL.
- P. Provide heat recovery units of the heat pipe air-to-air type as shown on equipment schedules. Heat pipe shall be manufactured by AHU manufacturer as an integral component. Heat pipe shall transfer heat between outgoing and incoming air streams in counter flow arrangement. A portion shall be provided to isolate the outgoing and incoming air streams; with no cross contamination. Performance data shall be in accordance with ASHRAE Standard 84-1991 "method of testing air-to-air heat exchangers." Performance shall be rated in accordance with ARI testing procedures.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install roof top unit in conformance with ARI 435.
- B. Assemble roof top unit components following manufacturer's instructions for handling, testing and operation. Repair damaged galvanized areas with paint in accordance with Military Spec. DOD-P-21035A. Repair painted units by touch up of all scratches with finish paint material. Vacuum the interior of air-handling units clean prior to operation.
- C. Install seismic restraints for roof top units. Refer to specification Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- D. Leakage and test requirements for roof top units shall be the same as specified for ductwork in Specification Section 23 31 00, HVAC DUCTS AND CASINGS except leakage shall not exceed Leakage Class (C_L) 12 listed in SMACNA HVAC Air Duct Leakage Test Manual when tested at 1.5 times the design static pressure. Repair casing air leaks that can be heard or felt during normal operation and to meet test requirements.
- E. Perform field mechanical (vibration) balancing in accordance with Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.
- F. Seal and/or fill all openings between the casing and RTU components and utility connections to prevent air leakage or bypass.

3.2 STARTUP SERVICES

- A. The air handling unit shall not be operated for any purpose, temporary or permanent, until ductwork is clean, filters are in place, bearings are lubricated and fan has been test run under observation.
- B. After the air handling unit is installed and tested, provide startup and operating instructions to VA personnel.
- C. An authorized factory representative should start up, test and certify the final installation and application specific calibration of control components. Items to be verified include fan performance over entire operating range, noise and vibration testing, verification of proper alignment, overall inspection of the installation, Owner/Operator training, etc.

3.3 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

- - - E N D - - -

SECTION 23 82 00
CONVECTION HEATING AND COOLING UNITS

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Fan-coil units and unit heaters.

1.2 RELATED WORK

- A. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Seismic restraints for equipment.
- B. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General mechanical requirements and items, which are common to more than one section of Division 23.
- C. Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT: Noise requirements.
- D. Section 23 21 13, HYDRONIC PIPING: Heating hot water and chilled water piping.
- E. Section 23 31 00, HVAC DUCTS and CASINGS: Ducts and flexible connectors.
- F. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC: Valve operators.
- G. Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC: Flow rates adjusting and balancing.
- H. Section 23 82 16, AIR COILS: Additional coil requirements.
- I. Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.
- J. Section 01 09 00 - GENERAL COMMISSIONING REQUIREMENTS

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Fan-Coil units.
 - 2. Unit heaters.
- C. Certificates:
 - 1. Compliance with paragraph, QUALITY ASSURANCE.
 - 2. Compliance with specified standards.

- D. Operation and Maintenance Manuals: Submit in accordance with paragraph, INSTRUCTIONS, in Section 01 00 00, GENERAL REQUIREMENTS.
- E. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American National Standards Institute / Air Conditioning, Heating and Refrigeration Institute (ANSI/AHRI):
 - 440-08.....Performance Rating of Room Fan CoilsNational Fire Protection Association (NFPA):
 - 90A-09.....Standard for the Installation of Air Conditioning and Ventilating Systems
 - 70-11.....National Electrical Code
- C. Underwriters Laboratories, Inc. (UL):
 - 181-08.....Standard for Factory-Made Air Ducts and Air Connectors
 - 1995-05.....Heating and Cooling Equipment

1.6 GUARANTY

In accordance with FAR clause 52.246-21

PART 2 - PRODUCTS

2.1 FAN-COIL UNITS

- A. Capacity Certification: AHRI 440.
- B. Safety Compliance: NEC compliant and UL listed.
- C. Noise Levels: Operating at full cooling capacity, sound power level shall not exceed by more than 5 dB the numerical value of sound pressure levels associated with noise criteria specified in Section 23 05 51, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT. Select units at intermediate speed, for compliance with the noise criteria.
- D. Chassis: Galvanized steel, acoustically and thermally insulated to attenuate noise and prevent condensation.
- E. Cabinet: Minimum 1.3 mm (18 gage) steel reinforced and braced. Arrange components and provide adequate space for installation of piping

package and control valves. Finish shall be factory-baked enamel in manufacturer's standard color on all exposed surfaces.

1. Horizontal Unit: Provide Exposed type as shown. Provide supports and vibration isolators for horizontal units as recommended by the manufacturer.

a. Exposed Units: Fully enclosed cabinet with hinged bottom access panel with cam-lock fasteners. Provide stamped integral inlet and discharged grilles in front of cabinet.

F. Fans: Centrifugal, forward curved, double width type wheels, galvanized steel or polyester resin construction, statically and dynamically balanced, direct driven.

1. Motors: Premium efficiency, 3-speed permanent split capacitor type with integral thermal overload protection, for operation at not more than 1200 RPM.

2. Provide a fan speed selector switch, with off, low, medium, and high positions. Switch shall have a set of auxiliary contacts which are open when the switch is in the "off" position and closed when the switch in any of the other positions.

G. Cooling and Heating Coils:

1. Hydronic (two separate coils for cooling and heating): Copper tubes, 10 mm (three-eighths inch) minimum inside diameter, not less than 4.3 mm (0.017 inch) thick with copper or aluminum fins. Coils shall be pressure tested for bursting and strength in accordance with Underwriters Laboratories, Inc., requirements for pressure tested coils, and shall be designed to provide adequate heat transfer capacity. Provide manual air vent at high point of each coil and drain at each low point.

H. Piping Package: Factory furnished with unit by the manufacturer or field-installed by the contractor to fit control valves provided by the controls supplier. Submit manufacturer's detailed drawings of the piping in the end compartments for approval prior to fabrication of the piping packages. Provide ball stop valves on the supply and return pipes and balancing fittings on the return pipes.

I. Drain pans: Furnish galvanized steel with solderless drain connections and molded polystyrene foam insulating liner:

1. Auxiliary drain pan: Located under control valve and piping within the unit enclosure to prevent dripping.

- J. Air Filter: Manufacturer's standard throwaway type, not less than 25 mm (1 inch) thick, MERV 7, supported to be concealed from sight and be tight fitting to prevent air by-pass. Filters shall have slide out frames and be easily replaced without removing enclosure or any part thereof.
- K. Control valves and remote wall mounted space thermostats or unit mounted return air thermostats, where shown or specified are to be field installed. Provide two-way modulating control valves unless shown or specified otherwise.

2.3 UNIT HEATERS

- A. General: Horizontal discharge type for steam or hot water heating medium, as indicated.
- B. Casing: Steel sheet, phosphatized to resist rust and finished in baked enamel. Provide hanger supports.
- C. Fan: Propeller type, direct driven by manufacturer's standard electric motor. Provide resilient mounting. Provide fan guard for horizontal discharge units.
- D. Discharge Air Control:
 - 1. Horizontal discharge: Horizontal, adjustable louvers.
- E. Steam or Hot Water Coil: Aluminum fins bonded to seamless copper tubing by mechanical expansion of the tubing, designed for 517 kPa (75 psig) steam working pressure.
 - 1. Corrosion Control: Provide corrosion control for coils in high-humidity locations by using a multi-stage, epoxy immersion coating (electrically deposited) process fully described in Section 23 82 16 - Air Coils.
- F. Controls: Provide field installed remote wall mounted line voltage electric space thermostats or unit mounted return air thermostats, where shown or specified to control the unit fan. Provide an aquastat on steam hot water units to prevent fan operation when the heating system is off.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Work shall be installed as shown and according to the manufacturer's diagrams and recommendations.
- B. Handle and install units in accordance with manufacturer's written instructions.

- C. Support units rigidly so they remain stationary at all times. Cross-bracing or other means of stiffening shall be provided as necessary. Method of support shall be such that distortion and malfunction of units cannot occur.

3.2 OPERATIONAL TEST

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

3.3 STARTUP AND TESTING

- A. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the COTR and Commissioning Agent. Provide a minimum of 7 days prior notice.

3.4 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.5 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for four hours to instruct VA personnel in operation and maintenance of units.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

SECTION 23 82 16
AIR COILS

PART 1 - GENERAL**1.1 DESCRIPTION**

Heating and cooling coils for air handling unit and duct applications

1.2 RELATED WORK

- A. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- B. Section 23 31 00, HVAC DUCTS AND CASINGS
- C. Section 23 36 00, AIR TERMINAL UNITS: Reheat coils for CV terminals.
- D. Section 23 74 13, PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS
- E. Section 23 82 00, CONVECTION HEATING AND COOLING UNITS
- F. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.
- G. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS

1.3 QUALITY ASSURANCE

- A. Refer to paragraph, QUALITY ASSURANCE, Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- B. Unless specifically exempted by these specifications, heating and cooling coils shall be tested, rated, and certified in accordance with AHRI Standard 410 and shall bear the AHRI certification label.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data for Heating and Cooling Coils: Submit type, size, arrangements and performance details. Present application ratings in the form of tables, charts or curves.
- C. Provide installation, operating and maintenance instructions.
- D. Certification Compliance: Evidence of listing in current ARI Directory of Certified Applied Air Conditioning Products.
- E. Coils may be submitted with Section 23 74 13, PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS, Section 23 36 00, AIR TERMINAL UNITS, or Section 23 82 00, CONVECTION HEATING AND COOLING UNITS.
- F. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Air Conditioning and Refrigeration Institute (AHRI):
Directory of Certified Applied Air Conditioning Products
AHRI 410-01.....Forced-Circulation Air-Cooling and Air-Heating Coils
- C. American Society for Testing and Materials (ASTM):
B75/75M-02.....Standard Specifications for Seamless Copper Tube
- D. National Fire Protection Association (NFPA):
70-11.....National Electric Code
- E. National Electric Manufacturers Association (NEMA):
250-11.....Enclosures for Electrical Equipment (1,000 Volts Maximum)

PART 2 - PRODUCTS

2.1 HEATING AND COOLING COILS

- A. Conform to ASTM B75 and AHRI 410.
- B. Surgical Suites - All Locations: All coils installed in the air handling units serving surgical suites, duct-mounted reheat coils, and air terminal unit-mounted reheat coils shall be equipped with copper fins.
- C. High Humidity Locations: For air-handling unit mounted coils provide the following corrosion treatment:
 - 1. Epoxy Immersion Coating - Electrically Deposited: The multi-stage corrosion-resistant coating application comprises of cleaning (heated alkaline immersion bath) and reverse-osmosis immersion rinse prior to the start of the coating process. The coating thickness shall be maintained between 0.6-mil and 1.2-mil. Before the coils are subjected to high-temperature oven cure, they are treated to permeate immersion rinse and spray. Where the coils are subject to UV exposure, UV protection spray treatment comprising of UV-resistant urethane mastic topcoat shall be applied. Provide complete coating process traceability for each coil and minimum five years of limited warranty.
 - 2. The coating process shall such that uniform coating thickness is maintained at the fin edges. The quality control shall be maintained by ensuring compliance to the applicable ASTM Standards for the following:
 - a. Salt Spray Resistance (Minimum 6,000 Hours)

- b. Humidity Resistance (Minimum 1,000 Hours)
- c. Water Immersion (Minimum 260 Hours)
- d. Cross-Hatch Adhesion (Minimum 4B-5B Rating)
- e. Impact Resistance (Up to 160 Inch/Pound)
- D. Tubes: Minimum 16 mm (0.625 inch) tube diameter; Seamless copper tubing.
- E. Fins: 0.1397 mm (0.0055 inch) aluminum or 0.1143 mm (0.0045 inch) copper mechanically bonded or soldered or helically wound around tubing.
- F. Headers: Copper, welded steel or cast iron. Provide seamless copper tubing or resistance welded steel tube for volatile refrigerant coils.
- G. "U" Bends, Where Used: Machine die-formed, silver brazed to tube ends.
- H. Coil Casing: 1.6 mm (16 gage) galvanized steel with tube supports at 1200 mm (48 inch) maximum spacing. Construct casing to eliminate air bypass and moisture carry-over. Provide duct connection flanges.
- I. Pressures kPa (PSIG):

Pressure	Water Coil	Steam Coil
Test	2070 (300)	1725 (250)
Working	1380 (200)	520 (75)

- J. Protection: Unless protected by the coil casing, provide cardboard, plywood, or plastic material at the factory to protect tube and finned surfaces during shipping and construction activities.
- K. Vents and Drain: Coils that are not vented or drainable by the piping system shall have capped vent/drain connections extended through coil casing.
- L. Cooling Coil Condensate Drain Pan: Section 23 74 13, PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS.
- M. Steam Distributing Coils: Conform to ASTM B75 and ARI 410. Minimum 9.5 mm (3/8-inch) steam distributing tubing installed concentrically in 25 mm (one-inch) OD condensing coil tubes.
- N. Dampers: Interlocking opposed blades to completely isolate coil from air flow when unit is in bypass position; 1.6 mm (16 gage) steel, coated with factory applied corrosion resistant baked enamel finish. Provide damper linkage and electric operators. Damper operators shall be of same manufacturer as controls furnished under Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

2.2 REHEAT COILS, DUCT MOUNTED

The coils shall be continuous circuit booster type for steam or hot water as shown on drawings. Use the same coil material as listed in Paragraphs 2.1.

2.3 WATER COILS

- A. Use the same coil material as listed in Paragraphs 2.1.
- B. Drainable Type (Self Draining, Self Venting); Manufacturer standard:
 - 1. Cooling, all types.
 - 2. Heating or preheat.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Follow coil manufacturer's instructions for handling, cleaning, installation and piping connections.
- B. Comb fins, if damaged. Eliminate air bypass or leakage at coil sections.

3.2 STARTUP AND TESTING

- A. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the COTR and Commissioning Agent. Provide a minimum of 7 days prior notice.

3.3 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.4 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for four hours to instruct VA personnel in operation and maintenance of units.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

**SECTION 26 05 11
REQUIREMENTS FOR ELECTRICAL INSTALLATIONS**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section applies to all sections of Division 26.
- B. Furnish and install electrical wiring, systems, equipment and accessories in accordance with the specifications and drawings. Capacities and ratings of motors, transformers, cable, switchboards, panelboards, and other items and arrangements for the specified items are shown on drawings.
- C. Wiring ampacities specified or shown on the drawings are based on copper conductors, with the conduit and raceways accordingly sized. Aluminum conductors are prohibited.

1.2 MINIMUM REQUIREMENTS

- A. References to the International Building Code (IBC), National Electrical Code (NEC), Underwriters Laboratories, Inc. (UL) and National Fire Protection Association (NFPA) are minimum installation requirement standards.
- B. Drawings and other specification sections shall govern in those instances where requirements are greater than those specified in the above standards.

1.3 TEST STANDARDS

- A. All materials and equipment shall be listed, labeled or certified by a nationally recognized testing laboratory to meet Underwriters Laboratories, Inc., standards where test standards have been established. Equipment and materials which are not covered by UL Standards will be accepted provided equipment and material is listed, labeled, certified or otherwise determined to meet safety requirements of a nationally recognized testing laboratory. Equipment of a class which no nationally recognized testing laboratory accepts, certifies, lists, labels, or determines to be safe, will be considered if inspected or tested in accordance with national industrial standards, such as NEMA, or ANSI. Evidence of compliance shall include certified test reports and definitive shop drawings.
- B. Definitions:
 - 1. Listed; Equipment, materials, or services included in a list published by an organization that is acceptable to the authority having jurisdiction and concerned with evaluation of products or services, that maintains periodic inspection of production or listed equipment or materials or periodic evaluation of services, and whose listing states that the equipment, material, or services either meets

appropriate designated standards or has been tested and found suitable for a specified purpose.

2. Labeled; Equipment or materials to which has been attached a label, symbol, or other identifying mark of an organization that is acceptable to the authority having jurisdiction and concerned with product evaluation, that maintains periodic inspection of production of labeled equipment or materials, and by whose labeling the manufacturer indicates compliance with appropriate standards or performance in a specified manner.
3. Certified; equipment or product which:
 - a. Has been tested and found by a nationally recognized testing laboratory to meet nationally recognized standards or to be safe for use in a specified manner.
 - b. Production of equipment or product is periodically inspected by a nationally recognized testing laboratory.
 - c. Bears a label, tag, or other record of certification.
4. Nationally recognized testing laboratory; laboratory which is approved, in accordance with OSHA regulations, by the Secretary of Labor.

1.4 QUALIFICATIONS (PRODUCTS AND SERVICES)

- A. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.
- B. Product Qualification:
 1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
 2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.
- C. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within eight hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.5 APPLICABLE PUBLICATIONS

Applicable publications listed in all Sections of Division are the latest issue, unless otherwise noted.

1.6 MANUFACTURED PRODUCTS

- A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, for which replacement parts shall be available.
- B. When more than one unit of the same class or type of equipment is required, such units shall be the product of a single manufacturer.
- C. Equipment Assemblies and Components:
 - 1. Components of an assembled unit need not be products of the same manufacturer.
 - 2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
 - 3. Components shall be compatible with each other and with the total assembly for the intended service.
 - 4. Constituent parts which are similar shall be the product of a single manufacturer.
- D. Factory wiring shall be identified on the equipment being furnished and on all wiring diagrams.
- E. When Factory Testing Is Specified:
 - 1. The Government shall have the option of witnessing factory tests. The contractor shall notify the VA through the COTR a minimum of 15 working days prior to the manufacturers making the factory tests.
 - 2. Four copies of certified test reports containing all test data shall be furnished to the COTR prior to final inspection and not more than 90 days after completion of the tests.
 - 3. When equipment fails to meet factory test and re-inspection is required, the contractor shall be liable for all additional expenses, including expenses of the Government.

1.7 EQUIPMENT REQUIREMENTS

Where variations from the contract requirements are requested in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

1.8 EQUIPMENT PROTECTION

- A. Equipment and materials shall be protected during shipment and storage against physical damage, vermin, dirt, corrosive substances, fumes, moisture, cold and rain.
 - 1. Store equipment indoors in clean dry space with uniform temperature to prevent condensation. Equipment shall include but not be limited

- to switchboards, panelboards, transformers, motor controllers, enclosures, controllers, circuit protective devices, cables, wire, light fixtures, electronic equipment, and accessories.
2. During installation, equipment shall be protected against entry of foreign matter; and be vacuum-cleaned both inside and outside before testing and operating. Compressed air shall not be used to clean equipment. Remove loose packing and flammable materials from inside equipment.
 3. Damaged equipment shall be, as determined by the COTR, placed in first class operating condition or be returned to the source of supply for repair or replacement.
 4. Painted surfaces shall be protected with factory installed removable heavy kraft paper, sheet vinyl or equal.
 5. Damaged paint on equipment and materials shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

1.9 WORK PERFORMANCE

- A. All electrical work must comply with the requirements of NFPA 70 (NEC), NFPA 70B, NFPA 70E, OSHA Part 1910 subpart J, OSHA Part 1910 subpart S and OSHA Part 1910 subpart K in addition to other references required by contract.
- B. Job site safety and worker safety is the responsibility of the contractor.
- C. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished in this manner for the required work, the following requirements are mandatory:
 1. Electricians must use full protective equipment (i.e., certified and tested insulating material to cover exposed energized electrical components, certified and tested insulated tools, etc.) while working on energized systems in accordance with NFPA 70E.
 2. Electricians must wear personal protective equipment while working on energized systems in accordance with NFPA 70E.
 3. Before initiating any work, a job specific work plan must be developed by the contractor with a peer review conducted and documented by the COTR and Medical Center staff. The work plan must include procedures to be used on and near the live electrical equipment, barriers to be installed, safety equipment to be used and exit pathways.
 4. Work on energized circuits or equipment cannot begin until prior written approval is obtained from the COTR.

- D. For work on existing stations, arrange, phase and perform work to assure electrical service for other locations and buildings at all times. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.
- E. New work shall be installed and connected to existing work neatly, safely and professionally. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.
- F. Coordinate location of equipment and conduit with other trades to minimize interferences.

1.10 EQUIPMENT INSTALLATION AND REQUIREMENTS

- A. Equipment location shall be as close as practical to locations shown on the drawings.
- B. Working spaces shall not be less than specified in the NEC for all voltages specified.
- C. Inaccessible Equipment:
 - 1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.
 - 2. "Conveniently accessible" is defined as being capable of being reached quickly for operation, maintenance, or inspections without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

1.11 EQUIPMENT IDENTIFICATION

- A. In addition to the requirements of the NEC, install an identification sign which clearly indicates information required for use and maintenance of items such as switchboards, panelboards, cabinets, motor controllers (starters), fused and unfused safety switches, separately enclosed circuit breakers, individual breakers and controllers in switchboards, control devices and other significant equipment.
- B. Nameplates for Normal Power System equipment shall be laminated black phenolic resin with a white core with engraved lettering. Nameplates for Essential Electrical System (EES) equipment, as defined in the NEC, shall be laminated red phenolic resin with a white core with engraved lettering. Lettering shall be a minimum of 1/2 inch [12mm] high. Nameplates shall indicate equipment designation, rated bus amperage, voltage, number of phases, number of wires, and type of EES power branch as applicable. Secure nameplates with screws.

- C. Install adhesive arc flash warning labels on all equipment as required by NFPA 70E. Label shall indicate the arc hazard boundary (inches), working distance (inches), arc flash incident energy at the working distance (calories/cm²), required PPE category and description including the glove rating, voltage rating of the equipment, limited approach distance (inches), restricted approach distance (inches), prohibited approach distance (inches), equipment/bus name, date prepared, and manufacturer name and address.

1.12 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. The Government's approval shall be obtained for all equipment and material before delivery to the job site. Delivery, storage or installation of equipment or material which has not had prior approval will not be permitted at the job site.
- C. All submittals shall include adequate descriptive literature, catalog cuts, shop drawings and other data necessary for the Government to ascertain that the proposed equipment and materials comply with specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify equipment being submitted.
- D. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.
1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
 2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
 3. Submit each section separately.
- E. The submittals shall include the following:
1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, pictures, nameplate data and test reports as required.
 2. Submittals are required for all equipment anchors and supports. Submittals shall include weights, dimensions, center of gravity, standard connections, manufacturer's recommendations and behavior problems (e.g., vibration, thermal expansion,) associated with equipment or piping so that the proposed installation can be properly reviewed. Include sufficient fabrication information so that appropriate mounting and securing provisions may be designed and/or attached to the equipment.

3. Elementary and interconnection wiring diagrams for communication and signal systems, control systems and equipment assemblies. All terminal points and wiring shall be identified on wiring diagrams.
4. Parts list which shall include those replacement parts recommended by the equipment manufacturer.

F. Manuals: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

1. Maintenance and Operation Manuals: Submit as required for systems and equipment specified in the technical sections. Furnish four copies, bound in hardback binders, (manufacturer's standard binders) or an approved equivalent. Furnish one complete manual as specified in the technical section but in no case later than prior to performance of systems or equipment test, and furnish the remaining manuals prior to contract completion.
2. Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, equipment, building, name of Contractor, and contract number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the system or equipment.
3. Provide a "Table of Contents" and assemble the manual to conform to the table of contents, with tab sheets placed before instructions covering the subject. The instructions shall be legible and easily read, with large sheets of drawings folded in.
4. The manuals shall include:
 - a. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
 - b. A control sequence describing start-up, operation, and shutdown.
 - c. Description of the function of each principal item of equipment.
 - d. Installation instructions.
 - e. Safety precautions for operation and maintenance.
 - f. Diagrams and illustrations.
 - g. Periodic maintenance and testing procedures and frequencies, including replacement parts numbers and replacement frequencies.
 - h. Performance data.
 - i. Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare parts, and name of servicing organization.
 - j. List of factory approved or qualified permanent servicing organizations for equipment repair and periodic testing and

maintenance, including addresses and factory certification qualifications.

G. Approvals will be based on complete submission of manuals together with shop drawings.

H. After approval and prior to installation, furnish the COTR with one sample of each of the following:

1. A 300 mm (12 inch) length of each type and size of wire and cable along with the tag from the coils of reels from which the samples were taken.
2. Each type of conduit coupling, bushing and termination fitting.
3. Conduit hangers, clamps and supports.
4. Duct sealing compound.
5. Each type of receptacle, toggle switch, occupancy sensor, outlet box, manual motor starter, device wall plate, engraved nameplate, wire and cable splicing and terminating material, and branch circuit single pole molded case circuit breaker.

1.13 SINGULAR NUMBER

Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

1.14 ACCEPTANCE CHECKS AND TESTS

The contractor shall furnish the instruments, materials and labor for field tests.

1.15 TRAINING

- A. Training shall be provided in accordance with Article 1.25, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.
- B. Training shall be provided for the particular equipment or system as required in each associated specification.
- C. A training schedule shall be developed and submitted by the contractor and approved by the COTR at least 30 days prior to the planned training.

- - - E N D - - -

SECTION 26 05 21
LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW)

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies the furnishing, installation, and connection of the low voltage power and lighting wiring.

1.2 RELATED WORK

- A. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire-rated construction.
- B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.
- D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits for cables and wiring.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 FACTORY TESTS

Low voltage cables shall be thoroughly tested at the factory per NEMA WC-70 to ensure that there are no electrical defects. Factory tests shall be certified.

1.5 SUBMITTALS

In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:

- 1. Manufacturer's Literature and Data: Showing each cable type and rating.
- 2. Certifications: Two weeks prior to the final inspection, submit four copies of the following certifications to the COTR:
 - a. Certification by the manufacturer that the materials conform to the requirements of the drawings and specifications.
 - b. Certification by the contractor that the materials have been properly installed, connected, and tested.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are reference in the text by designation only.

- B. American Society of Testing Material (ASTM):
- D2301-04.....Standard Specification for Vinyl Chloride
Plastic Pressure-Sensitive Electrical Insulating
Tape
- C. National Fire Protection Association (NFPA):
- 70-Latest Edition.....National Electrical Code (NEC)
- D. National Electrical Manufacturers Association (NEMA):
- WC 70-09.....Power Cables Rated 2000 Volts or Less for the
Distribution of Electrical Energy
- E. Underwriters Laboratories, Inc. (UL):
- 83-08.....Thermoplastic-Insulated Wires and Cables
- 467-071.....Electrical Grounding and Bonding Equipment
- 486A-486B-03.....Wire Connectors
- 486C-04.....Splicing Wire Connectors
- 486D-05.....Sealed Wire Connector Systems
- 486E-94.....Equipment Wiring Terminals for Use with Aluminum
and/or Copper Conductors
- 493-07.....Thermoplastic-Insulated Underground Feeder and
Branch Circuit Cable
- 514B-04.....Conduit, Tubing, and Cable Fittings
- 1479-03.....Fire Tests of Through-Penetration Fire Stops

PART 2 - PRODUCTS

2.1 CONDUCTORS AND CABLES

- A. Conductors and cables shall be in accordance with NEMA WC-70 and as specified herein.
- B. Single Conductor:
1. Shall be annealed copper.
 2. Shall be stranded for sizes No. 8 AWG and larger, solid for sizes No. 10 AWG and smaller.
 3. Shall be minimum size No. 12 AWG, except where smaller sizes are allowed herein.
- C. Insulation:
1. THHN-THWN shall be in accordance with NEMA WC-70 and UL 83.
- D. Color Code:
1. Secondary service feeder and branch circuit conductors shall be color-coded as follows:

208/120 volt	Phase	480/277 volt
Black	A	Brown

Red	B	Orange
Blue	C	Yellow
White	Neutral	Gray *
* or white with colored (other than green) tracer.		

- a. Lighting circuit "switch legs" and 3-way switch "traveling wires" shall have color coding that is unique and distinct (e.g., pink and purple) from the color coding indicated above. The unique color codes shall be solid and in accordance with the NEC.
Coordinate color coding in the field with the COTR.
2. Use solid color insulation or solid color coating for No. 12 AWG and No. 10 AWG branch circuit phase, neutral, and ground conductors.
3. Conductors No. 8 AWG and larger shall be color-coded using one of the following methods:
 - a. Solid color insulation or solid color coating.
 - b. Stripes, bands, or hash marks of color specified above.
 - c. Color as specified using 0.75 in [19 mm] wide tape. Apply tape in half-overlapping turns for a minimum of 3 in [75 mm] for terminal points, and in junction boxes, pull-boxes, and troughs. Apply the last two laps of tape with no tension to prevent possible unwinding. Where cable markings are covered by tape, apply tags to cable, stating size and insulation type.
4. For modifications and additions to existing wiring systems, color coding shall conform to the existing wiring system.

2.2 SPLICES AND JOINTS

- A. In accordance with UL 486A, C, D, E, and NEC.
- B. Aboveground Circuits (No. 10 AWG and smaller):
 1. Connectors: Solderless, screw-on, reusable pressure cable type, rated 600 V, 220° F [105° C], with integral insulation, approved for copper and aluminum conductors.
 2. The integral insulator shall have a skirt to completely cover the stripped wires.
 3. The number, size, and combination of conductors, as listed on the manufacturer's packaging, shall be strictly followed.
- C. Aboveground Circuits (No. 8 AWG and larger):
 1. Connectors shall be indent, hex screw, or bolt clamp-type of high conductivity and corrosion-resistant material, listed for use with copper and aluminum conductors.

2. Field-installed compression connectors for cable sizes 250 kcmil and larger shall have not fewer than two clamping elements or compression indents per wire.
3. Insulate splices and joints with materials approved for the particular use, location, voltage, and temperature. Splice and joint insulation level shall be not less than the insulation level of the conductors being joined.
4. Plastic electrical insulating tape: Per ASTM D2304, flame-retardant, cold and weather resistant.

D. Underground Branch Circuits and Feeders:

1. Submersible connectors in accordance with UL 486D, rated 600 V, 190° F [90° C], with integral insulation.

2.3 CONTROL WIRING

- A. Unless otherwise specified elsewhere in these specifications, control wiring shall be as specified for power and lighting wiring, except that the minimum size shall be not less than No. 14 AWG.
- B. Control wiring shall be large enough such that the voltage drop under in-rush conditions does not adversely affect operation of the controls.

2.4 WIRE LUBRICATING COMPOUND

- A. Lubricating compound shall be suitable for the wire insulation and conduit, and shall not harden or become adhesive.

PART 3 - EXECUTION

3.1 GENERAL

- A. Install in accordance with the NEC, and as specified.
- B. Install all wiring in raceway systems.
- C. Splice cables and wires only in outlet boxes, junction boxes, or pull-boxes.
- D. Wires of different systems (e.g., 120 V, 277 V) shall not be installed in the same conduit or junction box system.
- E. Install cable supports for all vertical feeders in accordance with the NEC. Provide split wedge type which firmly clamps each individual cable and tightens due to cable weight.
- F. For panel boards, cabinets, wireways, switches, and equipment assemblies, neatly form, train, and tie the cables in individual circuits.
- G. Seal cable and wire entering a building from underground between the wire and conduit where the cable exits the conduit, with a non-hardening approved compound.
- H. Wire Pulling:

1. Provide installation equipment that will prevent the cutting or abrasion of insulation during pulling of cables. Use lubricants approved for the cable.
 2. Use nonmetallic ropes for pulling feeders.
 3. Attach pulling lines for feeders by means of either woven basket grips or pulling eyes attached directly to the conductors, as approved by the COTR.
 4. All cables in a single conduit shall be pulled simultaneously.
 5. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values.
- I. No more than three single-phase branch circuits shall be installed in any one conduit.

3.2 SPLICE INSTALLATION

- A. Splices and terminations shall be mechanically and electrically secure.
- B. Tighten electrical connectors and terminals according to manufacturer's published torque values.
- C. Where the Government determines that unsatisfactory splices or terminations have been installed, remove the devices and install approved devices at no additional cost to the Government.

3.3 FEEDER IDENTIFICATION

- A. In each interior pull-box and junction box, install metal tags on all circuit cables and wires to clearly designate their circuit identification and voltage. The tags shall be the embossed brass type, 1.5 in [40 mm] in diameter and 40 mils thick. Attach tags with plastic ties.

3.4 EXISTING WIRING

Unless specifically indicated on the plans, existing wiring shall not be reused for a new installation.

3.5 CONTROL AND SIGNAL WIRING INSTALLATION

- A. Unless otherwise specified in other sections, install wiring and connect to equipment/devices to perform the required functions as shown and specified.
- B. Except where otherwise required, install a separate power supply circuit for each system so that malfunctions in any system will not affect other systems.
- C. Where separate power supply circuits are not shown, connect the systems to the nearest panel boards of suitable voltages, which are intended to supply such systems and have suitable spare circuit breakers or space for installation.

3.6 CONTROL AND SIGNAL SYSTEM WIRING IDENTIFICATION

- A. Install a permanent wire marker on each wire at each termination.
- B. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.
- C. Wire markers shall retain their markings after cleaning.

3.7 ACCEPTANCE CHECKS AND TESTS

- A. Feeders and branch circuits shall have their insulation tested after installation and before connection to utilization devices, such as fixtures, motors, or appliances. Test each conductor with respect to adjacent conductors and to ground. Existing conductors to be reused shall also be tested.
- B. Applied voltage shall be 500VDC for 300-volt rated cable, and 1000VDC for 600-volt rated cable. Apply test for one minute or until reading is constant for 15 seconds, whichever is longer. Minimum insulation resistance values shall not be less than 25 megohms for 300-volt rated cable and 100 megohms for 600-volt rated cable.
- C. Perform phase rotation test on all three-phase circuits.
- D. The contractor shall furnish the instruments, materials, and labor for all tests.

- - - E N D - - -

SECTION 26 05 26
GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies the general grounding and bonding requirements for electrical equipment and operations to provide a low impedance path for possible ground fault currents.
- B. "Grounding electrode system" refers to all electrodes required by NEC, as well as made, supplementary, and lightning protection system grounding electrodes.
- C. The terms "connect" and "bond" are used interchangeably in this specification and have the same meaning.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.
- B. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Low Voltage power and lighting wiring.
- C. Section 26 22 00, LOW-VOLTAGE TRANSFORMERS: Low voltage transformers.
- D. Section 26 24 11, DISTRIBUTION SWITCHBOARDS: Low voltage distribution switchboards.
- E. Section 26 24 16, PANELBOARDS: Low voltage panelboards.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- B. Shop Drawings:
 - 1. Clearly present enough information to determine compliance with drawings and specifications.
 - 2. Include the location of system grounding electrode connections and the routing of aboveground and underground grounding electrode conductors.
- C. Test Reports: Provide certified test reports of ground resistance.

D. Certifications: Two weeks prior to final inspection, submit four copies of the following to the COTR

1. Certification that the materials and installation are in accordance with the drawings and specifications.
2. Certification by the contractor that the complete installation has been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

A. American Society for Testing and Materials (ASTM):

B1-07.....Standard Specification for Hard-Drawn Copper Wire

B3-07.....Standard Specification for Soft or Annealed Copper Wire

B8-04.....Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

B. Institute of Electrical and Electronics Engineers, Inc. (IEEE):

81-1983.....IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System

C2-07.....National Electrical Safety Code

C. National Fire Protection Association (NFPA):

70-LATEST EDITION.....National Electrical Code (NEC)

99-2005.....Health Care Facilities

D. Underwriters Laboratories, Inc. (UL):

83-08Thermoplastic-Insulated Wires and Cables

467-07Grounding and Bonding Equipment

486A-486B-03Wire Connectors

PART 2 - PRODUCTS

2.1 GROUNDING AND BONDING CONDUCTORS

- A. Equipment grounding conductors shall be UL 83 insulated stranded copper, except that sizes No. 10 AWG [6 mm²] and smaller shall be solid copper. Insulation color shall be continuous green for all equipment grounding conductors, except that wire sizes No. 4 AWG [25 mm²] and larger shall be identified per NEC.

B. Bonding conductors shall be ASTM B8 bare stranded copper, except that sizes No. 10 AWG [6 mm²] and smaller shall be ASTM B1 solid bare copper wire.

C. Conductor sizes shall not be less than shown on the drawings, or not less than required by the NEC, whichever is greater.

2.2 GROUND CONNECTIONS

A. Above Grade:

1. Bonding Jumpers: Compression-type connectors, using zinc-plated fasteners and external tooth lockwashers.
2. Connection to Building Steel: Exothermic-welded type connectors.
3. Ground Busbars: Two-hole compression type lugs, using tin-plated copper or copper alloy bolts and nuts.
4. Rack and Cabinet Ground Bars: One-hole compression-type lugs, using zinc-plated or copper alloy fasteners.

2.3 EQUIPMENT RACK AND CABINET GROUND BARS

Provide solid copper ground bars designed for mounting on the framework of open or cabinet-enclosed equipment racks with minimum dimensions of 0.375 in [4 mm] thick x 0.75 in [19 mm] wide.

2.4 GROUND TERMINAL BLOCKS

At any equipment mounting location (e.g., backboards and hinged cover enclosures) where rack-type ground bars cannot be mounted, provide screw lug-type terminal blocks.

2.5 GROUNDING BUS

Pre-drilled rectangular copper bar with stand-off insulators, minimum 0.25 in [6.3 mm] thick x 4 in [100 mm] high in cross-section, length as shown on drawings, with 0.281 in [7.1 mm] holes spaced 1.125 in [28 mm] apart.

PART 3 - EXECUTION

3.1 GENERAL

- A. Ground in accordance with the NEC, as shown on drawings, and as specified herein.
- B. System Grounding:
1. Secondary service neutrals: Ground at the supply side of the secondary disconnecting means and at the related transformers.
 2. Separately derived systems (transformers downstream from the service entrance): Ground the secondary neutral.
- C. Equipment Grounding: Metallic structures, including ductwork and building steel, enclosures, raceways, junction boxes, outlet boxes,

cabinets, machine frames, and other conductive items in close proximity with electrical circuits, shall be bonded and grounded.

- D. Special Grounding: For patient care area electrical power system grounding, conform to NFPA 99 and NEC.

3.2 INACCESSIBLE GROUNDING CONNECTIONS

Make grounding connections, which are normally inaccessible (except connections for which access for periodic testing is required), by exothermic weld.

3.3 SECONDARY VOLTAGE EQUIPMENT AND CIRCUITS

- A. Metallic Piping, Building Steel, and Supplemental Electrode(s):
1. Provide a grounding electrode conductor sized per NEC between the service equipment ground bus and all metallic water pipe systems, building steel, and supplemental or made electrodes. Provide jumper insulating joints in the metallic piping. All connections to electrodes shall be made with fittings that conform to UL 467.
 2. Provide a supplemental ground electrode and bond to the grounding electrode system.
- B. Service Disconnect (Separate Individual Enclosure): Provide a ground bar bolted to the enclosure with lugs for connecting the various grounding conductors.
- C. Switchboards and Panelboards:
1. Connect the various feeder equipment grounding conductors to the ground bus in the enclosure with suitable pressure connectors.
 2. Provide ground bars, bolted to the housing, with sufficient lugs to terminate the equipment grounding conductors.
 3. Connect metallic conduits that terminate without mechanical connection to the housing, by grounding bushings and grounding conductor to the equipment ground bus.
- D. Transformers:
1. Separately derived systems (transformers downstream from service equipment): Ground the secondary neutral at the transformer. Provide a grounding electrode conductor from the transformer to the nearest component of the grounding electrode system.

3.4 RACEWAY

- A. Conduit Systems:
1. Ground all metallic conduit systems. All metallic conduit systems shall contain an equipment grounding conductor.

2. Non-metallic conduit systems, except non-metallic feeder conduits that carry a grounded conductor only, shall contain an equipment grounding conductor.
 3. Conduit that only contains a grounding conductor, and is provided for its mechanical protection, shall be bonded to that conductor at the entrance and exit from the conduit.
 4. Metallic conduits which terminate without mechanical connection to an electrical equipment housing by means of locknut and bushings or adapters, shall be provided with grounding bushings. Connect bushings with a bare grounding conductor to the equipment ground bus.
- B. Feeders and Branch Circuits: Install equipment grounding conductors with all feeders and power and lighting branch circuits.
- C. Boxes, Cabinets, Enclosures, and Panelboards:
1. Bond the equipment grounding conductor to each pullbox, junction box, outlet box, device box, cabinets, and other enclosures through which the conductor passes (except for special grounding systems for intensive care units and other critical units shown).
 2. Provide lugs in each box and enclosure for equipment grounding conductor termination.
- D. Wireway Systems:
1. Bond the metallic structures of wireway to provide 100% electrical continuity throughout the wireway system, by connecting a No. 6 AWG [16 mm²] bonding jumper at all intermediate metallic enclosures and across all section junctions.
 2. Install insulated No. 6 AWG [16 mm²] bonding jumpers between the wireway system, bonded as required above, and the closest building ground at each end and approximately every 50 ft [16 M].
 3. Use insulated No. 6 AWG [16 mm²] bonding jumpers to ground or bond metallic wireway at each end for all intermediate metallic enclosures and across all section junctions.
 4. Use insulated No. 6 AWG [16 mm²] bonding jumpers to ground cable tray to column-mounted building ground plates (pads) at each end and approximately every 49 ft [15 M].
- E. Receptacles shall not be grounded through their mounting screws. Ground receptacles with a jumper from the receptacle green ground terminal to the device box ground screw and a jumper to the branch circuit equipment grounding conductor.

- F. Ground lighting fixtures to the equipment grounding conductor of the wiring system when the green ground is provided; otherwise, ground the fixtures through the conduit systems. Fixtures connected with flexible conduit shall have a green ground wire included with the power wires from the fixture through the flexible conduit to the first outlet box.
- G. Fixed electrical appliances and equipment shall be provided with a ground lug for termination of the equipment grounding conductor.
- H. Panelboard Bonding in Patient Care Areas: The equipment grounding terminal buses of the normal and essential branch circuit panel boards serving the same individual patient vicinity shall be bonded together with an insulated continuous copper conductor not less than No. 10 AWG [16 mm²]. These conductors shall be installed in rigid metal conduit.

3.5 CORROSION INHIBITORS

When making ground and ground bonding connections, apply a corrosion inhibitor to all contact surfaces. Use corrosion inhibitor appropriate for protecting a connection between the metals used.

3.6 CONDUCTIVE PIPING

- A. Bond all conductive piping systems, interior and exterior, to the grounding electrode system. Bonding connections shall be made as close as practical to the equipment ground bus.
- B. In operating rooms, bond the gases and suction piping at the outlets directly to the room or patient ground bus.

3.7 ELECTRICAL ROOM GROUNDING

Building Earth Ground Busbars: Provide ground busbar and mounting hardware at each electrical room and connect to pigtail extensions of the building grounding ring.

- - - E N D - - -

SECTION 26 05 33
RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies the furnishing, installation, and connection of conduit, fittings, and boxes, to form complete, coordinated, grounded raceway systems. Raceways are required for all wiring unless shown or specified otherwise.
- B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

1.2 RELATED WORK

- A. Section 06 10 00, ROUGH CARPENTRY: Mounting board for telephone closets.
- B. Section 07 60 00, FLASHING AND SHEET METAL: Fabrications for the deflection of water away from the building envelope at penetrations.
- C. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire rated construction.
- D. Section 07 92 00, JOINT SEALANTS: Sealing around conduit penetrations through the building envelope to prevent moisture migration into the building.
- E. Section 09 91 00, PAINTING: Identification and painting of conduit and other devices.
- F. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS
- G. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.
- H. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:

- A. Manufacturer's Literature and Data: Showing each cable type and rating. The specific item proposed and its area of application shall be identified on the catalog cuts.
- B. Shop Drawings:

1. Size and location of main feeders.
 2. Size and location of panels and pull-boxes.
 3. Layout of required conduit penetrations through structural elements.
- C. Certifications:
1. Two weeks prior to the final inspection, submit four copies of the following certifications to the COTR:
 - a. Certification by the manufacturer that the material conforms to the requirements of the drawings and specifications.
 - b. Certification by the contractor that the material has been properly installed.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. American National Standards Institute (ANSI):
- C80.1-05.....Electrical Rigid Steel Conduit
 - C80.3-05.....Steel Electrical Metal Tubing
- C. National Fire Protection Association (NFPA):
- 70-LATEST EDITION.....National Electrical Code (NEC)
- D. Underwriters Laboratories, Inc. (UL):
- 1-05.....Flexible Metal Conduit
 - 5-04.....Surface Metal Raceway and Fittings
 - 6-07.....Electrical Rigid Metal Conduit - Steel
 - 50-95.....Enclosures for Electrical Equipment
 - 360-093.....Liquid-Tight Flexible Steel Conduit
 - 467-07.....Grounding and Bonding Equipment
 - 514A-04.....Metallic Outlet Boxes
 - 514B-04.....Conduit, Tubing, and Cable Fittings
 - 514C-96.....Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers
 - 797-07.....Electrical Metallic Tubing
- E. National Electrical Manufacturers Association (NEMA):
- FB1-07.....Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable

PART 2 - PRODUCTS

2.1 MATERIAL

- A. Conduit Size: In accordance with the NEC, but not less than 0.75 in [19 mm] unless otherwise shown. Where permitted by the NEC, 0.75 in [19 mm]

flexible conduit may be used for tap connections to recessed lighting fixtures.

B. Conduit:

1. Rigid steel: Shall conform to UL 6 and ANSI C80.1.
2. Electrical metallic tubing (EMT): Shall conform to UL 797 and ANSI C80.3. Maximum size not to exceed 4 in [105 mm] and shall be permitted only with cable rated 600 V or less.
3. Flexible galvanized steel conduit: Shall conform to UL 1.
4. Liquid-tight flexible metal conduit: Shall conform to UL 360.
5. Surface metal raceway: Shall conform to UL 5.

C. Conduit Fittings:

1. Rigid steel conduit fittings:
 - a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
 - b. Standard threaded couplings, locknuts, bushings, conduit bodies, and elbows: Only steel or malleable iron materials are acceptable.
 - c. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
 - d. Bushings: Metallic insulating type, consisting of an insulating insert, molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
 - e. Sealing fittings: Threaded cast iron type. Use continuous drain-type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.
2. Electrical metallic tubing fittings:
 - a. Fittings and conduit bodies shall meet the requirements of UL 514B, ANSI C80.3, and NEMA FB1.
 - b. Only steel or malleable iron materials are acceptable.
 - c. Compression couplings and connectors: Concrete-tight and rain-tight, with connectors having insulated throats.
 - d. Indent-type connectors or couplings are prohibited.
 - e. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.
4. Flexible steel conduit fittings:
 - a. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
 - b. Clamp-type, with insulated throat.
5. Liquid-tight flexible metal conduit fittings:

- a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
 - b. Only steel or malleable iron materials are acceptable.
 - c. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.
6. Surface metal raceway fittings: As recommended by the raceway manufacturer. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, conduit entry fittings, accessories, and other fittings as required for complete system.
 7. Expansion and deflection couplings:
 - a. Conform to UL 467 and UL 514B.
 - b. Accommodate a 0.75 in [19 mm] deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.
 - c. Include internal flexible metal braid, sized to guarantee conduit ground continuity and a low-impedance path for fault currents, in accordance with UL 467 and the NEC tables for equipment grounding conductors.
 - d. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat-resistant molded rubber material with stainless steel jacket clamps.
- D. Conduit Supports:
1. Parts and hardware: Zinc-coat or provide equivalent corrosion protection.
 2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
 3. Multiple conduit (trapeze) hangers: Not less than 1.5 x 1.5 in [38 mm x 38 mm], 12-gauge steel, cold-formed, lipped channels; with not less than 0.375 in [9 mm] diameter steel hanger rods.
 4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.
- E. Outlet, Junction, and Pull Boxes:
1. UL-50 and UL-514A.
 2. Cast metal where required by the NEC or shown, and equipped with rustproof boxes.
 3. Sheet metal boxes: Galvanized steel, except where otherwise shown.
 4. Flush-mounted wall or ceiling boxes shall be installed with raised covers so that the front face of raised cover is flush with the wall.

Surface-mounted wall or ceiling boxes shall be installed with surface-style flat or raised covers.

5. Flush-mounted floor boxes shall be moppable and fire rated.

F. Wireways: Equip with hinged covers, except where removable covers are shown. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to match and mate with wireways as required for a complete system.

PART 3 - EXECUTION

3.1 PENETRATIONS

A. Cutting or Holes:

1. Cut holes in advance where they should be placed in the structural elements, such as ribs or beams. Obtain the approval of the COTR prior to drilling through structural elements.
2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammers, impact electric, hand, or manual hammer-type drills are not allowed, except where permitted by the COTR as required by limited working space.

B. Firestop: Where conduits, wireways, and other electrical raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING.

C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal clearances around the conduit and make watertight, as specified in Section 07 92 00, JOINT SEALANTS.

3.2 INSTALLATION, GENERAL

A. In accordance with UL, NEC, as shown, and as specified herein.

B. Essential (Emergency) raceway systems shall be entirely independent of other raceway systems, except where shown on drawings.

C. Install conduit as follows:

1. In complete mechanically and electrically continuous runs before pulling in cables or wires.
2. Unless otherwise indicated on the drawings or specified herein, installation of all conduits shall be concealed within finished walls, floors, and ceilings.
3. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new undamaged material.
4. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
5. Cut square, ream, remove burrs, and draw up tight.

6. Independently support conduit at 8 ft [2.4 M] on centers. Support conduit on underside of the concrete slab. Do not use interior wall to support horizontal conduit run. Do not use other supports, i.e., suspended ceilings, suspended ceiling supporting members, lighting fixtures, conduits, mechanical piping, or mechanical ducts.
 7. Support within 12 in [300 mm] of changes of direction, and within 12 in [300 mm] of each enclosure to which connected.
 8. Close ends of empty conduit with plugs or caps at the rough-in stage until wires are pulled in, to prevent entry of debris.
 9. Conduit installations under fume and vent hoods are prohibited.
 10. Secure conduits to cabinets, junction boxes, pull-boxes, and outlet boxes with bonding type locknuts. For rigid conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.
 11. Flashing of penetrations of the roof membrane is specified in Section 07 60 00, FLASHING AND SHEET METAL.
 12. Conduit bodies shall only be used for changes in direction, and shall not contain splices.
- D. Conduit Bends:
1. Make bends with standard conduit bending machines.
 2. Conduit hickey may be used for slight offsets and for straightening stubbed out conduits.
 3. Bending of conduits with a pipe tee or vise is prohibited.
- E. Layout and Homeruns:
1. Install conduit with wiring, including homeruns, as shown on drawings.
 2. Deviations: Make where necessary to avoid interferences with structural, mechanical, and plumbing runs. Coordinate deviations with the COTR.

3.3 CONCEALED WORK INSTALLATION

- A. Above Furred or Suspended Ceilings and in Walls:
1. Conduit for conductors 600 V and below: Rigid steel or EMT. Mixing different types of conduits indiscriminately in the same system is prohibited.
 2. Align and run conduit parallel or perpendicular to the building lines.
 3. Connect recessed lighting fixtures to conduit runs with maximum 6 ft [1.8 M] of flexible metal conduit extending from a junction box to the fixture.
 4. Tightening setscrews with pliers is prohibited.

3.4 EXPOSED WORK INSTALLATION

- A. Unless otherwise indicated on the drawings, exposed conduit is only permitted in mechanical and electrical rooms, and as shown on drawings..
- B. Conduit for Conductors 600 V and Below: Rigid steel or EMT. Mixing different types of conduits indiscriminately in the system is prohibited.
- C. Align and run conduit parallel or perpendicular to the building lines.
- D. Install horizontal runs close to the ceiling or beams and secure with conduit straps.
- E. Support horizontal or vertical runs at not over 8 ft [2.4 M] intervals.
- F. Surface metal raceways: Use only where shown.
- G. Painting:
 - 1. Paint exposed conduit as specified in Section 09 91 00, PAINTING.
 - 2. Paint outdoor exposed wall mounted conduits to match surrounding area.

3.5 HAZARDOUS LOCATIONS

- A. Use rigid steel conduit only, notwithstanding requirements otherwise specified in this or other sections of these specifications.
- B. Install UL approved sealing fittings that prevent passage of explosive vapors in hazardous areas equipped with explosion-proof lighting fixtures, switches, and receptacles, as required by the NEC.

3.6 WET OR DAMP LOCATIONS

- A. Unless otherwise shown, use conduits of rigid steel.
- B. Provide sealing fittings to prevent passage of water vapor where conduits pass from warm to cold locations, i.e., refrigerated spaces, constant-temperature rooms, air-conditioned spaces, building exterior walls, roofs, or similar spaces.
- C. Unless otherwise shown, use rigid steel conduit within 5 ft [1.5 M] of the exterior and below concrete building slabs in contact with soil, gravel, or vapor barriers. Conduit shall be half-lapped with 10 mil PVC tape before installation. After installation, completely recoat or retape any damaged areas of coating.

3.7 MOTORS AND VIBRATING EQUIPMENT

- A. Use flexible metal conduit for connections to motors and other electrical equipment subject to movement, vibration, misalignment, cramped quarters, or noise transmission.
- B. Use liquid-tight flexible metal conduit for installation in exterior locations, moisture or humidity laden atmosphere, corrosive atmosphere, water or spray wash-down operations, inside airstream of HVAC units, and locations subject to seepage or dripping of oil, grease, or water.

Provide a green equipment grounding conductor with flexible metal conduit.

3.8 EXPANSION JOINTS

- A. Conduits 3 in [75 mm] and larger that are secured to the building structure on opposite sides of a building expansion joint require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.
- B. Provide conduits smaller than 3 in [75 mm] with junction boxes on both sides of the expansion joint. Connect conduits to junction boxes with sufficient slack of flexible conduit to produce 5 in [125 mm] vertical drop midway between the ends. Flexible conduit shall have a bonding jumper installed. In lieu of this flexible conduit, expansion and deflection couplings as specified above for conduits 15 in [375 mm] and larger are acceptable.
- C. Install expansion and deflection couplings where shown.
- D. Seismic Areas: In seismic areas, provide conduits rigidly secured to the building structure on opposite sides of a building expansion joint with junction boxes on both sides of the joint. Connect conduits to junction boxes with 15 in [375 mm] of slack flexible conduit. Flexible conduit shall have a copper green ground bonding jumper installed.

3.9 CONDUIT SUPPORTS, INSTALLATION

- A. Safe working load shall not exceed one-quarter of proof test load of fastening devices.
- B. Use pipe straps or individual conduit hangers for supporting individual conduits.
- C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and 200 lbs [90 kg]. Attach each conduit with U-bolts or other approved fasteners.
- D. Support conduit independently of junction boxes, pull-boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.
- E. Fasteners and Supports in Solid Masonry and Concrete:
 - 1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
 - 2. Existing Construction:
 - a. Steel expansion anchors not less than 0.25 in [6 mm] bolt size and not less than 1.125 in [28 mm] embedment.
 - b. Power set fasteners not less than 0.25 in [6 mm] diameter with depth of penetration not less than 3 in [75 mm].

- c. Use vibration and shock-resistant anchors and fasteners for attaching to concrete ceilings.
- E. Hollow Masonry: Toggle bolts.
- F. Bolts supported only by plaster or gypsum wallboard are not acceptable.
- G. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.
- H. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.
- I. Chain, wire, or perforated strap shall not be used to support or fasten conduit.
- J. Spring steel type supports or fasteners are prohibited for all uses except horizontal and vertical supports/fasteners within walls.
- K. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

3.10 BOX INSTALLATION

- A. Boxes for Concealed Conduits:
 - 1. Flush-mounted.
 - 2. Provide raised covers for boxes to suit the wall or ceiling, construction, and finish.
- B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling-in operations.
- C. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.
- D. Outlet boxes mounted back-to-back in the same wall are prohibited. A minimum 24 in [600 mm] center-to-center lateral spacing shall be maintained between boxes.
- E. Minimum size of outlet boxes for ground fault interrupter (GFI) receptacles is 4 in [100 mm] square x 2.125 in [55 mm] deep, with device covers for the wall material and thickness involved.
- F. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example "SIG-FA JB No. 1."
- G. On all branch circuit junction box covers, identify the circuits with black marker.

- - - E N D - - -

SECTION 26 05 71
ELECTRICAL SYSTEM PROTECTIVE DEVICE STUDY

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the requirements of the Electrical System Protective Device Study (herein, "the study").
- B. A short-circuit and selective coordination study shall be prepared for the electrical overcurrent devices to be installed under this project.
- C. The study shall present an organized time-current analysis of each protective device in series from the contractor's point of connection to the individual existing switchboards and panelboards, and through the new switchboards and panelboards, transformers to the last panelboards and protective devices. The study shall reflect the operation of each device during normal and abnormal current conditions.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section of Division 26.
- B. Section 26 24 11, DISTRIBUTION SWITCHBOARDS: Low-voltage distribution switchboards.
- C. Section 26 24 16, PANEL BOARDS: Low-voltage panelboards.

1.3 QUALITY ASSURANCE

- A. Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- B. The protective device study shall be prepared by the equipment manufacturer's qualified engineers or an approved consultant. The contractor is responsible for providing all pertinent information required by the preparers to complete the study.

1.4 SUBMITTALS

- A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
- B. Product data on the software program to be used for the study. Software shall be in mainstream use in the industry, shall provide device settings and ratings, and shall show selective coordination by time-current drawings.
- C. Complete short-circuit and coordination study as described in paragraph 1.6.

- D. Protective equipment shop drawings shall be submitted simultaneously with or after the protective device study. Protective equipment shop drawings will not be accepted prior to protective device study.
- E. Certification: Two weeks prior to final inspection, submit four copies of the following to the COTR:
Certification by the contractor that the protective devices have been adjusted and set in accordance with the approved protective device study.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. Institute of Electrical and Electronics Engineers (IEEE):
 - 242-01.....Recommended Practice for Protection and
Coordination of Industrial and Commercial Power
Systems
 - 399-97.....Recommended Practice for Power Systems Analysis
 - 1584a-04.....Guide for Performing Arc-Flash Hazard
Calculations

1.6 REQUIREMENTS

- A. The complete study shall include a system one line diagram, short-circuit and ground fault analysis, and protective coordination plots for all overcurrent protective devices.
- B. One Line Diagram:
 - 1. On the one line diagram, show all electrical equipment and wiring to be protected by the overcurrent devices installed under this project.
 - 2. On the one line diagram, also show the following specific information:
 - a. Calculated fault impedance, X/R ratios, and short-circuit values at each feeder and branch circuit bus.
 - b. Breaker and fuse ratings.
 - c. Transformer kVA and voltage ratings, percent impedance, X/R ratios, and wiring connections.
 - d. Voltage at each bus.
 - e. Identification of each bus, matching the identification on the construction drawings.
 - f. Conduit, cable, and busway material and sizes, length, and X/R ratios.
- C. Short-Circuit Study:

1. Systematically calculate the fault impedance to determine the available short-circuit and ground fault currents at each bus. Incorporate the motor contribution in determining the momentary and interrupting ratings of the protective devices.
 2. The study shall be calculated by means of a computer program. Pertinent data and the rationale employed in developing the calculations shall be incorporated in the introductory remarks of the study.
 3. Present the data conclusions of the short-circuit study in a table format. Include the following:
 - a. Device identification.
 - b. Operating voltage.
 - c. Protective device.
 - d. Device rating.
 - e. Calculated short-circuit current.
- D. Coordination Curves:
1. Prepare the coordination curves to determine the required settings of protective devices to ensure selective coordination. Graphically illustrate on log-log paper that adequate time separation exists between series devices. Plot the specific time-current characteristics of each protective device in such a manner that all upstream devices are clearly depicted on one sheet.
 2. The following specific information shall also be shown on the coordination curves:
 - a. Device identification.
 - b. Voltage and current ratio for curves.
 - c. 3-phase and 1-phase ANSI damage points for each transformer.
 - d. No-damage, melting, and clearing curves for fuses.
 - e. Cable damage curves.
 - f. Transformer in-rush points.
 - g. Maximum short-circuit cutoff point.
 3. Develop a table to summarize the settings selected for the protective devices. Include the following in the table:
 - a. Device identification.
 - b. Relay CT ratios, tap, time dial, and instantaneous pickup.
 - c. Circuit breaker sensor rating, long-time, short-time, and instantaneous settings, and time bands.
 - d. Fuse rating and type.
 - e. Ground fault pickup and time delay.

1.7 ANALYSIS

- A. Analyze the short-circuit calculations, and highlight any equipment determined to be underrated as specified. Propose approaches to effectively protect the underrated equipment. Provide minor modifications to conform with the study (examples of minor modifications are trip sizes within the same frame, the time-current curve characteristics of induction relays, CT ranges, etc.).
- B. After developing the coordination curves, highlight areas lacking coordination. Present a technical evaluation with a discussion of the logical compromises for best coordination.

1.8 ADJUSTMENTS, SETTINGS AND MODIFICATIONS

- A. Necessary final field adjustments, settings, and minor modifications shall be made to conform with the study without additional cost to the Government.
- B. All final circuit breaker and relay settings and fuse sizes shall be made in accordance with the recommendations of the study.

- - - E N D - - -

**SECTION 26 09 23
LIGHTING CONTROLS**

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies the furnishing, installation and connection of the lighting controls.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General requirements that are common to more than one section of Division 26.
- B. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.
- D. Section 24 26 16, PANELBOARDS: panelboard enclosure and interior bussing used for lighting control panels.
- E. Section 26 27 26, WIRING DEVICES: Wiring devices used for control of the lighting systems.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
- B. Product Data: For each type of lighting control, submit the following information.
 - 1. Manufacturer's catalog data.
 - 2. Wiring schematic and connection diagram.
 - 3. Installation details.
- C. Manuals:
 - 1. Submit, simultaneously with the shop drawings companion copies of complete maintenance and operating manuals including technical data sheets, and information for ordering replacement parts.
 - 2. Two weeks prior to the final inspection, submit four copies of the final updated maintenance and operating manuals, including any changes, to the COTR.
- D. Certifications:
 - 1. Two weeks prior to final inspection, submit four copies of the following certifications to the COTR:

- a. Certification by the Contractor that the equipment has been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. Green Seal (GS):
GC-12.....Occupancy Sensors
- C. Illuminating Engineering Society of North America (IESNA):
IESNA LM-48Guide for Calibration of Photoelectric Control Devices
- D. National Electrical Manufacturer's Association (NEMA)
ICS-1.....Standard for Industrial Control and Systems
General Requirements
ICS-2.....Standard for Industrial Control and Systems:
Controllers, Contractors, and Overload Relays
Rated Not More than 2000 Volts AC or 750 Volts
DC: Part 8 - Disconnect Devices for Use in
Industrial Control Equipment
ICS-6.....Standard for Industrial Controls and Systems
Enclosures
- E. Underwriters Laboratories, Inc. (UL):
20.....Standard for General-Use Snap Switches
773.....Standard for Plug-In Locking Type Photocontrols
for Use with Area Lighting
773ANonindustrial Photoelectric Switches for
Lighting Control
98.....Enclosed and Dead-Front Switches

PART 2 - PRODUCTS

2.1 OUTDOOR PHOTOELECTRIC SWITCHES

- A. Solid state, with SPST dry contacts rated for 1800 VA tungsten or 1000 VA inductive, complying with UL 773A.
 1. Light-Level Monitoring Range: 1.5 to 10 fc [16.14 to 108 lx], with adjustable turn-on and turn-off levels.
 2. Time Delay: 15-second minimum.
 3. Surge Protection: Metal-oxide varistor.
 4. Mounting: Twist lock, with base-and-stem mounting or stem-and-swivel mounting accessories as required, or built-in as part of the fixture.

2.2 SKYLIGHT PHOTOELECTRIC SENSORS

- A. Solid-state, light-level sensor; housed in a threaded, plastic fitting for mounting under skylight; with separate relay unit.
 - 1. Sensor Output: Contacts rated to operate the associated relay, complying with UL 773A. Sensor shall be powered from the relay unit.
 - 2. Relay Unit: Dry contacts rated for 20A ballast load at 120V and 277V, for 13A tungsten at 120V, and for 1 hp at 120V.
 - 3. Monitoring Range: 1000 to 10,000 fc [10,800 to 108,000 lx], with an adjustment for turn-on and turn-off levels.
 - 4. Time Delay: Adjustable from 5 to 300 seconds, with deadband adjustment.
 - 5. Indicator: Two LEDs to indicate the beginning of on-off cycles.

2.3 INDOOR OCCUPANCY SENSORS

- A. Wall- or ceiling-mounting, solid-state units with a power supply and relay unit, suitable for the environmental conditions in which installed.
 - 1. Operation: Unless otherwise indicated, turn lights on when covered area is occupied and off when unoccupied; with a 1 to 15 minute adjustable time delay for turning lights off.
 - 2. Sensor Output: Contacts rated to operate the connected relay. Sensor shall be powered from the relay unit.
 - 3. Relay Unit: Dry contacts rated for 20A ballast load at 120V and 277V, for 13A tungsten at 120V, and for 1 hp at 120V.
 - 4. Mounting:
 - a. Sensor: Suitable for mounting in any position on a standard outlet box.
 - b. Time-Delay and Sensitivity Adjustments: Recessed and concealed behind hinged door.
 - 5. Indicator: LED, to show when motion is being detected during testing and normal operation of the sensor.
 - 6. Bypass Switch: Override the on function in case of sensor failure.
 - 7. Manual/automatic selector switch.
 - 8. Automatic Light-Level Sensor: Adjustable from 2 to 200 fc [21.5 to 2152 lx]; keep lighting off when selected lighting level is present.
 - 9. Faceplate for Wall-Switch Replacement Type: Refer to wall plate material and color requirements for toggle switches, as specified in Section 26 27 26, WIRING DEVICES.
- B. Dual-technology Type: Wall or Ceiling mounting; combination PIR and ultrasonic detection methods, field-selectable.
 - 1. Sensitivity Adjustment: Separate for each sensing technology.

2. Detector Sensitivity: Detect occurrences of 6-inch [150mm] minimum movement of any portion of a human body that presents a target of not less than 36 sq. in. [232 sq. cm], and detect a person of average size and weight moving not less than 12 inches [305 mm] in either a horizontal or a vertical manner at an approximate speed of 12 inches/s [305 mm/s].
 3. Detection Coverage: completely covers the area where unit is installed.
- C. Dual technology type with daylight saving photoelectric switch: Ceiling or wall mounting, combination PIR and ultrasonic detection methods, field selectable.
1. Sensitivity Adjustment: Separate for each sensine technology.
 2. Occupancy Sensor function shall meet dual-technology type indoor occupancy sensors requirements.
 3. Ambient light override function monitoring range and time delay shall meet ceiling-mounted photoelectric switch requirements.

PART 3 - EXECUTION

3.1 INSTALLATION:

- A. Installation shall be in accordance with the NEC, manufacturer's instructions and as shown on the drawings or specified.
- B. Aim outdoor photocell switch according to manufacturer's recommendations. Set adjustable window slide for 1 footcandle photocell turn-on.
- C. Aiming for wall-mounted and ceiling-mounted motion sensor switches shall be per manufacturer's recommendations.
- D. Set occupancy sensor "on" duration to 15 minutes.
- E. Locate light level sensors as indicated and in accordance with the manufacturer's recommendations. Adjust sensor for the scheduled light level at the typical work plane for that area.

3.2 ACCEPTANCE CHECKS AND TESTS

- A. Perform in accordance with the manufacturer's recommendations.
- B. Upon completion of installation, conduct an operating test to show that equipment operates in accordance with requirements of this section.
- C. Test for step dimming ballast and switches control. Observe visually for light level change.
- D. Test occupancy sensors for proper operation. Observe for light control over entire area being covered.

3.3 FOLLOW-UP VERIFICATION

Upon completion of acceptance checks and tests, the Contractor shall show by demonstration in service that the lighting control devices are

in good operating condition and properly performing the intended function.

- - - E N D - - -

SECTION 26 22 00
LOW-VOLTAGE TRANSFORMERS

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies the furnishing, installation, and connection of dry-type general-purpose transformers.

1.2 RELATED WORK

- A. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Requirements for seismic restraint of nonstructural components.
- B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items common to more than one section of Division 26.
- C. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.
- D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.
- E. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits and outlet boxes.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
- B. Shop Drawings:
 - 1. Clearly present sufficient information to determine compliance with drawings and specifications.
 - 2. Include electrical ratings, impedance, dimensions, weight, mounting details, decibel rating, terminations, temperature rise, no load and full load losses, and connection diagrams.
 - 3. Complete nameplate data, including manufacturer's name and catalog number.
- C. Manuals:
 - 1. When submitting the shop drawings, submit companion copies of complete maintenance and operating manuals, including technical data sheets and wiring diagrams.

2. If changes have been made to the maintenance and operating manuals originally submitted, then submit four copies of the updated maintenance and operating manuals to the COTR two weeks prior to final inspection.
- D. Certifications: Two weeks prior to the final inspection, submit four copies of the following to the COTR:
 1. Certification by the manufacturer that the materials conform to the requirements of the drawings and specifications.
 2. Certification by the contractor that the equipment has been properly installed and tested.

1.4 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. National Fire Protection Association (NFPA):
70-Latest Edition.....National Electrical Code (NEC)
- C. National Electrical Manufacturers Association (NEMA):
ST20-92.....Dry-Type Transformers for General Applications
TP1-02.....Guide for Determining Energy Efficiency for
Distribution Transformers
TR1-00.....Transformers, Regulators, and Reactors

PART 2 - PRODUCTS

2.1 GENERAL PURPOSE DRY-TYPE TRANSFORMERS

- A. Unless otherwise specified, dry-type transformers shall be in accordance with NEMA, NEC, and as shown on the drawings. Transformers shall be UL-listed and labeled.
- B. Dry-type transformers shall have the following features:
 1. Transformers shall be self-cooled by natural convection, isolating windings, indoor dry-type. Autotransformers will not be accepted.
 2. Rating and winding connections shall be as shown on the drawings.
 3. Transformers shall have copper windings.
 4. Ratings shown on the drawings are for continuous duty without the use of cooling fans.
 5. Insulation systems:
 - a. Transformers 30 kVA and larger: UL rated 220° C system with an average maximum rise by resistance of 150 ° C in a maximum ambient of 40 ° C.

- b. Transformers below 30 kVA: Same as for 30 kVA and larger or UL rated 185 ° C system with an average maximum rise by resistance of 115 ° C in a maximum ambient of 40 ° C.
- 6. Core and coil assemblies:
 - a. Rigidly braced to withstand the stresses caused by short-circuit currents and rough handling during shipment.
 - b. Cores shall be grain-oriented, non-aging, and silicon steel.
 - c. Coils shall be continuous windings without splices except for taps.
 - d. Coil loss and core loss shall be minimized for efficient operation.
 - e. Primary and secondary tap connections shall be brazed or pressure type.
 - f. Coil windings shall have end filters or tie-downs for maximum strength.
- 7. Certified sound levels determined in accordance with NEMA, shall not exceed the following:

Transformer Rating	Sound Level Rating
0 - 9 KVA	40 dB
10 - 50 KVA	45 dB
51 - 150 KVA	50 dB
151 - 300 KVA	55 dB
301 - 500 KVA	60 dB

- 8. If not shown on drawings, nominal impedance shall be as permitted by NEMA.
- 9. Single phase transformers rated 15 kVA through 25 kVA shall have two 5% full capacity taps below normal rated primary voltage. All transformers rated 30 kVA and larger shall have two 2.5% full capacity taps above, and four 2.5% full capacity taps below normal rated primary voltage.
- 10. Core assemblies shall be grounded to their enclosures with adequate flexible ground straps.
- 11. Enclosures:
 - a. Comprised of not less than code gauge steel.
 - b. Outdoor enclosures shall be NEMA 3R.

- c. Temperature rise at hottest spot shall conform to NEMA Standards, and shall not bake and peel off the enclosure paint after the transformer has been placed in service.
 - d. Ventilation openings shall prevent accidental access to live components.
 - e. The enclosure at the factory shall be thoroughly cleaned and painted with manufacturer's prime coat and standard finish.
12. Standard NEMA features and accessories, including ground pad, lifting provisions, and nameplate with the wiring diagram and sound level indicated on it.
 13. Dimensions and configurations shall conform to the spaces designated for their installations.
 14. Transformers shall meet the minimum energy efficiency values per NEMA TP1 as listed below:

kVA Rating	Output efficiency (%)
15	97
30	97.5
45	97.7
75	98
112.5	98.2
150	98.3
225	98.5
300	98.6
500	98.7
750	98.8

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Installation of transformers shall be in accordance with the NEC, as recommended by the equipment manufacturer and as shown on the drawings.
- B. Install transformers with manufacturer's recommended clearance from wall and adjacent equipment for air circulation. Minimum clearance shall be 6 in [150 mm].
- C. Install transformers on vibration pads designed to suppress transformer noise and vibrations.
- D. Use flexible metal conduit to enclose the conductors from the transformer to the raceway systems.

3.2 ACCEPTANCE CHECKS AND TESTS

Perform tests in accordance with the manufacturer's recommendations.

Include the following visual and mechanical inspections.

1. Compare equipment nameplate data with specifications and approved shop drawings.
2. Inspect physical and mechanical condition.
3. Inspect all field-installed bolted electrical connections, using the calibrated torque-wrench method to verify tightness of accessible bolted electrical connections.
4. Perform specific inspections and mechanical tests as recommended by manufacturer.
5. Verify correct equipment grounding.
6. Verify proper secondary phase-to-phase and phase-to-neutral voltage after energization and prior to connection to loads.

3.3 FOLLOW-UP VERIFICATION

Upon completion of acceptance checks, settings, and tests, the contractor shall demonstrate that the transformers are in good operating condition and properly performing the intended function.

- - - E N D - - -

SECTION 26 24 11
DISTRIBUTION SWITCHBOARDS

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the furnishing, installation, and connection of the distribution switchboards.

1.2 RELATED WORK

- A. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Requirements for Seismic Restraint for Nonstructural Components.
- B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.
- C. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.
- D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for Personnel Safety and to provide a low impedance path for possible fault currents.
- E. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduit and outlet boxes.
- F. Section 26 05 71, ELECTRICAL SYSTEM PROTECTIVE DEVICE STUDY: Coordination study of overcurrent protection devices.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 FACTORY TESTS

- A. Distribution switchboards shall be thoroughly tested at the factory to assure that there are no electrical or mechanical defects. Tests shall be conducted as per NEMA PB 2 and UL 891. Factory tests shall be certified.
- B. The following additional tests shall be performed:
 - 1. Verify that circuit breaker sizes and types correspond to drawings and coordination study.
 - 2. Verify tightness of bolted electrical connections by calibrated torque-wrench method in accordance with manufacturer's published data.
 - 3. Confirm correct operation and sequencing of electrical and mechanical interlock systems by attempting closure on locked-open devices, and attempting to open locked-closed devices, and making key exchange with devices operated in off-normal positions.

4. Exercise all active components.
 5. Perform a dielectric withstand voltage test on each bus section, each phase-to-ground with phases not under test grounded, in accordance with manufacturer's published data.
 6. Perform insulation-resistance tests on control wiring with respect to ground. Applied potential shall be 500 volts dc for 300-volt rated cable and 1000 volts dc for 600-volt rated cable, or as required if solid-state components or control devices cannot tolerate the applied voltage.
 7. If applicable, verify correct function of control transfer relays located in the switchboard with multiple control power sources.
- C. Furnish four (4) copies of certified manufacturer's factory test reports to the COTR prior to shipment of the switchboards to ensure that the switchboards have been successfully tested as specified.
- D. The Government shall have an option to witness the factory tests. All expenses of the Government Representative's trips to witness the testing will be paid by the Government. Notify the COTR not less than 30 days prior to making tests at the factory.

1.5 SUBMITTALS

Submit in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS:

A. Shop Drawings:

1. Sufficient information, clearly presented, shall be included to determine compliance with drawings and specifications.
2. Include electrical ratings, dimensions, mounting details, materials, required clearances, terminations, weight, temperature rise, wiring and connection diagrams, plan, front, side, and rear elevations, sectional views, bus work, circuit breaker frame sizes, trip and short-circuit rating, long-time, short-time, instantaneous and ground fault settings, coordinated breaker and fuse curves, accessories, and device nameplate data.
3. Show the size, ampere-rating, number of bars per phase and neutral in each bus run (horizontal and vertical), bus spacing, equipment ground bus, and bus material.

B. Manuals:

1. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals including technical data sheets, wiring diagrams, and information for ordering replacement parts.

- a. Wiring diagrams shall have their terminals identified to facilitate installation, maintenance, and operation.
 - b. Wiring diagrams shall indicate internal wiring for each item of equipment and the interconnection between the items of equipment.
 - c. Provide a clear and concise description of operation, which gives, in detail, the information required to properly operate the equipment.
 - d. Approvals will be based on complete submissions of manuals together with shop drawings.
2. Two weeks prior to final inspection, deliver four copies of the final updated maintenance and operating manuals to the COTR.
 - a. The manuals shall be updated to include any information necessitated by shop drawing approval.
 - b. Complete "As Installed" wiring and schematic diagrams shall be included which show all items of equipment and their interconnecting wiring.
 - c. Show all terminal identification.
 - d. Include information for testing, repair, trouble shooting, assembly, disassembly, and recommended maintenance intervals.
 - e. Provide a replacement parts list with current prices. Include a list of recommended spare parts, tools, and instruments for testing and maintenance purposes.
 - f. Furnish manuals in loose-leaf binder or manufacturer's standard binder.
- C. Certifications:
1. Two weeks prior to final inspection, submit four copies of the following to the COTR:
 - a. Certification by the Contractor that the assemblies have been properly installed, adjusted and tested, including circuit breakers settings.
 - b. Certified copies of all of the factory design and production tests, field test data sheets and reports for the assemblies.

1.6 APPLICABLE PUBLICATIONS

Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.

- A. Institute of Engineering and Electronic Engineers (IEEE):
- C37.13.....Low Voltage AC Power Circuit Breakers Used in Enclosures

- C57.13.....Instrument Transformers
- C62.41.....Surge Voltage in Low Voltage AC Power Circuits
- C62.45.....Surge Testing for Equipment connected to Low-Voltage AC Power Circuits
- B. National Electrical Manufacturer's Association (NEMA):
 - PB-2.....Dead-Front Distribution Switchboards.
 - PB-2.1.....Instructions for Proper Handling, Installation, Operation, and Maintenance of Switchboards
 - AB-1.....Molded Case Circuit Breakers, Molded Case Switches and Circuit Breaker Enclosures
- C. National Fire Protection Association (NFPA):
 - 70-Latest Edition.....National Electrical Code (NEC)
- D. Underwriters Laboratories, Inc. (UL):
 - 67.....Panelboards
 - 489.....Molded Case Circuit Breakers and Circuit Breakers Enclosures
 - 891.....Dead-Front Switchboards
 - 1283.....Electromagnetic Interference Filters
 - 1449.....Transient Voltage Surge Suppressors

PART 2 - PRODUCTS

2.1 GENERAL

- A. Switchboards shall be in accordance with UL, NEMA, NEC, IEEE, and as shown on the drawings.
- B. Switchboards shall be provided complete, ready for operation including, but not limited to housing, buses, circuit breakers, instruments and related transformers, fuses, and wiring.
- C. Switchboard dimensions shall not exceed the dimensions shown on the drawings.
- D. Manufacturer's nameplate shall include complete ratings of switchboard in addition to the date of manufacture.

2.2 BASIC ARRANGEMENT

- A. Type I: Switchboard shall be front accessible with the following features:
 - 1. Device mounting:
 - a. Main breaker: Individually mounted and compartmented or group mounted with feeder breakers.
 - b. Feeder breakers: Group mounted.
 - 2. Section alignment: As shown on the drawings.
 - 3. Accessibility:
 - a. Main section line and load terminals: Front and side.

- b. Distribution section line and load terminals: Front.
- c. Through bus connections: Front and end.
- 4. Bolted line and load connections.
- 5. Full height wiring gutter covers for access to wiring terminals.
- 6. Short Circuit Current Rating: 65,000 amperes rms symmetrical, minimum, or as shown on the drawings, whichever is higher.

2.3 HOUSING

- A. Provide a completely enclosed, free standing, steel enclosure not less than the gage required by the ANSI and UL standards. The enclosure is to consist of the required number of vertical sections bolted together to form one metal enclosed rigid switchboard. The sides, top and rear shall be covered with removable screw on sheet steel plates.
- B. Provide ventilating louvers where required to limit the temperature rise of current carrying parts. All openings shall be protected against entrance of falling dirt, water, or foreign matter.
- C. Enclosure shall be thoroughly cleaned, phosphate treated, and primed with rust-inhibiting paint. Final finish coat to be the manufacturers standard gray. Provide a quart of finish paint for touch-up purposes.

2.4 BUSES

- A. General: Buses shall be arranged for 3 phase, 4 wire distribution. Main phase buses (through bus), full size neutral bus, and ground bus shall be full capacity the entire length of the switchboard. Provide for future extensions by means of bolt holes or other approved method. Brace the bus to withstand the available short circuit current at the particular location and as shown on the drawings. No magnetic material shall be used between buses to form a magnetic loop.
- B. Material and Size: Buses and connections shall be hard drawn copper of 98 percent conductivity. Bus temperature rise shall not exceed 65 degrees C (149 degrees F). Section busing shall be sized based on UL and NEMA Switchboard Standards.
- C. Bus Connections: All contact surfaces shall be copper. Provide a minimum of two plated bolts per splice. Where physical bus size permits only one bolt, provide a means other than friction to prevent turning, twisting or bending. Torque bolts to the manufacturer's recommended values.
- D. Neutral Bus: Provide bare or plated bus and mount on insulated bus supports. Provide neutral disconnect link to permit isolation of neutral bus from the common ground bus and service entrance conductors.
- E. Ground Bus: Provide an uninsulated 6 mm by 50 mm (1/4 inch by 2 inch) copper equipment ground bus bar sized per UL 891 the length of the switchboard and secure at each section.

2.5 POWER MONITORS

- A. Provide instruments for power monitoring.
- B. RMS Real-Time Measurements:
 - 1. Current: Each Phase.
 - 2. Voltage: Line-to-line each phase, line-to-neutral each phase.
 - 3. Power: Watt, Volt-Amp reactive, Volt-Amp.
 - 4. Power Factor.
 - 5. Frequency.
 - 6. Demand Real Power:
 - a. Present.
 - b. Peak.

2.6 NAMEPLATES AND MIMIC BUS

- A. Nameplates: For Normal Power system, provide laminated black phenolic resin with white core with 1/2 inch [12mm] engraved lettered nameplates next to each circuit breaker. For Essential Electrical System, provide laminated red phenolic resin with white core with 1/2 inch [12mm] engraved lettered nameplates next to each circuit breaker. Nameplates shall indicate equipment served, spaces, or spares in accordance with one line diagram shown on drawings. Nameplates shall be mounted with plated screws on front of breakers or on equipment enclosure next to breakers. Mounting nameplates only with adhesive is not acceptable.
- B. Mimic Bus: Provide an approved mimic bus on front of each switchboard assembly. Color shall be black for the Normal Power system and red for the Essential Electrical System, either factory-painted plastic or metal strips. Plastic tape shall not be used. Use symbols similar to one line diagram shown on drawings. Plastic or metal strips shall be mounted with plated screws.

2.7 PROVISION FOR FUTURE

Where "provision for", "future", or "space" is noted on drawings, the space shall be equipped with bus connections to the future overcurrent device with suitable insulation and bracing to maintain proper short circuit rating and physical clearance. Provide buses for the ampere rating as shown for the future device.

2.8 BREAKER REMOVAL EQUIPMENT

Where draw out circuit breakers are provided, furnish a portable elevating carriage or switchboard permanent top mounted device for installation and removal of the breakers.

2.9 CONTROL WIRING

Control wiring shall be 600 volt class B stranded SIS. Install all control wiring complete at the factory adequately bundled and protected.

Wiring across hinges and between shipping units shall be Class C stranded. Size in accordance with NEC. Provide control circuit fuses.

2.10 MAIN CIRCUIT BREAKERS

- A. Type I Switchboard: Provide UL listed and labeled molded case circuit breakers in accordance with NEC and as shown on the drawings. Circuit breakers shall be the solid state adjustable trip type.
 - 1. Trip units shall have field adjustable tripping characteristics as follows:
 - a. Ampere setting (continuous).
 - b. Long time band.
 - c. Short time trip point.
 - d. Short time delay.
 - e. Instantaneous trip point.
 - f. Ground fault trip point.
 - g. Ground fault trip delay.
 - 2. Trip settings shall be as shown on the electrical system protective device study.
 - 3. Breakers, which have same rating, shall be interchangeable with each other.

2.11 FEEDER CIRCUIT BREAKERS

- A. Provide UL listed and labeled molded case circuit breakers, in accordance with the NEC, as shown on the drawings, and as herein specified.
- B. Non-adjustable Trip Molded Case Circuit Breakers:
 - 1. Molded case circuit breakers shall have automatic, trip free, non-adjustable, inverse time, and instantaneous magnetic trips for 100 ampere frame size or less. Magnetic trip shall be adjustable from 3X to 10X for breakers with 600 ampere frame size and higher. Factory setting shall be LOW unless otherwise noted.
 - 2. Breaker features shall be as follows:
 - a. A rugged, integral housing of molded insulating material.
 - b. Silver alloy contacts.
 - c. Arc quenchers and phase barriers for each pole.
 - d. Quick-make, quick-break, operating mechanisms.
 - e. A trip element for each pole, thermal magnetic type with long time delay and instantaneous characteristics, a common trip bar for all poles and a single operator.
 - f. Electrically and mechanically trip free.
 - g. An operating handle which indicates ON, TRIPPED and OFF positions.
 - h. Line and load connections shall be bolted.

- i. Interrupting rating shall not be less than the maximum short circuit current available at the line.
 - j. An overload on one pole of a multipole breaker shall automatically cause all the poles of the breaker to open.
- C. Adjustable Trip Molded Case Circuit Breakers:
1. Provide molded case, solid state adjustable trip type circuit breakers.
 2. Trip units shall have field adjustable tripping characteristics as follows:
 - a. Ampere setting (continuous).
 - b. Long time band.
 - c. Short time trip point.
 - d. Short time delay.
 - e. Instantaneous trip point.
 - f. Ground fault trip point.
 - g. Ground fault trip delay.
 3. Trip settings shall be shown on the electrical system protective device study.
 4. Breakers, which have same rating, shall be interchangeable with each other.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install the switchboard in accordance with the NEC, as shown on the drawings, and as recommended by the manufacturer.
- B. In seismic areas, switchboard shall be adequately anchored and braced to withstand the seismic forces at the location where installed.
- C. Interior Location. Mount switchboard on concrete slab. Unless otherwise indicated, the slab shall be at least 4 inches [100mm] thick. The top of the concrete slab shall be approximately 4 inches [100mm] above finished floor. Edges above floor shall have 1/2 inch [12.5mm] chamfer. The slab shall be of adequate size to project at least 8 inches [200mm] beyond the equipment. Provide conduit turnups and cable entrance space required by the equipment to be mounted. Seal voids around conduit openings in slab with water- and oil-resistant caulking or sealant. Cut off and bush conduits 3 inches [75mm] above slab surface. Concrete work shall be as specified in Section 03 30 00, CAST-IN-PLACE CONCRETE.

3.2 ACCEPTANCE CHECKS AND TESTS

- A. Perform in accordance with the manufacturer's recommendations. Include the following visual and mechanical inspections and electrical tests:
 1. Visual and Mechanical Inspection

- a. Compare equipment nameplate data with specifications and approved shop drawings.
 - b. Inspect physical, electrical, and mechanical condition.
 - c. Confirm correct application of manufacturer's recommended lubricants.
 - d. Verify appropriate anchorage, required area clearances, and correct alignment.
 - e. Verify that circuit breaker sizes and types correspond to approved shop drawings.
 - f. Verifying tightness of accessible bolted electrical connections by calibrated torque-wrench method, or performing thermographic survey after energization.
 - g. Confirm correct operation and sequencing of electrical and mechanical interlock systems.
 - h. Clean switchboard.
 - i. Inspect insulators for evidence of physical damage or contaminated surfaces.
 - j. Verify correct shutter installation and operation.
 - k. Exercise all active components.
 - l. Verify the correct operation of all sensing devices, alarms, and indicating devices.
 - m. If applicable, verify that vents are clear.
 - n. If applicable, inspect control power transformers.
2. Electrical Tests
- a. Perform insulation-resistance tests on each bus section.
 - b. Perform overpotential tests.
 - c. Perform insulation-resistance test on control wiring; do not perform this test on wiring connected to solid-state components.

3.3 FOLLOW-UP VERIFICATION

Upon completion of acceptance checks, settings, and tests, the Contractor shall show by demonstration in service that the switchboard is in good operating condition and properly performing the intended function. Circuit breakers shall be tripped by operation of each protective device.

3.4 INSTRUCTION

Furnish the services of a factory certified instructor for one 4 hour period for instructing personnel in the operation and maintenance of the switchboard and related equipment on the date requested by the COTR.

- - - E N D - - -

**SECTION 26 24 16
PANELBOARDS**

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies the furnishing, installation, and connection of panelboards.

1.2 RELATED WORK

- A. Section 09 91 00, PAINTING: Identification and painting of panelboards.
- B. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Requirements for seismic restraint of non-structural components.
- C. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one Section of Division 26.
- D. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.
- E. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.
- F. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits and outlet boxes.
- G. Section 26 05 71, ELECTRICAL SYSTEM PROTECTIVE DEVICE STUDY: Requirements for installing the over-current protective devices to ensure proper equipment and personnel protection.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- B. Shop Drawings:
 - 1. Sufficient information, shall be clearly presented to determine compliance with drawings and specifications.
 - 2. Include electrical ratings, dimensions, mounting details, materials, wiring diagrams, accessories, and weights of equipment. Complete nameplate data, including manufacturer's name and catalog number.

C. Manuals:

1. When submitting the shop drawings, submit companion copies of complete maintenance and operating manuals, including technical data sheets and wiring diagrams.
2. If changes have been made to the maintenance and operating manuals that were originally submitted, then submit four copies of updated maintenance and operating manuals to the COTR two weeks prior to final inspection.

D. Certification: Two weeks prior to final inspection, submit four copies of the following to the COTR:

1. Certification by the manufacturer that the materials conform to the requirements of the drawings and specifications.
2. Certification by the contractor that the materials have been properly installed, connected, and tested.

1.5 APPLICABLE PUBLICATIONS**A.** Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.**B. National Electrical Manufacturers Association (NEMA):**

PB-1-06.....Panelboards

250-08.....Enclosures for Electrical Equipment (1000V
Maximum)**C. National Fire Protection Association (NFPA):**

70-Latest EditionNational Electrical Code (NEC)

70E-Latest Edition.....Standard for Electrical Life Safety in the
Workplace**D. Underwriters Laboratories, Inc. (UL):**

50-95.....Enclosures for Electrical Equipment

67-09.....Panelboards

489-09.....Molded Case Circuit Breakers and Circuit
Breaker Enclosures**PART 2 - PRODUCTS****2.1 PANELBOARDS**

- A. Panelboards shall be in accordance with UL, NEMA, NEC, and as shown on the drawings.
- B. Panelboards shall be standard manufactured products.
- C. All panelboards shall be hinged "door in door" type with:

1. Interior hinged door with hand-operated latch or latches, as required to provide access only to circuit breaker operating handles, not to energized parts.
 2. Outer hinged door shall be securely mounted to the panelboard box with factory bolts, screws, clips, or other fasteners, requiring a tool for entry. Hand-operated latches are not acceptable.
 3. Push inner and outer doors shall open left to right.
- D. All panelboards shall be completely factory-assembled with molded case circuit breakers and integral accessories as scheduled on the drawings or specified herein. Include one-piece removable, inner dead front cover, independent of the panelboard cover.
- E. Panelboards shall have main breaker or main lugs, bus size, voltage, phase, top or bottom feed, and flush or surface mounting as scheduled on the drawings.
- F. Panelboards shall conform to NEMA PB-1, NEMA AB-1, and UL 67 and have the following features:
1. Non-reduced size copper bus bars with current ratings as shown on the panel schedules, rigidly supported on molded insulators.
 2. Bus bar connections to the branch circuit breakers shall be the "distributed phase" or "phase sequence" type.
 3. Mechanical lugs furnished with panelboards shall be cast, stamped, or machined metal alloys of sizes suitable for the conductors to which they will be connected.
 4. Neutral bus shall be 100% rated, mounted on insulated supports.
 5. Grounding bus bar shall be equipped with screws or lugs for the connection of grounding wires.
 6. Buses shall be braced for the available short-circuit current. Bracing shall not be less than 22,000 A symmetrical for 120/208 V and 120/240 V panelboards, and 22,000 A symmetrical for 277/480 V panelboards.
 7. Branch circuit panelboards shall have buses fabricated for bolt-on type circuit breakers.
 8. Protective devices shall be designed so that they can easily be replaced.
 9. Where designated on panel schedule "spaces," include all necessary bussing, device support, and connections. Provide blank cover for each space.

10. In two section panelboards, the main bus in each section shall be full size. The first section shall be furnished with subfeed lugs on the line side of main lugs only, or through-feed lugs for main breaker type panelboards, and have cable connections to the second section. Panelboard sections with tapped bus or crossover bus are not acceptable.
11. Series-rated panelboards are not permitted.

2.2 CABINETS AND TRIMS

Cabinets:

1. Provide galvanized steel cabinets to house panelboards. Cabinets for outdoor panelboards shall be factory primed and suitably treated with a corrosion-resisting paint finish meeting UL 50 and UL 67.
2. Cabinet enclosure shall not have ventilating openings.
3. Cabinets for panelboards may be of one-piece formed steel or of formed sheet steel with end and side panels welded, riveted, or bolted as required.

2.3 MOLDED CASE CIRCUIT BREAKERS FOR PANELBOARDS

- A. Circuit breakers shall be per UL 489, in accordance with the NEC, as shown on the drawings, and as specified.
- B. Circuit breakers in panelboards shall be bolt-on type.
- C. Molded case circuit breakers shall have minimum interrupting rating as required to withstand the available fault current, but not less than:
 1. 120/208 V Panelboard: 22,000 A symmetrical.
 2. 120/240 V Panelboard: 22,000 A symmetrical.
 3. 277/480 V Panelboard: 22,000 A symmetrical.
- D. Molded case circuit breakers shall have automatic, trip free, non-adjustable, inverse time, and instantaneous magnetic trips for 100 A frame or lower. Magnetic trip shall be adjustable from 3x to 10x for breakers with 600 A frames and higher. Factory setting shall be HI, unless otherwise noted. Re-adjust breaker trip setting in the field, based on the approved protective device study as specified in Section 26 05 71, ELECTRICAL SYSTEM PROTECTIVE DEVICE STUDY.
- E. Breaker features shall be as follows:
 1. A rugged, integral housing of molded insulating material.
 2. Silver alloy contacts.
 3. Arc quenchers and phase barriers for each pole.
 4. Quick-make, quick-break, operating mechanisms.

5. A trip element for each pole, thermal magnetic type with long time delay and instantaneous characteristics, a common trip bar for all poles and a single operator.
6. Electrically and mechanically trip free.
7. An operating handle which indicates ON, TRIPPED, and OFF positions.
8. An overload on one pole of a multipole breaker shall automatically cause all the poles of the breaker to open.
9. Ground fault current interrupting breakers, shunt trip breakers, lighting control breakers (including accessories to switch line currents), or other accessory devices or functions shall be provided where indicated.
10. For circuit breakers being added to existing panelboards, coordinate the breaker type with existing panelboards. Modify the panel directory accordingly.

2.4 SEPARATELY ENCLOSED MOLDED CASE CIRCUIT BREAKERS

- A. Where separately enclosed molded case circuit breakers are shown on the drawings, provide circuit breakers in accordance with the applicable requirements of those specified for panelboards.
- B. Enclosures are to be of the NEMA types shown on the drawings. Where the types are not shown, they are to be the NEMA type most suitable for the environmental conditions where the circuit breakers are being installed.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Installation shall be in accordance with the manufacturer's instructions, the NEC, as shown on the drawings, and as specified.
- B. Locate panelboards so that the present and future conduits can be conveniently connected.
- C. Install a printed schedule of circuits in each panelboard after approval by the COTR. Schedules shall be printed on the panelboard directory cards, installed in the appropriate panelboards, and incorporate all applicable contract changes. Information shall indicate outlets, lights, devices, or other equipment controlled by each circuit, and the final room numbers served by each circuit.
- D. Mount the fully-aligned panelboard such that the maximum height of the top circuit breaker above the finished floor shall not exceed 78 in [1980 mm]. Mount panelboards that are too high such that the bottom of

the cabinets will not be less than 6 in [150 mm] above the finished floor.

- E. Rust and scale shall be removed from the inside of existing backboxes where new panelboards are to be installed. Paint inside of backboxes with rust-preventive paint before the new panelboard interior is installed. Provide new trim and doors for these panelboards. Covers shall fit tight to the box with no gaps between the cover and the box.

3.2 ACCEPTANCE CHECKS AND TESTS

Perform in accordance with the manufacturer's recommendations. Include the following visual and mechanical inspections and electrical tests:

1. Visual and Mechanical Inspection

- a. Compare equipment nameplate data with specifications and approved shop drawings.
- b. Inspect physical, electrical, and mechanical condition.
- c. Verify appropriate anchorage and required area clearances.
- d. Verify that circuit breaker sizes and types correspond to approved shop drawings.
- e. To verify tightness of accessible bolted electrical connections, use the calibrated torque-wrench method or perform thermographic survey after energization.
- f. Clean panelboard.

3.3 FOLLOW-UP VERIFICATION

Upon completion of acceptance checks, settings, and tests, the contractor shall demonstrate that the panelboards are in good operating condition and properly performing the intended function.

- - - E N D - - -

SECTION 26 27 26
WIRING DEVICES

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies the furnishing, installation and connection of wiring devices.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section of Division 26.
- B. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits and outlets boxes.
- C. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.
- D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
- B. Shop Drawings:
 - 1. Sufficient information, clearly presented, shall be included to determine compliance with drawings and specifications.
 - 2. Include electrical ratings, dimensions, mounting details, construction materials, grade and termination information.
- C. Manuals: Two weeks prior to final inspection, deliver four copies of the following to the COTR: Technical data sheets and information for ordering replacement units.
- D. Certifications: Two weeks prior to final inspection, submit four copies of the following to the COTR: Certification by the Contractor that the devices comply with the drawings and specifications, and have been properly installed, aligned, and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent

referenced. Publications are referenced in the text by basic designation only.

- B. National Fire Protection Association (NFPA):
70-Latest Edition.....National Electrical Code (NEC)
- C. National Electrical Manufacturers Association (NEMA):
WD 1.....General Color Requirements for Wiring Devices
WD 6Wiring Devices - Dimensional Requirements
- D. Underwriter's Laboratories, Inc. (UL):
5.....Surface Metal Raceways and Fittings
20.....General-Use Snap Switches
231.....Power Outlets
467.....Grounding and Bonding Equipment
498.....Attachment Plugs and Receptacles
943.....Ground-Fault Circuit-Interrupters

PART 2 - PRODUCTS

2.1 RECEPTACLES

- A. General: All receptacles shall be listed by Underwriters Laboratories, Inc., and conform to NEMA WD 6.
 - 1. Mounting straps shall be plated steel, with break-off plaster ears and shall include a self-grounding feature. Terminal screws shall be brass, brass plated or a copper alloy metal.
 - 2. Receptacles shall have provisions for back wiring with separate metal clamp type terminals (four min.) and side wiring from four captively held binding screws.
- B. Duplex Receptacles: Hospital-grade, single phase, 20 ampere, 120 volts, 2-pole, 3-wire, and conform to the NEMA 5-20R configuration in NEMA WD 6. The duplex type shall have break-off feature for two-circuit operation. The ungrounded pole of each receptacle shall be provided with a separate terminal.
 - 1. Bodies shall be ivory in color.
 - 2. Switched duplex receptacles shall be wired so that only the top receptacle is switched. The remaining receptacle shall be unswitched.
 - 3. Duplex Receptacles on Emergency Circuit:
 - a. Bodies shall be red in color.
 - 4. Ground Fault Interrupter Duplex Receptacles: Shall be an integral unit, hospital-grade, suitable for mounting in a standard outlet box.
 - a. Ground fault interrupter shall be consist of a differential current transformer, solid state sensing circuitry and a circuit interrupter switch. Device shall have nominal sensitivity to ground leakage current of five milliamperes and shall function to

interrupt the current supply for any value of ground leakage current above five milliamperes (+ or - 1 milliamp) on the load side of the device. Device shall have a minimum nominal tripping time of 1/30th of a second.

- b. Ground Fault Interrupter Duplex Receptacles (not hospital-grade) shall be the same as ground fault interrupter hospital-grade receptacles except for the "hospital-grade" listing.

5. Safety Duplex Receptacles:

- a. Bodies shall be gray in color.
 - 1. Shall permit current flow only while a standard plug is in the proper position in the receptacle.
 - 2. Screws exposed while the wall plates are in place shall be tamperproof type.

6. Duplex Receptacles (not hospital grade): Shall be the same as hospital grade duplex receptacles except for the "hospital grade" listing and as follows.

- a. Bodies shall be brown phenolic compound supported by a plated steel mounting strap having plaster ears.

C. Receptacles; 20, 30 and 50 ampere, 250 volts: Shall be complete with appropriate cord grip plug. Devices shall meet UL 231.

D. Weatherproof Receptacles: Shall consist of a duplex receptacle, mounted in box with a gasketed, weatherproof, cast metal cover plate and cap over each receptacle opening. The cap shall be permanently attached to the cover plate by a spring-hinged flap. The weatherproof integrity shall not be affected when heavy duty specification or hospital grade attachment plug caps are inserted. Cover plates on outlet boxes mounted flush in the wall shall be gasketed to the wall in a watertight manner.

2.2 TOGGLE SWITCHES

A. Toggle Switches: Shall be totally enclosed tumbler type with bodies of phenolic compound. Toggle handles shall be ivory in color unless otherwise specified. The rocker type switch is not acceptable and will not be approved.

- 1. Switches installed in hazardous areas shall be explosion proof type in accordance with the NEC and as shown on the drawings.
- 2. Shall be single unit toggle, butt contact, quiet AC type, heavy-duty general-purpose use with an integral self grounding mounting strap with break-off plaster ears and provisions for back wiring with separate metal wiring clamps and side wiring with captively held binding screws.

3. Ratings:

- a. 120 volt circuits: 20 amperes at 120-277 volts AC.
- b. 277 volt circuits: 20 amperes at 120-277 volts AC.

2.3 WALL PLATES

- A. Wall plates for switches and receptacles shall be type smooth nylon. Oversize plates are not acceptable.
- B. Color shall be ivory unless otherwise specified.
- C. Standard NEMA design, so that products of different manufacturers will be interchangeable. Dimensions for openings in wall plates shall be accordance with NEMA WD 6.
- D. For receptacles or switches mounted adjacent to each other, wall plates shall be common for each group of receptacles or switches.
- E. Wall plates for data, telephone or other communication outlets shall be as specified by VA Medical Center.
- G. Duplex Receptacles on Emergency Circuit:
 - 1. Bodies shall be red in color. Wall plates shall be red with the word "EMERGENCY" engraved in 6 mm, (1/4 inch) white letters.

2.4 SURFACE MULTIPLE-OUTLET ASSEMBLIES

- A. Assemblies shall conform to the requirements of NFPA 70 and UL 5.
- B. Shall have the following features:
 - 1. Enclosures:
 - a. Thickness of steel shall be not less than 0.040 inch [1mm] steel for base and cover. Nominal dimension shall be 1-1/2 by 2-3/4 inches [40 by 70mm] with inside cross sectional area not less than 3.5 square inches [2250 square mm]. The enclosures shall be thoroughly cleaned, phosphatized and painted at the factory with primer and the manufacturer's standard baked enamel or lacquer finish.
 - 2. Receptacles shall be duplex, hospital grade. See paragraph 'RECEPTACLES' in this section. Device cover plates shall be the manufacturer's standard corrosion resistant finish and shall not exceed the dimensions of the enclosure.
 - 3. Unless otherwise shown on drawings, spacing of the receptacles along the strip shall be 24 inches [600mm] on centers.
 - 4. Wires within the assemblies shall be not less than No. 12 AWG copper, with 600 volt ratings.
 - 5. Installation fittings shall be designed for the strips being installed including bends, offsets, device brackets, inside couplings, wire clips, and elbows.
 - 6. Bond the strips to the conduit systems for their branch supply circuits.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Installation shall be in accordance with the NEC and as shown as on the drawings.
- B. Ground terminal of each receptacle shall be bonded to the outlet box with an approved green bonding jumper, and also connected to the green equipment grounding conductor.
- C. Outlet boxes for light shall be mounted on the strike side of doors.
- D. Provide barriers in multigang outlet boxes to separate systems of different voltages, Normal Power and Emergency Power systems, and in compliance with the NEC.
- E. Coordinate with other work, including painting, electrical boxes and wiring installations, as necessary to interface installation of wiring devices with other work. Coordinate the electrical work with the work of other trades to ensure that wiring device flush outlets are positioned with box openings aligned with the face of the surrounding finish material. Pay special attention to installations in cabinet work, and in connection with laboratory equipment.
- F. Exact field locations of floors, walls, partitions, doors, windows, and equipment may vary from locations shown on the drawings. Prior to locating sleeves, boxes and chases for roughing-in of conduit and equipment, the Contractor shall coordinate exact field location of the above items with other trades. In addition, check for exact direction of door swings so that local switches are properly located on the strike side.
- G. Install wall switches 48 inches [1200mm] above floor, OFF position down.
- H. Install convenience receptacles 18 inches [450mm] above floor, and 6 inches [152mm] above counter backsplash or workbenches. Install specific-use receptacles at heights shown on the drawings.
- I. Label device plates with a permanent adhesive label listing panel and circuit feeding the wiring device.
- J. Test wiring devices for damaged conductors, high circuit resistance, poor connections, inadequate fault current path, defective devices, or similar problems using a portable receptacle tester. Correct circuit conditions, remove malfunctioning units and replace with new, and retest as specified above.
- K. Test GFCI devices for tripping values specified in UL 1436 and UL 943.

- - - E N D - - -

**SECTION 26 29 21
DISCONNECT SWITCHES**

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies the furnishing, installation, and connection of low voltage disconnect switches.

1.2 RELATED WORK

- A. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.
- C. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES 600 VOLTS AND BELOW: Cables and wiring.
- D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground faults.
- E. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits for cables and wiring.
- F. Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS: Motor rated toggle switches.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- B. Shop Drawings:
 - 1. Clearly present sufficient information to determine compliance with drawings and specifications.
 - 2. Include electrical ratings, dimensions, mounting details, materials, enclosure types, and fuse types and classes.
 - 3. Show the specific switch and fuse proposed for each specific piece of equipment or circuit.
- C. Manuals:
 - 1. Provide complete maintenance and operating manuals for disconnect switches, including technical data sheets, wiring diagrams, and information for ordering replacement parts. Deliver four copies to the COTR two weeks prior to final inspection.

2. Terminals on wiring diagrams shall be identified to facilitate maintenance and operation.
3. Wiring diagrams shall indicate internal wiring and any interlocking.
- D. Certifications: Two weeks prior to the final inspection, submit four copies of the following certifications to the COTR:
 1. Certification by the manufacturer that the materials conform to the requirements of the drawings and specifications.
 2. Certification by the contractor that the materials have been properly installed, connected, and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. National Electrical Manufacturers Association (NEMA):
 - FU 1-07.....Low Voltage Cartridge Fuses
 - KS 1-06.....Enclosed and Miscellaneous Distribution
Equipment Switches (600 Volts Maximum)
- C. National Fire Protection Association (NFPA):
 - 70-Latest Edition.....National Electrical Code (NEC)
- D. Underwriters Laboratories, Inc. (UL):
 - 98-04.....Enclosed and Dead-Front Switches
 - 248-00.....Low Voltage Fuses
 - 977-94.....Fused Power-Circuit Devices

PART 2 - PRODUCTS

2.1 LOW VOLTAGE FUSIBLE SWITCHES RATED 600 AMPERES AND LESS

- A. In accordance with UL 98, NEMA KS1, and NEC.
- B. Shall have NEMA classification General Duty (GD) for 240 V switches and NEMA classification Heavy Duty (HD) for 480 V switches.
- C. Shall be HP rated.
- D. Shall have the following features:
 1. Switch mechanism shall be the quick-make, quick-break type.
 2. Copper blades, visible in the OFF position.
 3. An arc chute for each pole.
 4. External operating handle shall indicate ON and OFF position and have lock-open padlocking provisions.
 5. Mechanical interlock shall permit opening of the door only when the switch is in the OFF position, defeatable to permit inspection.
 6. Fuse holders for the sizes and types of fuses specified.
 7. Solid neutral for each switch being installed in a circuit which includes a neutral conductor.

8. Ground lugs for each ground conductor.

9. Enclosures:

- a. Shall be the NEMA types shown on the drawings for the switches.
- b. Where the types of switch enclosures are not shown, they shall be the NEMA types most suitable for the ambient environmental conditions. Unless otherwise indicated on the plans, all outdoor switches shall be NEMA 3R, indoor wet locations shall be NEMA 4 and hazardous locations shall be explosion-proof.
- c. Shall be finished with manufacturer's standard gray baked enamel paint over pretreated steel (for the type of enclosure required).

2.2 LOW VOLTAGE UNFUSED SWITCHES RATED 600 AMPERES AND LESS

Shall be the same as Low Voltage Fusible Switches Rated 600 Amperes and Less, but without provisions for fuses.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install disconnect switches in accordance with the NEC and as shown on the drawings.
- B. Fusible disconnect switches shall be furnished complete with fuses. Arrange fuses such that rating information is readable without removing the fuse.

3.2 SPARE PARTS

Two weeks prior to the final inspection, furnish one complete set of spare fuses for each fusible disconnect switch installed on the project. Deliver the spare fuses to the COTR.

- - - E N D - - -

**SECTION 26 51 00
INTERIOR LIGHTING**

PART 1 - GENERAL**1.1 DESCRIPTION:**

This section specifies the furnishing, installation and connection of the interior lighting systems.

1.2 RELATED WORK

- A. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Requirement for seismic restraint for nonstructural Components.
- B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General requirements that are common to more than one section of Division 26.
- C. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.
- D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.
- E. Section 26 27 26, WIRING DEVICES: Wiring devices used for control of the lighting systems.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
- B. Product Data: For each type of lighting fixture (luminaire) designated on the LIGHTING FIXTURE SCHEDULE, arranged in order of fixture designation, submit the following information.
 - 1. Material and construction details include information on housing, optics system and lens/diffuser.
 - 2. Physical dimensions and description.
 - 3. Wiring schematic and connection diagram.
 - 4. Installation details.
 - 5. Energy efficiency data.
 - 6. Photometric data based on laboratory tests complying with IESNA Lighting Measurements, testing and calculation guides.
 - 7. Lamp data including lumen output (initial and mean), color rendition index (CRI), rated life (hours) and color temperature (degrees Kelvin).

8. Ballast data including ballast type, starting method, ambient temperature, ballast factor, sound rating, system watts and total harmonic distortion (THD).

C. Manuals:

1. Submit, simultaneously with the shop drawings companion copies of complete maintenance and operating manuals including technical data sheets, and information for ordering replacement parts.
2. Two weeks prior to the final inspection, submit four copies of the final updated maintenance and operating manuals, including any changes, to the COTR.

D. Certifications:

1. Two weeks prior to final inspection, submit four copies of the following certifications to the COTR:
 - a. Certification by the Contractor that the equipment has been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. Institute of Electrical and Electronic Engineers (IEEE):
C62.41-91.....Guide on the Surge Environment in Low Voltage
(1000V and less) AC Power Circuits
- C. National Fire Protection Association (NFPA):
70-Latest Edition.....National Electrical Code (NEC)
101.....Life Safety Code
- D. National Electrical Manufacturer's Association (NEMA):
C82.1-97.....Ballasts for Fluorescent Lamps - Specifications
C82.2-02.....Method of Measurement of Fluorescent Lamp
Ballasts
C82.11-02.....High Frequency Fluorescent Lamp Ballasts
- E. Underwriters Laboratories, Inc. (UL):
496-96.....Edison-Base Lampholders
542-99.....Lampholders, Starters, and Starter Holders for
Fluorescent Lamps
844-95.....Electric Lighting Fixtures for Use in Hazardous
(Classified) Locations
924-95.....Emergency Lighting and Power Equipment
935-01.....Fluorescent-Lamp Ballasts
1598-00.....Luminaires
2108-04.....Standard for Low-Voltage Lighting Systems

8750-08.....Light Emitting Diode (LED) Light Sources for Use
in Lighting Product.

F. Federal Communications Commission (FCC):

Code of Federal Regulations (CFR), Title 47, Part 18

PART 2 - PRODUCTS

2.1 LIGHTING FIXTURES (LUMINAIRES)

A. Shall be in accordance with NFPA 70 and UL 1598, as shown on drawings, and as specified.

B. Sheet Metal:

1. Shall be formed to prevent warping and sagging. Housing, trim and lens frame shall be true, straight (unless intentionally curved) and parallel to each other as designed.
2. Wireways and fittings shall be free of burrs and sharp edges and shall accommodate internal and branch circuit wiring without damage to the wiring.
3. When installed, any exposed fixture housing surface, trim frame, door frame and lens frame shall be free of light leaks; lens doors shall close in a light tight manner.
4. Hinged door closure frames shall operate smoothly without binding when the fixture is in the installed position, latches shall function easily by finger action without the use of tools.

C. Ballasts shall be serviceable while the fixture is in its normally installed position, and shall not be mounted to removable reflectors or wireway covers unless so specified.

D. Lamp Sockets:

1. Fluorescent: Lampholder contacts shall be the biting edge type or phosphorous-bronze with silver flash contact surface type and shall conform to the applicable requirements of UL 542. Lamp holders for bi-pin lamps shall be of the telescoping compression type, or of the single slot entry type requiring a one-quarter turn of the lamp after insertion.

E. Recessed fixtures mounted in an insulated ceiling shall be listed for use in insulated ceilings.

F. Mechanical Safety: Lighting fixture closures (lens doors, trim frame, hinged housings, etc.) shall be retained in a secure manner by captive screws, chains, captive hinges or fasteners such that they cannot be accidentally dislodged during normal operation or routine maintenance.

G. Metal Finishes:

1. The manufacturer shall apply standard finish (unless otherwise specified) over a corrosion resistant primer, after cleaning to free the metal surfaces of rust, grease, dirt and other deposits. Edges of pre-finished sheet metal exposed during forming, stamping or shearing processes shall be finished in a similar corrosion resistant manner to match the adjacent surface(s). Fixture finish shall be free of stains or evidence of rusting, blistering, or flaking, and shall be applied after fabrication.
 2. Interior light reflecting finishes shall be white with not less than 85 percent reflectances, except where otherwise shown on the drawing.
 3. Exterior finishes shall be as shown on the drawings.
- H. Lighting fixtures shall have a specific means for grounding metallic wireways and housings to an equipment grounding conductor.
- I. Light Transmitting Components for Fluorescent Fixtures:
1. Shall be 100 percent virgin acrylic.
 2. Flat lens panels shall have not less than 1/8 inch [3.2mm] of average thickness. The average thickness shall be determined by adding the maximum thickness to the minimum unpenetrated thickness and dividing the sum by 2.
 3. Unless otherwise specified, lenses, diffusers and louvers shall be retained firmly in a metal frame by clips or clamping ring in such a manner as to allow expansion and contraction of the lens without distortion or cracking.
- J. Lighting fixtures in hazardous areas shall be suitable for installation in Class and Group areas as defined in NFPA 70, and shall comply with UL 844.
- K. Compact fluorescent fixtures shall be manufactured specifically for compact fluorescent lamps with ballast integral to the fixture. Assemblies designed to retrofit incandescent fixtures are prohibited except when specifically indicated for renovation of existing fixtures (not the lamp). Fixtures shall be designed for lamps as specified.

2.2 BALLASTS

- A. Linear Fluorescent Lamp Ballasts: Multi-voltage (120 - 277V) electronic programmed-start or rapid-start type, complying with UL 935 and with ANSI C 82.11, designed for type and quantity of lamps indicated. Ballast shall be designed for full light output unless dimmer or bi-level control is indicated; including the following features:
1. Automatic lamp starting after lamp replacement.
 2. Sound Rating: Class A.
 3. Total Harmonic Distortion Rating: 10 percent or less.

4. Transient Voltage Protection: IEEE C62.41.1 and IEEE C62.41.2, Category A or better.
 5. Operating Frequency: 20 kHz or higher.
 6. Lamp Current Crest Factor: 1.7 or less.
 7. Ballast Factor: 0.87 or higher unless otherwise indicated.
 8. Power Factor: 0.98 or higher.
 9. Interference: Comply with 47 CFT 18, Ch.1, Subpart C, for limitations on electromagnetic and radio-frequency interference for non-consumer equipment.
 10. To facilitate multi-level lamp switching, lamps within fixture shall be wired with the outermost lamp at both sides of the fixture on the same ballast, the next inward pair on another ballast and so on to the innermost lamp (or pair of lamps). Within a given room, each switch shall uniformly control the same corresponding lamp (or lamp pairs) in all fixture units that are being controlled.
 11. Where three-lamp fixtures are indicated, unless switching arrangements dictate otherwise, utilize a common two-lamp ballast to operate the center lamp.
 12. Dimming Ballast shall be as per above, except bi-level step dimming on 50% and 100% of rated lamp lumens.
- B. Low-Frequency Linear T8 Fluorescent Lamp Ballasts (allowed for Surgery Suites): 277V hybrid electronic-electromagnetic rapid-start type, complying with UL 935 and with ANSI C 82.11, designed for type and quantity of lamps indicated. Ballast shall be designed for full light output; including the following features:
1. Automatic lamp starting after lamp replacement.
 2. Sound Rating: Class A.
 3. Total Harmonic Distortion Rating: 20 percent or less.
 4. Transient Voltage Protection: IEEE C62.41.1 and IEEE C62.41.2, Category A or better.
 5. Operating Frequency: 60 Hz.
 6. Lamp Current Crest Factor: 1.7 or less.
 7. Ballast Factor: 0.85 or higher unless otherwise indicated.
 8. Power Factor: 0.90 or higher.
 9. Interference: Comply with 47 CFT 18, Ch.1, Subpart C, for limitations on electromagnetic and radio-frequency interference for non-consumer equipment.
 10. To facilitate multi-level lamp switching, lamps within fixture shall be wired with the outermost lamp at both sides of the fixture on the same ballast, the next inward pair on another ballast and so on to

- the innermost lamp (or pair of lamps). Within a given room, each switch shall uniformly control the same corresponding lamp (or lamp pairs) in all fixture units that are being controlled.
11. Where three-lamp fixtures are indicated, unless switching arrangements dictate otherwise, utilize a common two-lamp ballast to operate the center lamp.
- C. Compact Fluorescent Lamp Ballasts: Multi-voltage (120 - 277V), electronic-programmed rapid-start type, complying with UL 935 and with ANSI C 82.11, designed for type and quantity of lamps indicated. Ballast shall be designed for full light output unless dimmer or bi-level control is indicated; including the following features:
1. Lamp end-of-life detection and shutdown circuit.
 2. Automatic lamp starting after lamp replacement.
 3. Sound Rating: Class A.
 4. Total Harmonic Distortion Rating: 10 percent or less.
 5. Transient Voltage Protection: IEEE C62.41.1 and IEEE C62.41.2, Category A or better.
 6. Operating Frequency: 20 kHz or higher.
 7. Lamp Current Crest Factor: 1.7 or less.
 8. Ballast Factor: 0.95 or higher unless otherwise indicated.
 9. Power Factor: 0.98 or higher.
 10. Interference: Comply with 47 CFR 18, Ch. 1, Subpart C, for limitations on electromagnetic and radio-frequency interference for non-consumer equipment.
- D. Ballasts for high intensity discharge fixtures: Multi-tap voltage (120-480v) electromagnetic ballast for high intensity discharge lamps. Comply with ANSI C82.4 and UL 1029. Include the following features unless otherwise indicated:
1. Ballast Circuit: Constant-wattage autotransformer or regulating high-power-factor type.
 2. Minimum Starting Temperature: Minus 22 deg F (Minus 30 deg C) for single-lamp ballasts.
 3. Rated Ambient Operating Temperature: 104 deg F (40 deg C).
 4. Open-circuit operation that will not reduce average life.
 5. Low-Noise Ballasts: Manufacturers' standard epoxy-encapsulated models designed to minimize audible fixture noise.
- E. Electronic ballast for high intensity discharge metal-halide lamps shall include the following features unless otherwise indicated:
1. Minimum Starting Temperature: Minus 20 deg F (Minus 29 deg C) for single-lamp ballasts.

2. Rated Ambient Operating Temperature: 130 deg F (54 deg C).
3. Lamp end-of-life detection and shutdown circuit.
4. Sound Rating: Class A.
5. Total Harmonic Distortion Rating: 20 percent or less.
6. Transient Voltage Protection: IEEE C62.41.1 and IEEE C62.41.2, Category A or better.
7. Lamp Current Crest Factor: 1.5 or less.
8. Power Factor: 0.90 or higher.
9. Interference: Comply with 47 CFR 18, Ch. 1, Subpart C, for limitations on electromagnetic and radio-frequency interference for non-consumer equipment.
10. Protection: Class P thermal cut.

2.3 LAMPS

A. Linear and U-shaped T8 Fluorescent Lamps:

1. Rapid start fluorescent lamps shall comply with ANSI C78.1; and instant-start lamps shall comply with ANSI C78.3.
2. Chromacity of fluorescent lamps shall comply with ANSI C78.376.
3. Except as indicated below, lamps shall be low-mercury energy saving type, have a color temperature between 3500° and 4100°K, a Color Rendering Index (CRI) of greater than 70, average rated life of 20,000 hours, and be suitable for use with dimming ballasts, unless otherwise indicated. Low mercury lamps shall have passed the EPA Toxicity Characteristic Leachate Procedure (TCLP) for mercury by using the lamp sample preparation procedure described in NEMA LL 1.
 - a. In Operating Rooms and Surgery use color corrected lamps having a CRI of 85 or above and a correlated color temperature between 5000 and 6000°K.
 - b. Other areas as indicated on the drawings.

B. Compact Fluorescent Lamps:

1. T4, CRI 80 (minimum), color temperature 3500 K, and suitable for use with dimming ballasts, unless otherwise indicated.

C. Long Twin-Tube Fluorescent Lamps:

1. T5, CRI 80 (minimum), color temperature between 3500° and 4100°K, 20,000 hours average rated life.

D. High Intensity Discharge Lamps:

1. Pulse-Start, Metal-Halide Lamps: Minimum CRI 65, and color temperature 4000°K.

3. Ceramic, Pulse-Start, Metal-Halide Lamps: CRI 80 (minimum), and color temperature 4000°K.

2.4 RADIO-INTERFERENCE-FREE FLUORESCENT FIXTURES

- A. Shall be specially designed for suppressing radio-frequency energy produced within the fixtures. The Rules and Regulations of FCC (CFR 47, Part 18) shall apply.
- B. Lenses shall have a light-transparent layer of metal permanently bonded to them, and in positive contact with the steel housing or equal to prevent the radio-frequency interferences from passing through the lenses. The effective light transmittance of the lenses shall be not less than 75 percent.
- C. Install line filters within the body of the fixtures and wired in series with the supply circuit conductors to eliminate the transmission of radio frequency energy into the supply circuit.
- D. Ballasts shall be as specified herein.

2.5 EXIT LIGHT FIXTURES

- A. Exit light fixtures shall meet applicable requirements of NFPA 101 and UL 924.
- B. Housing and Canopy:
 1. Shall be made of die-cast aluminum.
 2. Optional steel housing shall be a minimum 20 gauge thick or equivalent strength aluminum.
 3. Steel housing shall have baked enamel over corrosion resistant, matte black or ivory white primer.
- C. Door frame shall be cast or extruded aluminum, and hinged with latch.
- D. Finish shall be satin or fine-grain brushed aluminum.
- E. There shall be no radioactive material used in the fixtures.
- F. Fixtures:
 1. Maximum fixture wattage shall be 1 watt or less.
 2. Inscription panels shall be cast or stamped aluminum a minimum of 0.090 inch [2.25mm] thick, stenciled with 6 inch [150mm] high letters, baked with red color stable plastic or fiberglass. Lamps shall be luminous Light Emitting Diodes (LED) mounted in center of letters on red color stable plastic or fiberglass. The LED shall be rated minimum 25 years life.
 3. Double-Faced Fixtures: Provide double-faced fixtures where required or as shown on drawings.
 4. Directional Arrows: Provide directional arrows as part of the inscription panel where required or as shown on drawings. Directional

arrows shall be the "chevron-type" of similar size and width as the letters and meet the requirements of NFPA 101.

G. Voltages: Refer to Lighting Fixture Schedule.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Installation shall be in accordance with the NEC, manufacturer's instructions and as shown on the drawings or specified.
- B. Align, mount and level the lighting fixtures uniformly.
- C. Lighting Fixture Supports:
 - 1. Shall provide support for all of the fixtures. Supports may be anchored to channels of the ceiling construction, to the structural slab or to structural members within a partition, or above a suspended ceiling.
 - 2. Shall maintain the fixture positions after cleaning and relamping.
 - 3. Shall support the lighting fixtures without causing the ceiling or partition to deflect.
 - 4. Hardware for recessed lighting fixtures:
 - a. All fixture mounting devices connecting fixtures to the ceiling system or building structure shall have a capacity for a horizontal force of 100 percent of the fixture weight and a vertical force of 400 percent of the fixture weight.
 - b. Mounting devices shall clamp the fixture to the ceiling system structure (main grid runners or fixture framing cross runners) at four points in such a manner as to resist spreading of these supporting members. Each support point device shall utilize a screw or approved hardware to "lock" the fixture housing to the ceiling system, restraining the fixture from movement in any direction relative to the ceiling. The screw (size No. 10 minimum) or approved hardware shall pass through the ceiling member (T-bar, channel or spline), or it may extend over the inside of the flange of the channel (or spline) that faces away from the fixture, in a manner that prevents any fixture movement.
 - c. In addition to the above, the following is required for fixtures exceeding 20 pounds [9kg] in weight.
 - 1) Where fixtures mounted in ASTM Standard C635-69 "Intermediate" and "Heavy Duty" ceilings and weigh between 20 pounds and 56 pounds [9kg and 25kg] provide two 12 gauge safety hangers hung slack between diagonal corners of the fixture and the building structure.

- 2) Where fixtures weigh over 56 pounds [25kg] they shall be independently supported from the building structure by approved hangers. Two-way angular bracing of hangers shall be provided to prevent lateral motion.
- d. Where ceiling cross runners are installed for support of lighting fixtures, they must have a carrying capacity equal to that of the main ceiling runners and be rigidly secured to the main runners.
5. Surface mounted lighting fixtures:
 - a. Fixtures shall be bolted against the ceiling independent of the outlet box at four points spaced near the corners of each unit. The bolts (or stud-clips) shall be minimum 1/4-20 [6mm] bolt, secured to main ceiling runners and/or secured to cross runners. Non-turning studs may be attached to the main ceiling runners and cross runners with special non-friction clip devices designed for the purpose, provided they bolt through the runner, or are also secured to the building structure by 12 gauge safety hangers. Studs or bolts securing fixtures weighing in excess of 56 pounds [25kg] shall be supported directly from the building structure.
 - b. Where ceiling cross runners are installed for support of lighting fixtures they must have a carrying capacity equal to that of the main ceiling runners and be rigidly secured to the main runners.
 - c. Fixtures less than 15 pounds [6.8kg] in weight and occupying less than two square feet [600mm x 600mm] of ceiling area may, (when designed for the purpose) be supported directly from the outlet box when all the following conditions are met.
 - 1) Screws attaching the fixture to the outlet box pass through round holes (not key-hole slots) in the fixture body.
 - 2) The outlet box is attached to a main ceiling runner (or cross runner) with approved hardware.
 - 3) The outlet box is supported vertically from the building structure.
 - d. Fixtures mounted in open construction shall be secured directly to the building structure with approved bolting and clamping devices.
6. Single or double pendant-mounted lighting fixtures:
 - a. Each stem shall be supported by an approved outlet box, mounted swivel joint and canopy which holds the stem captive and provides spring load (or approved equivalent) dampening of fixture oscillations. Outlet box shall be supported vertically from the building structure.

7. Outlet boxes for support of lighting fixtures (where permitted) shall be secured directly to the building structure with approved devices or supported vertically in a hung ceiling from the building structure with a nine gauge wire hanger, and be secured by an approved device to a main ceiling runner or cross runner to prevent any horizontal movement relative to the ceiling.
- E. Furnish and install the specified lamps for all lighting fixtures installed and all existing lighting fixtures reinstalled under this project.
- F. Coordinate between the electrical and ceiling trades to ascertain that approved lighting fixtures are furnished in the proper sizes and installed with the proper devices (hangers, clips, trim frames, flanges), to match the ceiling system being installed.
- G. Bond lighting fixtures and metal accessories to the grounding system as specified in Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.
- H. Exercise electronic dimming ballasts over full range of dimming capability by operating the control devices(s) in the presence of the COTR. Observe for visually detectable flicker over full dimming range.
- I. Burn-in all lamps that require specific aging period to operate properly, prior to occupancy by Government. Burn-in period to be 40 hours minimum, unless a lesser period is specifically recommended by lamp manufacturer. Burn-in fluorescent and compact fluorescent lamps intended to be dimmed, for at least 100 hours at full voltage. Replace any lamps and ballasts which fail during burn-in.
- J. At completion of project, relamp/reballast fixtures which have failed lamps/ballasts. Clean fixtures, lenses, diffusers and louvers that have accumulated dust/dirt/fingerprints during construction. Replace damaged lenses, diffusers and louvers with new.
- K. Dispose of lamps per requirements of federal, State, and local requirements.

- - - E N D - - -

**SECTION 26 56 00
EXTERIOR LIGHTING**

PART 1 - GENERAL**1.1 DESCRIPTION**

This section specifies the furnishing, installation, and connection of exterior luminaries, and supports.

1.2 RELATED WORK

- A. Section 09 06 00, SCHEDULE FOR FINISHES: Finishes for exterior light supports and luminaries.
- B. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- C. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.
- D. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Low voltage power and lighting wiring.
- E. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.
- F. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits, fittings, and boxes for raceway systems.
- G. Section 26 09 23, LIGHTING CONTROLS: Controls for exterior lighting.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- B. Shop Drawings:
 - 1. Clearly present sufficient information to determine compliance with drawings and specifications.
 - 2. Include electrical ratings, dimensions, mounting, details, materials, required clearances, terminations, wiring and connection diagrams, photometric data, ballasts, luminaires, lamps, and accessories. Include electronic photometric files in IES format, or provide link (URL) to manufacturer's website that contains photometric data for each specific fixture used, excluding wallpack fixtures.

- C. Manuals: Two weeks prior to final inspection, submit four copies of operating and maintenance manuals to the COTR. Include technical data sheets, wiring and connection diagrams, and information for ordering replacement lamps, ballasts, and parts.
- D. Certifications: Two weeks prior to final inspection, submit four copies of the following to the COTR:
1. Certification by the manufacturer that the materials are in accordance with the drawings and specifications.
 2. Certification by the contractor that the complete installation has been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. Aluminum Association Inc. (AA):
AAH35.1-06.....Alloy and Temper Designation Systems for
Aluminum
- C. American Concrete Institute (ACI):
318-05Building Code Requirements for Structural
Concrete
- D. American National Standards Institute (ANSI):
C81.61-09Electrical Lamp Bases - Specifications for
Bases (Caps) for Electric Lamps
- E. American Society for Testing and Materials (ASTM):
A123/A123M-09Zinc (Hot-Dip Galvanized) Coatings on Iron and
Steel Products
A153/A153M-09.....Zinc Coating (Hot-Dip) on Iron and Steel
Hardware
B108-03a-08Aluminum-Alloy Permanent Mold Castings
- F. Illuminating Engineering Society of North America (IESNA)
HB-9-00.....Lighting Handbook
RP-33-99.....Lighting for Exterior Environments
LM-5-96.....Photometric Measurements of Area and Sports
Lighting Installations
LM-72-97.....Directional Positioning of Photometric Data

LM-79-08.....Approved Method for the Electrical and
Photometric Measurements of Solid-State Lighting
Products

I. National Electrical Manufacturers Association (NEMA):

C78.43-07Electric Lamps - Single-Ended Metal-Halide
Lamps

C78.1381-98.....Electric Lamps - 70-Watt M85 Double-Ended
Metal-Halide Lamps

C136.3-05For Roadway and Area Lighting Equipment -
Luminaire Attachments

C136.17-05Roadway and Area Lighting Equipment - Enclosed
Side-Mounted Luminaires for Horizontal-Burning
High-Intensity-Discharge Lamps - Mechanical
Interchangeability of Refractors

ICS 2-00 (R2005)Controllers, Contactors and Overload Relays
Rated 600 Volts

ICS 6-93 (R2006)Enclosures

J. National Fire Protection Association (NFPA):

70-Latest EditionNational Electrical Code (NEC)

K. Underwriters Laboratories, Inc. (UL):

496-08Lampholders

773-95.....Plug-In, Locking Type Photocontrols for Use
with Area Lighting

773A-06Nonindustrial Photoelectric Switches for
Lighting Control

1598-08Luminaires

PART 2 - PRODUCTS

2.1 MATERIALS AND EQUIPMENT

Materials and equipment shall be in accordance with NEC, UL, ANSI, and
as shown on the drawings and specified.

2.2 LUMINAIRES

- A. Per UL 1598 and NEMA C136.17. Luminaires shall be weatherproof, heavy
duty, outdoor types designed for efficient light utilization, adequate
dissipation of lamp and ballast heat, and safe cleaning and relamping.
- B. Incorporate ballasts in the luminaire housing, except where otherwise
shown on the drawings.
- C. Lenses shall be frame-mounted, heat-resistant, borosilicate glass, with
prismatic refractors, unless otherwise shown on the drawings. Use heat

and aging-resistant, resilient gaskets to seal and cushion lenses and refractors in luminaire doors.

- D. Lamp sockets for high intensity discharge (H.I.D) fixture shall have locking-type porcelain enclosures in conformance to the applicable requirements of ANSI C81.61 and UL 496.
- E. Pre-wire internal components to terminal strips at the factory.
- F. Bracket-mounted luminaires shall have leveling provisions.
- G. Materials shall be rustproof. Latches and fittings shall be non-ferrous metal.
- H. Provide manufacturer's standard finish, as scheduled on the drawings. Where indicated on drawings, match finish process and color of pole or support materials. Where indicated on drawings, provide finishes as indicated in Section 09 06 00, SCHEDULE FOR FINISHES.
- I. Luminaires shall carry factory labels, showing complete, specific lamp and ballast information.

2.3 LAMPS

- A. Install the proper lamps in every luminaire installed.
- B. Lamps shall be general-service, outdoor lighting types.
- C. Metal-Halide Lamps: NEMA C78.43 or NEMA C78.1381.

2.4 METAL HALIDE CORE AND COIL BALLASTS

- A. Shall be pulse start, linear reactor type for 277 volt luminaires and constant-wattage autotransformer (CWA) type for other voltage luminaires (if not otherwise specified).
- B. Ballasts shall have individual overcurrent protection in each ungrounded supply conductor.
- C. Power factor shall be not less than 90%.
- D. Ballast shall have an allowable line voltage variations of $\pm 5\%$ for linear reactor type and $\pm 10\%$ for CWA, with a maximum 20% lamp wattage regulation spread.
- E. Ballast shall have a minimum starting temperature of -40° F [-40° C].
- F. Lamp current crest factor shall be 1.8 or less, in accordance with lamp manufacturer recommendations.

2.5 METAL HALIDE ELECTRONIC BALLASTS

- A. Ballast shall be low-frequency electronic type, and shall operate pulse start and ceramic metal halide lamps at a frequency of 90 to 200 Hz square wave.
- B. Ballast shall be labeled Type '1' outdoor, suitable for recessed use, Class 'P'.

- C. Ballast shall have auto-resetting thermal protector to shut off ballast when operating temperatures reach unacceptable levels.
- D. Ballast shall have an end of lamp life detection and shut-down circuit.
- E. Lamp current crest factor shall be 1.5 or less.
- F. Ballasts shall comply with FCC Title 47 CFR Part 18 Non-consumer RFI/EMI Standards.
- G. Ballast shall have a minimum ballast factor of 1.0.
- H. Input current THD shall not exceed 20% for the primary lamp.
- I. Ballasts shall have ANSI C62.41, category 'A' transient protection.
- J. Ballasts shall have power factor greater than 90%.
- K. Ballast shall have a Class 'A' sound rating.

2.6 EXISTING LIGHTING SYSTEMS

- A. For modifications or additions to existing lighting systems, the new components shall be compatible with the existing systems.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install lighting in accordance with the NEC, as shown on the drawings, and in accordance with manufacturer's recommendations.
- B. Install lamps in each luminaire.
- C. Adjust luminaires that require field adjustment or aiming.

3.2 GROUNDING

Ground noncurrent-carrying parts of equipment, including luminaires, mounting arms, brackets, and metallic enclosures, as specified in Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS. Where copper grounding conductor is connected to a metal other than copper, provide specially-treated or lined connectors suitable and listed for this purpose.

3.3 ACCEPTANCE CHECKS AND TESTS

Verify operation after installing luminaires and energizing circuits.

- - - E N D - - -

SECTION 27 05 11
REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This Section, Requirements for Communications Installations, applies to all sections of Division 27.
- B. Furnish and install communications cabling, systems, equipment, and accessories in accordance with the specifications and drawings. Capacities and ratings of cable, and other items and arrangements for the specified items are shown on drawings.

1.2 MINIMUM REQUIREMENTS

- A. References to industry and trade association standards and codes are minimum installation requirement standards.
- B. Drawings and other specification sections shall govern in those instances where requirements are greater than those specified in the above standards.

1.3 QUALIFICATIONS (PRODUCTS AND SERVICES)

- A. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.
- B. Product Qualification:
 - 1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
 - 2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.
- C. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.4 MANUFACTURED PRODUCTS

- A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, for which replacement parts shall be available.
- B. When more than one unit of the same class of equipment is required, such units shall be the product of a single manufacturer.

C. Equipment Assemblies and Components:

1. Components of an assembled unit need not be products of the same manufacturer.
2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
3. Components shall be compatible with each other and with the total assembly for the intended service.
4. Constituent parts which are similar shall be the product of a single manufacturer.

D. Factory wiring shall be identified on the equipment being furnished and on all wiring diagrams.

E. When Factory Testing Is Specified:

1. The Government shall have the option of witnessing factory tests. The contractor shall notify the VA through the COTR a minimum of 15 working days prior to the manufacturers making the factory tests.
2. Four copies of certified test reports containing all test data shall be furnished to the COTR prior to final inspection and not more than 90 days after completion of the tests.
3. When equipment fails to meet factory test and re-inspection is required, the contractor shall be liable for all additional expenses, including expenses of the Government.

1.5 EQUIPMENT REQUIREMENTS

Where variations from the contract requirements are requested in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

1.6 EQUIPMENT PROTECTION

- A. Equipment and materials shall be protected during shipment and storage against physical damage, dirt, moisture, cold and rain:
1. During installation, enclosures, equipment, controls, controllers, circuit protective devices, and other like items, shall be protected against entry of foreign matter; and be vacuum cleaned both inside and outside before testing and operating and repainting if required.
 2. Damaged equipment shall be, as determined by the COTR, placed in first class operating condition or be returned to the source of supply for repair or replacement.

3. Painted surfaces shall be protected with factory installed removable heavy kraft paper, sheet vinyl or equal.
4. Damaged paint on equipment and materials shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

1.7 WORK PERFORMANCE

- A. Job site safety and worker safety is the responsibility of the contractor.
- B. For work on existing stations, arrange, phase and perform work to assure communications service for other area at all times. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.
- C. New work shall be installed and connected to existing work neatly and carefully. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.
- D. Coordinate location of equipment and pathways with other trades to minimize interferences.

1.8 EQUIPMENT INSTALLATION AND REQUIREMENTS

- A. Equipment location shall be as close as practical to locations shown on the drawings.
- B. Inaccessible Equipment:
 1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.
 2. "Conveniently accessible" is defined as being capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

1.9 EQUIPMENT IDENTIFICATION

- A. Install an identification sign which clearly indicates information required for use and maintenance of equipment.
- B. Nameplates shall be laminated black phenolic resin with a white core with engraved lettering, a minimum of 6 mm (1/4 inch) high. Secure nameplates with screws. Nameplates that are furnished by manufacturer as a standard catalog item, or where other method of identification is herein specified, are exceptions.

1.10 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. The Government's approval shall be obtained for all equipment and material before delivery to the job site. Delivery, storage, or installation of equipment or material which has not had prior approval will not be permitted at the job site.
- C. All submittals shall include adequate descriptive literature, catalog cuts, shop drawings, and other data necessary for the Government to ascertain that the proposed equipment and materials comply with specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify equipment being submitted.
- D. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.
 - 1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
 - 2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
 - 3. Submit each section separately.
- E. The submittals shall include the following:
 - 1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, pictures, nameplate data and test reports as required.
 - 2. Submittals are required for all equipment anchors and supports. Submittals shall include weights, dimensions, center of gravity, standard connections, manufacturer's recommendations and behavior problems (e.g., vibration, thermal expansion,) associated with equipment or piping so that the proposed installation can be properly reviewed.
 - 3. Elementary and interconnection wiring diagrams for communication and signal systems, control system and equipment assemblies. All terminal points and wiring shall be identified on wiring diagrams.
 - 4. Parts list which shall include those replacement parts recommended by the equipment manufacturer, quantity of parts, current price and availability of each part.
- F. Manuals: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

1. Maintenance and Operation Manuals: Submit as required for systems and equipment specified in the technical sections. Furnish four copies, bound in hardback binders, (manufacturer's standard binders) or an approved equivalent. Furnish one complete manual as specified in the technical section but in no case later than prior to performance of systems or equipment test, and furnish the remaining manuals prior to contract completion.
2. Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, equipment, building, name of Contractor, and contract number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the system or equipment.
3. Provide a "Table of Contents" and assemble the manual to conform to the table of contents, with tab sheets placed before instructions covering the subject. The instructions shall be legible and easily read, with large sheets of drawings folded in.
4. The manuals shall include:
 - a. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
 - b. A control sequence describing start-up, operation, and shutdown.
 - c. Description of the function of each principal item of equipment.
 - d. Installation and maintenance instructions.
 - e. Safety precautions.
 - f. Diagrams and illustrations.
 - g. Testing methods.
 - h. Performance data.
 - i. Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare parts, and name of servicing organization.
 - j. Appendix; list qualified permanent servicing organizations for support of the equipment, including addresses and certified qualifications.
- G. Approvals will be based on complete submission of manuals together with shop drawings.
- H. After approval and prior to installation, furnish the COTR with one sample of each of the following:

1. A 300 mm (12 inch) length of each type and size of wire and cable along with the tag from the coils of reels from which the samples were taken.
 2. Each type of conduit and pathway coupling, bushing and termination fitting.
 3. Raceway and pathway hangers, clamps and supports.
 4. Duct sealing compound.
- I. In addition to the requirement of SUBMITTALS, the VA reserves the right to request the manufacturer to arrange for a VA representative to see typical active systems in operation, when there has been no prior experience with the manufacturer or the type of equipment being submitted.

1.11 SINGULAR NUMBER

Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

1.12 TRAINING

- A. Training shall be provided in accordance with Article, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.
- B. Training shall be provided for the particular equipment or system as required in each associated specification.
- C. A training schedule shall be developed and submitted by the contractor and approved by the COTR at least 30 days prior to the planned training.

- - - E N D - - -

**SECTION 27 10 00
STRUCTURED CABLING**

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section specifies the furnishing, installation, and connection of the structured cabling system to provide a comprehensive telecommunications infrastructure.

1.2 RELATED WORK

- A. Sealing around penetrations to maintain the integrity of time rated construction: Section 07 84 00, FIRESTOPPING.
- B. Anchoring: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- C. General electrical requirements that are common to more than one section in Division 27: Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

1.3 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:
1. Manufacturer's Literature and Data: Showing each cable type and rating.
 2. Certificates: Two weeks prior to final inspection, deliver to the COTR four copies of the certification that the material is in accordance with the drawings and specifications and has been properly installed.

1.4 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are reference in the text by the basic designation only.
- B. American Society of Testing Material (ASTM):
D2301-04.....Standard Specification for Vinyl Chloride
Plastic Pressure Sensitive Electrical Insulating
Tape
- C. Federal Specifications (Fed. Spec.):
A-A-59544-00.....Cable and Wire, Electrical (Power, Fixed
Installation)
- D. National Fire Protection Association (NFPA):
70-Latest Edition.....National Electrical Code (NEC)
- E. Underwriters Laboratories, Inc. (UL):

44-02.....	Thermoset-Insulated Wires and Cables
83-03.....	Thermoplastic-Insulated Wires and Cables
467-01.....	Electrical Grounding and Bonding Equipment
486A-01.....	Wire Connectors and Soldering Lugs for Use with Copper Conductors
486C-02.....	Splicing Wire Connectors
486D-02.....	Insulated Wire Connector Systems for Underground Use or in Damp or Wet Locations
486E-00.....	Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors
493-01.....	Thermoplastic-Insulated Underground Feeder and Branch Circuit Cable
514B-02.....	Fittings for Cable and Conduit
1479-03.....	Fire Tests of Through-Penetration Fire Stops

PART 2 - PRODUCTS

2.1 CONTROL WIRING

- A. Unless otherwise specified in other sections of these specifications, control wiring shall be as specified for power and lighting wiring, except the minimum size shall be not less than No. 14 AWG.
- B. Control wiring shall be large enough so that the voltage drop under inrush conditions does not adversely affect operation of the controls.

2.2 COMMUNICATION AND SIGNAL WIRING

- A. Shall conform to the recommendations of the manufacturers of the communication and signal systems; however, not less than what is shown.
- B. Wiring shown is for typical systems. Provide wiring as required for the systems being furnished.
- C. Multi-conductor cables shall have the conductors color coded.

2.3 WIRE LUBRICATING COMPOUND

- A. Suitable for the wire insulation and conduit it is used with, and shall not harden or become adhesive.
- B. Shall not be used on wire for isolated type electrical power systems.

2.4 FIREPROOFING TAPE

- A. The tape shall consist of a flexible, conformable fabric of organic composition coated one side with flame-retardant elastomer.
- B. The tape shall be self-extinguishing and shall not support combustion. It shall be arc-proof and fireproof.
- C. The tape shall not deteriorate when subjected to water, gases, salt water, sewage, or fungus and be resistant to sunlight and ultraviolet light.

- D. The finished application shall withstand a 200-ampere arc for not less than 30 seconds.
- E. Securing tape: Glass cloth electrical tape not less than 0.18 mm (7 mils) thick, and 19 mm (3/4 inch) wide.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Install all wiring above ceiling with J-hooks anchored to the concrete deck.
- B. Wire Pulling:
 - 1. Provide installation equipment that will prevent the cutting or abrasion of insulation during pulling of cables.
 - 2. Use ropes made of nonmetallic material for pulling cables.
 - 3. Attach pulling lines for cables by means of either woven basket grips or pulling eyes attached directly to the conductors, as approved by the COTR.
 - 4. Pull in multiple cables together in a single conduit, or a single run.

3.2 CONTROL, COMMUNICATION AND SIGNAL WIRING INSTALLATION

- A. Unless otherwise specified in other sections, install wiring and connect to equipment/devices to perform the required functions as shown and specified.
- B. Except where otherwise required, install a separate power supply circuit for each system so that malfunctions in any system will not affect other systems.
- C. Where separate power supply circuits are not shown, connect the systems to the nearest panelboards of suitable voltages, which are intended to supply such systems and have suitable spare circuit breakers or space for installation.
- D. Install a red warning indicator on the handle of the branch circuit breaker for the power supply circuit for each system to prevent accidental de-energizing of the systems.
- E. System voltages shall be 120 volts or lower as required by the NEC.

3.4 CONTROL, COMMUNICATION AND SIGNAL SYSTEM IDENTIFICATION

- A. Install a permanent wire marker on each wire at each termination.
- B. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.
- C. Wire markers shall retain their markings after cleaning.

3.5 EXISTING WIRING

Unless specifically indicated on the plans, existing wiring shall not be reused for the new installation. Only wiring that conforms to the

specifications and applicable codes may be reused. If existing wiring does not meet these requirements, existing wiring may not be reused and new wires shall be installed.

- - - E N D - - -

SECTION 28 13 00
ACCESS CONTROL SYSTEM

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section outlines the minimum requirements for a complete and operating Access Control System (ACS) for the for the Correct SPD/Surgical Deficiencies project for the Ambulatory Care Building at the VA Healthcare Center in Roseburg, Oregon on a design/build basis.
- B. The ACS system shall include, but not be limited to, provision of a new "Andover Controls" access control panel in the electrical room, and , transformers, magnets, door strikes, door locks, switches, power supplies, electrical supervision circuits, LAN connection and wiring and as shown on the drawings and herein specified.

1.2 GENERAL REQUIREMENTS

- A. The ACS (hereinafter referred to as "the system") shall be designed, engineered, furnished, delivered, installed and tested to ensure it is fully operating and free of engineering, installation, system operation and Original Equipment Manufacturer (OEM) defects that provide a "turnkey" installation.
- B. The system shall provide manual and automatic door control functions as shown on the drawings and herein specified. Additionally, the system shall allow for the addition of future ACS controls and activation units by adding appropriate transmission lines and equipment at each location.
- C. Each door control unit shall be powered by 24 - 30 Volts Alternating Current (VAC) Class II, low voltage with battery backup.
- D. The system shall provide ease of operation, servicing, maintenance, testing and expansion of additional services. Any equipment required making a complete working system, though not specified, shall be furnished and installed by the Contractor. The Contractor shall ensure that all installation personnel understand and comply with the OEM's and this document's requirements.
- E. The VA is the approving authority for all physical system physical installation. The Contractor must obtain written approval and instructions, routed through the Contracting Officer's Technical Representative (COTR) prior to any installation. Usual areas of concern are identification of all Government Furnished Equipment (GFE) and system specific equipment locations.

- F. Requirements (quantities, lists, equipment type, standards, miscellaneous items, etc.) identified in the Contractors Furnished Equipment (CFE) lists are considered to be the minimum necessary to provide the system as described herein. The Contractor is responsible to provide items in sufficient quantity to complete the system installation as specified herein, even though the provided CFE list does not indicate the additional items.
- G. The Contractor shall provide, in writing, system mechanical, location, mounting and installation plans or recommendations that shall be specifically approved by the VA, in writing, and be coordinated with the VAMC COTR before any type of installation is allowed.
- H. Conduit for system signal, control and power wires or cables shall be provided by the Contractor.
- I. The system shall not be used until all specification requirements; operation, installation, electrical and mechanical specifications have been identified and accepted by the COTR; and all contractual requirements have been met and accepted by the COTR.
- J. Door release items installed in areas with suspended ceiling, fixed tile, plaster, or concrete walls, and/or metal door frames shall be provided in tamperproof unobtrusive dual gang receptacle back box with stainless steel cover plate.
- K. External cables shall be fully enclosed in conduit or flexible protective armor, from the activating unit location's enclosure receptacle back box to and above the ceiling wall mounted junction box(s).
- L. Each activation unit cover plate or OEM specified installation equipment shall conform to the mounted location and be provided with tamperproof attachments to the receptacle back box.
- M. All external cables for the associated junction box to the remaining system locations shall be fully enclosed in conduit or flexible protective armor, from the junction box to above ceiling mounted cable duct(s) or master conduit route(s).
- N. Each system item shall be securely fastened to the wall, ceiling, or other approved structure with suitable anchors that shall support the total structure without causing damage to the mounting, wall, or ceiling surfaces.
- O. Each panel cover plate shall be OEM specified for the installed equipment shall conform to the mounted location and be provided with tamperproof attachments to the receptacle rack frame enclosure

- chassis. Indicating lamps shall be provided and labeled for each location specified and as shown on the drawings.
- P. All external cables for the associated junction box to the remaining system locations shall be fully enclosed in conduit or flexible protective armor, from the junction box to above ceiling mounted cable duct(s) or master conduit route(s).
- Q. Each system item shall be securely fastened to the wall, ceiling, or other approved structure with suitable anchors that shall support the total structure without causing damage to the mounting, wall, or ceiling surfaces.
- R. The system shall be designed to provide continuous electrical supervision of the complete and entire system (i.e. door activation units, light bulbs, panels, wires, contact switch connections, circuit boards, data, audio, and communication busses, main and UPS power, etc.). All alarm initiating and signaling circuits shall be supervised for open circuits, short circuits, and system grounds. Main and battery power circuits shall be supervised for a change in state (i.e. primary to back up, low battery, UPS on line, etc.). When an open, short or ground occurs in any system circuit, an audible and visual fault alarm signal shall be initiated at the master control station and all remote locations.
- S. The system shall meet the following minimum performance standards:
1. The system shall fully complement and match the door manufacturer's magnetic controls and hardware, if so supplied.
 2. The system shall fully function with the OEM supplied door controls and hardware to activate the system in routine and emergency conditions.
 3. The system shall fully function within the supplied electrical supervision circuits as described herein.
 4. The system shall be fully compatible, compliment and operate the door magnets provided by the door manufacturer of the system or OEM supplied door-operating hardware.
 5. The system shall have a proximity reader to release and secure each door.
 6. Each door control function shall be identified with a lamp electronically identified on the panel or associated display unit.
 7. Each door location shall be permanently labeled (paper labels are not acceptable) or electronically identified on the panel or associated display unit.

8. The system shall fully function within the supplied electrical supervision circuits as described herein.
- T. Terminators, filters, traps, pads and so forth (ETC), shall be installed for minimizing interference and for balancing the system. Filters, traps, splitters, couplers, tap offs, etc., shall be able to pass all system signals in the frequency bands selected, directions specified; with low loss, high isolation and have MIN delay or reflections of the identified frequencies or signals.
- U. Provisions shall be made at each equipment site and interconnection/distribution point to locally access the system and equipment functional test points and automatic circuits.

1.3 SUBMITTALS

- A. General: Submit 4 copies and 1 reproducible in accordance with section 01 33 23, Shop Drawings, Product Data and Samples, and section 26 05 00, Common Work Results for Electrical.
- B. Drawings:
 1. Prepare drawings using AutoCAD 2004 or newer software and include all contractors' information. Layering shall be by VA criteria as provided by the COTR.
 2. Floor plans: Provide locations of all devices, appliances, panels, equipment, junction/terminal cabinets/boxes, risers, electrical power connections, individual circuits and raceway routing, system zoning; number, size, and type of raceways and conductors in each raceway; conduit fill calculations with cross section area percent fill for each type and size of conductor and raceway. Only those devices connected and incorporated into the final system shall be on these floor plans.
 3. Riser diagrams: Provide, for the entire system, the number, size and type of riser raceways and conductors in each riser raceway and number of each type device per floor and zone.
 4. Detailed wiring diagrams: Provide for control panels, power supplies, connections, auxiliary relays, locks, strikes, etc showing termination identifications, size and type conductors. Diagrams shall be drawn to a scale sufficient to show spatial relationships between components, enclosures and equipment configuration.
 5. Two weeks prior to final inspection, the Contractor shall deliver to the COTR one (1) set of reproducible, as-built drawings, two blackline copies and one (1) set of the as-built drawing computer files using AutoCAD 2004 or newer.

C. Manuals:

1. Submit simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals including technical data sheets for all items used in the system, power requirements, device wiring diagrams, dimensions, and information for ordering replacement parts.
2. Two weeks prior to final inspection, deliver four copies of the final updated maintenance and operating manual to the COTR.
 - a. The manual shall be updated to include any information necessitated by the maintenance and operating manual approval.
 - b. Complete "As installed" wiring and schematic diagrams shall be included that shows all items of equipment and their interconnecting wiring. Show all final terminal identifications.
 - c. Complete listing of all programming information, including all control events per device including an updated input/output matrix.
 - d. Certificate from equipment manufacturer assuring compliance with all manufacturers installation requirements and satisfactory system operation.

1.4 RELATED WORK

- A. Section 01 00 00 - GENERAL REQUIREMENTS.
- B. Section 07 84 00 - FIRESTOPPING.
- C. Section 26 05 21 - LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW).
- D. Section 28 05 28.33 - CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY.

1.5 APPLICABLE PUBLICATIONS

The following publications, except as hereinafter modified, are incorporated herein by reference and form a part of this specification to the extent indicated by the references thereto. Except where a specific date is given, the issue in effect (including amendments, addenda, revisions, supplements and errata) on the date of the Invitation for Bids shall be applicable. In text such publications are referred to by basic designation only.

- A. National Fire Protection Association (NFPA)
 - NFPA 70 - National Electric Code
 - NFPA 101 - Life Safety Code
- B. Electronic Industries Association (EIA)
 - REC 127-49 - Power Supplies

- C. Underwriters Laboratories, Inc. (UL)
UL 50-80 - Cabinets and Boxes

PART 2 - PRODUCTS

2.1 EQUIPMENT AND MATERIALS

- A. The component characteristics listed herein shall serve as a guide in selecting equipment for the system but are not mandatory if more suitable equipment is available. The COTR, prior to installation shall approve variations.
- B. All equipment to be supplied under this specification shall be new and the current model of a standard product of an OEM or record. All monitoring and control equipment shall be manufactured by Johnson Controls, Inc. (JCI) and match the equipment on the 1st Floor. An OEM of record shall be defined as a company whose main occupation is the manufacture for sale of the items of equipment supplied and which:
1. Maintains a factory production line for the item submitted.
 2. Maintains a stock of replacement parts for the item submitted.
 3. Maintains engineering drawings, specifications, and operating manuals for the items submitted.
 4. Has published and distributed descriptive literature and equipment specifications on the items of equipment submitted at least one year prior to the Invitation for Bid.
- C. Specifications of equipment as set forth herein are salient and minimum requirements, unless otherwise stated, and shall not be construed as limiting the overall quality, quantity, or performance characteristics of items furnished in the system. When the Contractor furnishes an item of equipment for which there is a specification contained herein, the item of equipment shall meet or exceed the specification for that item of equipment.
- D. The Contractor shall produce verification, in writing to the COTR at time of installation, that the type of wire/cable actually being provided is recommended and approved by the OEM and will provide a total system free of undesirable effects. The Contractor is responsible for providing the correct protection cable duct and/or conduit and wiring even though the actual installation may be by another subcontractor.

2.2 EQUIPMENT LISTS

- A. The Contractor shall include the list as a part of the technical submittal as identified herein. Select the required equipment items

quantities that will satisfy the needs of the system. Delete equipment items that are not required add additional items required, and renumber section as per system design.

2.3 EQUIPMENT ITEMS

2.3.1 DOOR CONTROL ITEMS AND PANELS

- A. It is the intent of this document to allow the contractor to select and provide standard "off the shelf" equipment items to form a complete and operating ACS to minimum function as described herein. All equipment shall be compatible with the existing access control system equipment on the 1st Floor. The contractor is required to exchange the technical information described herein along with all applicable drawings with an OEM as described herein and provide an ACS system that fully satisfies the requirements of this specification. *However*, this will not limit the contractor to "custom design" a system that fully satisfies this document. The VA will consider any technical approach provided by the contractor as long as each submittal fully complies with the format requirements and each submittal is a fully separate submittal as allowed by the specification.

2.3.2 ACCESS CONTROL READER - PROXIMITY TYPE

- A. When entering a door equipped with an access control reader, a token shall be presented and the unique ID code associated to the token shall be compared and analyzed from a security panel or database, which shall associate the rights to an individual. Upon denied/access granted the security panel shall temporarily shunt or activate power to the electrified hardware as well as internally shunt the associated door position switch or switches for a predetermined amount of time.
- B. The reader shall output industry standard Wiegand outputs or equivalent.
- C. Card readers shall be a single package, sealed, weatherproof unit and shall be constructed of high impact ABS plastic. The card readers shall be designed for indoor and outdoor operation for temperatures ranging from -22 °F to 150 °F. The color of the card readers shall be coordinated with the Architect prior to ordering. Readers shall be manufactured by JCI.
- D. Access control readers shall derive their power and communication from the security panel, therefore, the Security Contractor shall adhere to the manufacturer's guidelines for maximum distance from the

reader to the security panel.

- E. Access control readers shall incorporate a dual means of notification of door operation. Specifically, the access control reader shall supply an audible tone for access granted, access denied, out of service and door propped conditions. Additionally, the reader shall also supply a visual means of notification for the above events. Each of these notifications shall be customizable and not dependant on the other and shall be software selectable.
- F. Card readers shall be UL-294 certified for indoor and outdoor applications, with an excitation frequency of 125 KHz and 12 to 62.5 KHz return to provide Wiegand coded output.
- G. The reader shall have internal diagnostics.
- H. Accidental or intentional transmission of radio frequency signals into the reader shall not compromise the system.
- I. Standard card readers and mullion card readers shall provide for read ranges up to 4". Extended range card readers shall provide for read ranges up to 22".
- J. Mullion reader shall be utilized where there is no physical location to mount the reader other than the door mullion. Mullion mounted access control reader shall mount directly on to the mullion. The Security Contractor shall coordinate with the manufacturer holes and thickness of the mullion to offset the possibility of radio transmission interference.
- K. Typical access control readers shall be furnished and installed on a single gang backbox in accordance with the manufacturer guidelines. The Security Contractor shall take care in mounting the access control reader providing necessary spacers to prevent radio interference. Standard card readers requiring a special back box shall not be acceptable.
- L. Card readers shall be mounted with top of reader at 42 inches above finished floor.

2.3.3 ELECTRIFIED HARDWARE POWER SUPPLY

- A. The Security contractor shall furnish individually fused power supplies for electrified hardware as shown on the drawings.
- B. Power supplies shall be furnished to provide 125% of the current requirements for all associated locking devices.
- C. Power supplies shall be equipped with a minimum of a (4) four-hour backup battery for continued electrified lockset operation after a power failure.
- D. Power supplies shall be equipped with an off-board 24V power relay or

manufacturer specified module to indicate when main power has dropped. Further, all power supply enclosures shall be wall mounted in the security closets shown on the drawings and shall be key lockable and equipped with a tamper switch.

- E. The Security Contractor shall provide an additional input into the security panel to notify of a low battery warning.
- F. The Security Contractor shall ensure that the above specifics are provided. It is the Security Contractor's responsibility to coordinate and possibly furnish and install the above items if not provided.

2.3.4 DOOR POSITION SWITCH

- A. Door Position switches shall be provided which will indicate the position of the associated door, either open, closed, held or forced open.
- B. Balanced surface mounted door position switches shall be provided in instances that recessed mounting is not practical or possible.
- C. The Contractor shall supply necessary equipment for preventing a voltage surge on to prevent damage to any panels or to the device itself.
- D. Balanced door position switch(s) shall be supplied with 10' of armored cabling.
- E. The Security Contractor is required to provide all cabling encased in either armored cabling or conduit up to the ceiling space, where it shall connect to a common wire tray or conduit system or be ran in an open plenum rated cable properly secured.
- F. Door position switches shall be concealed/flush mounted whenever applicable. The Security Contractor shall coordinate with the Owner and the hollow metal contractor of their exact needs whenever possible.
- G. The door position switch shall consist of a two part hermetically sealed assembly and will be designed for either metal or wood frame installations.
- H. Door positions switches shall be a double pole double throw type. The Security Contractor shall be responsible for providing resistors, wire, mounting hardware and necessary field modifications to hollow or metal frame doors. Resistors for end of line supervision shall be furnished at the end of line device location. Resistors placed at the panel and not at the door switch shall not be acceptable.
- I. Door position switches shall be made from rugged construction, self-locking, if applicable. Switches shall be designed so that separation

of the door from the frame shall be no more than 3/4 inches in which it shall cause the door position switch to change state and signal an alarm.

- J. The Security Contractor shall coordinate with the hollow frame contractor to determine the location for dust boxes in fire labeled doors. Under no circumstance may the Security Contractor modify a fire rated/ labeled door. It is the Security Contractor's responsibility to verify that either cable pulls by them or other contractors are properly fire stopped where required.
- K. When multiple or dutch door conditions exist, the Security Contractor shall be responsible for providing a door position switch on each leaf.
- L. Where required, the Security Contractor shall provide rare earth metals as required for specialty applications.
- M. The door position switch shall consist of a two part hermetically sealed assembly and will be designed for either metal or wood frame installations.
- N. The Security Contractor shall furnish and install all magnets, armored cable and required hardware to accomplish mounting of surface mounted door position switches.
- O. Each door position switch shall be a logical point unless otherwise noted on the drawings.
- P. The Security Contractor shall supply only magnetic types of door monitoring, mechanical types of door monitoring shall not be acceptable.
- Q. Door position switches shall be furnished and installed in accordance with the drawings, details and specifications.

2.3.5 SYSTEM CABLES

Each cable shall be certified 100% sweep tested by tags on each reel and have a noncontaminating jacket. The certification tags shall be delivered to the VAMC Contracting Officer prior to installation of the cable.

2.3.6 AC POWER CABLE

AC power cable shall be three-conductor, at least 16 AWG, 13 AMP @ 120 VAC and 1625 Watt (W). Master AC power and cable installation specification and requirements are given in SPEC Section IV.

PART 3 - EXECUTION

3.1 INSTALLATION

3.1.1 GENERAL

- A. Equipment installed outdoors shall be weatherproof or installed in waterproof enclosure(s) with hinged doors and locks keyed alike with two keys. Universal lock keying of each system enclosure is acceptable.
- B. Equipment installed indoors shall be installed in metal enclosure(s) with hinged doors and locks keyed alike with two keys. Universal lock keying of each system enclosure is acceptable.
- C. Equipment provided for the system and its subsystems shall be installed in a manner that complies with this document, accepted industry standards of good practice, OEM instructions and in a manner which does not constitute a safety hazard.
- D. Passive equipment shall be connected according to the OEM's specifications to insure correct termination, isolation, impedance match and signal level balance.
- E. Terminating resistors shall be used to terminate all unused branches, interconnection ports or outlets and equipment ports of the system. They shall be designed for the purpose of terminating equipment ports, wires and cables carrying the identified system signals.
- F. Enclosures shall be installed plumb and square. Each enclosure shall be permanently attached to the building structure and held firmly in place. Care must be exercised to insure proper top, back, side and front enclosure clearance that allows direct access and doors to properly function without interference. Fifteen inches of front vertical space opening shall be provided for additional equipment with appropriate blank panels installed to cover unused enclosure openings.
- G. Circuits, transmission lines and signal extensions shall have continuity, correct connection and polarity. Polarity shall be maintained between all points in the system.
- H. Wire ends shall be neatly formed and where insulation has been cut, heat shrink tubing shall be employed to secure the insulation on each wire. **Tape of any type is not acceptable.**
- I. Mount card readers with top of reader at 42 inches above finished floor.

3.1.2 LABELING

- A. Abbreviations may be used as long as they are the symbol(s) designated for the system or equipment by accepted industry standards and each abbreviation and symbol are used on the appropriate system and subsystem "as-installed" drawing(s).

- B. The Contractor shall install labels on all cables at each side of all connections. The labeling shall be permanent, with contrasting identification alpha or numeric, identifying each cable according to the system "as installed" drawings. Labels shall be installed adjacent to each mechanical connector, pull box or break in the cable run.
- C. Each circuit breaker shall be labeled at the AC power panel to identify which equipment console, cabinet or enclosure that it serves. Each equipment console, cabinet or enclosure shall be labeled to identify which AC power panel provides power to it. These labels shall be permanently affixed to the equipment with metal screws, permanent mounting devices or cement.
- D. The Contractor shall label all conduit, including utilized GFE, with permanent marking devices or spray painted stenciling every 10 feet identifying it as the system. Also, each enclosure shall be labeled according to this standard.

3.1.3 GROUNDING

- A. Equipment installed outside of a building shall be connected to earth ground with wires run inside of the building to eliminate all shock hazard and minimize to the maximum extent possible, all ground loops, common mode returns, noise pickup, cross talk, etc. The number of ground connections shall be kept to a minimum. In all cases, total ground resistance shall be 0.1 Ohm or less.
- B. A common ground bus of at least #10 AWG solid copper wire shall extend throughout each equipment enclosure and be connected to the earth ground. Do not bus commons together.
- C. Equipment shall be bonded to the cabinet bus with copper braid equivalent to at least a minimum #14 AWG. Self grounding equipment enclosures that provide functional ground connections through physical contact with installed equipment are acceptable alternates.
- D. Cable shields shall be bonded to the enclosure bus with #14 AWG wire at only one end of the cable run. Cable shields shall be insulated from each other, faceplates, equipment enclosures; except, at the system common ground point. Coaxial and audio cables, insofar as is possible, shall have one ground connection at the source; in all cases, cable shield ground connections shall be kept to a MIN.

3.1.4 AC POWER

- A. All equipment shall be connected to the VAMC's emergency AC power distribution system.

- B. The Contractor shall furnish and install a separate AC power branch circuit in conduit to each equipment enclosure from the designated Government Emergency AC Power Panel in accordance with the NEC. The Contractor shall furnish and install all circuit breakers, conduit and outlet boxes. AC power wires shall be run separate from signal wires and cables.
- C. The Contractor shall furnish and install one AC power panel with a single switch to control all AC power distribution throughout the central equipment cabinet(s).

3.1.5 CONDUIT

- A. Conduit, junction boxes, connectors, sleeves, weather heads, pitch pockets and associated sealing materials not specifically identified in this document as GFE, shall be furnished and installed by the Contractor. **All conduit penetrations of walls, ceilings, floors, interstitial space, fire barriers, etc., shall be sleeved and sealed.**
- B. Conduit, furnished and installed by the Contractor, fill shall not exceed 40%. Each conduit (including GFE) end shall be equipped with a protective insulator or sleeve to cover the conduit end and connection nut to protect the cable installed in the conduit. Electrical power conduit shall be installed in accordance with the NEC. AC power conduit shall be run separate from signal conduit.

3.2 ACCEPTANCE TESTS

3.2.1 PRETESTING

- A. Upon completing the installation of the System, the Contractor shall align and balance the System. The Contractor shall pretest the entire System prior to scheduling the proof of performance test.
 - 1. During the System pretest the Contractor shall verify (utilizing an approved spectrum analyzer and test equipment) that the System is fully operational and meets all the System performance requirements of this standard.
 - 2. The Contractor shall measure and record, the control (and/or voice) carrier levels of every System channel at each of the following points in the system:
 - a. Door located actuating devices,
 - b. Door control panel functions,
 - c. Electronic supervisory control units' inputs and outputs,
 - d. Distribution system input and output,
 - 3. The Contractor shall provide two copies of the recorded system pretest measurements to be submitted, along with the pretest certification, to the VAMC Contracting Officer. One copy shall be

forwarded by the VAMC Contacting Officer, to the
Telecommunications Division (162D1) for evaluation.

3.2.2 PERFORMANCE ACCEPTANCE TEST

- A. After pretesting the System the Contractor shall notify the COTR, in writing, that the System is ready for proof of performance testing, and that it meets all requirements specified in this document. Submission of this notification of System readiness shall be accomplished by the Contractor no later than 20 working days prior to the beginning of the scheduled proof of performance test. Failure of the Contractor to comply with the above pretest requirements may be grounds for automatically canceling the scheduled test. Rescheduling of the proof of performance test shall be at the convenience of the Government and all costs incurred for the retest could be borne by the Contractor at the discretion of the COTR.
- B. The System shall be tested, in the presence of the COTR and Contractor's Representative. The 162D1 Technical Representative will conduct this test. The test shall verify that the total System meets all requirements and complies with all System Performance Standards listed in this document. The Contractor shall insure that the documentation required herein, will be available for acceptance testing.
1. The Contractor shall perform an operational test of each Subsystem to verify that all equipment is properly connected, interfaced and is functionally operational to meet the requirements of this document. If any Subsystem is not functionally ready, that Subsystem shall be declared unacceptable and all testing shall be terminated. At this point, the Contractor shall be permitted one hour to correct deficiencies. It may be mutually agreed upon to wait one hour or to commence testing of the next Subsystem.
 2. Repeated failures of Subsystem testing which results in a cumulative time of four hours to effect repairs shall be grounds for declaring the entire System unacceptable and all testing to be terminated.
 3. The testing shall proceed until the System and Subsystems are functionally tested and accepted. The total System tests shall verify that the requirements have been met for DC (and/or audio), sub carrier, and control signals as per this document. Repeated failures of total System testing which results in a cumulative time of four hours to effect repairs shall be grounds for

declaring the entire System unacceptable and all testing to be terminated.

4. Once all equipment and interconnecting systems have been verified and technically approved. Two photographs shall be made of each test equipment's correct representation for each item identified in this standard. These photographs shall become a part of the Systems as installed drawings and maintenance manuals to be a reference for future expansion, repair, preventative maintenance or troubleshooting.

- - - END - - -

SECTION 28 23 00**VIDEO SURVEILLANCE****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. Provide and install a complete Video Surveillance System, which is identified as the Video Assessment and Surveillance System hereinafter referred to as the VASS System as specified in this section.
- B. This Section includes video surveillance system consisting of cameras, data transmission wiring, and associated equipment.

1.2 RELATED WORK

- A. Section 01 00 00 - GENERAL REQUIREMENTS.
- B. Section 07 84 00 - FIRESTOPPING.
- C. Section 26 05 21 - LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW).
- D. Section 13 05 41, SEISMIC RESTRAINTS REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.3 DEFINITIONS

- A. CCD: Charge-coupled device.
- B. UPS: Uninterruptible power supply.
- C. PTZ: refers to a movable camera that has the ability to pan left and right, tilt up and down, and zoom or magnify a scene.

1.4 QUALITY ASSURANCE

- A. The Contractor shall be responsible for providing, installing, and the operation of the VASS System as shown.
- B. The system shall be installed and tested to ensure all components are fully compatible as a system and can be integrated with the existing system.
- C. The Contractor or security sub-contractor shall be a licensed Contractor as required within the state or jurisdiction of where the installation work is being conducted.
- 2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.

1.5 SUBMITTALS

- A. Submit below items in conjunction with Master Specification Sections 01 33 23, Shop Drawings, Product Data, and Samples.

- B. Provide a pre-installation and as-built design package in both electronic format and on paper. Drawing submittals shall be per the established project schedule.
- C. Pre-installation design and as-built packages shall include, but not be limited to:
 - 1. Index Sheet that shall:
 - a. Define each page of the design package to include facility name, building name, floor, and sheet number.
 - b. Provide a list of all security abbreviations and symbols.
 - c. Reference all general notes that are utilized within the design package.
 - 2. Floor plans, site plans, and enlarged plans shall:
 - a. Include a title block as defined above.
 - b. Define the drawings scale in both standard and metric measurements.
 - c. Provide device identification and location.
 - d. Address all signal and power conduit runs and sizes that are associated with the design of the system.
 - e. Identify all pull box and conduit locations, sizes, and fill capacities.
 - f. Address all general and drawing specific notes for a particular drawing sheet.
 - 3. A riser drawing for each applicable security subsystem shall:
 - a. Indicate the sequence of operation.
 - b. Relationship of integrated components on one diagram.
 - c. Include the number, size, identification, and maximum lengths of interconnecting wires.
 - d. Wire/cable types shall be defined by a wire and cable schedule. The schedule shall utilize a lettering system that will correspond to the wire/cable it represents (example: A = 18 AWG/1 Pair Twisted, Unshielded). This schedule shall also provide the manufacturer's name and part number for the wire/cable being installed.
 - 6. Detail and elevation drawings for all devices that define how they were installed and mounted.
- D. Pre-installation design packages shall be reviewed by the Contractor along with a VA representative to ensure all work has been clearly

defined and completed. All reviews shall be conducted in accordance with the project schedule.

E. Provide manufacturer system product cut-sheets.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American National Standards Institute (ANSI)/Electronic Industries Alliance (EIA):

330-09.....Electrical Performance Standards for CCTV
Cameras

C. Underwriters Laboratories, Inc. (UL):

983-06.....Standard for Surveillance Camera Units
3044-01.....Standard for Surveillance Closed Circuit
Television Equipment

1.7 WARRANTY OF CONSTRUCTION

A. Warrant VASS System work subject to the Article "Warranty of Construction" of FAR clause 52.246-21.

B. Demonstration and training shall be performed prior to system acceptance.

PART 2 - PRODUCTS

2.1 GENERAL

A. Video signal format shall comply with the NTSC standard composite video, interlaced. Composite video signal termination shall be 75 ohms.

B. Surge Protection: Protect components from voltage surges originating external to equipment housing and entering through power, communication, signal, control, or sensing leads. Include surge protection for external wiring of each conductor entry connection to components.

C. Power Connections: Comply with requirements in Section 28 05 00 COMMON WORK REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY, Part 2, as recommended by manufacturer for type of line being protected.

D. Tamper Protection: Tamper switches on enclosures, control units, pull boxes, junction boxes, cabinets, and other system components shall initiate a tamper-alarm signal when unit is opened or partially

disassembled. Control-station, control-unit alarm display shall identify tamper alarms and indicate locations.

2.2 CAMERAS

- A. All Cameras shall be compatible with existing display equipment located in the Ambulatory Care Facility. Cameras to have fixed lens.
- B. Minimum Protection for Communication, Signal, Control, and Low-Voltage 983 compliant and be fitted with AI/DC lenses to ensure the image quality under different light conditions.

2.3 VIDEO DISPLAY EQUIPMENT

- A. Video Display Equipment
 - 1. Existing video display equipment is located in the Ambulatory Care Facility.
 - 2. Existing video display equipment will be utilized for new cameras.

2.4 CONTROLLING EQUIPMENT

- A. Existing video control equipment is located in the Ambulatory Care Building.
- B. Existing video control equipment will be utilized for new cameras.

2.5 VIDEO CAMERAS

- A. The cameras shall be high-resolution color video cameras with wide dynamic range capturing capability.
- B. The camera shall match existing cameras.
- C. The camera shall be compatible with existing video display and control equipment.

2.6 CAMERA HOUSINGS AND MOUNTS

- 1. The camera and lens contained inside the housing shall be installed on a camera mount. All additional mounting hardware required to install the camera housing at its specified location shall be provided along with the housing.

2.7 INTERIOR DOMES

- 1. The interior dome shall be a pendant mount, pole mount, ceiling mount, surface mount, or corner mounted equipment.
- 2. The lower portion of the dome that provides camera viewing shall be made of black opaque acrylic and shall have a light attenuation factor of no more than one f-stop.
- 3. The housing shall be equipped with fixed positioning complete with wiring, wiring harness, connectors, receiver/driver, pan/tilt control system, pre-position cards, or any other hardware and

equipment as needed to fully provide a fully functional pan/tilt dome.

2.8 EXTERIOR DOMES

1. The exterior dome shall meet all requirements outlined in the interior dome paragraph above.
2. The housing shall be constructed to be dust and water tight, and fully operational in 100 percent condensing humidity.

2.9 POWER SUPPLIES

- A. Power supplies shall be a low-voltage power supplies matched for voltage and current requirements of cameras and accessories, type as recommended by camera, [infrared illuminator] and lens manufacturer.

2.10 RECORDING DEVICES

- A. Existing video recording equipment is located in the Ambulatory Care Facility.
- B. Existing video control equipment will be utilized for new cameras.

2.11 WIRES AND CABLES

- A. Shall meet or exceed the manufacturer's recommendation for power and signal.
- B. Will be carried in an enclosed conduit system, utilizing electromagnetic tubing (EMT) to include the equivalent in flexible metal, rigid galvanized steel (RGS) to include the equivalent of liquid tight, polyvinylchloride (PVC) schedule 40 or 80.
- C. All conduits will be sized and installed per the NEC. All security system signal and power cables that traverse or originate in a high security office space will contained in either EMT or RGS conduit.
- D. All conduit, pull boxes, and junction boxes shall be clearly marked with colored permanent tape or paint that will allow it to be distinguished from all other conduit and infrastructure.

PART 3 - EXECUTION

3.1. GENERAL

- A. Installation: The Contractor shall install all system components including Owner furnished equipment, and appurtenances in accordance with the manufacturer's instructions and shall furnish all necessary connectors, terminators, interconnections, services, and adjustments required for a complete and operable data transmission system.
- B. Identification and Labeling: The Contractor shall supply permanent identification labels for each cable at each end that will appear on the as-built drawings. The labeling format shall be identified and a

complete record shall be provided to the Owner with the final documentation. Each cable shall be identified by type or signal being carried and termination points. The labels shall be printed on letter size label sheets that are self laminated vinyl that can be printed from a computer data base or spread sheet. The labels shall be E-Z code WES12112 or equivalent.

1. The Contractor shall provide all personnel, equipment, instrumentation, and supplies necessary to perform all testing.

- C. Transient Voltage Surge Suppressors (TVSS): The Contractor shall mount TVSS within 3 m (118 in) of equipment to be protected inside terminal cabinets or suitable NEMA 1 enclosures. Terminate off-premise conductors on input side of device. Connect the output side of the device to the equipment to be protected. Connect ground lug to a low impedance earth ground (less than 10 ohms) via Number 12 AWG insulated, stranded copper conductor.
- D. Contractor's Field Test: The Contractor shall verify the complete operation of the data transmission system during the Contractor's Field Testing. Field test shall include a bit error rate test. The Contractor shall perform the test by sending a minimum of 1,000,000 bits of data on each DTM circuit and measuring the bit error rate. The bit error rate shall not be greater than one (1) bit out of each 100,000 bits sent for each dial-up DTM circuit, and one (1) bit out of 1,000,000 bits sent for each leased or private DTM circuit. The Contractor shall submit a report containing results of the field test.
- E. Acceptance Test and Endurance Test: The wire line data transmission system shall be tested as a part of the completed IDS and EECS during the Acceptance test and Endurance Test as specified.
- F. Identification and Labeling: The Contractor shall supply identification tags or labels for each cable. Cable shall be labeled at both end points and at intermediate hand holes, manholes, and junction boxes. The labeling format shall be identified and a complete record shall be provided to the Owner with the final documentation. Each cable shall be identified with type of signal being carried and termination points.

3.2 INSTALLATION

- A. System installation shall be in accordance with NECA 303, manufacturer and related documents and references, for each type of security subsystem designed, engineered and installed.

- B. Components shall be configured with appropriate "service points" to pinpoint system trouble in less than 30 minutes.
- C. The Contractor shall install all system components including Government furnished equipment, and appurtenances in accordance with the manufacturer's instructions, documentation listed in Sections 1.5 of this document, and shall furnish all necessary connectors, terminators, interconnections, services, and adjustments required for a complete and operable system.
- D. The System will be designed, engineered, installed, and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the system is a stand alone or a complete network.
- E. For programming purposes refer to the manufacturers requirements for correct system operations. Ensure computers being utilized for system integration meet or exceed the minimum system requirements outlined on the systems software packages.
- F. A complete System shall be comprised of, but not limited to, the following components:
 - 1. Cameras
 - 2. Lenses
 - 3. Video Display Equipment
 - 4. Camera Housings and Mounts
 - 5. Controlling Equipment
 - 6. Recording Devices
 - 7. Wiring and Cables
- G. The Contractor shall visit the site and verify that site conditions are in agreement/compliance with the design package. The Contractor shall report all changes to the site or conditions that will affect performance of the system to the Contracting Officer in the form of a report. The Contractor shall not take any corrective action without written permission received from the Contracting Officer.
- H. Existing Equipment
 - 1. The Contractor shall connect to and utilize existing video equipment, video and control signal transmission lines, and devices as outlined in the design package. Video equipment and signal lines that are usable in their original configuration without modification may be reused with Contracting Officer approval.

2. The Contractor shall perform a field survey, including testing and inspection of all existing video equipment and signal lines intended to be incorporated into the VASS System, and furnish a report to the Contracting Officer as part of the site survey report. For those items considered nonfunctioning, provide (with the report) specification sheets, or written functional requirements to support the findings and the estimated cost to correct the deficiency. As part of the report, the Contractor shall include a schedule for connection to all existing equipment.
 3. The Contractor shall make written requests and obtain approval prior to disconnecting any signal lines and equipment, and creating equipment downtime. Such work shall proceed only after receiving Contracting Officer approval of these requests. If any device fails after the Contractor has commenced work on that device, signal or control line, the Contractor shall diagnose the failure and perform any necessary corrections to the equipment.
 4. The Contractor shall be held responsible for repair costs due to Contractor negligence, abuse, or incorrect installation of equipment.
 5. The Contracting Officer shall be provided a full list of all equipment that is to be removed or replaced by the Contractor, to include description and serial/manufacturer numbers where possible. The Contractor shall dispose of all equipment that has been removed or replaced based upon approval of the Contracting Officer after reviewing the equipment removal list. In all areas where equipment is removed or replaced the Contractor shall repair those areas to match the current existing conditions.
- I. Enclosure Penetrations: All enclosure penetrations shall be from the bottom of the enclosure unless the system design requires penetrations from other directions. Penetrations of interior enclosures involving transitions of conduit from interior to exterior, and all penetrations on exterior enclosures shall be sealed with rubber silicone sealant to preclude the entry of water and will comply with VA Master Specification 07 84 00, Firestopping. The conduit riser shall terminate in a hot-dipped galvanized metal cable terminator. The terminator shall be filled with an approved sealant as recommended by the cable manufacturer and in such a manner that the cable is not damaged.

- J. Cold Galvanizing: All field welds and brazing on factory galvanized boxes, enclosures, and conduits shall be coated with a cold galvanized paint containing at least 95 percent zinc by weight.
- K. Interconnection of Console Video Equipment: The Contractor shall connect signal paths between video equipment as specified by the OEM. Cables shall be as short as practicable for each signal path without causing strain at the connectors. Rack mounted equipment on slide mounts shall have cables of sufficient length to allow full extension of the slide rails from the rack.
- N. Cameras:
1. Install the cameras with the focal length lens as indicated for each zone.
 2. Connect power and signal lines to the camera.
 3. Aim camera to give field of view as needed to cover the alarm zone.
 5. Focus the lens to give a sharp picture (to include checking for day and night focus and image quality) over the entire field of view
 6. Synchronize all cameras so the picture does not roll on the monitor when cameras are selected.
 7. PTZ cameras shall have all preset positions and privacy areas defined and programmed.
- X. Camera Housings, Mounts, and Poles:
1. Install the camera housings and mounts as specified by the manufacturer and as shown, provide mounting hardware sized appropriately to secure each camera, housing and mount with maximum wind and ice loading encountered at the site.
 2. Provide a foundation for each camera pole as specified and shown.
 3. Provide a ground rod for each camera pole and connect the camera pole to the ground rod as specified in Division 26 of the VA Master Specification and the VA Electrical Manual 730.
 4. Provide electrical and signal transmission cabling to the mount location via a hardened carrier system from the Physical Access Control System and Database Management to the device.
 5. Connect signal lines and AC power to the housing interfaces.
 6. Connect pole wiring harness to camera.

3.3 SYSTEM START-UP

- A. The Contractor shall not apply power to the System until the following items have been completed:

1. System equipment items and have been set up in accordance with manufacturer's instructions.
 2. A visual inspection of the System has been conducted to ensure that defective equipment items have not been installed and that there are no loose connections.
 3. System wiring has been tested and verified as correctly connected as indicated.
 4. All system grounding and transient protection systems have been verified as installed and connected as indicated.
 5. Power supplies to be connected to the System have been verified as the correct voltage, phasing, and frequency as indicated.
- B. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the COTR and Commissioning Agent. Provide a minimum of 7 days prior notice.
- C. Satisfaction of the above requirements shall not relieve the Contractor of responsibility for incorrect installation, defective equipment items, or collateral damage as a result of Contractor work efforts.

3.4 SUPPLEMENTAL CONTRACTOR QUALITY CONTROL

- A. The Contractor shall provide the services of technical representatives who are familiar with all components and installation procedures of the installed System; and are approved by the Contracting Officer.
- B. The Contractor will be present on the job site during the preparatory and initial phases of quality control to provide technical assistance.
- C. The Contractor shall also be available on an as needed basis to provide assistance with follow-up phases of quality control.
- D. The Contractor shall participate in the testing and validation of the system and shall provide certification that the system installed is fully operational as all construction document requirements have been fulfilled.

3.5 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 28 08 00 - COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 28 08 00 -

"COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS" and related sections for contractor responsibilities for system commissioning.

3.6 DEMONSTRATION AND TRAINING

- A. All testing and training shall be compliant with the VA General Requirements, Section 01 00 00, "GENERAL REQUIREMENTS."
- B. Provide services of manufacturer's technical representative for [four] <insert hours> hours to instruct VA personnel in operation and maintenance of units.
- C. Submit training plans and instructor qualifications in accordance with the requirements of Section 28 08 00 - "COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS."

-----END-----

SECTION 28 31 00**FIRE ALARM SYSTEM****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. This section of the specifications includes the furnishing, installation, and connection of the fire alarm equipment to form a complete coordinated system ready for operation. It shall include, but not be limited to, alarm initiating devices, alarm notification appliances, control units, fire safety control devices, annunciators, power supplies, and wiring as shown on the drawings and as specified. The intent is to expand the existing fire alarm system on the second floor into the new second floor expansion wing of the Ambulatory Care Building and expand the existing audible and visual notification appliance circuit on the first floor to include the addition of a notification appliance located in the renovated indoor patio space adjacent Electric Room 132A1.
- B. Fire alarm systems shall comply with requirements of NFPA 72 unless variations to NFPA 72 are specifically identified within these contract documents by the following notation: "variation". The design, system layout, document submittal preparation, and supervision of installation and testing shall be provided by a technician that is certified NICET level III or a registered fire protection engineer. The NICET certified technician shall be on site for the supervision and testing of the system. Factory engineers from the equipment manufacturer, thoroughly familiar and knowledgeable with all equipment utilized, shall provide additional technical support at the site as required by the Contracting Officer or his authorized representative. Installers shall have a minimum of two years experience installing fire alarm systems.
- C. Fire alarm signals:
The building shall have a general evacuation fire alarm signal in accordance with NFPA 72 to notify all occupants to evacuate.
- D. Alarm signals (by device), supervisory signals (by device) and system trouble signals (by device not reporting) shall be distinctly transmitted to the fire alarm system control unit.
- E. The existing fire alarm control unit shall automatically transmit alarm, supervisory and trouble signals to a listed central station using a digital alarm communicator transmitter in accordance with NFPA 72.

1.2 SCOPE

- A. Extend the existing fire alarm system in the Ambulatory Care Building to include the new fire alarm devices and appliances added in the new wing expansion of the second floor and renovated first floor indoor patio space. Fire alarm device locations shown on the drawings are for reference only unless specifically dimensioned. Actual locations shall be in accordance with NFPA 72 and this specification.
- B. Basic Performance:
 - 1. Response time between alarm initiation (contact closure) and recording at the main fire alarm control unit (appearance on alphanumeric read out) shall not exceed five (5) seconds.
 - 2. Initiating device circuits (IDC) shall be wired Class B in accordance with NFPA 72.
 - 3. Signaling line circuits (SLC) within the building shall be wired Class B in accordance with NFPA 72. Individual signaling line circuits shall be limited to covering 22,500 square feet of floor space or 3 floors whichever is less.
 - 4. Notification appliance circuits (NAC) shall be wired Class B in accordance with NFPA 72.

1.3 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- C. Section 07 84 00, FIRESTOPPING.
- D. Section 08 17 10, INTEGRATED DOOR ASSEMBLIES
- E. Section 09 91 00, PAINTING.
- F. Section 13 05 41, SEISMIC RESTRAINTS REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- G. Section 21 13 13, WET-PIPE SPRINKLER SYSTEM.

1.4 SUBMITTALS

- A. General: Submit 4 copies and 1 reproducible in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- B. Drawings:
 - 1. Prepare drawings using AutoCAD 2004 or newer software and include all contractors' information. Layering shall be by VA criteria as provided by the Resident Engineer (RE). Bid drawing files on AutoCAD will be provided to the Contractor at the pre-construction meeting. The contractor shall be responsible for verifying all critical dimensions shown on the drawings provided by VA.
 - 2. Floor plans: Provide locations of all devices (with device number at each addressable device corresponding to control unit

programming), appliances, panels, equipment, junction/terminal cabinets/boxes, risers, electrical power connections, individual circuits and raceway routing, system zoning; number, size, and type of raceways and conductors in each raceway; conduit fill calculations with cross section area percent fill for each type and size of conductor and raceway. Only those devices connected and incorporated into the final system shall be on these floor plans. Do not show any removed devices on the floor plans. Show all interfaces for all fire safety functions.

3. Riser diagrams: Provide, for the entire system, the number, size and type of riser raceways and conductors in each riser raceway and number of each type device per floor and zone. Show door holder interface, elevator control interface, fire/smoke damper interface, HVAC shutdown interface, fire extinguishing system interface, and all other fire safety interfaces. The riser diagram shall show the wiring Classes for all fire alarm circuits.
4. Detailed wiring diagrams: Provide for control panels, modules, power supplies, electrical power connections, auxiliary relays and annunciators showing termination identifications, size and type conductors, circuit boards, LED lamps, indicators, adjustable controls, switches, ribbon connectors, wiring harnesses, terminal strips and connectors, spare zones/circuits. Diagrams shall be drawn to a scale sufficient to show spatial relationships between components, enclosures and equipment configuration.
5. Two weeks prior to final inspection, the Contractor shall deliver to the RE one (1) set of reproducible, as-built drawings, two blackline copies and one (1) set of the as-built drawing computer files using AutoCAD 2004 or newer. As-built drawings (floor plans) shall show all new and existing conduit used for the fire alarm system.

C. Manuals:

1. Submit simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals including technical data sheets for all items used in the system, power requirements, device wiring diagrams, dimensions, and information for ordering replacement parts.
 - a. Wiring diagrams shall have their terminals identified to facilitate installation, operation, expansion and maintenance.

- b. Wiring diagrams shall indicate internal wiring for each item of equipment and the interconnections between the items of equipment.
 - c. Include complete listing of all software used and installation and operation instructions including the input/output matrix chart.
 - d. Provide a clear and concise description of operation that gives, in detail, the information required to properly operate, inspect, test and maintain the equipment and system. Provide all manufacturers' installation limitations including but not limited to circuit length limitations.
 - e. Provide standby battery calculations under normal operating and alarm modes. Battery calculations shall include the magnets for holding the doors open for one minute.
 - f. Include information indicating who will provide emergency service and perform post contract maintenance.
 - g. Provide a replacement parts list with current prices. Include a list of recommended spare parts, tools, and instruments for testing and maintenance purposes.
 - h. A computerized preventive maintenance schedule for all equipment. The schedule shall be provided on disk in a computer format acceptable to the VAMC and shall describe the protocol for preventive maintenance of all equipment. The schedule shall include the required times for systematic examination, adjustment and cleaning of all equipment. A print out of the schedule shall also be provided in the manual. Provide the disk in a pocket within the manual.
 - i. Furnish manuals in 3 ring loose-leaf binder or manufacturer's standard binder.
 - j. A print out for all devices proposed on each signaling line circuit with spare capacity indicated.
2. Two weeks prior to final inspection, deliver four copies of the final updated maintenance and operating manual to the RE.
- a. The manual shall be updated to include any information necessitated by the maintenance and operating manual approval.
 - b. Complete "As installed" wiring and schematic diagrams shall be included that shows all items of equipment and their interconnecting wiring. Show all final terminal identifications.

- c. Complete listing of all programming information, including all control events per device including an updated input/output matrix.
- d. Certificate of Completion as required by NFPA 72. The certificate shall identify any variations from the National Fire Alarm and Signaling Code.
- e. Certificate from equipment manufacturer assuring compliance with all manufacturers installation requirements and satisfactory system operation.

D. Certifications:

- 1. Together with the shop drawing submittal, submit the technician's NICET level III fire alarm certification as well as certification from the control unit manufacturer that the proposed performer of contract maintenance is an authorized representative of the major equipment manufacturer. Include in the certification the names and addresses of the proposed supervisor of installation and the proposed performer of contract maintenance. Also include the name and title of the manufacturer's representative who makes the certification.
- 2. Together with the shop drawing submittal, submit a certification from either the control unit manufacturer or the manufacturer of each component (e.g., smoke detector) that the components being furnished are compatible with the control unit.
- 3. Together with the shop drawing submittal, submit a certification from the major equipment manufacturer that the wiring and connection diagrams meet this specification, UL and NFPA 72 requirements.

1.5 WARRANTY

- A. All work performed and all material and equipment furnished under this contract shall be free from defects and shall remain so for a period of five (5) years from the date of acceptance of the entire installation by the Contracting Officer.

1.6 WARRANTY PERIOD SERVICES

- A. Complete inspection, testing, maintenance and repair service for the fire alarm system shall be provided by a factory trained authorized representative of the manufacturer of the major equipment for a period of five years from the date of acceptance of the entire installation by the Contracting Officer.

- B. Contractor shall provide all necessary test equipment, parts and labor to perform required inspection, testing, maintenance and repair.
- C. All inspection, testing, maintenance and permanent records required by NFPA 72, and recommended by the equipment manufacturer shall be provided by the contractor. Work shall include operation of sprinkler system alarm and supervisory devices as well as all reused existing equipment connected to the fire alarm system. It shall include all interfaced equipment including but not limited to elevators, HVAC shutdown, and extinguishing systems.
- D. Maintenance and testing shall be performed in accordance with NFPA 72. A computerized preventive maintenance schedule shall be provided and shall describe the protocol for preventive maintenance of equipment. The schedule shall include a systematic examination, adjustment and cleaning of all equipment.
- E. Non-included Work: Repair service shall not include the performance of any work due to improper use, accidents, or negligence for which the contractor is not responsible.
- F. Service and emergency personnel shall report to the Engineering Office or their authorized representative upon arrival at the VAMC and again upon the completion of the required work. A copy of the work ticket containing a complete description of the work performed and parts replaced shall be provided to the VA Contracting Officer or his authorized representative.
- G. Emergency Service:
 - 1. Warranty Period Service: Service other than the preventative maintenance, inspection, and testing required by NFPA 72 shall be considered emergency call-back service and covered under the warranty of the installation during the first year of the warranty period, unless the required service is a result of abuse or misuse by the Government. Written notification shall not be required for emergency warranty period service and the contractor shall respond as outlined in the following sections on Normal and Overtime Emergency Call-Back Service. Warranty period service can be required during normal or overtime emergency call-back service time periods at the discretion of the Contracting Officer or his authorized representative.
 - 2. Normal and overtime emergency call-back service shall consist of an on-site response within two hours of notification of a system trouble.

3. Normal emergency call-back service times are between the hours of 7:30 a.m. and 4:00 p.m., Monday through Friday, exclusive of federal holidays. Service performed during all other times shall be considered to be overtime emergency call-back service. The cost of all normal emergency call-back service for years 2 through 5 shall be included in the cost of this contract.
4. Overtime emergency call-back service shall be provided for the system when requested by the Government. The cost of the first 40 man-hours per year of overtime call-back service during years 2 through 5 of this contract shall be provided under this contract. Payment for overtime emergency call-back service in excess of the 40 man hours per year requirement will be handled through separate purchase orders. The method of calculating overtime emergency call-back hours are based on actual time spent on site and does not include travel time.
- H. The contractor shall maintain a log at each fire alarm control unit. The log shall list the date and time of all examinations and trouble calls, condition of the system, and name of the technician. Each trouble call shall be fully described, including the nature of the trouble, necessary correction performed, and parts replaced.
- I. In the event that VA modifies the fire alarm system post-Acceptance but during the five-year Warranty Period Service, Contractor shall be required to verify that the system, as newly modified or added, is consistent with the manufacturer's requirements; any verification performed will be equitably adjusted under the Changes clause. The post-Acceptance modification or addition to the fire alarm system shall not void the continuing requirements under this contract set forth in the Warranty Period Service provision for the fire alarm system as modified or added. The contract will be equitably adjusted under the Changes clause for such additional performance.

1.7 APPLICABLE PUBLICATIONS

- A. The publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. The publications are referenced in text by the basic designation only.
- B. National Fire Protection Association (NFPA):
 - 70-2011.....National Electrical Code (NEC)
 - 72-2010.....National Fire Alarm and Signaling Code
 - 90A-2012.....Installation of Air Conditioning and Ventilating Systems

- 101-2012.....Life Safety Code
- C. Underwriters Laboratories, Inc. (UL):
- 2011.....Fire Protection Equipment Directory
- D. Factory Mutual Research Corp (FM): Approval Guide, Latest Edition
- E. Acoustical Society of America (ASA):
- S3.41-1990.....Audible Emergency Evacuation Signal
- F. International Building Code (IBC), 2009 edition.

PART 2 - PRODUCTS

2.1 EQUIPMENT AND MATERIALS, GENERAL

- A. All equipment and components shall be new and the manufacturer's current model unless otherwise noted. All initiating devices shall be manufactured by Notifier and be compatible with the existing fire alarm control unit and existing fire alarm network. All equipment shall be tested and listed by Underwriters Laboratories, Inc. or Factory Mutual Research Corporation for use as part of a fire alarm system. The authorized representative of the manufacturer of the major equipment shall certify that the installation complies with all manufacturers' requirements and that satisfactory total system operation has been achieved.

2.2 CONDUIT, BOXES, AND WIRE

- A. Conduit shall be in accordance with Section 28 05 28.33, CONDUIT AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY and as follows:
1. All new and reused conduit shall be installed in accordance with NFPA 70.
 2. Conduit fill shall not exceed 40 percent of interior cross sectional area.
 3. Conduit sizing and routing shall be determined by the Contractor.
 4. All new conduit shall be 19 mm (3/4 inch) minimum.
- B. Wire:
1. Wiring shall be in accordance with NEC article 760, Section 28 05 13, CONDUCTORS AND CABLES FRO ELECTRONIC SAFETY AND SECURITY, and as recommended by the manufacturer of the fire alarm system. All wires shall be color coded. Number, type and size of conductors shall be as recommended by the fire alarm system manufacturer, but not less than 18 AWG for initiating device circuits and 14 AWG for notification appliance circuits.
 2. Addressable circuits and wiring used for the multiplex communication loop shall be twisted and shielded unless

specifically accepted by the fire alarm equipment manufacturer in writing.

3. Any fire alarm system wiring that extends outside of a building shall have additional power surge protection to protect equipment from physical damage and false signals due to lightning, voltage and current induced transients. Protection devices shall be shown on the submittal drawings and shall be UL listed or in accordance with written manufacturer's requirements.
4. All wire or cable used in underground conduits including those in concrete shall be listed for wet locations.

C. Terminal Boxes, Junction Boxes, and Cabinets:

1. Shall be galvanized steel in accordance with UL requirements.
2. All new and reused boxes shall be sized and installed in accordance with NFPA 70.
3. New and existing covers shall be repainted red in accordance with Section 09 91 00, PAINTING and shall be identified with white markings as "FA" for junction boxes and as "FIRE ALARM SYSTEM" for cabinets and terminal boxes. Lettering shall be a minimum of 19 mm (3/4 inch) high.
4. Terminal boxes and cabinets shall have a volume 50 percent greater than required by the NFPA 70. Minimum sized wire shall be considered as 14 AWG for calculation purposes.
5. Terminal boxes and cabinets shall have identified pressure type terminal strips and shall be located at the base of each riser. Terminal strips shall be labeled as specified or as approved by the RE.

2.3 FIRE ALARM CONTROL UNIT

- A. The addressable fire alarm control unit in the Ambulatory Care Building is an existing AFP2020 fire alarm control unit located on the first floor of Building 1.

2.4 ANNUNCIATION

- A. All annunciators in the facility are existing to remain.

2.5 NOTIFICATION APPLIANCE POWER SUPPLY

- A. Notification appliance power supplies in sufficient quantity shall be provided for the operation of new visual strobe appliances.
1. Power supplies shall be supervised by the host fire alarm control unit for general faults (i.e., opens, shorts, grounds, battery failure, etc.).

2. The power supply shall be configured to provide to the host fire alarm control unit, a description of the location of where the power supply fault occurs.
- B. Power supplies provided shall be UL listed and compatible with the fire alarm control unit to which it is connected.
- C. Primary AC power supplied to the unit shall be provided from a 20 amp, dedicated electrical branch circuit.
- D. Batteries shall be provided within the notification appliance power supply.
 1. Upon loss of primary AC power, notification appliance power supplies shall be calculated to operate for 24 hours in standby and 15 minutes in alarm condition.
 2. Upon restoration of primary AC power, the notification appliance power supply shall re-charge the batteries to normal capacity within 48 hours.

2.6 ALARM NOTIFICATION APPLIANCES

- A. Speakers: Speakers shall be spaced and tapped so as to produce a sound output on alarm, which is clearly audible above the ambient noise level throughout the building. In no case shall the audible alarm be less than 80 dBA upon alert tone or voice messages. In noisy areas, a minimum of 15 dBA above the ambient room noise level shall be provided, as defined in NFPA 72.
- B. New voice communication system speakers shall be:
 1. For wall mounted applications, the appliance shall be mounted not less than 90 inches above the finished floor, and not less than 6 inches below the finished ceiling except when combined with visual strobe appliance then they shall be at 80" above the finished floor to the bottom of lens, See ADAAG Sec. 4.28 and ANSI guidelines.
 2. Speakers shall be equipped with standard cone type speakers mounted on standard 4-inch square back boxes. All speakers and speaker/strobe units within public corridors/public areas shall be low profile (white, circular cover).
 3. Speakers shall be equipped with variable watt input taps. Taps shall range from 1/2 to 2 watts. This may be reduced to 1/4 watt when located nearby an existing speaker or in locations where reverberant sounds will obstruct the intended signal.
 4. Speakers shall be listed in accordance with UL 1480.
 5. New speaker circuits, if provided, shall have minimum space circuit capacity of twenty (20) percent.

6. Speakers shall be zoned by floor and by building, except elevators shall be zoned individually. (One emergency evacuation signaling zone equals one floor). Individual speaker circuit (sub-zones) shall be provided as required herein.
7. Speaker circuits shall originate from the existing fire alarm control unit.
8. Speakers provided shall have either 25vac or 70vac settings to match the output provided by the existing amplifier unit.
9. Speaker appliances provided shall match existing appliances in facility.

C. Strobes:

1. Xenon flash tube type with candela rating as shown on the drawings with a flash rate of 1 HZ. All strobes shall flash in synchronization.
2. Backplate shall be red with 13 mm (1/2 inch) permanent red letters. Lettering to read "Fire", be oriented on the wall or ceiling properly, and be visible from all viewing directions.
3. Each strobe circuit shall have a minimum of twenty (20) percent spare capacity.
4. Strobes may be combined with the audible notification appliances specified herein.
5. Strobe appliances provided shall match existing appliances in facility.

D. Audible or combination speaker/strobe appliances shall be white in color.

1. Audible or combination speaker/strobe appliances located outside and exposed to the increment weather shall be weatherproof type and colored red.

2.7 ALARM INITIATING DEVICES

A. Manual Fire Alarm Stations:

1. Manual fire alarm stations shall be addressable and shall be compatible with the existing fire alarm control unit.
2. Manual fire alarm stations shall be located within five (5) feet of the exit doorway opening at each exit on each floor.
3. Manual fire alarm stations shall be mounted at a height of 48 inches (AFF) to the center of the activating lever.
4. Manual pull stations shall be Lexan and shall be red in color.

B. Smoke Detectors:

1. Smoke detectors shall be UL listed for use with the existing fire alarm control unit.

2. Smoke detectors shall be addressable type complying with applicable UL Standards for system type detectors. Smoke detectors shall be installed in accordance with the manufacturer's recommendations and NFPA 72.
 3. Detectors shall have an indication lamp to denote an alarm condition. Provide remote indicator lamps and identification plates where detectors are concealed from view. Locate the remote indicator lamps and identification plates flush mounted on walls so they can be observed from a normal standing position.
 4. All spot type and duct type detectors installed shall be of the photoelectric type.
 5. Photoelectric detectors shall be factory calibrated and readily field adjustable. The sensitivity of any photoelectric detector shall be factory set at 3.0 plus or minus 0.25 percent obscuration per foot.
 6. Detectors shall provide a visual trouble indication if they drift out of sensitivity range or fail internal diagnostics. Detectors shall also provide visual indication of sensitivity level upon testing. Detectors, along with the fire alarm control units shall be UL listed for testing the sensitivity of the detectors.
- C. Waterflow Indicators: Waterflow switches shall be monitored.

2.8 SUPERVISORY DEVICES

A. Duct Smoke Detectors:

1. Duct smoke detectors shall be provided and connected by way of an address reporting interface device. Detectors shall be provided with an approved duct housing mounted exterior to the duct, and shall have perforated sampling tubes extending across the full width of the duct (wall to wall). Detector placement shall be such that there is uniform airflow in the cross section of the duct.
2. Interlocking with fans shall be provided in accordance with NFPA 90A and as specified in Part 3.
3. Provide remote indicator lamps, key test stations and identification nameplates (e.g. "DUCT SMOKE DETECTOR AHU-X") for all duct detectors. Locate key test stations in plain view on walls or ceilings so that they can be observed and operated from a normal standing position.
4. Duct smoke detectors installed in locations exposed to increment weather conditions shall be installed within NEMA Type 4 weatherproof enclosures.

- B. Sprinkler and Standpipe System Supervisory Switches: All sprinkler valves and supervisory switches shall be monitored.

2.9 TROUBLE DEVICES

A. Addressable Monitor Module:

1. Shall have unique addresses that reports directly to the building fire alarm panel.
1. Shall be compatible with the existing fire alarm control unit and shall be listed for their intended use.
2. Shall be configurable to monitor normally open or normally closed devices for both alarm and trouble conditions.
3. The wiring from the monitored device, contact or circuit to the monitor module input terminals, shall be a (Style B) electrically supervised circuit using an end-of-line resistor.
4. A monitor module shall be provided for supervision of remote notification appliance power supplies.
5. Shall be mounted in a weatherproof enclosure if mounted at locations exposed to increment weather conditions.

2.10 CONTROL DEVICES

A. Addressable Control (relay) Module:

1. Shall have unique addresses that reports directly to the building fire alarm panel.
2. Shall be compatible with the existing fire alarm control unit, and shall be listed for their intended use.
3. Shall be mounted in weatherproof enclosure if mounted at locations exposed to increment weather conditions.

B. Multi-voltage relays:

1. Multi-voltage relays shall be provided for use with addressable control (relay) modules when interfaced with devices using AC voltage.
2. Multi-voltage relay coils shall be capable to activate contacts upon either applied AC or DC voltage.

C. Magnetic Door Holder:

1. Magnetic door holders provided shall UL listed and shall be capable of being powered either by AC or DC voltages.
2. Magnetic door holders shall be of the fail-safe design and shall have a minimum door holding force of 25 pounds.
3. The door portion shall have a stainless steel pivotal mounted armature with shock absorbing nylon bearing.

4. Magnetic door holders supplied shall be either surface, flush, semi-flush, or floor mounted as surrounding conditions require. Wall extensions kits shall be provided where required.
5. Power to the magnetic door holders shall be supplied from the fire alarm system.

2.12 UTILITY LOCKS AND KEYS

- A. All key operated test switches, control units, annunciator panels and lockable cabinets shall be provided with a single standardized utility lock and key.
- B. Key-operated manual fire alarm stations shall have a single standardized lock and key separate from the control equipment.
- C. All keys shall be delivered to the RE.

2.13 SPARE AND REPLACEMENT PARTS

- A. Provide spare and replacement parts as follows:
 1. Fire alarm speaker/strobes - 2
 2. Fire alarm speakers - 1
 3. Fire alarm strobes - 2
 4. 2.5 oz containers aerosol smoke - 4
 5. Fire alarm smoke detector - 2
 6. Monitor modules - 1
 7. Control (relay) modules - 1
 8. Multi-voltage relays - 1
- B. Spare and replacement parts shall be in original packaging and submitted to the RE.
- C. Provide to the VA, all hardware, software, programming tools, license and documentation necessary to permanently modify the fire alarm system on site. The minimum level of modification includes addition and deletion of devices, circuits, zones and changes to system description, system operation, and digitized evacuation and instructional messages.

2.14 INSTRUCTION CHART

- A. Provide a typeset printed or typewritten instruction card mounted behind a Lexan plastic or glass cover in a stainless steel or aluminum frame with a backplate. Install the frame in a conspicuous location observable from each control unit where operations are performed. The card shall show those steps to be taken by an operator when a signal is received under all conditions, normal, alarm, supervisory, and trouble. Provide an additional copy with the binder for the input output matrix for the sequence of operation. The instructions shall be approved by the RE before being posted.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Installation shall be in accordance with NFPA 70, 72, 90A, and 101 as shown on the drawings, and as recommended by the major equipment manufacturer. Fire alarm wiring shall be installed in conduit. All conduit and wire shall be installed in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS. All penetrations of smoke and fire barriers shall be protected as required by Section 07 84 00, FIRESTOPPING.
- B. All new conduits, junction boxes, conduit supports and hangers shall be concealed in finished areas and may be exposed in unfinished areas. All existing accessible fire alarm conduit not reused shall be removed.
- C. All new or reused exposed conduit shall be painted in accordance with Section 09 91 00, PAINTING to match surrounding finished areas and red in unfinished areas.
- D. Existing devices that are reused shall be properly mounted and installed. Where devices are installed on existing shallow backboxes, extension rings of the same material, color and texture of the new fire alarm devices shall be used.
- E. All fire detection and alarm system devices, control units, power supplies, and remote annunciators shall be flush mounted when located in finished areas and may be surface mounted when located in unfinished areas. Exact locations to be approved by the RE.
- F. Visual strobe appliances or combination audible/visual appliances shall be wall mounted as shown on the drawings.
 - 1. Visual strobe appliances or combination audible/visual appliances shall be mounted at a height of 80 inches A.F.F. to the bottom of the strobe lens.

3.2 TYPICAL OPERATION

- A. Activation of any manual pull station, waterflow switch or smoke detector shall cause the following operations to occur:
 - 1. Continuously sound a three pulse temporal pattern general alarm signal and flash all visual strobes in the building in alarm until reset at the local fire alarm control unit.
 - 2. Transmit a separate fire alarm signal, via the main fire alarm control unit to the central station facility.
 - 3. Release magnetic held open doors in the smoke compartment.
 - 4. Open locked egress doors.

- B. Activation of duct smoke detectors shall cause the following operations to occur:
 - 1. Shut down the associated fan unit(s).
 - 2. Close the associated fire smoke dampers serving the affected fan unit.
 - 3. Transmit a separate supervisory alarm signal, via the main fire alarm control unit to the central station facility.
- C. Activation of any general trouble condition (i.e. opens, short, grounds, battery failure, etc.) shall cause the following operations to occur:
 - 1. Transmit a separate trouble alarm signal, via the main fire alarm control unit to the central station facility.

3.3 TESTS

- A. Provide the service of a NICET level III, competent, factory-trained engineer or technician authorized by the manufacturer of the fire alarm equipment to technically supervise and participate during all of the adjustments and tests for the system. Make all adjustments and tests in the presence of the RE.
- B. When the systems have been completed and prior to the scheduling of the final inspection, furnish testing equipment and perform the following tests in the presence of the RE. When any defects are detected, make repairs or install replacement components, and repeat the tests until such time that the complete fire alarm system meets all contract requirements. After the system has passed the initial test and been approved by the RE, the contractor may request a final inspection.
 - 1. Before energizing the cables and wires, check for correct connections and test for short circuits, ground faults, continuity, and insulation.
 - 2. Test the insulation on all installed cable and wiring by standard methods as recommended by the equipment manufacturer.
 - 3. Run water through all flow switches. Check time delay on water flow switches. Submit a report listing all water flow switch operations and their retard time in seconds.
 - 4. Open each alarm initiating and notification circuit to see if trouble signal actuates.
 - 5. Ground each alarm initiation and notification circuit and verify response of trouble signals.

3.4 FINAL INSPECTION AND ACCEPTANCE

- A. Prior to final acceptance a minimum 30 day "burn-in" period shall be provided. The purpose shall be to allow equipment to stabilize and potential installation and software problems and equipment malfunctions to be identified and corrected. During this diagnostic period, all system operations and malfunctions shall be recorded. Final acceptance will be made upon successful completion of the "burn-in" period and where the last 14 days is without a system or equipment malfunction.
- B. At the final inspection a factory trained representative of the manufacturer of the major equipment shall repeat the tests described herein and those required by NFPA 72. In addition the representative shall demonstrate that the systems function properly in every respect. The demonstration shall be made in the presence of the RE.

3.5 INSTRUCTION

- A. The Contractor and/or the Systems Manufacturer's representative shall provide a typewritten "Sequence of Operation" including a trouble shooting guide of the entire system for submittal to the RE. The sequence of operation will be shown for each input in the system in a matrix format and provided in a loose leaf binder. When reading the sequence of operation, the reader will be able to quickly and easily determine what output will occur upon activation of any input in the system. The INPUT/OUTPUT matrix format shall be as shown in Appendix A to NFPA 72.
- B. Furnish the services of a competent instructor for instructing personnel in the programming requirements necessary for system expansion. Such programming shall include addition or deletion of devices, zones, indicating circuits and printer/display text.

- - - END - - -

**SECTION 31 20 00
EARTH MOVING**

PART 1 - GENERAL

1.1 DESCRIPTION OF WORK:

- A. This section specifies the requirements for furnishing all equipment, materials, labor, tools, and techniques for earthwork including, but not limited to, the following:
1. Site preparation.
 2. Excavation.
 3. Underpinning.
 4. Filling and backfilling.
 5. Grading.
 6. Soil Disposal.
 7. Clean Up.

1.2 DEFINITIONS:

- A. Unsuitable Materials:
1. Fills: Topsoil; frozen materials; construction materials and materials subject to decomposition; clods of clay and stones larger than 75 mm (3 inches); organic material, including silts, which are unstable; and inorganic materials, including silts, too wet to be stable and any material with a liquid limit and plasticity index exceeding 40 and 15 respectively. Unsatisfactory soils also include satisfactory soils not maintained within 2 percent of optimum moisture content at time of compaction, as defined by ASTM D 698.
 2. Existing Subgrade (Except Footing Subgrade): Same materials as 1.2.A.1, that are not capable of direct support of slabs, pavement, and similar items with possible exception of improvement by compaction, proofrolling, or similar methods.
 3. Existing Subgrade (Footings Only): Same as paragraph 1, but no fill or backfill. If materials differ from design requirements, excavate to acceptable strata subject to COTR's approval.
- B. Building Earthwork: Earthwork operations required in area enclosed by a line located 1500 mm (5 feet) outside of principal building perimeter. It also includes earthwork required for auxiliary structures and buildings.
- C. Trench Earthwork: Trenchwork required for utility lines.
- D. Site Earthwork: Earthwork operations required in area outside of a line located 1500 mm (5 feet) outside of principal building perimeter and within new construction area with exceptions noted above.

- E. Degree of compaction: Degree of compaction is expressed as a percentage of maximum density obtained by laboratory test procedure. This percentage of maximum density is obtained through use of data provided from results of field test procedures presented in ASTM D1556, ASTM D2167, and ASTM D2922.
- F. Fill: Satisfactory soil materials used to raise existing grades. In the Construction Documents, the term "fill" means fill or backfill as appropriate.
- G. Backfill: Soil materials or controlled low strength material used to fill an excavation.
- H. Unauthorized excavation: Removal of materials beyond indicated sub-grade elevations or indicated lines and dimensions without written authorization by the COTR. No payment will be made for unauthorized excavation or remedial work required to correct unauthorized excavation.
- I. Authorized additional excavation: Removal of additional material authorized by the COTR based on the determination by the Government's soils testing agency that unsuitable bearing materials are encountered at required sub-grade elevations. Removal of unsuitable material and its replacement as directed will be paid on basis of Conditions of the Contract relative to changes in work.
- J. Subgrade: The undisturbed earth or the compacted soil layer immediately below granular sub-base, drainage fill, or topsoil materials.
- K. Structure: Buildings, foundations, slabs, tanks, curbs, mechanical and electrical appurtenances, or other man-made stationary features constructed above or below the ground surface.
- L. Borrow: Satisfactory soil imported from off-site for use as fill or backfill.
- M. Drainage course: Layer supporting slab-on-grade used to minimize capillary flow of pore water.
- N. Bedding course: Layer placed over the excavated sub-grade in a trench before laying pipe. Bedding course shall extend up to the springline of the pipe.
- O. Sub-base Course: Layer placed between the sub-grade and base course for asphalt paving or layer placed between the sub-grade and a concrete pavement or walk.
- P. Utilities include on-site underground pipes, conduits, ducts, and cables as well as underground services within buildings.
- Q. Debris: Debris includes all materials located within the designated work area not covered in the other definitions and shall include but not be limited to items like vehicles, equipment, appliances, building

materials or remains thereof, tires, any solid or liquid chemicals or products stored or found in containers or spilled on the ground.

- R. Contaminated soils: Soil that contains contaminants as defined and determined by the COTR or the Contractor's testing agency.

1.3 RELATED WORK:

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Safety requirements: Section 01 00 00, GENERAL REQUIREMENTS.
- C. Protection of existing utilities, fire protection services, existing equipment, roads, and pavements: Section 01 00 00, GENERAL REQUIREMENTS.
- D. Subsurface Investigation: Section 01 00 00, GENERAL REQUIREMENTS, Article, PHYSICAL DATA.

1.4 CLASSIFICATION OF EXCAVATION:

- A. Unclassified Excavation: Removal and disposal of pavements and other man-made obstructions visible on surface; utilities, and other items including underground structures indicated to be demolished and removed; together with any type of materials regardless of character of material and obstructions encountered.

1.5 SUBMITTALS:

- A. Not Applicable

1.6 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Association of State Highway and Transportation Officials (AASHTO):
- T99-01(2004).....Moisture-Density Relations of Soils Using a 2.5 kg (5.5 lb) Rammer and a 305 mm (12 inch) Drop
- T180-01(2004).....Moisture-Density Relations of Soils using a 4.54 kg (10 lb) Rammer and a 457 mm (18 inch) Drop
- C. American Society for Testing and Materials (ASTM):
- D448-03a.....Standard Classification for Sizes of Aggregate for Road and Bridge Construction
- D698-00a.1.....Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 ft. lbf/ft³ (600 kN m/m³))
- D1556-00.....Standard Test Method for Density and Unit Weight of Soil in Place by the Sand-Cone Method

- D1557-02e1.....Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/ft³ (2700 kN m/m³))
- D2167-94 (2001).....Standard Test Method for Density and Unit Weight of Soil in Place by the Rubber Balloon Method
- D2487-06.....Standard Classification of Soil for Engineering Purposes (Unified Soil Classification System)
- D2922-05.....Standard Test Methods for Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth)
- D2940-03.....Standard Specifications for Graded Aggregate Material for Bases or Subbases for Highways or Airports
- D. Society of Automotive Engineers (SAE):
- J732-92.....Specification Definitions - Loaders
- J1179-02.....Hydraulic Excavator and Backhoe Digging Forces

PART 2 - PRODUCTS

2.1 MATERIALS:

- A. General: Provide borrow soil material when sufficient satisfactory soil materials are not available from excavations.
- B. Fills: Material in compliance with ASTM D2487 Soil Classification Groups GW, GP, GM, SW, SP, SM, SC, and ML, or any combination of these groups; free of rock or gravel larger than 75 mm (3 inches) in any dimension, debris, waste, frozen materials, vegetation, and other deleterious matter. Material approved from on site or off site sources having a minimum dry density of 1760 kg/m³ (110 pcf), a maximum Plasticity Index of 15, and a maximum Liquid Limit of 40.
- C. Engineered Fill: Naturally or artificially graded mixture of compliance with ASTM D2487 Soil Classification Groups GW, GP, GM, SW, SP, SM, SC, and ML, or any combination of these groups, or as approved by the Engineer or material with at least 90 percent passing a 37.5-mm (1 1/2-inch) sieve and not more than 12 percent passing a 75-µm (No. 200) sieve, per ASTM D2940;.
- D. Bedding: Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D2940; except with 100 percent passing a 25 mm (1 inch) sieve and not more than 8 percent passing a 75-µm (No. 200) sieve.
- E. Drainage Fill: Washed, narrowly graded mixture of crushed stone, or crushed or uncrushed gravel; ASTM D448; coarse-aggregate grading Size

57; with 100 percent passing a 37.5 mm (1 1/2-inch) sieve and 0 to 5 percent passing a 2.36 mm (No. 8) sieve.

F. Granular Fill:

1. Under concrete slab, crushed stone or gravel graded from 25 mm (1 inch) to 4.75 mm (No. 4), per ASTM D 2940.
2. Bedding for sanitary and storm sewer pipe, crushed stone or gravel graded from 13 mm (1/2 inch) to 4.75 mm (No 4), per ASTM D 2940.

PART 3 - EXECUTION

3.1 SITE PREPARATION:

- A. Clearing: Clear within limits of earthwork operations as shown. Work includes removal of trees, shrubs, fences, foundations, incidental structures, paving, debris, trash, and other obstructions. Remove materials from Medical Center.
- B. Trees and Shrubs: Trees and shrubs, identified to be transplanted, shall be dug with a ball of earth and burlapped in accordance with latest issue of, "American Standard for Nursery Stock" of the American Association of Nurserymen, Inc. Transplant trees and shrubs to a permanent or temporary position within two hours after digging. Maintain trees and shrubs held in temporary locations by watering as necessary and feeding semiannually with liquid fertilizer with a minimum analysis of 5 percent nitrogen, 10 percent phosphorus, and 5 percent potash. Maintain plants moved to permanent positions as specified for plants in temporary locations until conclusion of contract.
- C. Concrete Slabs and Paving: Score deeply or saw cut to insure a neat, straight cut, sections of existing concrete slabs and paving to be removed where excavation or trenching occurs. Extend pavement section to be removed a minimum of 300 mm (12 inches) on each side of widest part of excavation and insure final score lines are approximately parallel unless otherwise indicated. Remove material from Medical Center.
- F. Lines and Grades: Registered Professional Land Surveyor or Registered Civil Engineer, specified in Section 01 00 00, GENERAL REQUIREMENTS, shall establish lines and grades.
 1. Grades shall conform to elevations indicated on plans within the tolerances herein specified. Generally grades shall be established to provide a smooth surface, free from irregular surface changes. Grading shall comply with compaction requirements and grade cross sections, lines, and elevations indicated. Where spot grades are indicated the grade shall be established based on interpolation of the elevations between the spot grades while maintaining appropriate

transition at structures and paving and uninterrupted drainage flow into inlets.

2. Locations of existing and proposed elevations indicated on plans, except spot elevations, are approximate. Contractor is responsible to notify COTR of any differences between existing elevations shown on plans and those encountered on site by Surveyor/Engineer described above. Notify COTR of any differences between existing or constructed grades, as compared to those shown on the plans.
3. Subsequent to establishment of lines and grades, Contractor will be responsible for any additional cut and/or fill required to ensure that site is graded to conform to elevations indicated on plans.

G. Disposal: All materials removed from the property shall be disposed of at a legally approved site, for the specific materials, and all removals shall be in accordance with all applicable Federal, State and local regulations. No burning of materials is permitted onsite.

3.2 EXCAVATION:

- A. Shoring, Sheet piling and Bracing: Shore, brace, or slope, its angle of repose or to an angle considered acceptable by the COTR, banks of excavations to protect workmen, banks, adjacent paving, structures, and utilities.
1. Design of the temporary support of excavation system is the responsibility of the Contractor.
 2. Construction of the support of excavation system shall not interfere with the permanent structure and may begin only after a review by the COTR.
 3. Extend shoring and bracing to a minimum of 1500 mm (5 feet) below the bottom of excavation. Shore excavations that are carried below elevations of adjacent existing foundations.
 4. If bearing material of any foundation is disturbed by excavating, improper shoring or removal of existing or temporary shoring, placing of backfill, and similar operations, the Contractor shall underpin the existing foundation, per Section 3.3 under disturbed foundations, as directed by COTR, at no additional cost to the Government. Do not remove shoring until permanent work in excavation has been inspected and approved by COTR.
- B. Excavation Drainage: Operate pumping equipment, and/or provide other materials, means and equipment as required to keep excavation free of water and subgrade dry, firm, and undisturbed until approval of

permanent work has been received from COTR. Approval by the COTR is also required before placement of the permanent work on all subgrades.

- C. Subgrade Protection: Protect subgrades from softening, undermining, washout, or damage by rain or water accumulation. Reroute surface water runoff from excavated areas and not allow water to accumulate in excavations. Do not use excavated trenches as temporary drainage ditches. When subgrade for foundations has been disturbed by water, remove disturbed material to firm undisturbed material after water is brought under control. Replace disturbed subgrade with concrete or material approved by the COTR.

D. Building Earthwork:

1. Excavation shall be accomplished as required by drawings and specifications.
2. Excavate foundation excavations to solid undisturbed subgrade.
3. Remove loose or soft materials to a solid bottom.
4. Fill excess cut under footings or foundations with 25 MPa (3000 psi) concrete poured separately from the footings.
5. Do not tamp earth for backfilling in footing bottoms, except as specified.
6. Slope grades to direct water away from excavations and to prevent ponding.

- E. Site Earthwork: Earth excavation includes excavating pavements and obstructions visible on surface; underground structures, utilities, and other items indicated to be removed; together with soil, boulders, and other materials not classified as rock or unauthorized excavation. Excavation shall be accomplished as required by drawings and specifications. Excavate to indicated elevations and dimensions within a tolerance of plus or minus 25 mm (1 inch). Extend excavations a sufficient distance from structures for placing and removing concrete formwork, for installing services and other construction, complying with OSHA requirements, and for inspections. Remove subgrade materials that are determined by COTR as unsuitable, and replace with acceptable material. If there is a question as to whether material is unsuitable or not, the contractor shall obtain samples of the material, under the direction of the COTR, and the materials shall be examined by an independent testing laboratory for soil classification to determine whether it is unsuitable or not. Testing of the soil shall be performed by the Contractor's Testing Laboratory. When unsuitable material is

confirmed through testing, Contractor shall seek direction from the VA before proceeding with removing and replacing with suitable material.

1. Site Grading:

- a. Provide a smooth transition between adjacent existing grades and new grades.
- b. Cut out soft spots, fill low spots, and trim high spots to comply with required surface tolerances.
- c. Grading Inside Building Lines: Finish subgrade to a tolerance of 13 mm (1/2 inch) when tested with a 3000 mm (10 foot) straightedge.

3.4 FILLING AND BACKFILLING:

- A. General: Do not fill or backfill until all debris, water, unsatisfactory soil materials, obstructions, and deleterious materials have been removed from excavation. For fill and backfill, use excavated materials and borrow meeting the criteria specified herein, as applicable. Borrow will be supplied at no additional cost to the Government. Do not use unsuitable excavated materials. Do not backfill until foundation walls have been completed above grade and adequately braced, waterproofing or dampproofing applied, foundation drainage, and pipes coming in contact with backfill have been installed and work inspected and approved by COTR.
- B. Placing: Place materials in horizontal layers not exceeding 200 mm (8 inches) in loose depth for material compacted by heavy compaction equipment, and not more than 100 mm (4 inches) in loose depth for material compacted by hand-operated tampers and then compacted. Place backfill and fill materials evenly on all sides of structures to required elevations, and uniformly along the full length of each structure. Place no material on surfaces that are muddy, frozen, or contain frost.
- C. Compaction: Compact with approved tamping rollers, sheepsfoot rollers, pneumatic tired rollers, steel wheeled rollers, vibrator compactors, or other approved equipment (hand or mechanized) well suited to soil being compacted. Do not operate mechanized vibratory compaction equipment within 3000 mm (10 feet) of new or existing building walls without prior approval of COTR. Moisten or aerate material as necessary to provide moisture content that will readily facilitate obtaining specified compaction with equipment used. Compact soil to not less than the following percentages of maximum dry density, according to ASTM D698 as specified below:
 1. Fills, Embankments, and Backfill

- a. Under proposed structures, building slabs, steps, and paved areas, scarify and recompact top 300 mm (12 inches) of existing subgrade and each layer of backfill or fill material in accordance with ASTM D698 95 percent.

3.5 GRADING:

- A. General: Uniformly grade the areas within the limits of this section, including adjacent transition areas. Smooth the finished surface within specified tolerance. Provide uniform levels or slopes between points where elevations are indicated, or between such points and existing finished grades. Provide a smooth transition between abrupt changes in slope.
- B. Cut rough or sloping rock to level beds for foundations. In pipe spaces or other unfinished areas, fill low spots and level off with coarse sand or fine gravel.
- C. Place crushed stone or gravel fill under concrete slabs on grade, tamped, and leveled. Thickness of fill shall be 150 mm (6 inches) unless otherwise shown.
- D. Finish subgrade in a condition acceptable to COTR at least one day in advance of paving operations. Maintain finished subgrade in a smooth and compacted condition until succeeding operation has been accomplished. Scarify, compact, and grade subgrade prior to further construction when approved compacted subgrade is disturbed by Contractor's subsequent operations or adverse weather.
- E. Grading for Paved Areas: Provide final grades for both subgrade and base course to +/- 6 mm (0.25 inches) of indicated grades.

3.6 DISPOSAL OF UNSUITABLE AND EXCESS EXCAVATED MATERIAL:

- A. Disposal: Remove surplus satisfactory soil and waste material, including unsatisfactory soil, trash, and debris, and legally dispose of it off Medical Center property.
- B. Place excess excavated materials suitable for fill and/or backfill on site where directed.
- C. Remove from site and dispose of any excess excavated materials after all fill and backfill operations have been completed.
- D. Segregate all excavated contaminated soil designated by the COTR from all other excavated soils, and stockpile on site on two 0.15 mm (6 mil) polyethylene sheets with a polyethylene cover. A designated area shall be selected for this purpose. Dispose of excavated contaminated material in accordance with State and Local requirements.

3.7 CLEAN UP:

Upon completion of earthwork operations, clean areas within contract limits, remove tools, and equipment. Provide site clear, clean, free of debris, and suitable for subsequent construction operations. Remove all debris, rubbish, and excess material from Medical Center Property.

----- E N D -----