


Item No.	Description	Quantity
1	Elbows needing re-insulation	10
2	Straight Pipe lengths requiring re-insulation	100'

TABLE 2
STEAM REPAIR ABATEMENT QUANTITIES

- NOTES:**
- (1) MAINTAIN STAFF AND PUBLIC SPACE THROUGHOUT PROJECT. ALL WORK SHALL BE COMPLETED DURING OFF-HOURS. CEILING GRIDS AND TILES SHALL BE REINSTALLED EACH DAY FOR REGULAR HOURS.
 - (2) INSTALL 6 MIL. POLYETHYLENE DROP CLOTH BELOW PIPE INSULATION JOINTS TO AT LEAST 6 FEET FROM INSULATION JOINTS TO PREVENT ASBESTOS REMOVAL.
 - (3) INSTALL THREE STAGE PDF AND W/DEE DECONTAMINATION UNITS (SEE SPECIFICATIONS SECTION 028213.13) IF REQUIRED BY OSHA.
 - (4) REMOVE AND DISPOSE OF ASBESTOS-CONTAINING PIPE INSULATION AND/OR PIPE INSULATION JOINTS IN ACCORDANCE WITH APPLICABLE PROVISIONS OF SECTION 028213.13 OF SPECIFICATIONS.
 - (5) SEE DETAILS THIS PAGE.

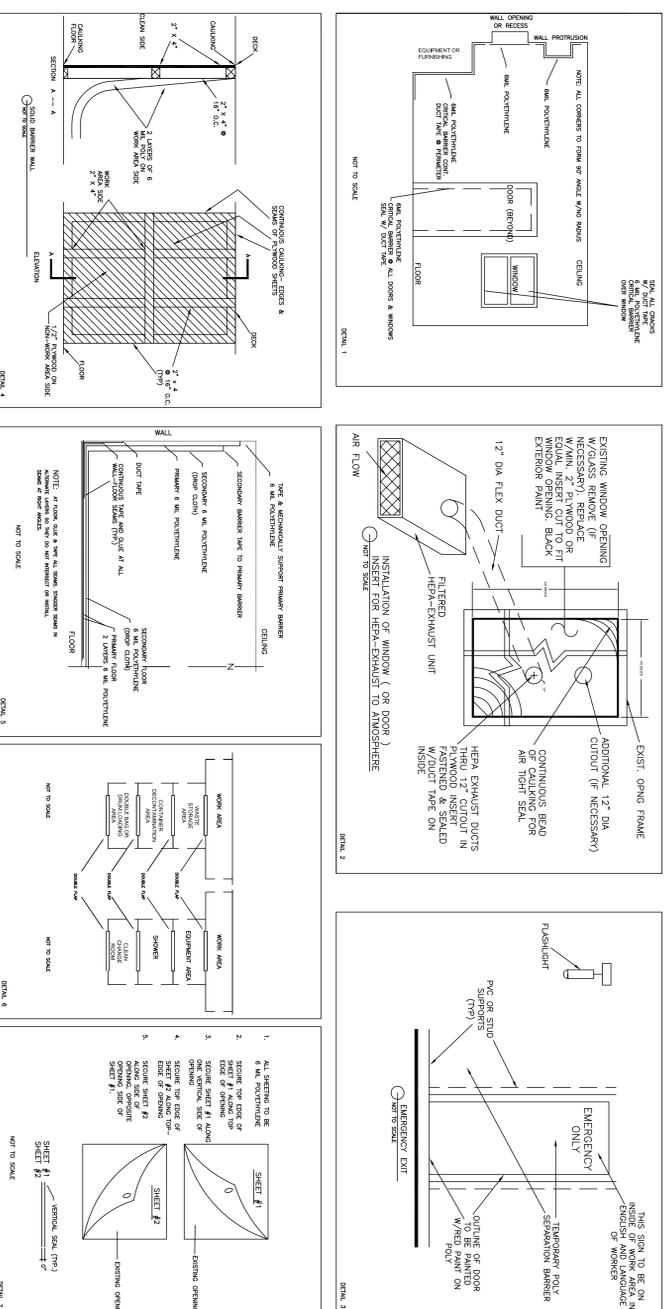

STANDARD ASBESTOS ABATEMENT DETAILS

ASBESTOS ABATEMENT ITEM TABLE & STANDARD ASBESTOS ABATEMENT DETAILS

Revisions:	Date
FINAL CD SUBMISSION	12-21-12
95% SUBMISSION	11-30-12
65% SUBMISSION	11-06-12

CONSULTANTS:
STEPHEN J. SEBESTA & ASSOCIATES, INC.
CONSULTING ENVIRONMENTAL HEALTH ENGINEERS
17830 ENGLEWOOD DRIVE, SUITE 16, CLEVELAND, OHIO 44130 (216) 781-0060

ARCHITECT:

Drawing Title
ASBESTOS ABATEMENT ITEM TABLES & STANDARD DETAILS

Project Title
STEAM TRAP MONITORING, INSULATION AND PIPING UPGRADES

Location
VAMC - WADE PARK

Project Number
541-12-115
Building Number
1
Drawing Number
1-AA1
1 OF 1

