



General Notes

1. Clean area surrounding oxygen tank area of all weeds, materials and foreign debris.
2. Clean, prep and paint all bollards surrounding the oxygen storage area to be same color.

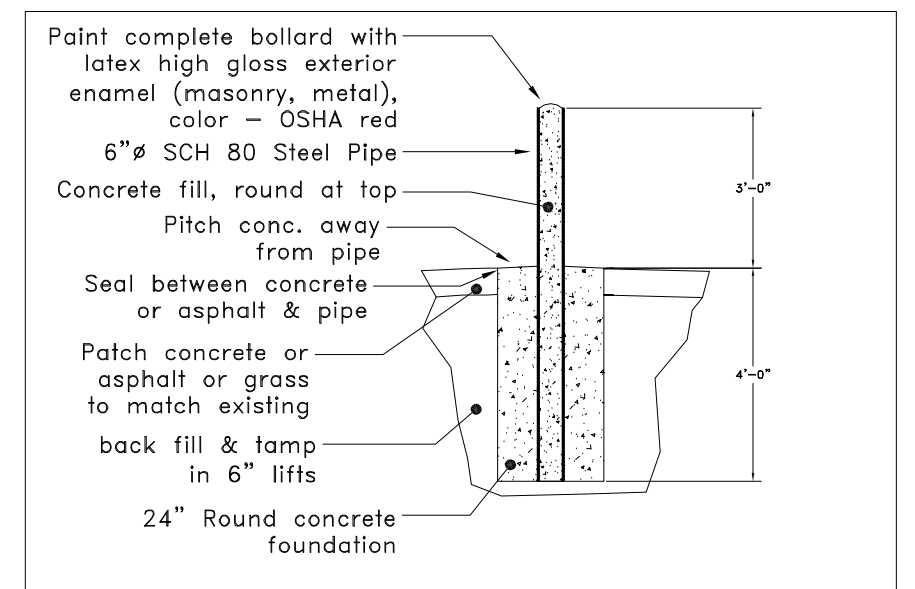

General Notes  
1. Steel pipe for bollards will be government furnish material. Pipe will be provided in 21' lengths. The General Contractor will be responsible for cutting to length and mobilizing material to site of installations.

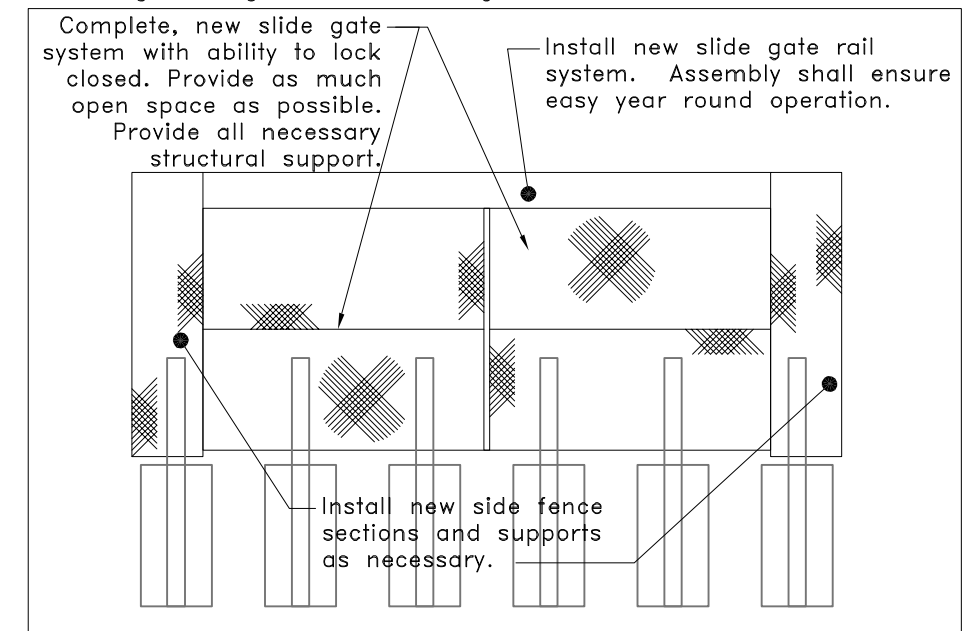

General Notes

1. Provide type of fencing equal to, or compatible with what fence will remain after removals. Include privacy barrier in fencing equal to what is remaining.
2. Coordinate access provided by new gate with VA COR.
3. Inspect all fence remaining after removal of existing gates. Provide all necessary materials and labor to ensure that all oxygen tank fencing is properly secured, in place, and operating properly.

		CONSULTANTS:		ARCHITECT/ENGINEERS:	Drawing Title NEW WORK - OXYGEN STORAGE AREA	Project Title SECURITY MEASURES AT BULK OXYGEN TANK CORAL & UTILITY LOCATIONS	Project Number UTIL - SECURITY	STRATTON VA MEDICAL CENTER			
					Approved: Project Director	Location ALBANY, NEW YORK	Building Number SITE				
							Date MARCH 18, 2013		Checked	Drawn TEL	Drawing Number NW-02 Dwg. 3 of 4
CLARIFY OPTIONAL LOCATIONS FOR BOLLARDS	07-01-13										
RFP	06-06-13										
Revisions:	Date										