



three inches = one foot
one and one-half inch = one foot
one inch = one foot
three-quarters inch = one foot
one-half inch = one foot
three-eighths inch = one foot
one-quarter inch = one foot
one-eighth inch = one foot

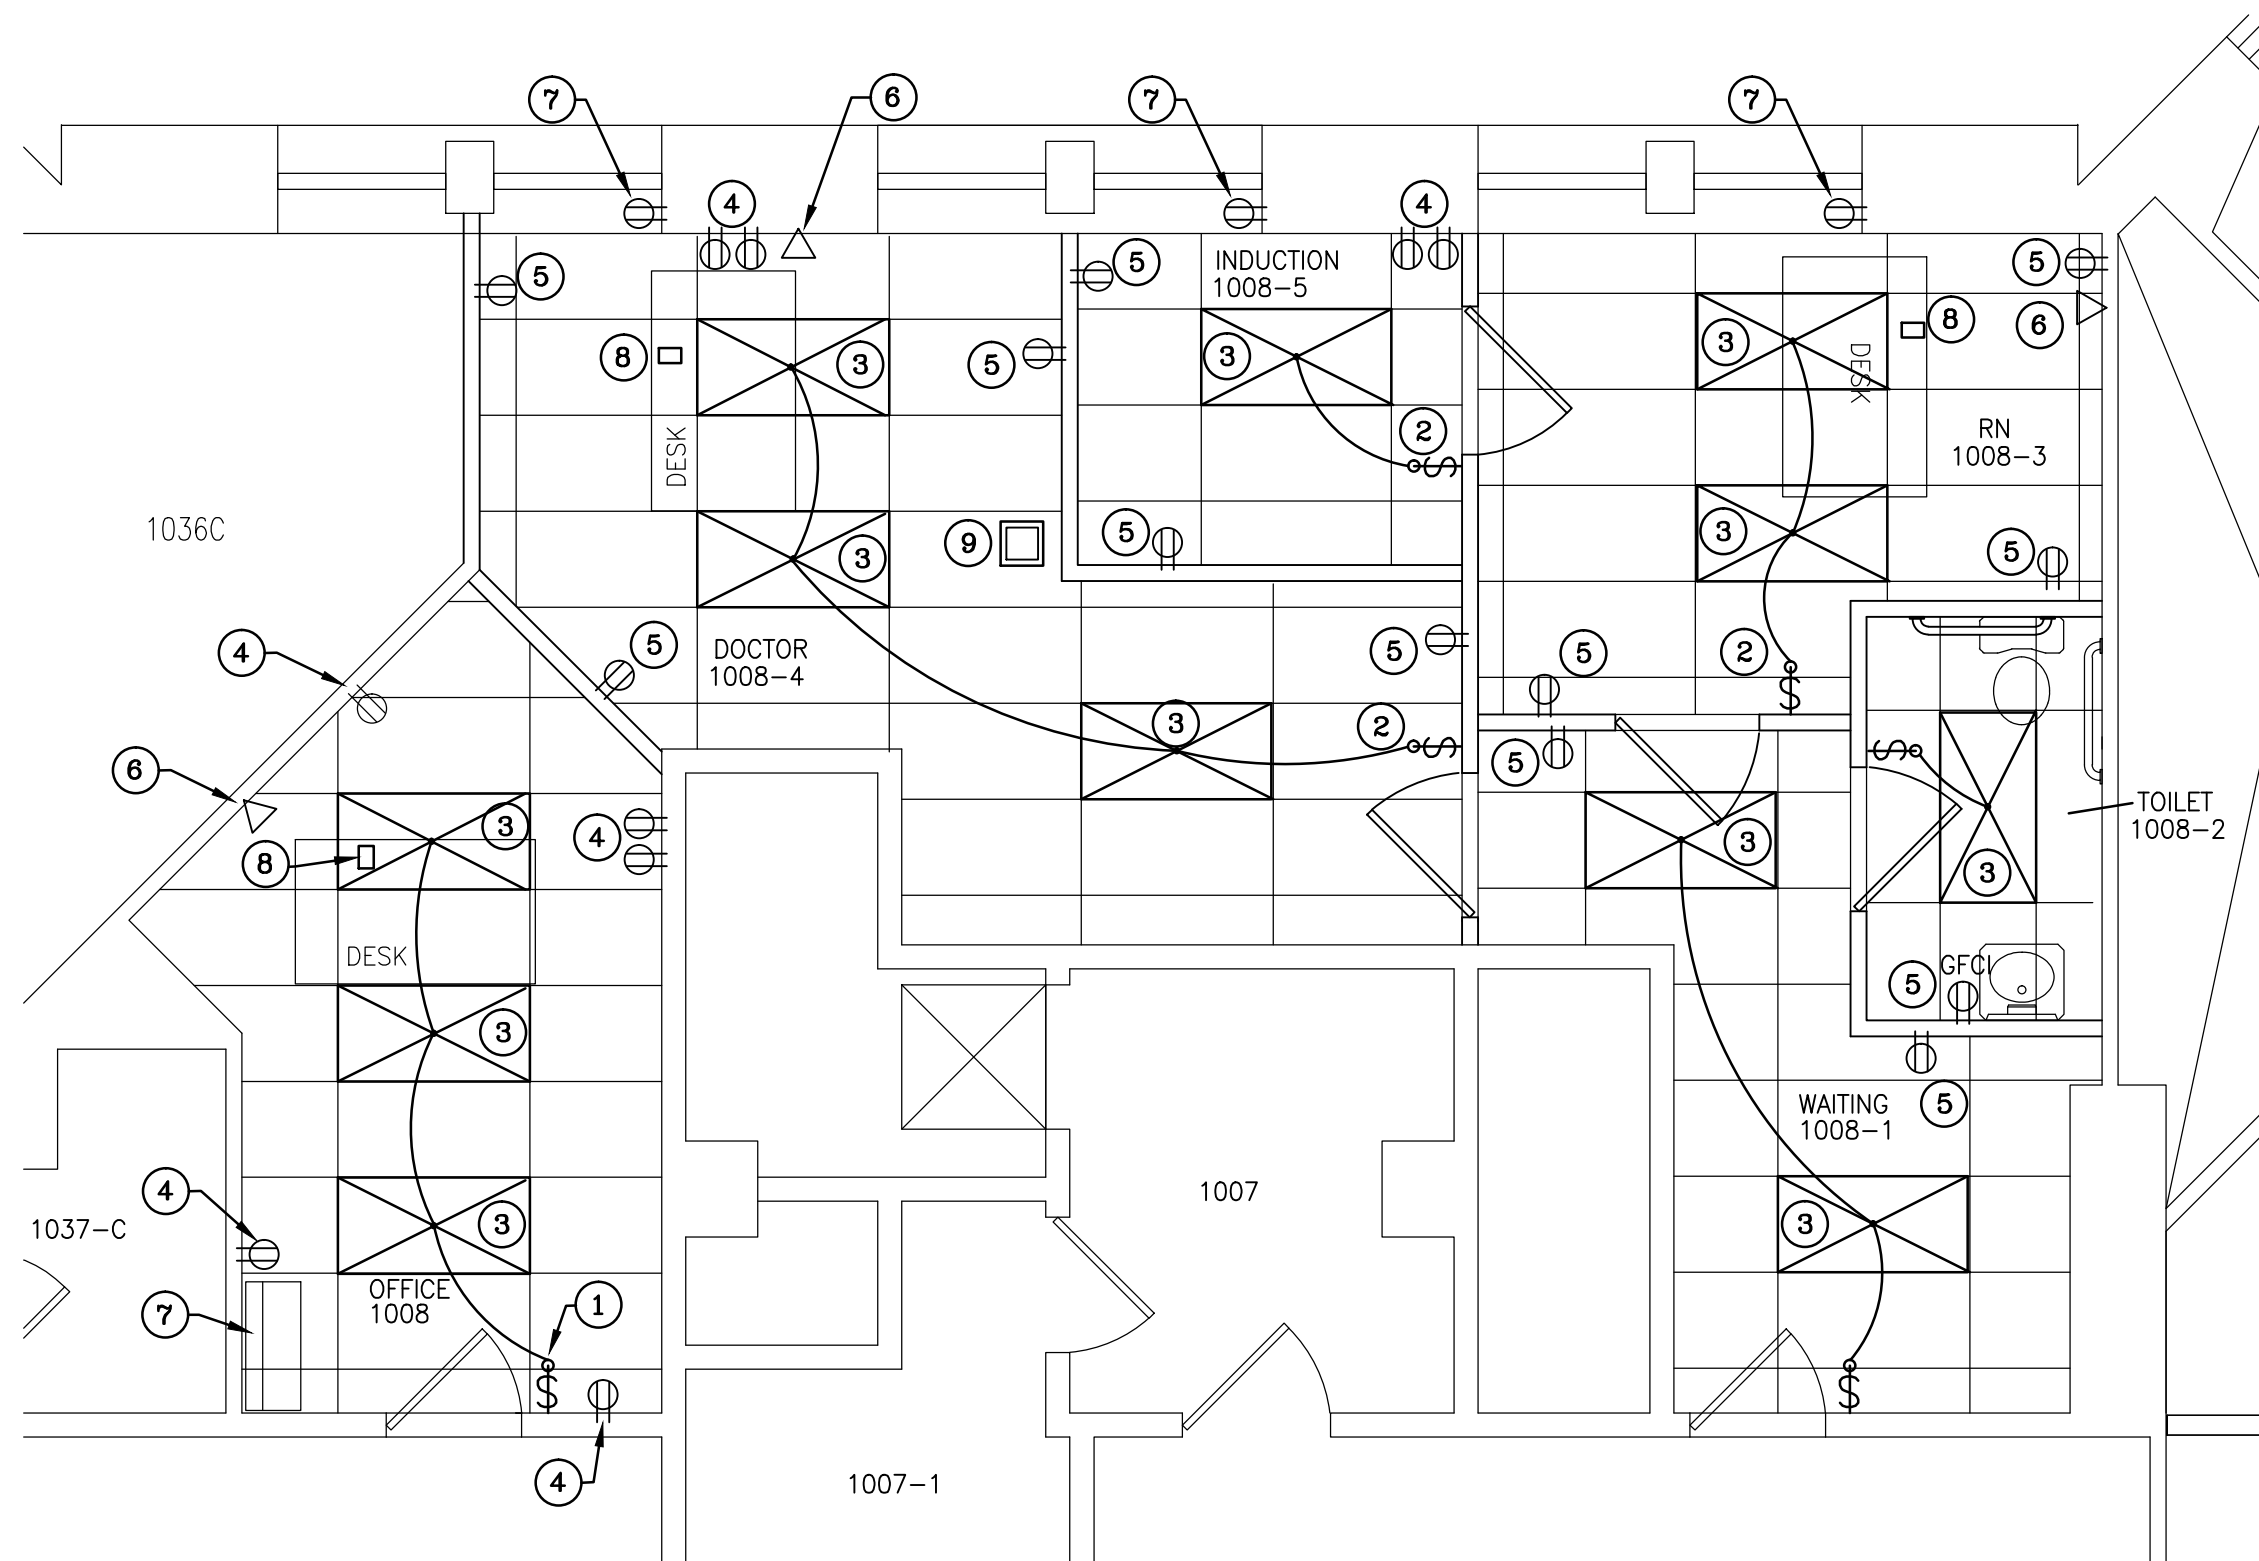

ELECTRICAL PLAN
NO SCALE

ELECTRICAL PLAN NOTES


- 1 PROVIDE SWITCH IN EXISTING BOX AND ROUTE BACK TO PANEL.
- 2 PROVIDE SWITCH AND BOX AND ROUTE BACK TO PANEL.
- 3 PROVIDE 2X4 LIGHTS (T8 LAMPS) AND CONNECT TO SWITCH INDICATED.
- 4 PROVIDE DUPLEX RECEPTACLES IN EXISTING BOX AND ROUTE BACK TO PANEL.
- 5 PROVIDE DUPLEX RECEPTACLE AND BOX AND ROUTE BACK TO PANEL.
- 6 PROVIDE DATA OUTLET AND BOX AND ROUTE BACK TO DATA CLOSET.
- 7 PROVIDE GFCI RECEPTACLE FOR AC UNIT AND ROUTE TO MECHANICAL PANEL.(APPROX 150'AWAY)
- 8 PROVIDE PANIC BUTTON UNDER DESK AND ROUTE BACK TO NURSE CALL SYSTEM.
- 9 REINSTALL WIRELESS ACCESS POINT AND RECONNECT TO EXISTING WIRING.

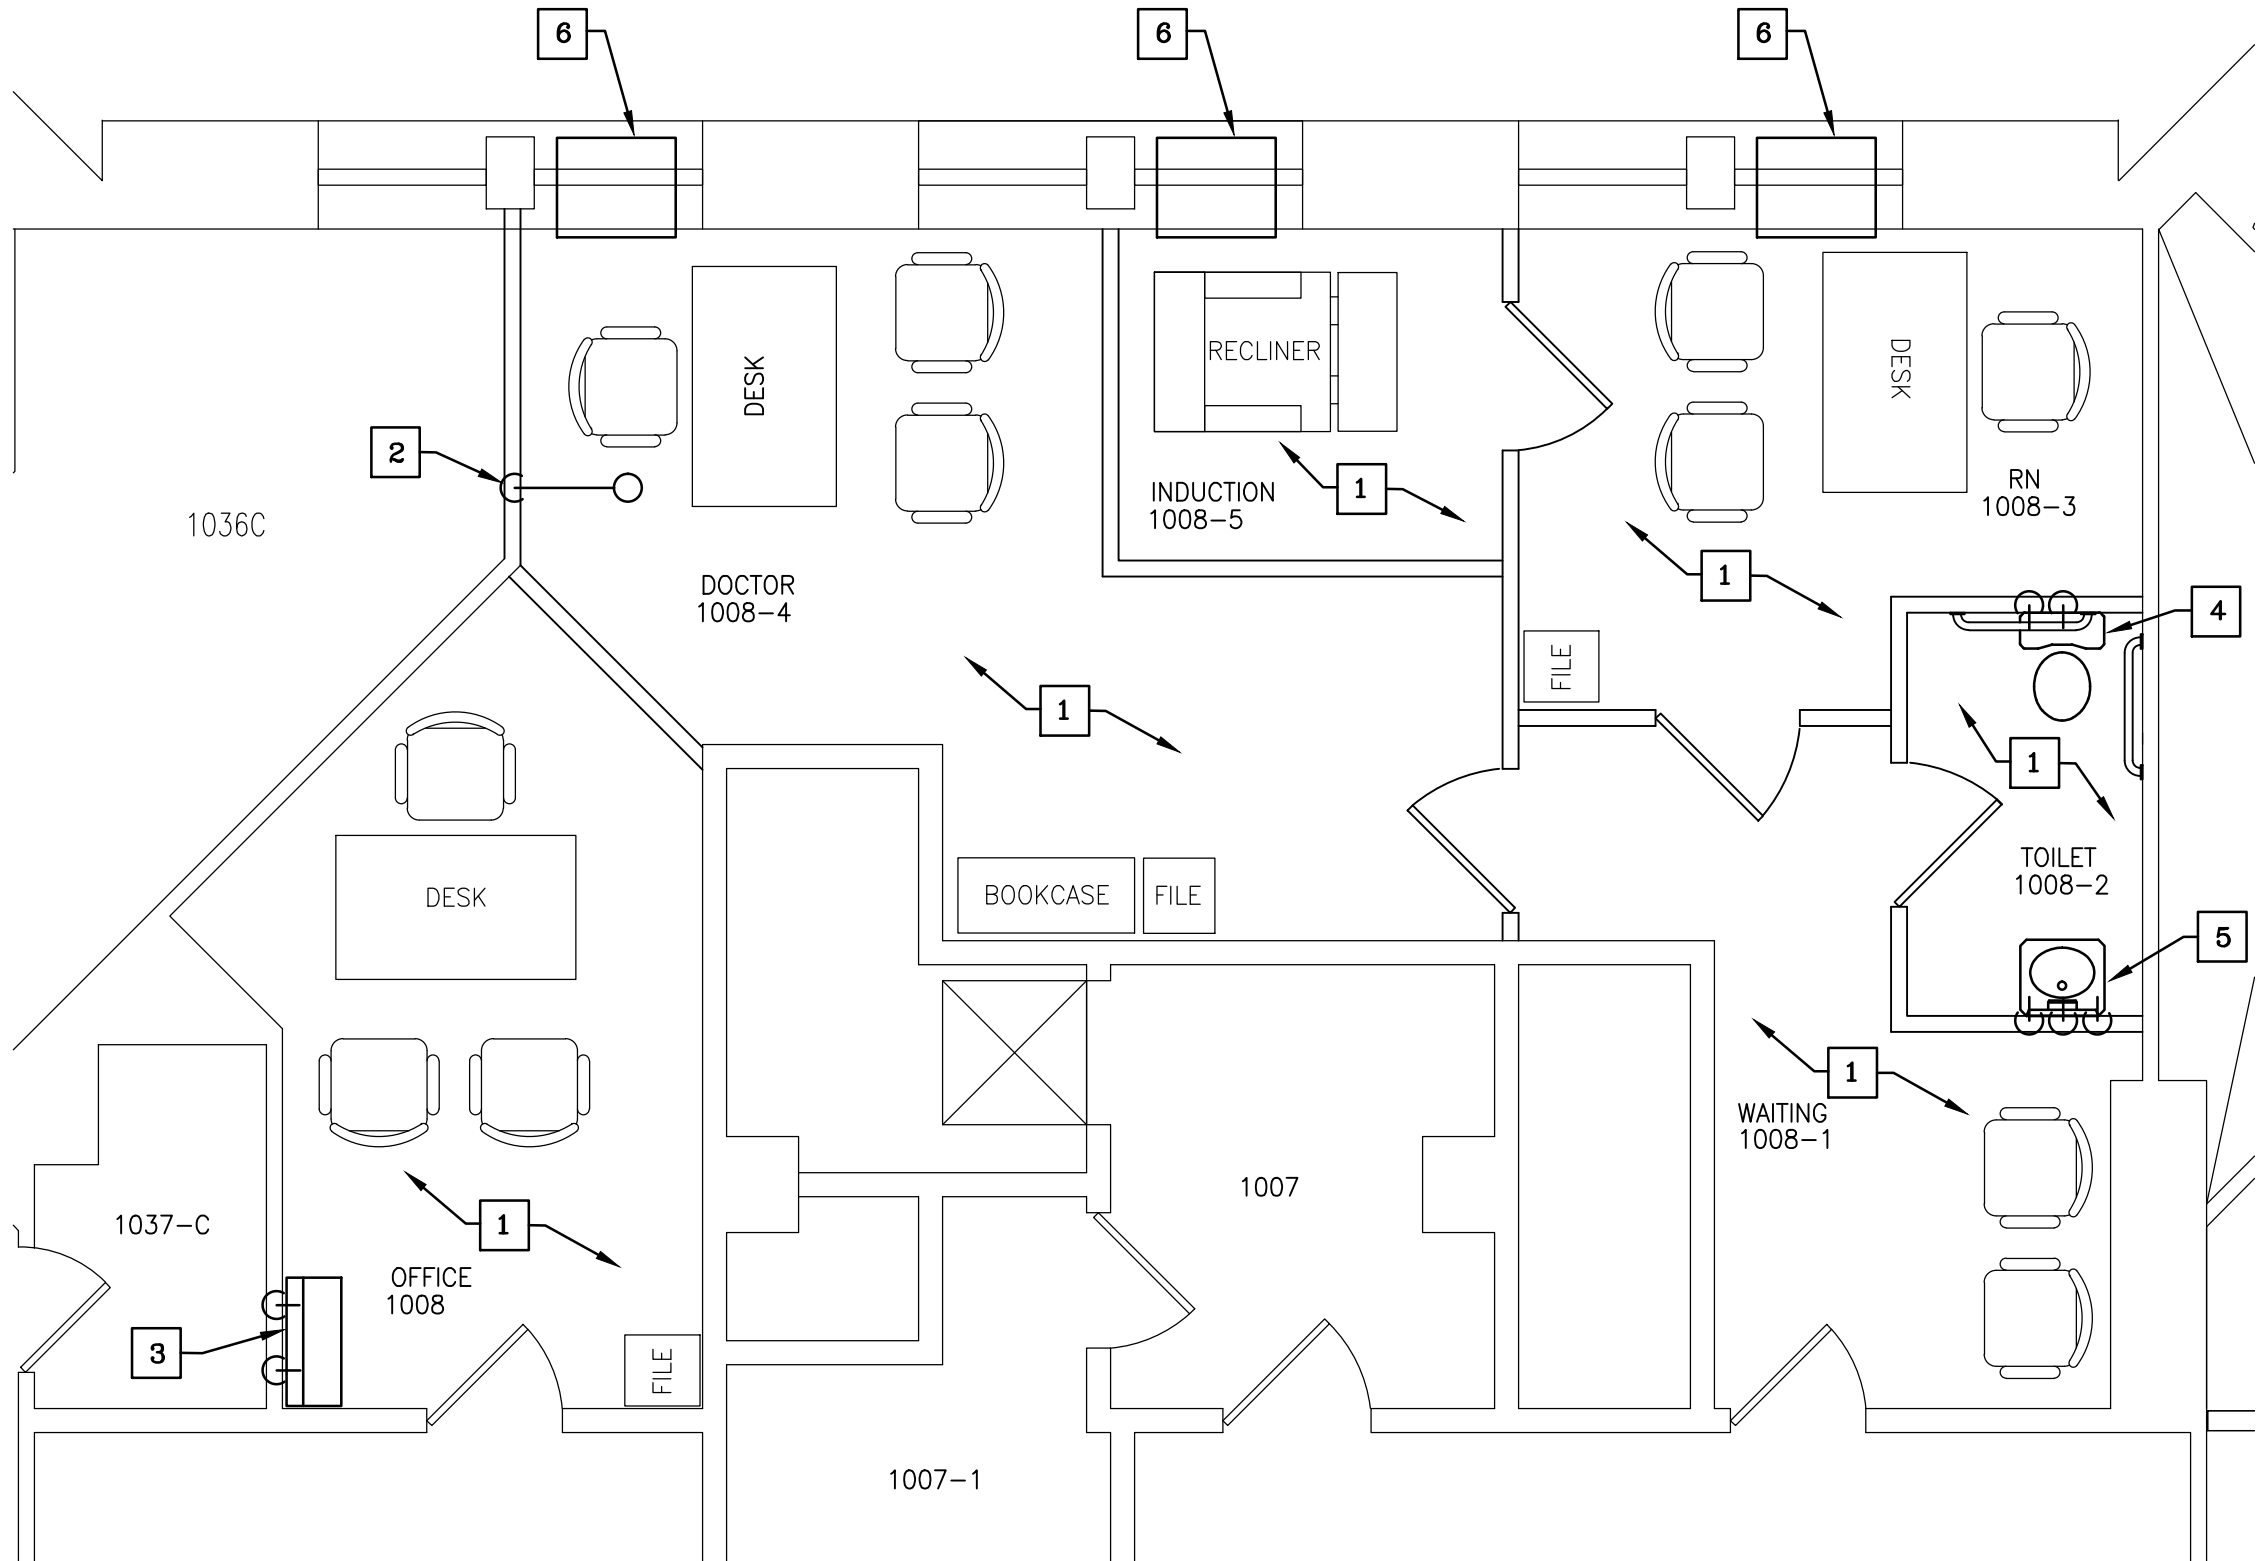

MECHANICAL PLAN
NO SCALE

MECHANICAL PLAN NOTES

- 1 PROVIDE QUICK-RESPONSE SPRINKLER HEADS AND ASSOCIATED PIPING PER NFPA.
- 2 OFFSET EXISTING ROOF LEADER PIPING IN 10TH AND 9TH FLOOR CEILINGS TO DROP IN NEW WALL.
- 3 PROVIDE WATER COOLED FLOOR MOUNTED AC UNIT (5000 BTU) AND EXTEND 1" COLD WATER, 1-1/2" WASTE AND VENT FROM STACK AND CONNECT TO AC UNIT.
- 4 PROVIDE FLOOR MOUNTED FLUSH VALVE WATER CLOSET AND EXTEND 1" COLD WATER, 3" WASTE AND 2" VENT FROM STACK AND CONNECT TO WATER CLOSET.
- 5 PROVIDE WALL MOUNTED LAVATORY AND EXTEND 1/2" COLD & HOT WATER, 1-1/2" WASTE AND VENT FROM STACK AND CONNECT TO LAVATORY.
- 6 PROVIDE WINDOW AC UNIT AND MOUNT IN WINDOW PANEL.

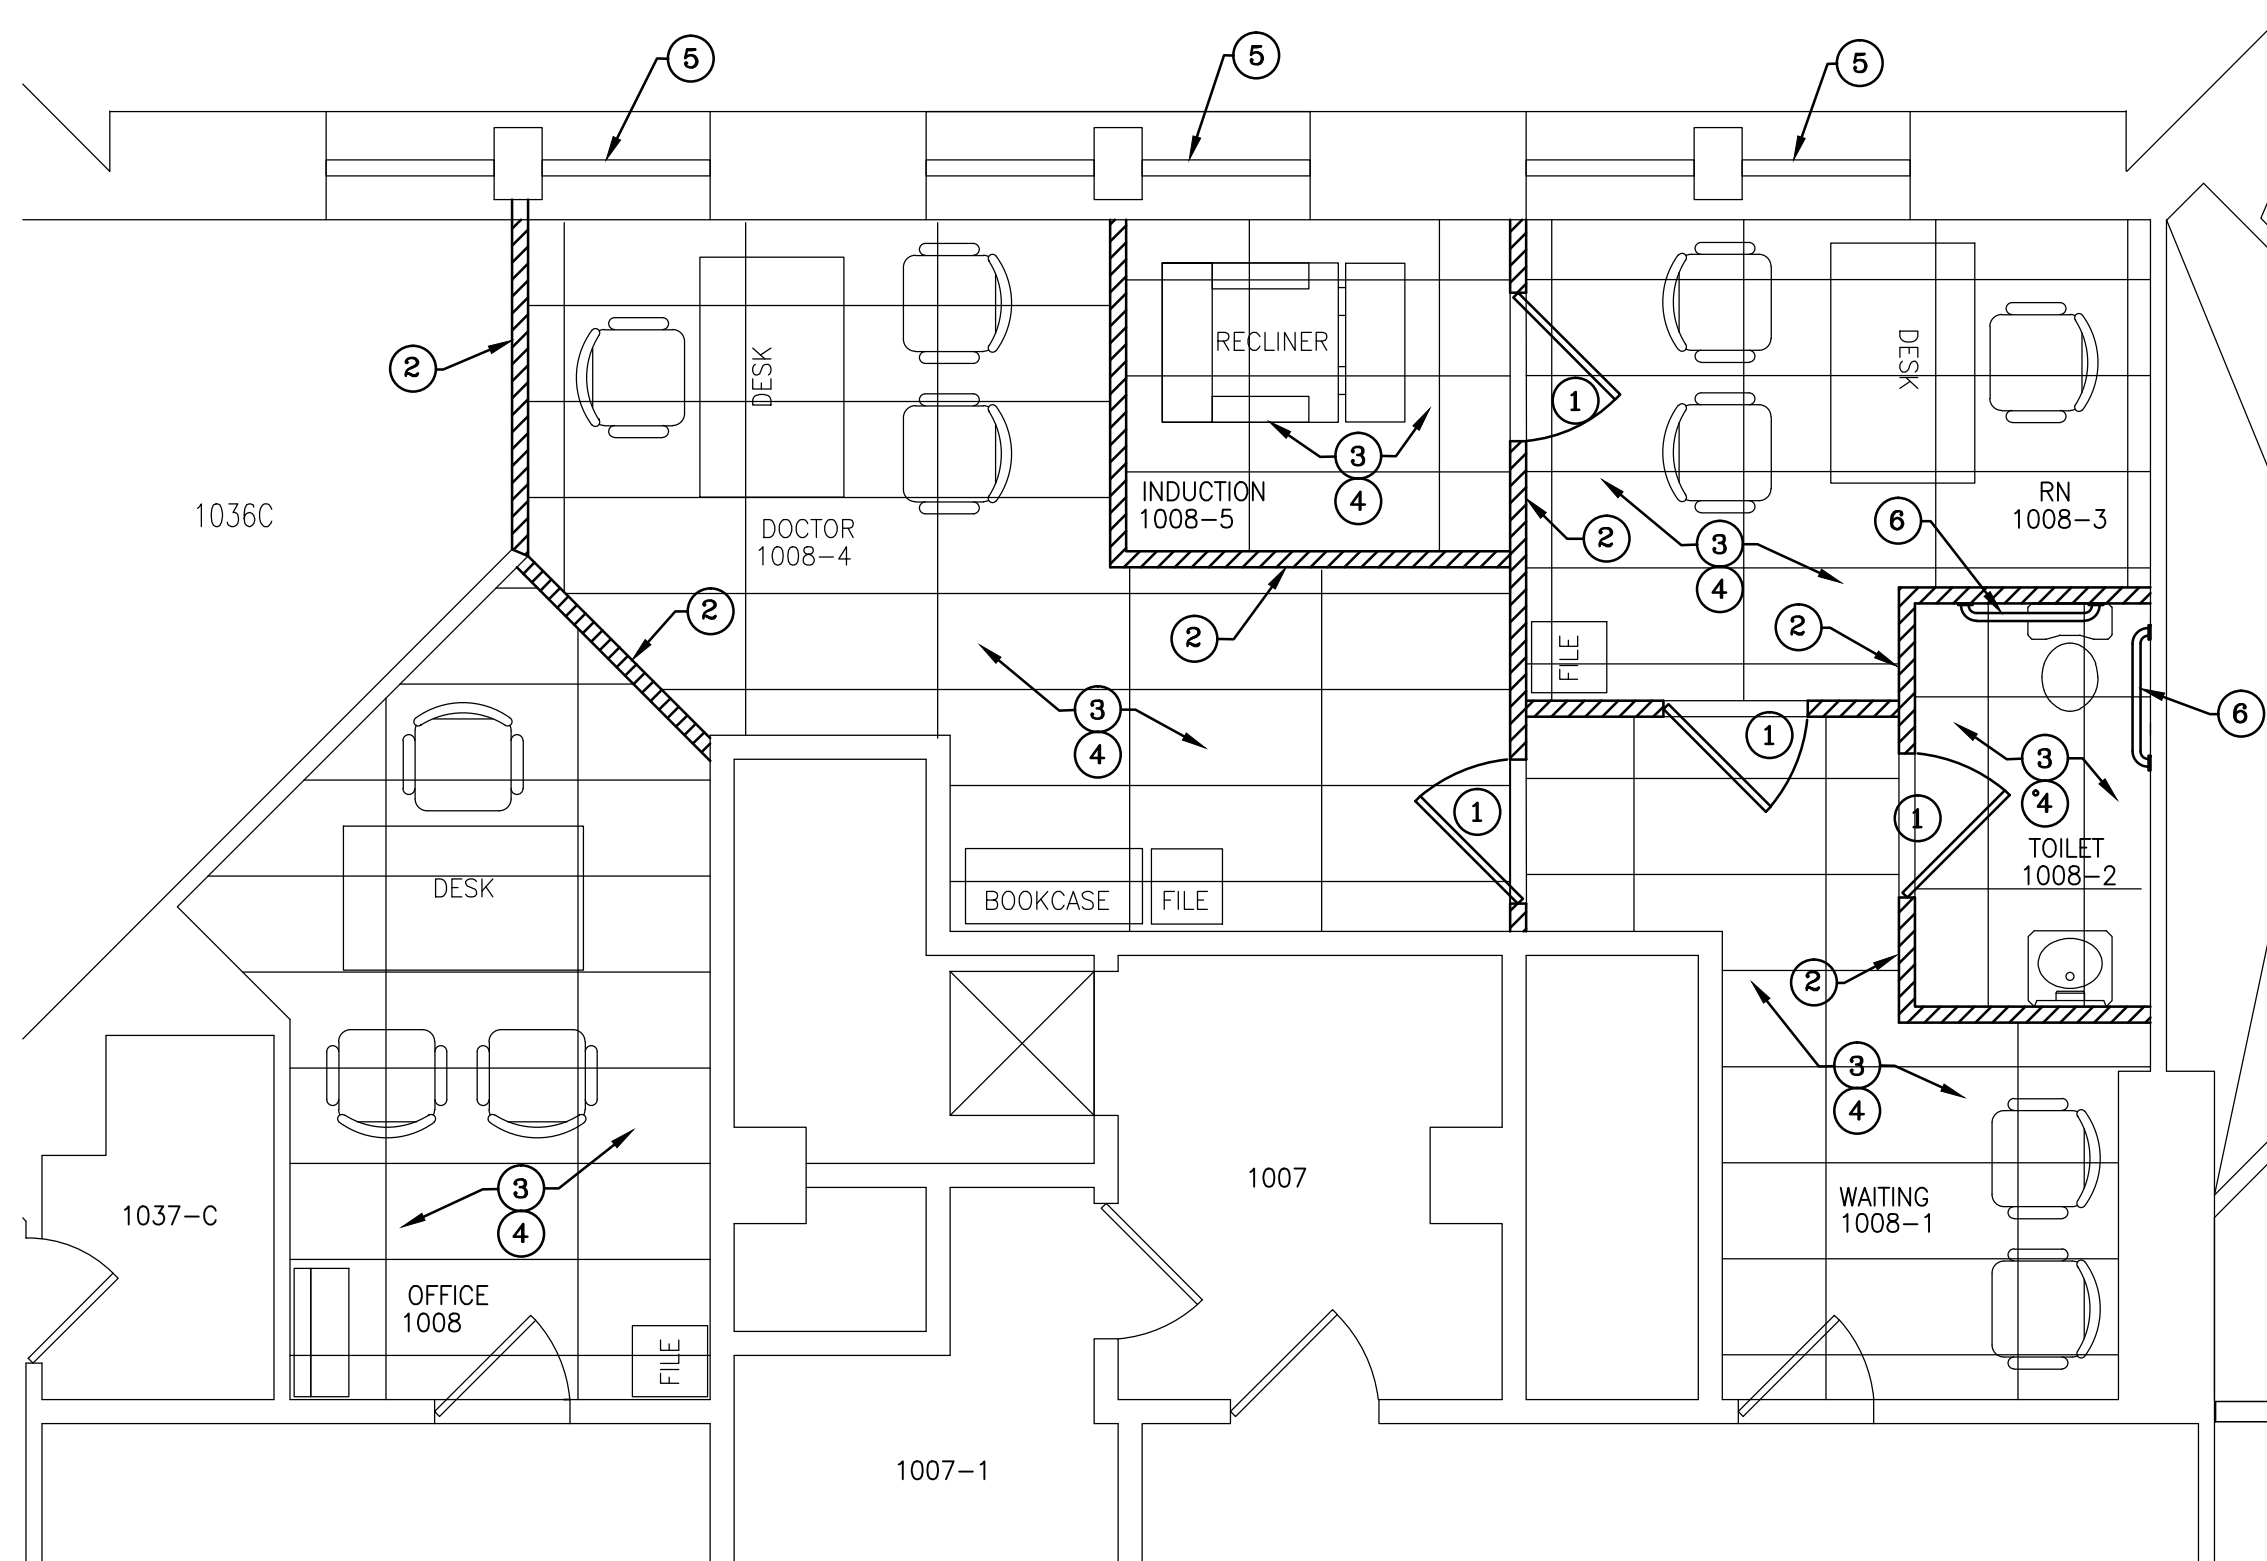


ARCHITECTURAL PLAN
NO SCALE

ARCHITECTURAL PLAN NOTES


- 1 PROVIDE NEW DOOR AND FRAME.
- 2 CONSTRUCT NEW WALL WITH METAL STUD AND DRYWALL.
- 3 PROVIDE 2'x4' CEILING GRID AND ACOUSTIC TILES
- 4 PROVIDE VCT FLOORING THRU-OUT SPACE WITH RUBBER COVE BASE
- 5 REPLACE GLASS WINDOW PANEL WITH SOLID BLACK PANEL TO HOUSE AC UNIT.
- 6 PROVIDE GRAB BARS PER ADA REQUIREMENTS.

GENERAL NOTES

- ALL DATA OUTLETS ARE TO INCLUDE (2) DATA LINES, (1) PHONE LINE AND (1) SPARE.
- PROVIDE WRITTEN SHUTDOWN REQUEST FOR SHUTDOWN OF ANY UTILITIES WITH MINIMUM ONE WEEK ADVANCE NOTICE.
- VERIFY CIRCUITS TO BE DISCONNECTED FOR EQUIPMENT BEING REMOVED. PROVIDE NEW BREAKERS FOR ALL NEW CONNECTIONS.
- PATCH ALL WALLS TO A COMPLETELY LEVEL SURFACE AND PRIME & PAINT.
- PATCH ALL EXISTING WALLS AS REQUIRED TO PROVIDE A COMPLETELY SMOOTH SURFACE. PRIME AND PAINT ALL EXISTING WALLS WITHIN WORK AREA.
- REMOVE ALL WIRING AND CONDUIT NO LONGER IN SERVICE BACK TO PANEL. PROVIDE ALL NEW WIRING CONDUIT AS NECESSARY TO PROVIDE A COMPLETE INSTALLATION.
- REMOVE ALL PIPING BACK TO MAINS AND CAP. DO NOT LEAVE ANY DEAD LEGS FOR ANY SERVICE.
- PROPERLY DISPOSE OF ALL REMOVED ITEMS UNLESS OTHERWISE NOTED.
- ALL CONDUIT, PIPING ETC. TO BE RECESSED IN WALLS.

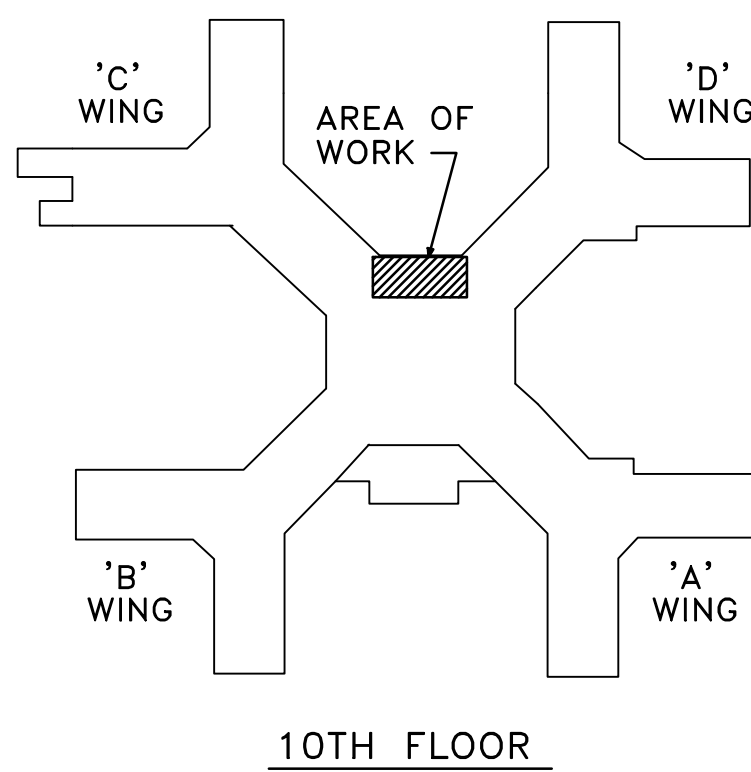

KEY PLAN
SCALE: NONE



Revisions	6/24/13
Revisions	Date

VA WESTERN NEW YORK HEALTHCARE SYSTEM
3495 BAILEY AVENUE
BUFFALO, NEW YORK 14215

Architect

stamp

CARDIOLOGY MANAGER	DATE	ENGINEERING MANAGER	DATE
INFECTION CONTROL	DATE	CARELINE MANAGER	DATE
SAFETY OFFICER	DATE	CHIEF OF STAFF	DATE

Drawing Title	Project Title
FLOOR PLANS AND NOTES	BUPRENORPHINE
MEDICAL CENTER DIRECTOR	Building Number 1
ASSOCIATE MEDICAL CENTER DIRECTOR	Location V.A.M.C. BUFFALO, NEW YORK

Date	Station No.
JUNE 24, 2013	528
Checked VR	Drawn RLR

13-S21 A101

