
A. CONSTRUCTION BARRIERS TO BE BUILT AS FOLLOWS: - FULL HEIGHT TO UNDERSIDE OF DECK ABOVE 1-HR RATED WITH SOUND INSULATION

**CONSTRUCTION BARRIER NOTES:** 

- FINISHED ON PATIENT/PUBLIC SIDE B. 5'-0" CLEAR MINIMUM DIMENSION TO BE MAINTAINED AT CORRIDORS WITH A CONSTRUCTION BARRIER. CLEAR DIMENSION INCLUDES HANDRAILS, ETC. C. SPRINKLER HEADS MUST BE A MIN. 4" OFF A WALL. TEMPORARILY RELOCATE HEADS
- AS NEEDED TO FOR CONSTRUCION BARRIER PLACEMENT. D. TEMPORARILY RELOCATE FIXTURES AND DEVICES AS NOTED TO COMPLETE CONSTRUCTION BARRIER INSTALLATION.
- REPLACE DISTURBED A.C.T. AND GRID TO MATCH EXISTING. RETURN TEMPORARILY RELOCATED SPRINKLER HEADS, FIXTURES, AND DEVICES TO ORIGINAL LOCATIONS UNLESS INDICATED OTHERWISE.

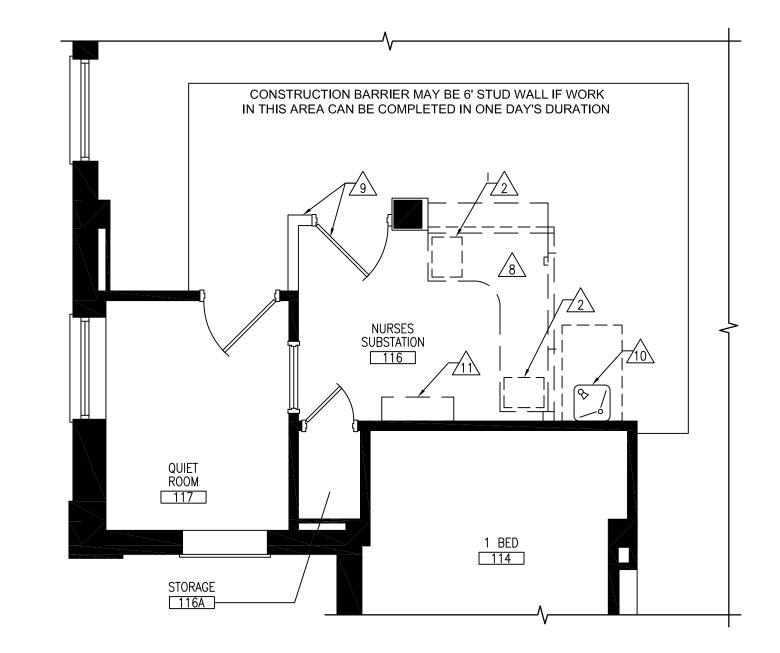

3 BLDG 51: FIRST FLOOR DEMO PLAN — NURSE STATION 116
AS2 1/4" =1'-0"

#### PHASING KEYNOTES:

- (P1) PHASE 1 CONSTRUCTION BARRIER
- P3 CONSTRUCTION BARRIER SERVED BY WALL OF NEW CONSTRUCTION
- (P2) PHASE 2 CONSTRUCTION BARRIER (P4) CONSTRUCTION BARRIER - COORDINATE PHASING WITH COR

## **GENERAL DEMOLITION NOTES:**

- 1. REMOVE INTERIOR WALLS (AS INDICATED ON PLAN WITH DASHED LINES) AS REQUIRED FOR NEW CONSTRUCTION (U.N.O.).
- PATCH & REPAIR FLOORS, WALLS & CEILING AS REQUIRED WHERE DEMOLITION OCCURS - MATCH EXISTING CONDITIONS. MAINTAIN & PROTECT ACCESS THROUGH MAIN CORRIDOR DURING CONSTRUCTION.
- 4. DOCUMENT/VERIFY ALL MOUNTING HEIGHTS FOR EQUIPMENT/CABINETS BEFORE REMOVAL. EXISTING EQUIPMENT TO BE RELOCATED WITH MATCHING HEIGHTS U.N.O. PROVIDE BLOCKING FOR MOUNTED OBJECTS WHERE REQUIRED.
- ALL FURNITURE AND EQUIPMENT TO REMAIN U.N.O. 6. CLEAN ALL EXISTING WALL SURFACES AFTER DEMOLITION AS NECESSARY.

# PROJECT DEMOLITION KEYNOTES:

- $\sqrt{1}$  VENDING MACHINE TO BE REMOVED FROM PROJECT BY VA.
- UNDER COUNTER FILE CABINET TO BE SALVAGED FOR REUSE. —SEE PLAN
- /3 LATERAL FILE CABINET TO BE SALVAGED / FOR REUSE. WORK W/ COR) Mo..
- 4 UNDER COUNTER REFRIGERATOR TO BE
- SALVAGED FOR REUSE. —SEE PLAN 5 NOT USED
- 6 ELECTRICAL PANEL TO REMAIN.
- /7 BUILDING DIRECTORY (10X43X33) TO BE
- SALVAGED FOR REUSE. —SEE PLAN 8 MODULAR FURNITURE/CASEWORK TO BE REMOVED FROM PROJECT CONTRACTOR TO DISPOSE OF OFF SITE PER SPECIFICATIONS.
- 9 HALF HEIGHT DOOR AND WALL TO REMAIN.
- 10 Drinking fountain to remain.
- /11 BOOKCASE TO BE REMOVED FROM PROJECT. VERIFY WITH VA ON RELOCATION OR DISPOSAL.
- 12\ REMOVE EXISTING PLUMBING FIXTURES AND ASSOCIATED ITEMS (PAPER TOWEL DISPENSERS, SOAP DISPENSERS, HAND SANITIZERS, TOWEL DISPENSERS, MIRRORS, ETC.). PAPER TOWEL/ TISSUE DISPENSERS, SOAP DISPENSERS AND HAND SANITIZERS TO BE REUSED. SEE PLAN
- MILLWORK TO BE REMOVED FROM PROJECT.

  CONTRACTOR TO DISPOSE OF OFF SITE PER SPECIFICATIONS. SPECIFICATIONS. 14 EQUIPMENT TO BE SALVAGED FOR REUSE. -SEE PLAN AND TEMPORARY RELOCATION

3

- 15\ REMOVE EXISTING WALL CONSTRUCTION AS REQUIRED FOR NEW CONSTRUCTION. -SEE
- 16 HALF HEIGHT DOOR AND WALL TO BE REMOVED.
- $\sqrt{17}$  REMOVE DOOR AND EXISTING CONSTRUCTION AS REQUIRED FOR NEW CONSTRUCTION. —SEE PLAN
- /18\ HANDRAIL AND BUMPER TO BE SALVAGED FOR REUSE. -SEE PLAN
- 19 FISH TANK TO BE REMOVED FROM PROJECT AREA BY VA.
- 20 VINYL WALL COVERING (VWC) AT FIRST FLOOR WALLS, COLUMNS, AND SOFFIT AREAS TO BE REMOVED. SKIM COAT SURFACES AND PREP FOR PRIMER AND PAINT.

/21\ REMOVE EXISTING FLOORING AS REQUIRED FOR


### PHASING: ITEMS TO TEMP. RELOCATE

/TI DOOR RELEASE BUTTON

NEW CONSTRUCTION.


- T2 INTELEX MONITORING SYSTEM
- /13\ REFRIGERATOR: G.C. TO PROVIDE TEMPORARY J.C. MONITORING AND EMERGENCY POWER.
- 2ND PATIENT REFRIGERATOR: G.C. TO PROVIDE TEMPORARY J.C. MONITORING AND EMERGENCY POWER. (RELOCATE TO DAYROOM 106A)
- 5 G.C. TO PROVIDE TEMPORARY EMERGENCY POWER FOR MEDICATION CART
- T6 G.C. TO PROVIDE (3) TEMPORARY PHONE AND DATA LOCATIONS. VERIFY LOCATIONS WITH COR

4 5

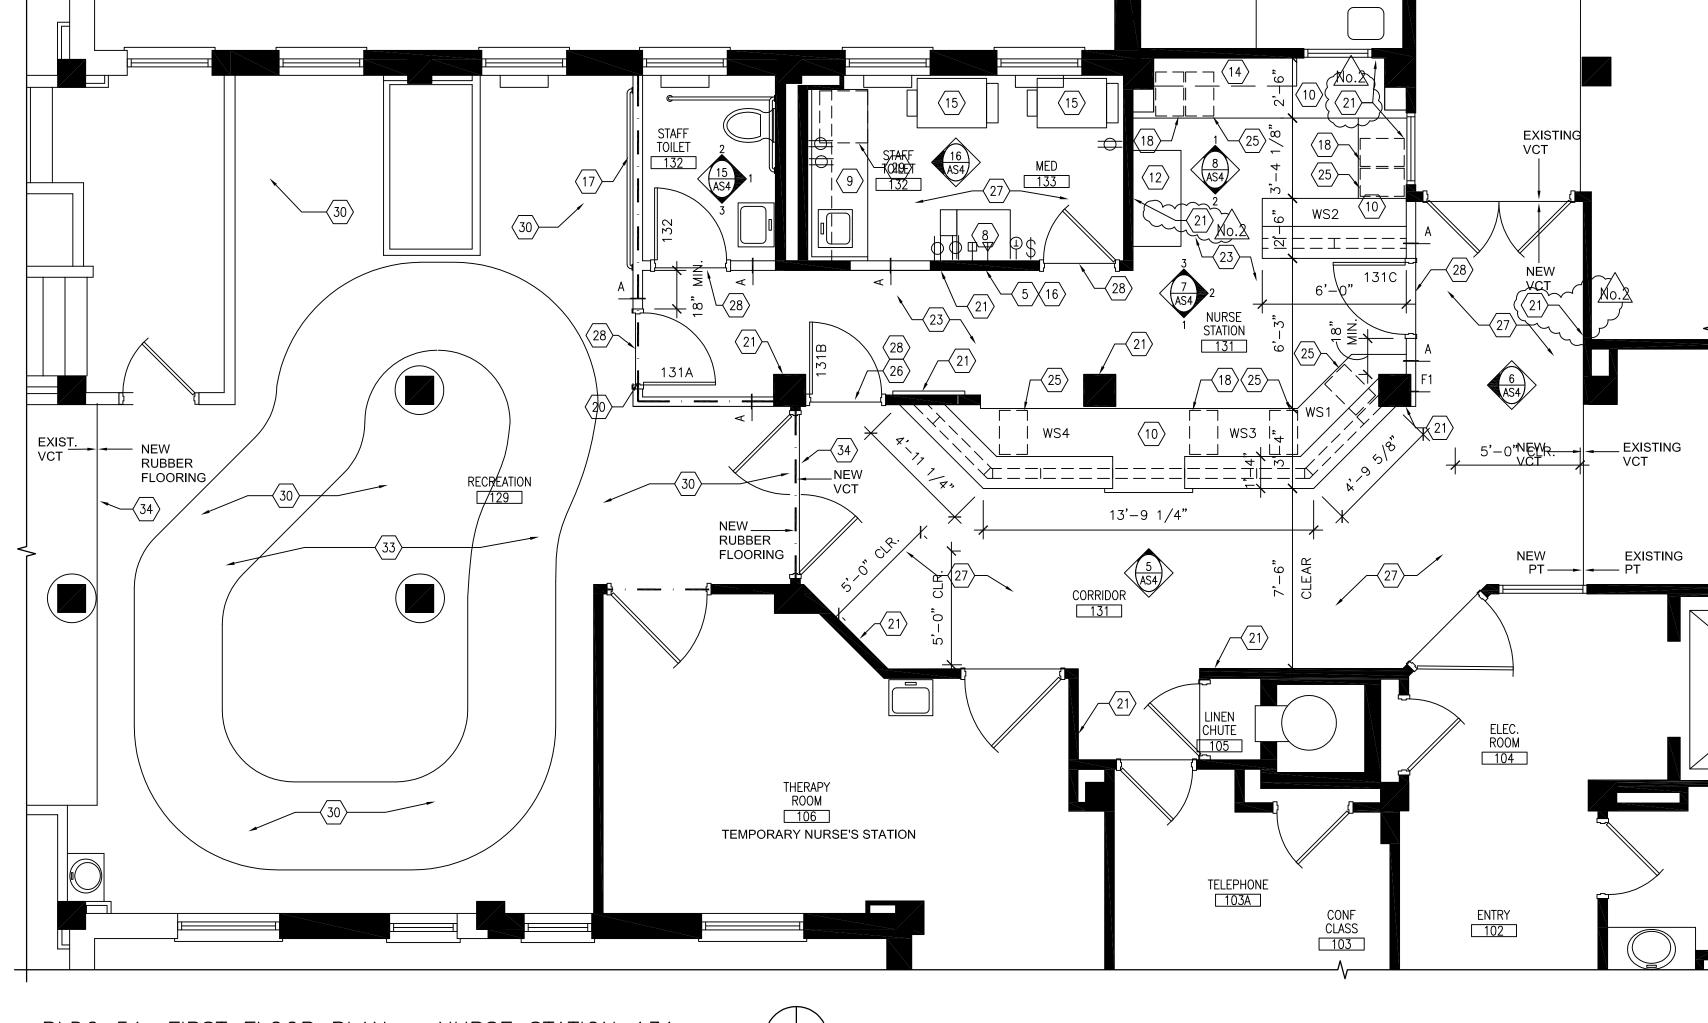

BLDG 51: FIRST FLOOR PLAN — NURSE STATION 131

PHASING NOTE: NO MORE THAN 1 NURSE'S STATION IN BUILDING 51 TO BE UNDER CONSTRUCTION AT ONE TIME.

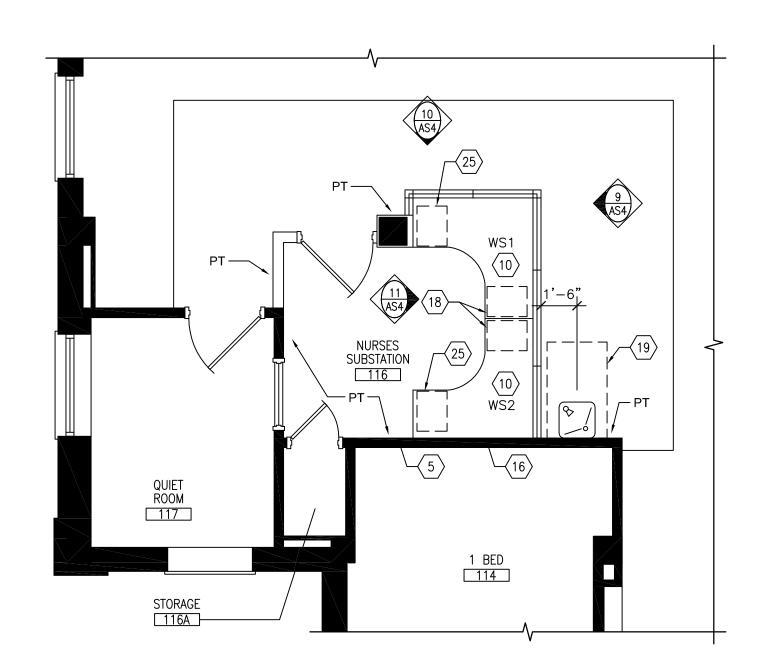

BLDG 51: FIRST FLOOR PLAN — NURSE STATION 116

AS2 1/4" =1'-0"

6

# **GENERAL NOTES:**

- ALL INTERIOR WALLS TO BE FULL HEIGHT (TO B.O. DECK ABOVE)
- ALL INTERIOR WALLS SHALL HAVE FULL HEIGHT SOUND INSULATION. MEASUREMENTS ARE FROM FACES OF EXISTING WALLS, CENTERLINES OF NEW WALLS, AND CENTERLINES OF MARKED OPENINGS/FIXTURES U.N.O.
- VERIFY DIMENSIONS AT EXISTING FEATURES TO PROVIDE CLEARANCE FOR NEW CONSTRUCTION.

PATCH FLOORING AND BASE TO MATCH EXISTING AS REQUIRED FOR NEW

CONSTRUCTION.

#### PROJECT KEYNOTES:

- 1 REUSE DOOR LOCKS COMPUTER
- (2) REUSE OPEN ACCESS COMPUTER
- (3) REUSE UNDER COUNTER REFRIGERATOR
- 4 REUSE LATERAL FILES (42X18X63)
- $\langle 5 \rangle$  EXISTING STRESS ALARM BUTTON/CALL STATION
- $\langle 6 \rangle$  REUSE UNDER COUNTER FILE CABINET
- (7) WALL MOUNTED CABINET
- (8) OMNICELL CABINET (27"X24.5"), VA SUPPLIED
- $\langle 9 \rangle$  S.S. SINK & COUNTERTOP (36" HT.)
- MODULAR FURNITURE SYSTEM REF. EQUIPMENT SCHEDULE ON SHEET AS4
- REUSE CLOSE CIRCUIT TELEVISION SYSTEM, SEE ELEC.
- (12) REUSE PRINTER
- (13) REUSE BUILDING DIRECTORY
- 14 NEW MAILSLOT CABINET TO MATCH EXISTING CONFIGURATION
- (15) EXISTING MEDCART (35"X25")
- (16) EXISTING CONTROLS (17) REUSE HANDRAIL AND BUMPER
- TRIPLE DRAWER UNDER COUNTER FILE CABINET W/CASTERS (EQUIPMENT <P-2>, SEE SCHEDULE)
- (29) REUSE EXISTING MED REFRIGERATOR

CONCRETE

NEW CONSTRUCTION

 $\langle 27 \rangle$  NEW VCT FLOORING

(28) FLOORING TRANSITION STRIP

 $\langle 23 \rangle$  NEW CARPET

NEW RUBBER FLOORING. PROVIDE PATTERN AS INDICATED ON DRAWINGS IN TWO-TONE COLORS. SEE MATERIAL SCHEDULE.

(19) MAINTAIN 48"X30" CLEAR FLOOR SPACE AROUND EXISTING DRINKING FOUNTAIN.

(20) DASHED LINE INDICATES SMOKE PARTITION WALL

22 NEW 42"H MTL DOOR AND FRAME FILLED WITH

 $\langle 24 \rangle$  PATCH VCT FLOORING TO MATCH EXISTING AT

(25) DOUBLE DRAWER UNDER COUNTER FILE CABINET

(26) INFILL HALF WALL WITH FULL HEIGHT WALL, ADD NEW DOOR AND FRAME

W/CASTERS (EQUIPMENT <P-1>, SEE SCHEDULE)

 $\langle 21 \rangle$  SKIM COAT EXISTING SURFACES AFTER VWC

-/ REMOVAL, PROVIDE PRIMER AND PAINT

- (31) ACCENT WALL (PT, SEE FINISH SCHEDULE)
- $\langle 32 \rangle$  NEW INTELEX MONITORING SYSTEM LOCATION.
- RUN CABELING IN CONDUIT PLACED IN NORTH SIDE OF COLUMN FURRING.
- (33) MAINTAIN EGRESS ROUTE THROUGH SPACE AT ALL TIMES DURING FLOORING INSTALLATION

34 BUTT FLOORING MATERIALS SEAMLESS AT TRANSITION

100% CONSTRUCTION DOCUMENTS

∥AS N□TED

||656-13-226

PROJECT NO.

DRAWING NO.



Alexandria 525 Broadway Street Alexandria, MN 56308 phone 320.759.9030 facsimile 320.759.9062 www.jlgarchitects.com copyright © 2012

I HEREBY CERTIFY THAT THIS PLAN,
SPECIFICATION, OR REPORT MAS PREPARED
BY ME OR UNDER MY DIRECT SUPERVISION,
AND THAT I AM A DULY LICENSED ARCHITECT
UNDER THE LAMS OF THE STATE OF
MINISPOTA Durker DATE: 05.15.2013

UPGRADE RECEPTION STATIONS | PLOT SCALE BUILDING 51, FIRST FLOOR BLDGS 2 & 51 DEMO & REVISED PLAN CHECKED BY DRAWN RWM || NJE || B51-1.DWG LOCATION
VA MEDICAL CENTER



Amendment No. 2

VA FORM 08-6231