


FIRE ALARM PLAN KEYNOTES

1. 2 x 2 x 10" DEEP PULLBOX FOR FIRE ALARM CABLING. MOUNT IN CEILING CAVITY ABOVE ROOM #346.
2. PROVIDE 2-1 1/2" RACEWAYS TO ROOM #E-23 (EXISTING FIRE ALARM HEADEND) FOR FIRE ALARM CABLING.
3. MAINTAIN EXISTING SMOKE DETECTOR.


NOTE:
AT ALL SMOKE AND COMBINATION DAMPER LOCATIONS SHOWN ON THIS DRAWING, DIV. 28 SHALL PROVIDE 120V THE FOLLOWING:
- DUST SMOKE DETECTOR
- REMOTE INDICATOR
- FA CONTROL MODULE INTERLOCKED WITH POWER CIRCUIT
SEE DETAIL 705-E-502 AND 755-E-502. TYPICAL AT ALL DAMPER LOCATIONS. CONFIRM ALL LOCATIONS WITH DIV. 23.

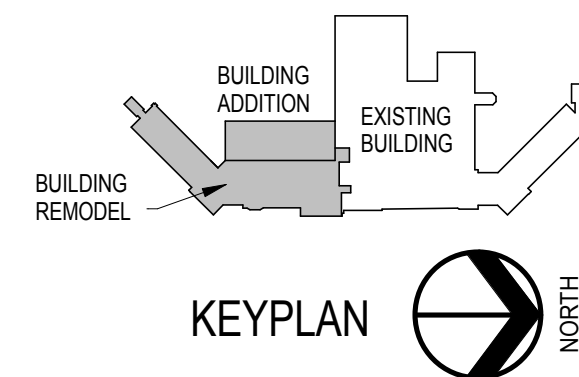

1F 3RD FLOOR FIRE DETECTION & ALARM PLAN
1/8" = 1'-0"

CONSULTANTS:

ARCHITECTS/ ENGINEERS:

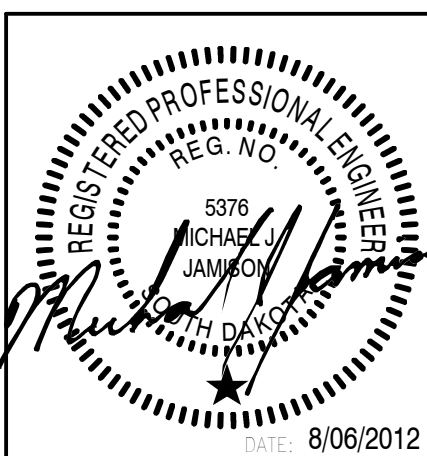

TSP, Inc.
1112 N. West Ave.
Sioux Falls, SD 57104
phone: (605) 336-1160
fax: (605) 336-7926
www.teamtsp.com



Drawing Title
3RD FLOOR FIRE DETECTION & ALARM PLAN

Approved: Project Director

Project Title
**Sioux Falls VA Health Care System
Acute Inpatient Medical Unit Addition
and Renovation**

Location
VA Medical Center
2801 W. 22nd Street, PO Box 5046
Sioux Falls, SD 57117-5046

Date
08/06/2012

Checked
MJJ

Drawn
KAK

Project Number
04100857

Building Number
5

Drawing Number

5-FA103
Dwg. 117 of 123

Office of
Construction
and Facilities
Management



**FULLY SPRINKLERED
100% CONSTRUCTION DOCUMENTS**