

**PLUMBING DEMO GENERAL NOTES**


A. WHERE EQUIPMENT AND/OR FEATURES ARE INDICATED TO BE REMOVED, THE DEMOLITION WORK SHALL BE SHOWN WITH A HATCHED AREA. DEMOLITION SERVICES FOR REMOVED EQUIPMENT AND/OR FEATURES SHALL BE REMOVED BACK TO MAINS AND CAPPED UNLESS OTHERWISE INDICATED.

B. CONTRACTOR SHALL VERIFY THE SIZE AND LOCATION OF EXISTING SERVICES. FIRE SPRINKLER DEMOLITION: REMOVE ALL SPRINKLERS FROM CEILING IN REMODELED AREAS. SEE DRAWINGS FOR LOCATION OF FIRE PROTECTION SPRINKLER SYSTEM MAIN PIPING.

C. DEMOLITION WORK IS TO OCCUR AFTER HOURS TO PREVENT DISRUPTION TO THE MEDICAL CENTER.

- PLUMBING DEMO KEYNOTES**
1. REMOVE PLUMBING FIXTURE AND RELATED PIPING.
  2. REMOVE ROOF DRAIN AND ROOF DRAIN PIPING.
  3. CRP SANITARY VENT THRU ROOF. REMOVE FLASHING WHERE VENT PENETRATES ROOF. NEW CONSTRUCTION AREAS ABOVE.
  4. EXPOSED PUMP DISCHARGE PIPING TO REMAIN.
  5. 4" SANITARY VENT THRU ROOF. REMOVE FLASHING WHERE VENT PENETRATES ROOF. NEW CONSTRUCTION AREAS ABOVE.
  6. ROOF DRAIN AND ROOF DRAIN PIPING TO REMAIN.
  7. DISCONNECT BRANCH ROOF DRAIN PIPING FROM MAIN. BRANCH PIPING TO REMAIN AND WILL BE CONNECTED TO NEW ROOF DRAIN PIPING.
  8. REMOVE HORIZONTAL PORTION OF ROOF DRAIN PIPING AND ELBOW TURNED 90 DEGREES TO NEW ROOF DRAIN PIPING. NEW CONSTRUCTION AREAS ABOVE.
  9. ROOF DRAIN PIPING TO REMAIN.
  10. SANITARY WASTE PIPING TO REMAIN.
  11. 4" H.V. AND R.W. PIPING TO REMAIN.
  12. REMOVE VERTICAL ROOF DRAIN PIPING CAP NEAR FLOOR.
  13. DISCONNECT SANITARY VENT TO ABOVE CEILING. VENT RISER UP TO REMAIN FOR RECONNECTION.
  14. SANITARY VENT PIPING TO REMAIN.
  15. PLUMBING FIXTURE AND PIPING TO REMAIN.
  16. REMOVE MEDICAL GAS PIPING.
  17. DISCONNECT MEDICAL GAS PIPING FROM HEAD WALL AT PATIENT BED.
  18. REMOVE MEDICAL GAS ZONE VALVES AND ASSOCIATED PIPING.
  19. REMOVE MEDICAL GAS PIPING TO POINT OF NEW CONNECTION.
  20. REMOVE MEDICAL GAS PIPING TO RISERS. CAP PIPING AT RISERS.
  21. REMOVE CARBON FILTER TANKS AND PIPING. SALVAGE TO BE INSTALLED IN A NEW LOCATION. LIFTING PUMP PIPING, VFD, AND CONTROLS. SALVAGE TO BE INSTALLED IN A NEW LOCATION.
  22. REMOVE STAND-PIPE WASTE AND RELATED PIPING.
  23. REMOVE 3/4" DUALYSIS WATER SUPPLY VALVE AND VACUUM BREAKER.
  24. REMOVE 1" DUALYSIS WATER BACK TO MAIN VALVE AND CAP.
  25. REMOVE HOSE BIBB AND RELATED PIPING.
  26. REMOVE VENT RISER UP/DOWN.
  27. DISCONNECT SANITARY WASTE TO ABOVE CEILING. WASTE RISER UP TO REMAIN FOR RECONNECTION.
  28. REMOVE WASTE RISER UP/DOWN.
  29. REMOVE VENT RISER UP.
  30. REMOVE S.W. D.H.W. UP/DOWN. RISERS ARE TO REMAIN UNTIL PIPING CONNECTIONS FROM NEW RISERS ARE MADE.
  31. REMOVE S.W. D.H.W. DOWN TO ABOVE CEILING. RISERS ARE TO REMAIN UNTIL PIPING CONNECTIONS FROM NEW RISERS ARE MADE FOR FOURTH FLOOR.
  32. REMOVE S.W. D.H.W. DOWN TO MAINS AND CAP. PIPING TO REMAIN UNTIL PIPING CONNECTIONS FROM NEW RISERS ARE MADE FOR FOURTH FLOOR.
  33. REMOVE S.W. D.H.W. DOWN TO MAINS AND CAP. PIPING TO REMAIN UNTIL PIPING CONNECTIONS FROM NEW RISERS ARE MADE FOR FOURTH FLOOR.
  34. REMOVE S.W. D.H.W. DOWN TO MAINS AND CAP. PIPING TO REMAIN UNTIL PIPING CONNECTIONS FROM NEW RISERS ARE MADE FOR FOURTH FLOOR.
  35. REMOVE S.W. D.H.W. DOWN TO MAINS AND CAP. PIPING TO REMAIN UNTIL PIPING CONNECTIONS FROM NEW RISERS ARE MADE FOR FOURTH FLOOR.
  36. REMOVE S.W. D.H.W. DOWN TO MAINS AND CAP. PIPING TO REMAIN UNTIL PIPING CONNECTIONS FROM NEW RISERS ARE MADE FOR FOURTH FLOOR.

NOTE: NOT ALL KEYNOTES MAY BE USED ON EACH PLAN.

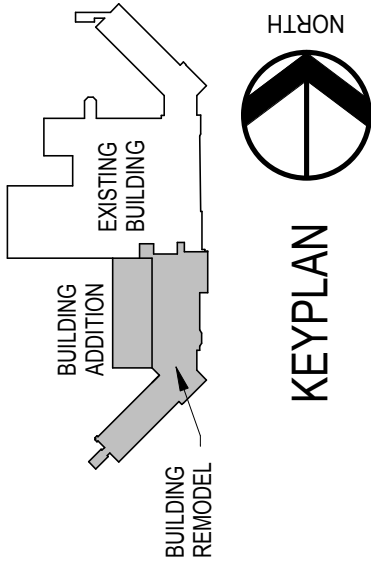

**1F** 1ST FLOOR PLUMBING DEMOLITION PLAN  
1/8" = 1'-0"

**FULLY SPRINKLERED**  
**100% CONSTRUCTION DOCUMENTS**

<b>CONSULTANTS:</b>	<b>ARCHITECTS/ENGINEERS:</b>	 TSP Inc. 1112 N. West Ave. Sioux Falls, SD 57104 phone: (605) 336-1160 fax: (605) 336-7926 www.tspinc.com To Solve. To Excel. Together.	 REGISTERED PROFESSIONAL ENGINEER STATE OF SOUTH DAKOTA NO. 0088 EXPIRATION DATE 8/06/2012 <i>John J. TSP</i>	<b>Drawing Title</b> 1ST FLOOR PLUMBING DEMOLITION PLAN	<b>Project Title</b> Sioux Falls VA Health Care System Acute Inpatient Medical Unit Addition and Renovation	<b>Project Number</b> 04-100987	<b>Building Number</b> 5	<b>Drawing Number</b> 5-PD101 Dwg. 60 of 123	<b>Office of Construction and Facilities Management</b> 			
										<b>Location</b> 1112 N. West Ave. Sioux Falls, SD 57104	<b>Checked</b> BSW	<b>Drawn</b> RAK
										<b>Date</b> 08/06/2012	<b>Approved: Project Director</b>	