


- 1 UNDERGROUND PVC CONDUIT (QTY AND SIZES AS INDICATED). SCHEDULE 40, RUN UNDERGROUND DIRECT BURIED. TYPICAL MINIMUM BURIAL DEPTH 36" BELOW FINISHED GRADE. PROVIDE CONTINUOUS WARNING TAPE OVER ALL BURIED CONDUIT AT 12" BELOW FINISH GRADE. INSTALL 3/8" MARKED PULL TAPE ALONG WITH REQUIRED CABLES.
- 2 TURN SCHED 40 PVC CONDUIT UP, SLEEVE AND SEAL FLOOR PENETRATION PER DIVISION SPECIFICATIONS. TERMINATE CONDUIT AT 18" A.F.F. WITH END BELL. PLUG UNUSED CONDUITS AND SLEEVE AROUND CABLES IN OTHERS.
- 3 COMMUNICATIONS HANDHOLE. SEE DETAILS.

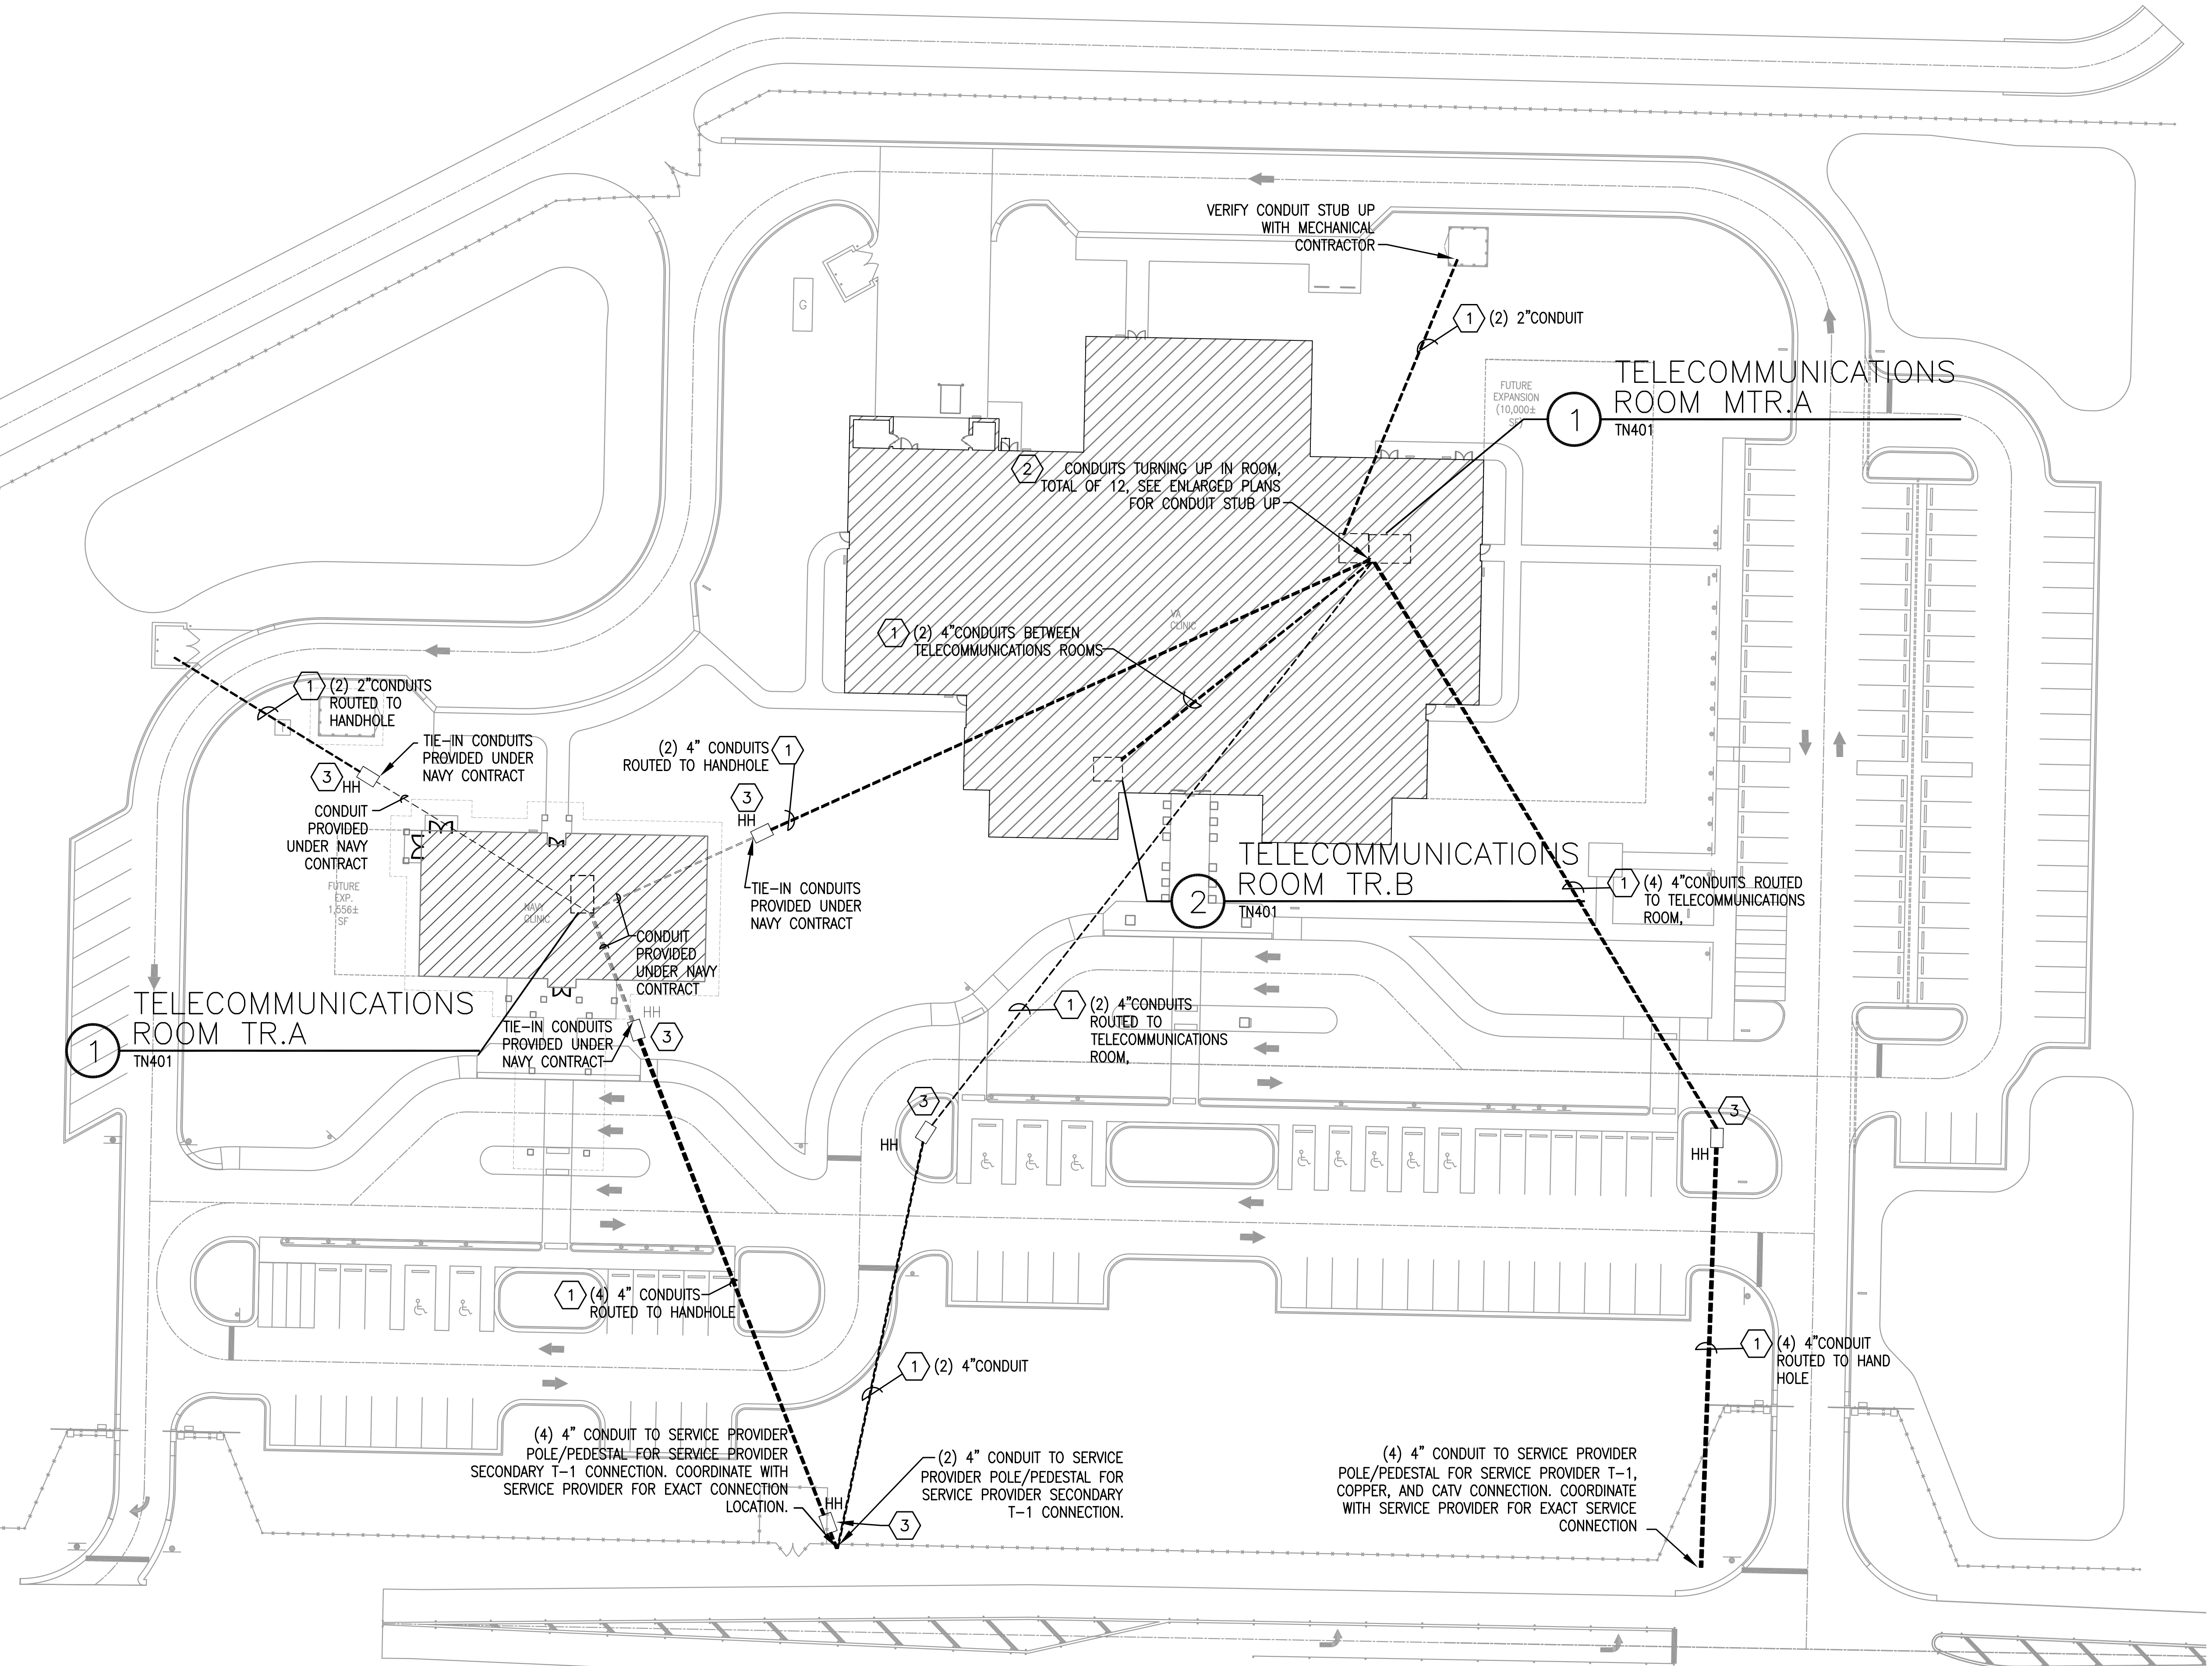

TELECOMMUNICATIONS SITE PLAN

[illegible]