

LIGHTING FIXTURE SCHEDULE				
TYPE	MANUFACTURER	CATALOG NO.	APPROVED SUBSTITUTE	REMARKS
A	LSI INDUSTRIES	PEC24-40-LED-40-W-120	RECESSED	LED 120
A1	LSI INDUSTRIES	PEC24-40-LED-55-W-120	RECESSED	LED 120
A2	LSI INDUSTRIES	PEC24-40-LED-55-W-120	RECESSED	LED 120
A3	LSI INDUSTRIES	PEC24-40-LED-55-W-120	RECESSED	LED 120
A4	LSI INDUSTRIES	25 PA12EX 2 U31 50 SSOR 120	RECESSED	LED 120
B	LSI INDUSTRIES	XR12-LED-48-300-W-120	RECESSED	LED 120
C	FOCAL POINT	F40-20-ED-135-120-R0-1-BH-14-R0-DN-CO-NP	RECESSED	LED 120
C1	FOCAL POINT	F40-13-ED-135-120-R0-1-BH-14-R0-DN-CO-NP	RECESSED	LED 120
C2	FOCAL POINT	F40-13-ED-135-120-R0-1-BH-14-R0-DN-CO-NP	RECESSED	LED 120
D	PEACHTREE	PROLED-6-35-W-C-WAL-W-VEERY FINISH WITH ARCHITECT	WALL	LED 120
D1	PEACHTREE	PROLED-6-35-W-C-WAL-W-VEERY FINISH WITH ARCHITECT	WALL	LED 120
D2	PEACHTREE	PROLED-6-35-W-C-WAL-W-VEERY FINISH WITH ARCHITECT	WALL	LED 120
E	BECA	4520 B BRZ	WALL	LED 120
G	WAC	HR-LED18-N-120V-SS-11W/HR-LED183-MT	RECESSED	LED 120
H	BIRCHWOOD LIGHTING	HAI-LED-125-HFZN-40-2-SC-FC-120-EB-RAS-40P-SC-6	WALL	LED 120
J	LOUIS POULSEN	PH5	PENDANT	LED 120
K	LSI INDUSTRIES	S-2-32-SS00-120	CHAN	LED 120
L	FOCAL POINT	F40-13-ED-135-120-R0-1-BH-14-R0-W-CD-NP	RECESSED	LED 120
M	BIRCHWOOD	JMK-LED-325-TL-HFZN-40-VEERY LENGTH-FW-120-D1	WALL/RECESSED	LED 120
N	VISA	Q3350 2LT13 PB ABA	WALL	LED 120
U	MERCURY	WP19-117-OC1-A-ELB-120	UNDERCOUNTER	LED 120
U1	MERCURY	WP19-125-OC1-A-ELB-120	UNDERCOUNTER	LED 120
U2	MERCURY	WP19-122-OC1-A-ELB-120	UNDERCOUNTER	LED 120
X	EVOLUTE	SOV-AC-R-1M-BL-BL-SW	WALL	LED 120
X1	EVOLUTE	SOV-AC-R-1M-BL-BL-SW	WALL	LED 120
X2	EVOLUTE	SOV-AC-R-2M-BL-BL-SL	END/WALL	LED 120
X3	EVOLUTE	SOV-AC-R-1M-BL-BL-SL	END/WALL	LED 120
X4	EVOLUTE	SOV-AC-R-1M-BL-BL-SL	WALL	LED 120

LIGHTING FIXTURE NOTES:

- PRIOR TO ORDERING ANY LIGHTING EQUIPMENT THE CONTRACTOR SHALL VERIFY THE LIGHTING EQUIPMENT IS COMPATIBLE WITH THE EXISTING ELECTRICAL SYSTEM.
- ALL LIGHTING FIXTURE FINISHES TO BE VERIFIED WITH ARCHITECT PRIOR TO ORDERING.
- VERIFY ACTUAL FIELD DIMENSIONS PRIOR TO ORDERING UNDERCOUNTER LIGHTING FIXTURES. FIXTURES SHALL BE INSTALLED UNDER THE ENTIRE LENGTH OF OVERHEAD CABINETS.
- VERIFY LENGTH IN FIELD FIXTURE SHALL EXTEND FROM FINISHED FLOOR TO CEILING



REDUCT ALTERNATE NO.5
STATE THE AMOUNT TO BE DEDUCTED FROM CONTRACT DOCUMENTS FOR USING THE LIGHTING FIXTURES INDICATED IN THE ALTERNATE LIGHTING FIXTURE SCHEDULE

ALTERNATE LIGHTING FIXTURE SCHEDULE				
TYPE	MANUFACTURER	CATALOG NO.	APPROVED SUBSTITUTE	REMARKS
A	FOCAL POINT	F40-24-AC-219H0-S-120-G1-WHA	RECESSED	LED 120
A1	FOCAL POINT	F40-24-AC-219-S-120-G1-WHA	RECESSED	LED 120
A2	FOCAL POINT	F40-22-AC-3-BKAC-S-120-G1-WHA	RECESSED	LED 120
A3	FOCAL POINT	F40-22-AC-3-BKAC-S-120-G1-WHA	RECESSED	LED 120
A4	LSI INDUSTRIES	ZS PA12EX 2 U31 50 SSOR 120	RECESSED	LED 120
B	LSI INDUSTRIES	LA125-2 U31-SB-SSOR-120	RECESSED	LED 120
C	ARCHITECTURAL STAR	AH6TE120U/AH105PCL	RECESSED	LED 120
C1	ARCHITECTURAL STAR	AH6TE120U/AH105PCL	RECESSED	LED 120
D	PEACHTREE	PO1632-C-1-WAL-W-VEERY FINISH WITH ARCHITECT	WALL	LED 120
D1	PEACHTREE	PO1632-C-1-WAL-W-VEERY FINISH WITH ARCHITECT	WALL	LED 120
D2	PEACHTREE	PO1632-C-1-WAL-W-VEERY FINISH WITH ARCHITECT	WALL	LED 120
E	BECA	4520 B BRZ	WALL	LED 120
G	WAC	B-F504-N-CO-R-502-MT-120	RECESSED	LED 120
H	BIRCHWOOD LIGHTING	HAI 125-TB-2-SC-FC-120-EB-RAS-40P-SC-6	WALL	LED 120
J	LOUIS POULSEN	PH5	PENDANT	LED 120
K	LSI INDUSTRIES	S-232-SS00-120	CHAN	LED 120
L	ARCHITECTURAL STAR	AH6TE120U/AH105PCL	WALL/RECESSED	LED 120
M	BIRCHWOOD	JMK-325-TL-TB-VEERY LENGTH-FW-120-HL-3	WALL	LED 120
N	VISA	Q3350 2LT13 PB ABA	WALL	LED 120
U	MERCURY	WP19-117-OC1-A-ELB-120	UNDERCOUNTER	LED 120
U1	MERCURY	WP19-125-OC1-A-ELB-120	UNDERCOUNTER	LED 120
U2	MERCURY	WP19-132-OC1-A-ELB-120	UNDERCOUNTER	LED 120
X	EVOLUTE	SOV-AC-R-1M-BL-BL-SW	WALL	LED 120
X1	EVOLUTE	SOV-AC-R-1M-BL-BL-SW	WALL	LED 120
X2	EVOLUTE	SOV-AC-R-2M-BL-BL-SL	END/WALL	LED 120
X3	EVOLUTE	SOV-AC-R-1M-BL-BL-SL	END/WALL	LED 120
X4	EVOLUTE	SOV-AC-R-1M-BL-BL-SL	WALL	LED 120

LIGHTING FIXTURE NOTES:

- ALL FLUORESCENT LAMPS SHALL HAVE A COLOR TEMPERATURE OF 4100K AND A COLOR RENDERING INDEX OF 85 MINIMUM.
- PRIOR TO ORDERING ANY LIGHTING EQUIPMENT THE CONTRACTOR SHALL VERIFY THE LIGHTING EQUIPMENT IS COMPATIBLE WITH THE EXISTING ELECTRICAL SYSTEM.
- VERIFY ACTUAL FIELD DIMENSIONS PRIOR TO ORDERING UNDERCOUNTER LIGHTING FIXTURES. FIXTURES SHALL BE INSTALLED UNDER THE ENTIRE LENGTH OF OVERHEAD CABINETS.
- VERIFY LENGTH IN FIELD FIXTURE SHALL EXTEND FROM FINISHED FLOOR TO CEILING
- VERIFY ACTUAL FIELD DIMENSIONS PRIOR TO ORDERING UNDERCOUNTER LIGHTING FIXTURES. FIXTURES SHALL BE INSTALLED UNDER THE ENTIRE LENGTH OF OVERHEAD CABINETS.

Drawings	Date
----------	------

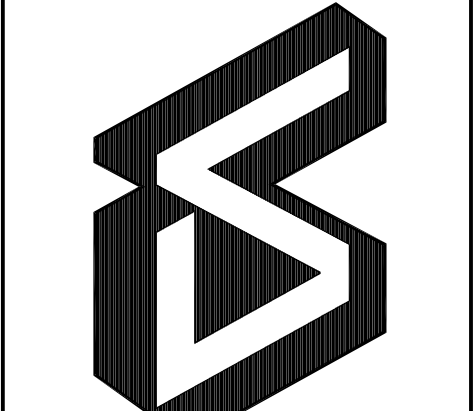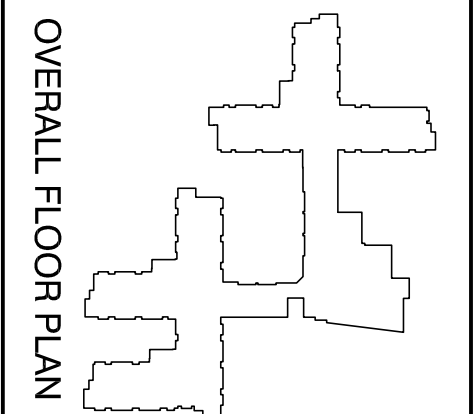

Department of Veterans Affairs
New Jersey Health Care System
151 Knollcroft Road
Lyons, New Jersey 07939



Architect Planning Interiors

BBLM Architects
892 Cherry Street
Pitts, PA 19107
(215) 625-2800

Pitts & Bange Associates, LLC
4220 Main Street
Philadelphia, PA 19127
(215) 908-9000

The Karpel Group
1218 Chestnut Street
Philadelphia, PA 19107
(215) 289-1994

CHROPER INC.
241 WILSON DRIVE
BIRMINGHAM, AL 35207
(205) 953-9000

Approved Chief Facilities Engineering Serv.
Approved Chief Executive Officer

Project Title
CLC SUPPORT SPACES
VAMC- LYONS

Drawn
SMR

Building Number
135

Contact Number
561-CSI-136

Date
2/05/13

Project No
1009

VETERANS ADMINISTRATION