



CONTRACTOR TO
DEPLOY EROSION CONTROL
FOR CONCRETE TO BE SLOPE
TO EXISTING ROAD

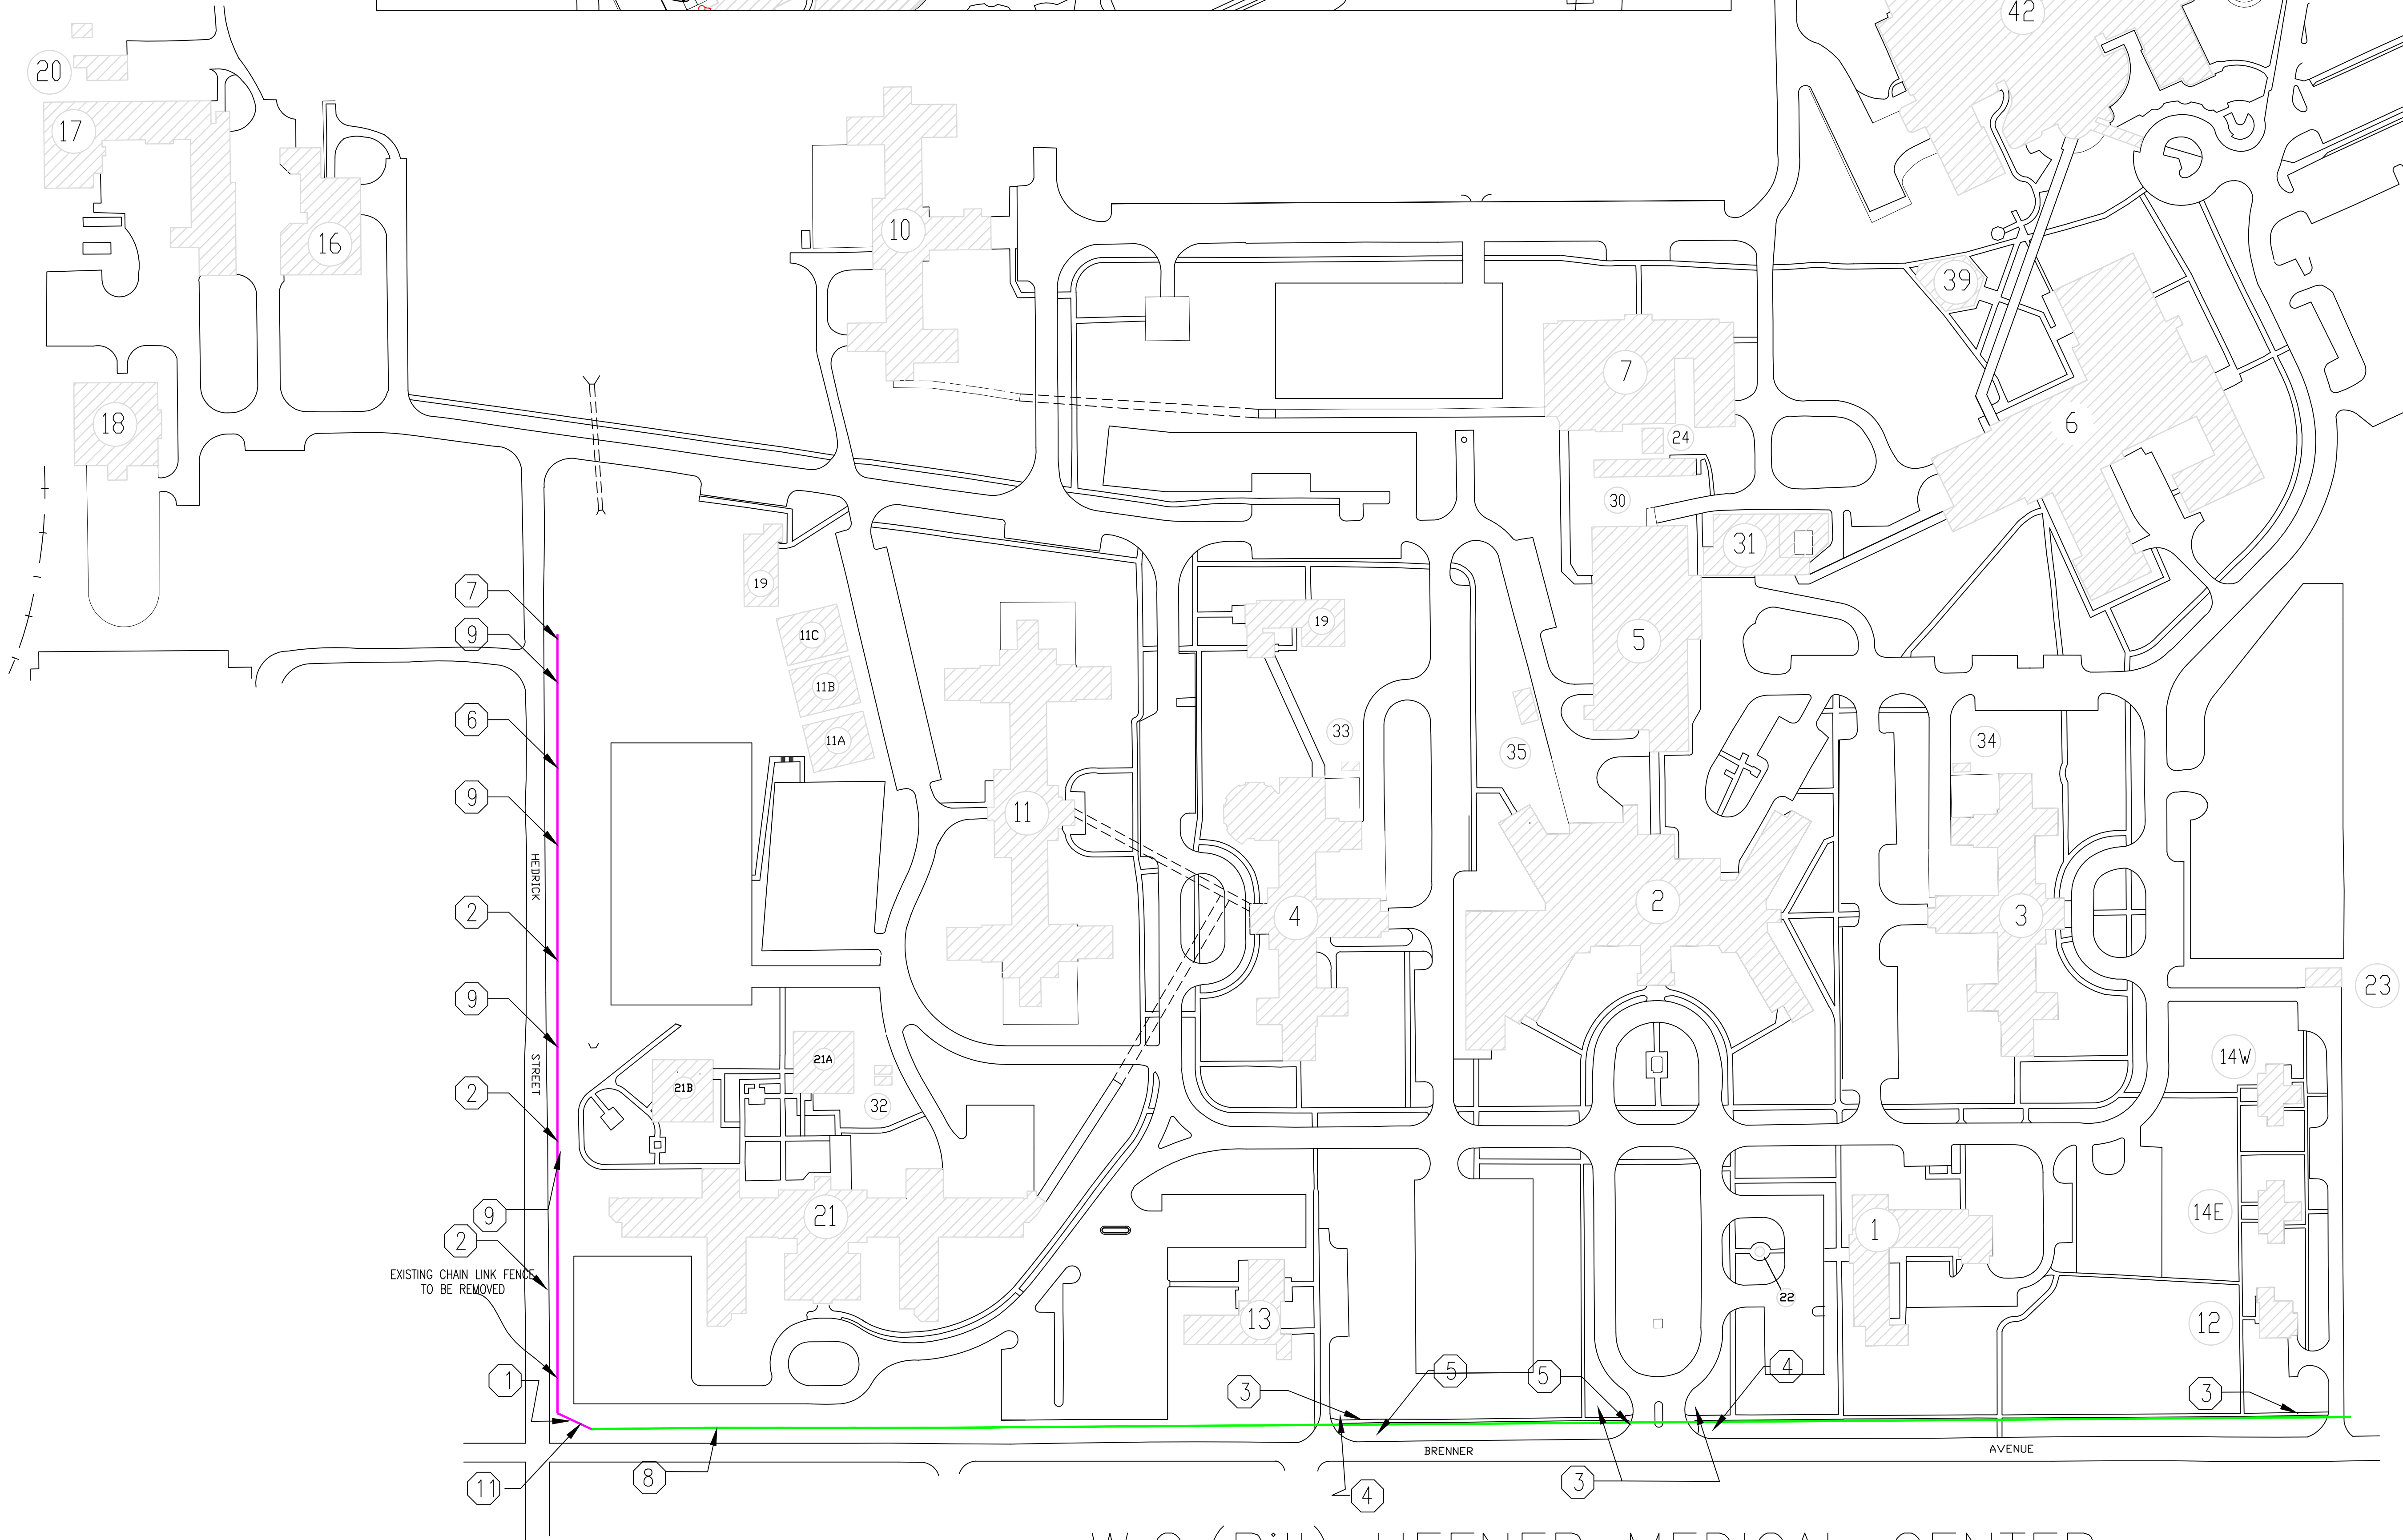

12. MATERIAL SHALL BE REMOVED FROM SITE. ROAD SHALL BE MECH. SWEEP AS REQUIRED TO KEEP DEBRIS ON THE ROAD WHILE MATERIAL IS BEING REMOVED. ONCE MATERIAL REMOVED CONTRACTOR TO GRADE AND SEED THE AREA. COORDINATE WITH COR.

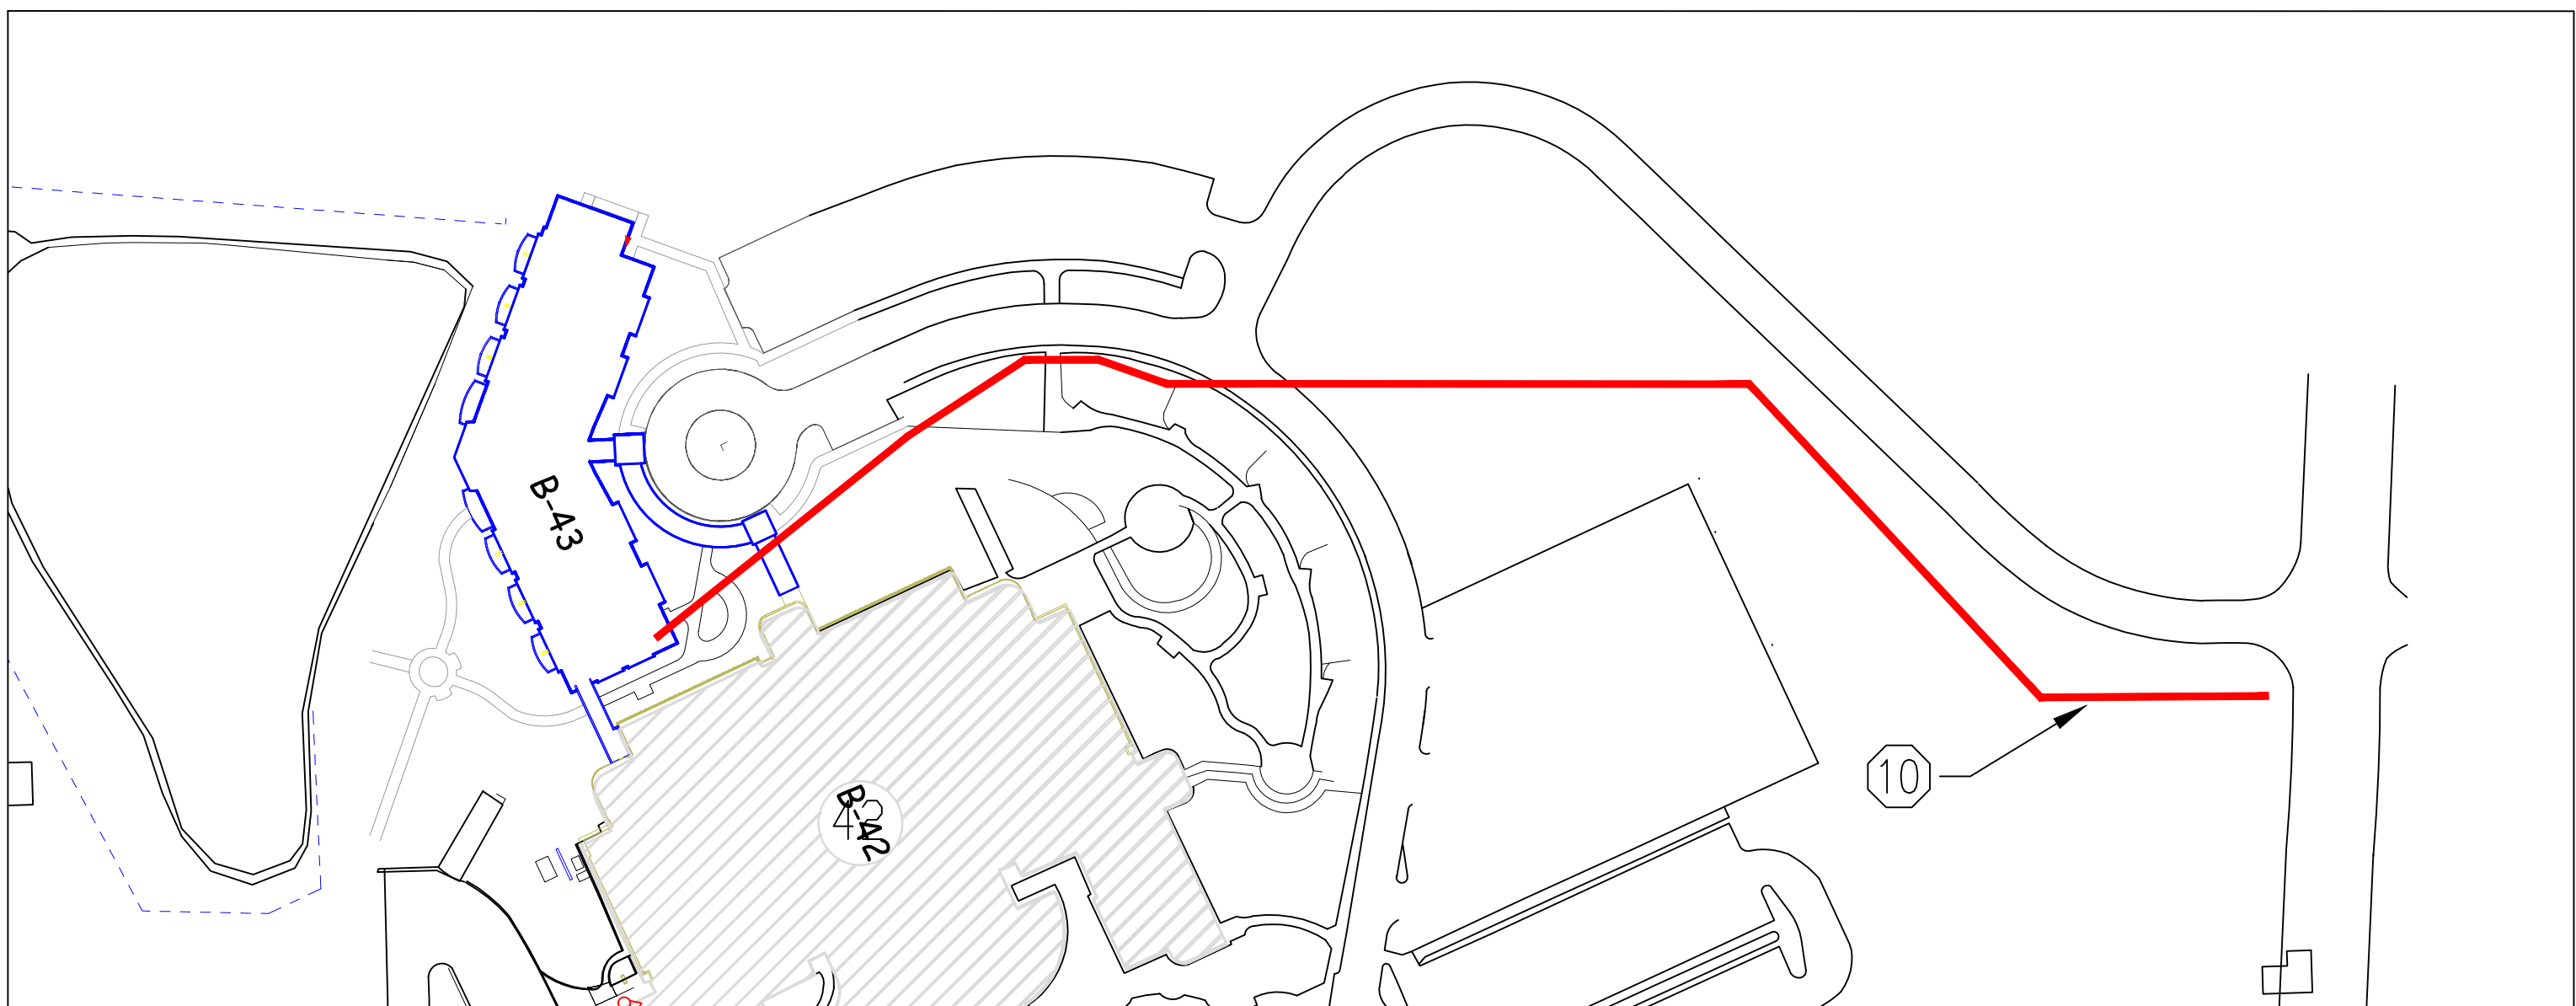

1. TIE-IN TO EXISTING FENCE AND REMOVE EXISTING FENCE THAT GOES BEYOND THE TIE-IN. COORDINATE LOCATION WITH COR.
2. FENCE SHALL BE INSTALLED WHERE EXISTING CHAIN LINK FENCE IS LOCATED AS NOT TO ENCROACH ONTO EXISTING RIGHT-OF-WAY AT HEDRICK AND STATESVILLE AVE.
3. AT EXISTING SLIDING GATES 48" TALL ORNAMENTAL FENCE SHALL BE INSTALLED WITH ON GATE FOR ACCESS TO THE GATER OPERATOR.
4. INSTALL DRAINAGE DITCH & REPAIR UNDERNEATH EXISTING MOW STRIP
5. INSTALL MOW STRIP UNDER EXISTING SLIDING GATE AND CONNECT TO EXISTING SIDEWALK
6. EXISTING DUKE POWER IN AREA: COORDINATE WITH DUKE POWER FOR UTILITY DETECTION
7. CONNECT FENCE TO EXISTING BRICK PILLARS.
8. CARD READER TO BE INSTALLED AT EXISTING MOW GATE & SHALL BE PIV 2 COMPLAINT AND SHALL BE INSTALLED PER MANUFACTURERS INSTRUCTIONS.
9. MOW GATE TO BE INSTALLED AS PER EXISTING MOW GATE WITH MIN OPENING OF 84". SEE STRUCTURAL DRAWINGS. NEW GATE SHALL BE PIV 2 COMPLAINT AND SHALL BE INSTALLED PER MANUFACTURERS INSTRUCTIONS.
9. CUT/FILL AS REQUIRED TO PROMOTE PROPER DRAINAGE FROM HEDRICK AND NEW FENCE WITH MOW STRIP.
10. CONTRACTOR TO RUN ELECTRICAL 2" ELECTRICAL CONDUIT AND POWER FOR STATESVILLE GATE. COORDINATE WITH COR FOR CONNECTING POWER TO THE STATESVILLE GATE OPERATOR.
11. DIGITAL SIGN WILL BE CONNECTED AS PER EXISTING DIGITAL SIGN LOCATED AT MAIN GATE TO THE SAME CONTROL STATION.
12. HAUL MATERIAL FROM VAMC CAMPUS AS PER GENERAL SPECIFICATION.

NOTES:

CONCRETE MOWING STRIP (4" DEPTH) TO BE INSTALLED BELOW/ALONG ENTIRE FENCE. THE CONCRETE MOWING STRIP SHALL HAVE A SLOPE OF 1/8 " PER FOOT. APPROXIMATE FENCE LENGTH (INCLUDING GATES) IS + OR - 1000 FEET. CONTRACTOR TO VERIFY TOTAL FENCE LENGTH.

CONTRACTOR SHALL REMOVE ALL SHRUBS, TREES, TREE STUMPS, OR ANY VEGETATION THAT IMPEDES ON PERIMETER FENCE OPERATIONS. SECTIONS OF EXISTING CONCRETE SIDEWALK ARE IN NEED OF REPAIR. CONTRACTOR TO VERIFY CONDITIONS AND REPLACE SIDEWALK IN NEED OF REPAIR.

ALL ELECTRICAL EXTERIOR RUNS SHALL BE IN-GROUND AND IN CONDUIT/PVC PER THE SPECIFICATIONS. SUBMIT METHODS, MATERIAL, AND LOCATION TO COR.

CONTRACTOR TO PERFORM UTILITIES DETECTION AND LOCATE BY SURVEYOR TO DEVELOP A DRAWING OF EXISTING UTILITIES TO SUBMIT TO THE GOVERNMENT IN ORDER TO OBTAIN A DIGGING PERMIT.

CONTRACTOR WILL PERFORM HIS OR HERS WORK BASE ON THE UTILITIES DETECTION MAP AND WILL TAKE FULL RESPONSIBILITY FOR ANY UTILITIES THAT ARE DISTURB OR DAMAGED.

CONTRACTOR TO PROVIDE ANY PERMITS NEEDED TO COMPLETE SCOPE OF WORK FROM CITY, AND/OR STATE AGENCIES.

W.G.(Bill) HEFNER MEDICAL CENTER

SCALE IS 1/8" = 1"

REVISION: CORRECT PAGE #	21 AUG 2013
Revision	Date

RECOMMEND APPROVAL			
REQUESTER	Date	CHIEF OF STAFF	Date
CHIEF OF SERVICE	Date	ASSOC. DIR. for OPERATIONS	Date
ASSOC. DIR. PATIENT CARE SVC.	Date		
APPROVAL BY:	Date		
MEDICAL CENTER DIRECTOR			

Drawing Title
WORK PLAN
Approved: Safety Manager/M&O Supervisor
Approved:Chief of Facilities Management Svr.

Project Title		
PERIMETER FENCE AND SECURITY GATE		
Building Number	Checked	Drawn
CAMPUS		BLF
Location	W.G.(Bill) Hefner Medical Center 1601 Brenner Ave. Salisbury NC 28144	

Date
30 APR 2013
Project No.
639-14-010
DRAWING NO.
A-101
DWG. 5 OF 10



Department of
Veterans Affairs