



## **Manhattan**

Department of Veteran Affairs  
Medical Center

## **RENOVATE WOMEN'S HEALTH CLINIC – 7 WEST**

Task Order: 630-11-009

LAA Project #: 1351-00

### **Project Manual**

VOLUME I - DIVISION 0 THROUGH 20

Bid Document

March, 2013



Lothrop Associates LLP Architects  
333 Westchester Ave, White Plains, NY, 10604

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**DEPARTMENT OF VETERANS AFFAIRS  
VHA MASTER SPECIFICATIONS**

**TABLE OF CONTENTS  
Section 00 01 10**

**VOLUME 1:**

	<b>DIVISION 00 - SPECIAL SECTIONS</b>
00 01 15	List of Drawing Sheets
	<b>DIVISION 01 - GENERAL REQUIREMENTS</b>
01 00 00	General Requirements
01 33 23	Shop Drawings, Product Data, and Samples
01 42 19	Reference Standards
01 45 29	Testing Laboratory Services
01 57 19	Temporary Environmental Controls
01 58 16	Temporary Interior Signage
01 74 19	Construction Waste Management
01 81 11	Sustainable Design Requirements
	<b>DIVISION 02 - EXISTING CONDITIONS</b>
02 41 00	Demolition
02 82 11	Traditional Asbestos Abatement
	<b>DIVISION 07 - THERMAL AND MOISTURE PROTECTION</b>
07 21 13	Thermal Insulation
07 84 00	Firestopping
07 92 00	Joint Sealants
	<b>DIVISION 08 - OPENINGS</b>
08 11 13	Hollow Metal Doors and Frames
08 14 00	Interior Wood Doors
08 17 10	Integrated Door Assemblies
08 31 13	Access Doors and Frames
08 71 00	Door Hardware
08 80 00	Glazing
	<b>DIVISION 09 - FINISHES</b>
09 06 00	Schedule for Finishes
09 22 16	Non-Structural Metal Framing
09 29 00	Gypsum Board
09 30 13	Ceramic/Porcelain Tiling

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

09 51 00	Acoustical Ceilings
09 65 13	Resilient Base and Accessories
09 65 16	Resilient Sheet Flooring
09 65 19	Resilient Tile Flooring
09 91 00	Painting
	<b>DIVISION 10 - SPECIALTIES</b>
10 21 23	Cubicle Curtain Tracks
	<b>DIVISION 12 - FURNISHINGS</b>
12 24 00	Window Shades
12 32 00	Manufactured Wood Casework
	<b>DIVISION 13 - SPECIAL CONSTRUCTION</b>
13 05 41	Seismic Restraint Requirements for Non-Structural Components
<b>VOLUMN 2:</b>	
	<b>DIVISION 21- FIRE SUPPRESSION</b>
21 05 11	Common Work Results for Fire Suppression
21 08 00	Commissioning of Fire Suppression System
21 10 00	Water-Based Fire-Suppression Systems
21 13 13	Wet-Pipe Sprinkler Systems
	<b>DIVISION 22 - PLUMBING</b>
22 05 11	Common Work Results for Plumbing
22 07 11	Plumbing Insulation
22 08 00	Commissioning of Plumbing Systems
22 11 00	Facility Water Distribution
22 13 00	Facility Sanitary and Vent Piping
22 40 00	Plumbing Fixtures
	<b>DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)</b>
23 05 11	Common Work Results for HVAC
23 05 12	General Motor Requirements for HVAC and Steam Generation Equipment
23 05 41	Noise and Vibration Control for HVAC Piping and Equipment
23 05 93	Testing, Adjusting, and Balancing for HVAC
23 07 11	HVAC and Boiler Plant Insulation
23 08 00	Commissioning of HVAC
23 09 23	Direct-Digital Control System for HVAC
23 21 13	Hydronic Piping

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

23 31 00	HVAC Ducts and Casings
23 37 00	Air Outlets and Inlets
23 82 00	Convection Heating and Cooling Units
23 82 16	Air Coils
	<b>DIVISION 26 - ELECTRICAL</b>
26 05 11	Requirements for Electrical Installations
26 05 21	Low-Voltage Electrical Power Conductors and Cables (600 Volts and Below)
26 05 26	Grounding And Bonding For Electrical Systems
26 05 33	Raceways And Boxes for Electrical Systems
26 08 00	Commissioning
26 24 16	Panel Boards
26 27 26	Wiring Devices
26 29 11	Motor Starters
26 29 21	Disconnect Switches
26 51 00	Interior Lighting
	<b>DIVISION 27 - COMMUNICATIONS</b>
27 05 11	Requirements for Communications Installations
27 05 33	Raceways and Boxes for Communications Systems
	<b>DIVISION 28 - FIRE ALARM</b>
28 05 13	Conductors/Cables For Electronic Safety/Security
28 31 00	Fire Detection and Alarm

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 00 01 15  
LIST OF DRAWING SHEETS**

The drawings listed below accompanying this specification form a part of  
the contract.

<u>Drawing No.</u>	<u>Title</u>
<b>ARCHITECTURAL</b>	
G1001	COVER SHEET
G1101	LIFE SAFETY PLAN
G1102	PHASING PLAN
AD 100	BUILDING 1-7 <sup>TH</sup> FLOOR WEST DEMOLITION PLAN
AE 102	BUILDING 1-7 <sup>TH</sup> FLOOR WEST CONSTRUCTION PLAN
AE 103	BUILDING 1-7 <sup>TH</sup> FLOOR WEST REFLECTED CEILING PLAN
AE 104	BUILDING 1-7 <sup>TH</sup> FLOOR WEST FURNITURE AND EQUIPMENT PLAN
AE 501	BUILDING 1-7 <sup>TH</sup> FLOOR WEST DETAILS
AE 502	BUILDING 1-7 <sup>TH</sup> FLOOR WEST DETAILS
AF 101	BUILDING 1-7 <sup>TH</sup> FLOOR WEST FINISH PLAN
<b>ASBESTOS ABATEMENT</b>	
HA101	6TH FLOOR ASBESTOS REMOVAL PLAN
HA102	7TH FLOOR ASBESTOS REMOVAL PLAN
HA501	ASBESTOS REMOVAL DETAIL
<b>FIRE PROTECTION</b>	
F-000.00	FIRE PROTECTION LEGEND AND NOTES
FD-101.00	7 <sup>TH</sup> FLOOR WEST FIRE PROTECTION DEMOLITION PLANS
FX-101.00	7 <sup>TH</sup> FLOOR WEST FIRE PROTECTION CONSTRUCTION PLAN
F-200.00	FIRE PROTECTION RISER DIAGRAM
FX-500.00	FIRE PROTECTION DETAILS AND NOTES
<b>PLUMBING</b>	
P-000.00	PLUMBING LEGEND AND NOTES
PD-101.00	7 <sup>TH</sup> FLOOR WEST PLUMBING DEMOLITION PLAN

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

PP-101.00	7 <sup>TH</sup> FLOOR WEST PLUMBING CONSTRUCTION PLAN
P-200.00	PLUMBING RISER DIAGRAMS
P-500.00	PLUMBING DETAILS AND SCHEDULES

**MECHANICAL**

M-000.00	MECHANICAL LEGEND AND NOTES
MD-101.00	7 <sup>TH</sup> FLOOR WEST MECHANICAL DEMOLITION PLAN
MH-101.00	7 <sup>TH</sup> FLOOR WEST MECHANICAL CONSTRUCTION PLAN
MP-101.00	7 <sup>TH</sup> FLOOR WEST MECHANICAL PIPING PLAN
M-200	MECHANICAL SCHEDULES
M-500	MECHANICAL DETAILS

**ELECTRICAL**

E-000.00	ELECTRICAL LEGEND, NOTES AND DETAILS
ED-101.00	7 <sup>TH</sup> FLOOR WEST ELECTRICAL LIGHTING DEMOLITION PLAN
ED-102.00	7 <sup>TH</sup> FLOOR WEST ELECTRICAL POWER DEMOLITION PLAN
E-201.00	7 <sup>TH</sup> FLOOR WEST ELECTRICAL LIGHTING CONSTRUCTION PLAN
E-202.00	7 <sup>TH</sup> FLOOR WEST ELECTRICAL POWER CONSTRUCTION PLAN
E-203.00	7 <sup>TH</sup> FLOOR WEST ELECTRICAL RISER AND SCHEDULE

**FIRE ALARM**

FAD-101.00	7 <sup>TH</sup> FLOOR WEST FIRE ALARM DEMOLITION PLAN
FA-101.00	7 <sup>TH</sup> FLOOR FIRE ALARM CONSTRUCTION PLAN
FA-201.00	FIRE ALARM RISER DIAGRAM AND SYMBOLS

- - - END - - -

Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

SECTION 01 00 00  
GENERAL REQUIREMENTS

TABLE OF CONTENTS

1.1 GENERAL INTENTION.....	1
1.2 STATEMENT OF BID ITEM(S).....	2
1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR.....	3
1.4 CONSTRUCTION SECURITY REQUIREMENTS.....	3
1.5 FIRE SAFETY.....	5
1.6 OPERATIONS AND STORAGE AREAS.....	8
1.7 ALTERATIONS.....	13
1.8 INFECTION PREVENTION MEASURES.....	15
1.9 DISPOSAL AND RETENTION.....	18
1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS.....	18
1.11 RESTORATION.....	19
1.12 PHYSICAL DATA.....	20
1.13 PROFESSIONAL SURVEYING SERVICES.....	20
1.14 LAYOUT OF WORK.....	20
1.15 AS-BUILT DRAWINGS.....	20
1.16 USE OF ROADWAYS.....	21
1.17 RESIDENT ENGINEER'S FIELD OFFICE.....	21
1.18 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.....	24
1.19 TEMPORARY USE OF EXISTING ELEVATORS.....	25
1.20 TEMPORARY USE OF NEW ELEVATORS.....	26
1.21 TEMPORARY TOILETS.....	26
1.22 AVAILABILITY AND USE OF UTILITY SERVICES.....	26
1.23 NEW TELEPHONE EQUIPMENT.....	28
1.24 TESTS.....	28
1.25 INSTRUCTIONS.....	29
1.26 GOVERNMENT-FURNISHED PROPERTY.....	30
1.27 RELOCATED EQUIPMENT and ITEMS .....	31
1.28 STORAGE SPACE FOR DEPARTMENT OF VETERANS AFFAIRS EQUIPMENT.....	32
1.29 CONSTRUCTION SIGN.....	32
1.30 SAFETY SIGN.....	33
1.31 PHOTOGRAPHIC DOCUMENTATION.....	34
1.32 FINAL ELEVATION Digital Images.....	33
1.33 HISTORIC PRESERVATION.....	33
1.34 SPECIAL REQUIREMENTS.....	34

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 01 00 00  
GENERAL REQUIREMENTS**

**1.1 GENERAL INTENTION**

- A. Contractor shall completely prepare site for building operations, including demolition and removal of existing structures, and furnish labor and materials and perform work to Renovate Women's Health Clinic - 7 West as required by drawings and specifications.
- B. Visits to the site by Bidders may be made only by appointment with the Medical Center Engineering Officer.
- C. Offices of Lothrop Associates LLP Architects as Architect-Engineers, will render certain technical services during construction. Such services shall be considered as advisory to the Government and shall not be construed as expressing or implying a contractual act of the Government without affirmations by Contracting Officer or his duly authorized representative.
- D. Before placement and installation of work subject to tests by testing laboratory retained by Department of Veterans Affairs, the Contractor shall notify the Resident Engineer in sufficient time to enable testing laboratory personnel to be present at the site in time for proper taking and testing of specimens and field inspection. Such prior notice shall be not less than three work days unless otherwise designated by the Resident Engineer.
- E. All employees of general contractor and subcontractors shall comply with VA security management program and obtain permission of the VA police, be identified by project and employer, and restricted from unauthorized access.
- F. Prior to commencing work, general contractor shall provide proof that a OSHA certified "competent person" (CP) (29 CFR 1926.20(b)(2)) will maintain a presence at the work site whenever the general or subcontractors are present.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**G. Training:**

1. All employees of general contractor or subcontractors shall have the 10-hour OSHA certified Construction Safety course and /or other relevant competency training, as determined by VA CP with input from the ICRA team.
2. Submit training records of all such employees for approval before the start of work.

**1.2 STATEMENT OF BID ITEM(S)**

ITEM I, GENERAL CONSTRUCTION: Work includes general construction, alterations, mechanical and electrical work, utility systems, necessary removal of existing furniture, equipment, structures and construction and certain items as per drawings and specifications. Base Bid shall include the following, but not limited to:

1. 8 Neuro resident exam rooms (exam rooms #1 to #8)
2. 1 patient closet
3. 1 clean utility room
4. 1 soil utility room
5. 1 house-keeping room
6. 1 storage room
7. 1 electric closet
8. 1 male patient bathroom
9. 1 female patient bathroom
10. 1 Pain NP exam rooms (#9)
11. 16 patients waiting/reception room
12. 1 male staff bathroom
13. 1 female staff bathroom
14. 1 Pain NP exam rooms (#10)
15. 2 nurse offices/exam rooms (11 & 12)
16. 2 staff offices
17. 1 Preceptor room

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

18. 1 male lockers room
19. 1 female lockers room
20. Close hall-door for room 7033W add new door at west wall
21. Remove furniture, paint door frames, interior walls and ceilings for rooms 7024BW and 7026W
22. Replace main corridor ceiling tiles, T-Grid, light fixtures, floor tiles and cove bases with new or approved equal
23. 1 pair of fire-rated door, hardware, fire alarm wiring and testing
24. Asbestos abatement
25. Remove and dispose existing old furniture and equipment in Medical Media area to be identified by the Resident Engineer/COR

B. ALTERNATE NO.1: Include all base bid except, delete work for main corridor (item 22).

**1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR**

- A. AFTER AWARD OF CONTRACT, 3 sets of specifications and drawings will be furnished. These drawings and specifications will consist of those returned by prospective bidders.
- B. Additional sets of drawings may be made by the Contractor, at Contractor's expense, from reproducible sepia prints furnished by Issuing Office. Such sepia prints shall be returned to the Issuing Office immediately after printing is completed.

**1.4 CONSTRUCTION SECURITY REQUIREMENTS**

- A. Security Plan:
  1. The security plan defines both physical and administrative security procedures that will remain effective for the entire duration of the project.
  2. The General Contractor is responsible for assuring that all sub-contractors working on the project and their employees also comply with these regulations.
- B. Security Procedures:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. General Contractor's employees shall not enter the project site without appropriate badge. They may also be subject to inspection of their personal effects when entering or leaving the project site.
2. For working outside the "regular hours" as defined in the contract, The General Contractor shall give 3 days notice to the Contracting Officer so that security arrangements can be provided for the employees. This notice is separate from any notices required for utility shutdown described later in this section.
3. No photography of VA premises is allowed without written permission of the Contracting Officer.
4. VA reserves the right to close down or shut down the project site and order General Contractor's employees off the premises in the event of a national emergency. The General Contractor may return to the site only with the written approval of the Contracting Officer.

**C. Guards:**

1. The General Contractor shall provide unarmed guards at the project site after construction hours.
2. The guard shall have communication devices to report events as directed by VA police.
3. The general Contractor shall install equipment for recording guard rounds to ensure systematic checking of the premises.

**D. Key Control:**

1. The General Contractor shall provide duplicate keys and lock combinations to the Resident Engineer for the purpose of security inspections of every area of project including tool boxes and parked machines and take any emergency action.
2. The General Contractor shall turn over all permanent lock cylinders to the VA locksmith for permanent installation. See Section 08 71 00, DOOR HARDWARE and coordinate.

**E. Document Control:**

1. Before starting any work, the General Contractor/Sub Contractors shall submit an electronic security memorandum describing the approach to following goals and maintaining confidentiality of "sensitive information".
2. The General Contractor is responsible for safekeeping of all drawings, project manual and other project information. This

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

information shall be shared only with those with a specific need to accomplish the project.

4. Certain documents, sketches, videos or photographs and drawings may be marked "Law Enforcement Sensitive" or "Sensitive Unclassified". Secure such information in separate containers and limit the access to only those who will need it for the project. Return the information to the Contracting Officer upon request.
5. These security documents shall not be removed or transmitted from the project site without the written approval of Contracting Officer.
6. All paper waste or electronic media such as CD's and diskettes shall be shredded and destroyed in a manner acceptable to the VA.
7. Notify Contracting Officer and Site Security Officer immediately when there is a loss or compromise of "sensitive information".
8. All electronic information shall be stored in specified location following VA standards and procedures using an Engineering Document Management Software (EDMS).
  - a. Security, access and maintenance of all project drawings, both scanned and electronic shall be performed and tracked through the EDMS system.
  - b. "Sensitive information" including drawings and other documents may be attached to e-mail provided all VA encryption procedures are followed.

**F. Motor Vehicle Restrictions**

1. Vehicle authorization request shall be required for any vehicle entering the site and such request shall be submitted 24 hours before the date and time of access. Access shall be restricted to picking up and dropping off materials and supplies.
2. Separate permits shall be issued for General Contractor and its employees for parking in designated areas only.

**1.5 FIRE SAFETY**

- A. Applicable Publications: Publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. American Society for Testing and Materials (ASTM):  
E84-2009.....Surface Burning Characteristics of Building  
Materials
2. National Fire Protection Association (NFPA):  
10-2010.....Standard for Portable Fire Extinguishers  
30-2008.....Flammable and Combustible Liquids Code  
51B-2009.....Standard for Fire Prevention During Welding,  
Cutting and Other Hot Work  
70-2011.....National Electrical Code  
241-2009.....Standard for Safeguarding Construction,  
Alteration, and Demolition Operations
3. Occupational Safety and Health Administration (OSHA):  
29 CFR 1926.....Safety and Health Regulations for Construction
- B. Fire Safety Plan: Establish and maintain a fire protection program in  
accordance with 29 CFR 1926. Prior to start of work, prepare a plan  
detailing project-specific fire safety measures, including periodic  
status reports, and submit to Project Engineer and Facility Safety  
Officer for review for compliance with contract requirements in  
accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND  
SAMPLES Prior to any worker for the contractor or subcontractors  
beginning work, they shall undergo a safety briefing provided by the  
general contractor's competent person per OSHA requirements. This  
briefing shall include information on the construction limits, VAMC  
safety guidelines, means of egress, break areas, work hours, locations  
of restrooms, use of VAMC equipment, etc. Documentation shall be  
provided to the Resident Engineer that individuals have undergone  
contractor's safety briefing.
- C. Site and Building Access: Maintain free and unobstructed access to  
facility emergency services and for fire, police and other emergency  
response forces in accordance with NFPA 241.
- D. Separate temporary facilities, such as trailers, storage sheds, and  
dumpsters, from existing buildings and new construction by distances in  
accordance with NFPA 241. For small facilities with less than 6 m (20  
feet) exposing overall length, separate by 3m (10 feet)
- E. Temporary Construction Partitions:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. Install and maintain temporary construction partitions to provide smoke-tight separations between construction areas and adjoining areas. Construct partitions of gypsum board or treated plywood (flame spread rating of 25 or less in accordance with ASTM E84) on both sides of fire retardant treated wood or metal steel studs. Extend the partitions through suspended ceilings to floor slab deck or roof. Seal joints and penetrations. At door openings, install Class C, ¾ hour fire/smoke rated doors with self-closing devices.
  2. Install one-hour or two-hour fire-rated temporary construction partitions as may be required, or as shown on drawings to maintain integrity of existing exit stair enclosures, exit passageways, fire-rated enclosures of hazardous areas, horizontal exits, smoke barriers, vertical shafts and openings enclosures.
  3. Close openings in smoke barriers and fire-rated construction to maintain fire ratings. Seal penetrations with listed through-penetration firestop materials in accordance with Section 07 84 00, FIRESTOPPING.
- F. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70.
- G. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with Project Engineer and facility Safety Officer.
- H. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to Project Engineer and facility Safety Officer.
- I. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.
- J. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.
- K. Standpipes: DELETED
- L. Sprinklers: Install, test and activate new automatic sprinklers prior to removing existing sprinklers.
- M. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate with Project Engineer and facility Safety Officer. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the medical center. Parameters for the testing and results of any tests performed shall be recorded by the medical center and copies provided to the Resident Engineer.

- N. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with Project Engineer and facility Safety Officer.
- O. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with Project Engineer. Obtain permits from facility Safety Officer at least 48 hours in advance.
- P. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to Project Engineer and facility Safety Officer.
- Q. Smoking: Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction. In separate and detached buildings under construction, smoking is prohibited except in designated smoking rest areas.
- R. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.
- S. Perform other construction, alteration and demolition operations in accordance with 29 CFR 1926.
- T. If required, submit documentation to the Resident Engineer that personnel have been trained in the fire safety aspects of working in areas with impaired structural or compartmentalization features.

**1.6 OPERATIONS AND STORAGE AREAS**

- A. The Contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The Contractor shall hold and save the Government,

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

its officers and agents, free and harmless from liability of any nature occasioned by the Contractor's performance.

- B. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the Contracting Officer and shall be built with labor and materials furnished by the Contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work. With the written consent of the Contracting Officer, the buildings and utilities may be abandoned and need not be removed.
- C. The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads.
- D. Working space and space available for storing materials shall be as determined by the Resident Engineer.
- E. Workmen are subject to rules of Medical Center applicable to their conduct. In addition, the contractor shall execute work in such a manner as to interfere as little as possible with work being done by others. Keep roads clear of construction materials, debris, standing construction equipment and vehicles at all times.
- F. Execute work so as to interfere as little as possible with normal functioning of Medical Center as a whole, including operations of utility services, fire protection systems and any existing equipment, and with work being done by others. Use of equipment and tools that transmit vibrations and noises through the building structure, are not permitted in buildings that are occupied, during construction, jointly



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

by patients or medical personnel, and Contractor's personnel, except as permitted by Resident Engineer where required by limited working space.

1. Do not store materials and equipment in other than assigned areas.
2. Schedule delivery of materials and equipment to immediate construction working areas within buildings in use by Department of Veterans Affairs in quantities sufficient for not more than two work days. Provide unobstructed access to Medical Center areas required to remain in operation.
3. Where access by Medical Center personnel to vacated portions of buildings is not required, storage of Contractor's materials and equipment will be permitted subject to fire and safety requirements.

F'. Utilities Services: Where necessary to cut existing pipes, electrical wires, conduits, cables, etc., of utility services, or of fire protection systems or communications systems (except telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by Resident Engineer. All such actions shall be coordinated with the Utility Company involved:

1. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.

G. Phasing: To insure such executions, Contractor shall furnish the Resident Engineer with a schedule of approximate phasing dates on which the Contractor intends to accomplish work in each specific area of site, building or portion thereof. In addition, Contractor shall notify the Resident Engineer two weeks in advance of the proposed date of starting work in each specific area of site, building or portion thereof. Arrange such phasing dates to insure accomplishment of this work in successive phases mutually agreeable to Medical Center Director, Resident Engineer and Contractor, as follows:

**Phase I:**

**Phase II:**

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- H. The entire building and adjacent departments and areas of the building will be occupied during performance of work, but immediate areas of alterations will be vacated.
1. Contractor shall take all measures and provide all material necessary for protecting existing equipment and property in affected areas of construction against dust and debris, so that equipment and affected areas to be used in the Medical Centers operations will not be hindered. Contractor shall permit access to Department of Veterans Affairs personnel and patients through other construction areas which serve as routes of access to such affected areas and equipment. Coordinate alteration work in areas occupied by Department of Veterans Affairs so that Medical Center operations will continue during the construction period.
  2. Immediate areas of alterations not mentioned in preceding Subparagraph 1 will be temporarily vacated while alterations are performed.
- I. Construction Fence: Before construction operations begin, Contractor shall provide a chain link construction fence, 2.1m (seven feet) minimum height, around the construction area indicated on the drawings. Provide gates as required for access with necessary hardware, including hasps and padlocks. Fasten fence fabric to terminal posts with tension bands and to line posts and top and bottom rails with tie wires spaced at maximum 375mm (15 inches). Bottom of fences shall extend to 25mm (one inch) above grade. Remove the fence when directed by Resident Engineer.
- J. When a building is turned over to Contractor, Contractor shall accept entire responsibility therefore.
1. Contractor shall maintain a minimum temperature of 4 degrees C (40 degrees F) at all times, except as otherwise specified.
  2. Contractor shall maintain in operating condition existing fire protection and alarm equipment. In connection with fire alarm equipment, Contractor shall make arrangements for pre-inspection of site with Fire Department or Company (Department of Veterans Affairs or municipal) whichever will be required to respond to an alarm from Contractor's employee or watchman.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- K. Utilities Services: Maintain existing utility services for Medical Center at all times. Provide temporary facilities, labor, materials, equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems (including telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by Resident Engineer.
1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted without prior approval of Resident Engineer. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished, work on any energized circuits or equipment shall not commence without the Medical Center Director's prior knowledge and written approval. Refer to specification Sections 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS and 28 05 11, REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATIONS for additional requirements.
  2. Contractor shall submit a request to interrupt any such services to Resident Engineer, in writing, 48 hours in advance of proposed interruption. Request shall state reason, date, exact time of, and approximate duration of such interruption.
  3. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations of Medical Center. Interruption time approved by Medical Center may occur at other than Contractor's normal working hours.
  4. Major interruptions of any system must be requested, in writing, at least 15 calendar days prior to the desired time and shall be performed as directed by the Resident Engineer.
  5. In case of a contract construction emergency, service will be interrupted on approval of Resident Engineer. Such approval will be confirmed in writing as soon as practical.
  6. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.
- L. Abandoned Lines: All service lines such as wires, cables, conduits, ducts, pipes and the like, and their hangers or supports, which are to be abandoned but are not required to be entirely removed, shall be sealed, capped or plugged. The lines shall not be capped in finished areas, but shall be removed and sealed, capped or plugged in ceilings, within furred spaces, in unfinished areas, or within walls or partitions; so that they are completely behind the finished surfaces.
- M. To minimize interference of construction activities with flow of Medical Center traffic, comply with the following:
1. Keep roads, walks and entrances to grounds, to parking and to occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles. Wherever excavation for new utility lines cross existing roads, at least one lane must be open to traffic at all times.
  2. Method and scheduling of required cutting, altering and removal of existing roads, walks and entrances must be approved by the Resident Engineer.
- N. Coordinate the work for this contract with other construction operations as directed by Resident Engineer. This includes the scheduling of traffic and the use of roadways, as specified in Article, USE OF ROADWAYS.
- O. DELETED

**1.7 ALTERATIONS**

- A. Survey: Before any work is started, the Contractor shall make a thorough survey with the Resident Engineer and a representative of VA Supply Service, of areas of buildings in which alterations occur and areas which are anticipated routes of access, and furnish a report, signed by all three to the Contracting Officer. This report shall list by rooms and spaces:
1. Existing condition and types of resilient flooring, doors, windows, walls and other surfaces not required to be altered throughout affected areas of the building.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. Existence and conditions of items such as plumbing fixtures and accessories, electrical fixtures, equipment, venetian blinds, shades, etc., required by drawings to be either reused or relocated, or both.
  3. Shall note any discrepancies between drawings and existing conditions at site.
  4. Shall designate areas for working space, materials storage and routes of access to areas within buildings where alterations occur and which have been agreed upon by Contractor and Resident Engineer.
- B. Any items required by drawings to be either reused or relocated or both, found during this survey to be nonexistent, or in opinion of Resident Engineer to be in such condition that their use is impossible or impractical, shall be furnished and/or replaced by Contractor with new items in accordance with specifications which will be furnished by Government. Provided the contract work is changed by reason of this subparagraph B, the contract will be modified accordingly, under provisions of clause entitled "DIFFERING SITE CONDITIONS" (FAR 52.236-2) and "CHANGES" (FAR 52.243-4 and VAAR 852.236-88).
- C. Re-Survey: Thirty days before expected partial or final inspection date, the Contractor and Resident Engineer together shall make a thorough re-survey of the areas of buildings involved. They shall furnish a report on conditions then existing, of resilient flooring, doors, windows, walls and other surfaces as compared with conditions of same as noted in first condition survey report:
1. Re-survey report shall also list any damage caused by Contractor to such flooring and other surfaces, despite protection measures; and, will form basis for determining extent of repair work required of Contractor to restore damage caused by Contractor's workmen in executing work of this contract.
- D. Protection: Provide the following protective measures:
1. Wherever existing roof surfaces are disturbed they shall be protected against water infiltration. In case of leaks, they shall be repaired immediately upon discovery.
  2. Temporary protection against damage for portions of existing structures and grounds where work is to be done, materials handled and equipment moved and/or relocated.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3. Protection of interior of existing structures at all times, from damage, dust and weather inclemency. Wherever work is performed, floor surfaces that are to remain in place shall be adequately protected prior to starting work, and this protection shall be maintained intact until all work in the area is completed.

**1.8 INFECTION PREVENTION MEASURES**

- A. Implement the requirements of VAMC's Infection Control Risk Assessment (ICRA) team. ICRA Group may monitor dust in the vicinity of the construction work and require the Contractor to take corrective action immediately if the safe levels are exceeded.
- B. Establish and maintain a dust control program as part of the contractor's infection preventive measures in accordance with the guidelines provided by ICRA Group and/or as specified here. Prior to start of work, prepare a plan detailing project-specific dust protection measures, including periodic status reports, and submit to Project Engineer and Facility ICRA team for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
  1. All personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the medical center.
- C. Medical center Infection Control personnel shall monitor for airborne disease (e.g. aspergillosis) as appropriate during construction. A baseline of conditions may be established by the medical center prior to the start of work and periodically during the construction stage to determine impact of construction activities on indoor air quality. In addition:
  1. The RE and VAMC Infection Control personnel shall review pressure differential monitoring documentation to verify that pressure differentials in the construction zone and in the patient-care rooms are appropriate for their settings. The requirement for negative air pressure in the construction zone shall depend on the location and type of activity. Upon notification, the contractor shall implement corrective measures to restore proper pressure differentials as needed.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. In case of any problem, the medical center, along with assistance from the contractor, shall conduct an environmental assessment to find and eliminate the source.
- D. In general, following preventive measures shall be adopted during construction to keep down dust and prevent mold.
1. Dampen debris to keep down dust and provide temporary construction partitions in existing structures where directed by Resident Engineer. Blank off ducts and diffusers to prevent circulation of dust into occupied areas during construction.
  2. Do not perform dust producing tasks within occupied areas without the approval of the Resident Engineer. For construction in any areas that will remain jointly occupied by the medical Center and Contractor's workers, the Contractor shall:
    - a. Provide dust proof one-hour or two-hour (as may be required) fire-rated temporary drywall construction barriers to completely separate construction from the operational areas of the hospital in order to contain dirt debris and dust. Barriers shall be sealed and made presentable on hospital occupied side. Install a self-closing rated door in a metal frame, commensurate with the partition, to allow worker access. Maintain negative air at all times. A fire retardant polystyrene, 6-mil thick or greater plastic barrier meeting local fire codes may be used where dust control is the only hazard, and an agreement is reached with the Resident Engineer and Medical Center.
    - b. HEPA filtration is required where the exhaust dust may reenter the breathing zone. Contractor shall verify that construction exhaust to exterior is not reintroduced to the medical center through intake vents, or building openings. Install HEPA (High Efficiency Particulate Accumulator) filter vacuum system rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. Insure continuous negative air pressures occurring within the work area. HEPA filters should have ASHRAE 85 or other prefilter to extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Exhaust hoses shall be heavy duty, flexible steel reinforced and exhausted so that dust is not reintroduced to the medical center.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- c. Adhesive Walk-off/Carpet Walk-off Mats, minimum 600mm x 900mm (24" x 36"), shall be used at all interior transitions from the construction area to occupied medical center area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.
  - d. Vacuum and wet mop all transition areas from construction to the occupied medical center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as they are created. Transport these outside the construction area in containers with tightly fitting lids.
  - e. The contractor shall not haul debris through patient-care areas without prior approval of the Resident Engineer and the Medical Center. When, approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.
  - f. Using a HEPA vacuum, clean inside the barrier and vacuum ceiling tile prior to replacement. Any ceiling access panels opened for investigation beyond sealed areas shall be sealed immediately when unattended.
  - g. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.
  - h. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.
- E. Final Cleanup:
- 1. Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
3. All new air ducts shall be cleaned prior to final inspection.

**1.9 DISPOSAL AND RETENTION**

- A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:
  1. Reserved items which are to remain property of the Government are identified by attached tags as items to be stored. Items that remain property of the Government shall be removed or dislodged from present locations in such a manner as to prevent damage which would be detrimental to re-installation and reuse. Store such items where directed by Resident Engineer.
  2. Items not reserved shall become property of the Contractor and be removed by Contractor from Medical Center.
  3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period, such items which are NOT required by drawings and specifications to be either relocated or reused will be removed by the Government in advance of work to avoid interfering with Contractor's operation.
  4. DELETED

**1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS**

- A. The Contractor shall preserve and protect all structures, equipment, and vegetation (such as trees, shrubs, and grass) on or adjacent to the work site, which are not to be removed and which do not unreasonably interfere with the work required under this contract. The Contractor shall only remove trees when specifically authorized to do so, and shall avoid damaging vegetation that will remain in place. If any limbs or branches of trees are broken during contract performance, or by the careless operation of equipment, or by workmen, the Contractor shall

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

trim those limbs or branches with a clean cut and paint the cut with a tree-pruning compound as directed by the Contracting Officer.

- B. The Contractor shall protect from damage all existing improvements and utilities at or near the work site and on adjacent property of a third party, the locations of which are made known to or should be known by the Contractor. The Contractor shall repair any damage to those facilities, including those that are the property of a third party, resulting from failure to comply with the requirements of this contract or failure to exercise reasonable care in performing the work. If the Contractor fails or refuses to repair the damage promptly, the Contracting Officer may have the necessary work performed and charge the cost to the Contractor.

**(FAR 52.236-9)**

- C. Refer to Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS, for additional requirements on protecting vegetation, soils and the environment. Refer to Articles, "Alterations", "Restoration", and "Operations and Storage Areas" for additional instructions concerning repair of damage to structures and site improvements.

- D. DELETED

**1.11 RESTORATION**

- A. Remove, cut, alter, replace, patch and repair existing work as necessary to install new work. Except as otherwise shown or specified, do not cut, alter or remove any structural work, and do not disturb any ducts, plumbing, steam, gas, or electric work without approval of the Resident Engineer. Existing work to be altered or extended and that is found to be defective in any way, shall be reported to the Resident Engineer before it is disturbed. Materials and workmanship used in restoring work, shall conform in type and quality to that of original existing construction, except as otherwise shown or specified.
- B. Upon completion of contract, deliver work complete and undamaged. Existing work (walls, ceilings, partitions, floors, mechanical and electrical work, lawns, paving, roads, walks, etc.) disturbed or removed

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

as a result of performing required new work, shall be patched, repaired, reinstalled, or replaced with new work, and refinished and left in as good condition as existed before commencing work.

- C. At Contractor's own expense, Contractor shall immediately restore to service and repair any damage caused by Contractor's workmen to existing piping and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems (including telephone) which are indicated on drawings and which are not scheduled for discontinuance or abandonment.
- D. Expense of repairs to such utilities and systems not shown on drawings or locations of which are unknown will be covered by adjustment to contract time and price in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88) and "DIFFERING SITE CONDITIONS" (FAR 52.236-2).

**1.12 PHYSICAL DATA - DELETED**

**1.13 PROFESSIONAL SURVEYING SERVICES - DELETED**

**1.14 LAYOUT OF WORK - DELETED**

**1.15 AS-BUILT DRAWINGS**

- A. The contractor shall maintain two full size sets of as-built drawings which will be kept current during construction of the project, to include all contract changes, modifications and clarifications.
- B. All variations shall be shown in the same general detail as used in the contract drawings. To insure compliance, as-built drawings shall be made available for the Resident Engineer's review, as often as requested.
- C. Contractor shall deliver two approved completed sets of as-built drawings to the Resident Engineer within 15 calendar days after each completed phase and after the acceptance of the project by the Resident Engineer.
- D. Paragraphs A, B, & C shall also apply to all shop drawings.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.16 USE OF ROADWAYS**

- A. For hauling, use only established public roads and roads on Medical Center property and, when authorized by the Resident Engineer, such temporary roads which are necessary in the performance of contract work. Temporary roads shall be constructed by the Contractor at Contractor's expense. When necessary to cross curbing, sidewalks, or similar construction, they must be protected by well-constructed bridges.
- B. When new permanent roads are to be a part of this contract, Contractor may construct them immediately for use to facilitate building operations. These roads may be used by all who have business thereon within zone of building operations.
- C. When certain buildings (or parts of certain buildings) are required to be completed in advance of general date of completion, all roads leading thereto must be completed and available for use at time set for completion of such buildings or parts thereof.

**1.17 RESIDENT ENGINEER'S FIELD OFFICE**

- A. The Contractor shall, within fifteen (15) days after receipt of Notice to Proceed, provide where shown on the drawings a temporary field office, furniture, and two inch deep gravel surfaced area for use of the Resident Engineer. Office and furniture shall be new.
- B. The field office shall provide not less than 67 square meters (720 gross square feet) of floor area in one unit. Installation of the office shall meet all local codes.
- C. Provide office with two, 900 mm (three foot) wide exterior doors, including hardware and OSHA approved platform and stairs leading to grade.
- D. Enclose the entire perimeter of the office from the floor to the ground and finish to match exterior. Provide R7 insulation and seal tight to ground with a painted 19 mm (3/4 inch) exterior grade plywood skirt.
- E. Exterior finishes shall be manufacturer's standards.
- F. Provide floor, wall, and roof with not less than R5 insulation.
- G. Interior finishes shall consist of resilient flooring, plywood paneling or painted wallboard on walls, and acoustical tile ceilings. Interior doors may be either painted or stained.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- H. Interior shall be subdivided with full height partitions to provide one office, one sample room, one toilet. Provide each space with 900 mm (three foot) wide door with master keyed locks. Section off an area with a low partition and counter for the secretary's desk.
- I. Provide 750 mm (2-1/2 feet) wide by 900 mm (3 feet) high operable windows; two in each room (none required in sample room), except provide only one 600 mm (2 foot) high window in toilet room(s). Window openings shall be fitted with security bars to prevent any forced entry. The door of field office shall have a hasp and padlock and also deadbolts keyed from both sides.
- J. Provide sufficient fluorescent lighting in each room to deliver 750 lux (70 foot-candles) of light at desk top height without the aid of daylight. Provide one light switch in each room.
- K. Provide one duplex receptacle in each wall of each room. If a wall is 3.0 m (10 feet) long or more, provide two receptacles for each 3.0 m (10 feet), or portion thereof, of wall. Provide two duplex receptacles in low partition at secretary's desk.
- L. The Contractor shall provide the following:
  - 1. Electricity, hot and cold water, and necessary utility services (except telephone).
  - 2. All necessary piping, power circuits network cabling, cat 5e or better cabling for phones and computers, electrical fixtures, lighting, and other items necessary to provide a habitable structure for the purpose intended. The number of network and electrical receptacles will be as per attached drawing of the field office.
  - 3. Thermostatically controlled, centralized heating and air conditioning system designed to maintain the temperature between 21 and 27 degrees C (70 and 80 degrees F) with 50 percent relative humidity maintained during the air conditioning season.
  - 4. One water closet, lavatory, mirror, toilet paper dispenser, paper towel dispenser, soap dispenser, towel bar, and two-prong coat hooks for each toilet room.
- M. Contractor shall, for the duration of the Resident Engineer's occupancy, provide the following:

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. Satisfactory conditions in and around the field office and parking area.
2. Maintenance of gravel surfaced area, including the area for parking, in an acceptable condition for vehicle and foot traffic at all times.
3. Maintenance of utility services.
4. Daily janitorial services and supplies (toilet paper, soap, etc.).
5. Potable water, fuel and electric power for normal office uses, including lights, heating and air conditioning.

N. The Contractor shall provide the following new items:

**QUANTITY REQUIRED**

- 1 Secretary workstation with adjustable keying desk or drawer 738 mm H x 1.5 m W x 760 mm D (size 29-1/2" H x 60" W x 30" D)
- 1 Printer stand 663 mm H x 1.5 m W x 750 mm D (size 26-1/2" H x 60" W x 30" D)
- 3 Office desks, double pedestal
- 1 Conference table 900 mm x 1.8 m (size 3' x 6')
- 1 Plan table 1.2 m x 2.1 m (4' x 7')
- 3 Work tables 750 mm x 1.8 m (folding 30" x 72")
- 1 Secretary chair
- 4 Swivel chairs with arms
- 6 Conference chairs (armless & folding)
- 2 Arm Chairs
- 4 Lockable 5 drawer file cabinets, letter size
- 1 Drawing rack, with 12-750 mm (12-30 inch) "Plan Hold" drawing holders, freestanding
- 1 Shelves for sample room, 7 adjustable Shelves, 305 mm W x 900 mm L (12" W x 3' L)
- 3 Bookcases
- 1 Electric water cooler
- 1 Metal storage cabinet, 900 mm x 450 mm x 1.8 m (36" x 18" x 72") with six shelves
- 2 Secretary workstations with adjustable keying desk or drawer 738 mm H x 1.5 m W 750 mm D (size 29-1/2" H x 60" W x 30" D)
- 2 Printer stands 738 mm H x 1500 mm W x 750 mm D (size 29-1/2" H x 60" H x 30" D)

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- 7 Office desks, double pedestal
- 2 Conference tables 900 mm x 1800 mm (size 3' x 6')
- 1 Plan table 1200 mm x 6 meters (4' x 20')
- 7 Work tables 750 mm x 1800 mm (folding 30" x 72")
- 2 Secretary chairs
- 7 Swivel chairs with arms
- 12 Conference chairs (armless and folding)
- 7 Arm chairs
- 8 Lockable 5 drawer file cabinets, letter-size
- 2 Drawing racks, each with 12-750 mm (12-30 inch) "Plan Hold" drawing holders, freestanding
- 7 Bookcases
- 1 Electric water cooler
- 4 Shelves for sample 900 mm x 450 mm x 1.8 m (36" x 18" x 72") high, 7 adjustable shelves

O. DELETED

P. At the completion of all work, including the punch list, the Resident Engineer's field office and facilities shall become the property of the Contractor and Contractor shall remove same, including utility connections, from the Medical Center. The site shall be restored to original condition and finished in accordance with contract requirements.

Q. The Contractor shall furnish floor plans for approval by the Resident Engineer prior to furnishing the field office.

**1.18 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT**

- A. Use of new installed mechanical and electrical equipment to provide heat, ventilation, plumbing, light and power will be permitted subject to compliance with the following provisions:
  - 1. Permission to use each unit or system must be given by Resident Engineer. If the equipment is not installed and maintained in accordance with the following provisions, the Resident Engineer will withdraw permission for use of the equipment.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. Electrical installations used by the equipment shall be completed in accordance with the drawings and specifications to prevent damage to the equipment and the electrical systems, i.e. transformers, relays, circuit breakers, fuses, conductors, motor controllers and their overload elements shall be properly sized, coordinated and adjusted. Voltage supplied to each item of equipment shall be verified to be correct and it shall be determined that motors are not overloaded. The electrical equipment shall be thoroughly cleaned before using it and again immediately before final inspection including vacuum cleaning and wiping clean interior and exterior surfaces.
  3. Units shall be properly lubricated, balanced, and aligned. Vibrations must be eliminated.
  4. Automatic temperature control systems for preheat coils shall function properly and all safety controls shall function to prevent coil freeze-up damage.
  5. The air filtering system utilized shall be that which is designed for the system when complete, and all filter elements shall be replaced at completion of construction and prior to testing and balancing of system.
  6. All components of heat production and distribution system, metering equipment, condensate returns, and other auxiliary facilities used in temporary service shall be cleaned prior to use; maintained to prevent corrosion internally and externally during use; and cleaned, maintained and inspected prior to acceptance by the Government.
- B. Prior to final inspection, the equipment or parts used which show wear and tear beyond normal, shall be replaced with identical replacements, at no additional cost to the Government.
- C. This paragraph shall not reduce the requirements of the mechanical and electrical specifications sections.

**1.19 TEMPORARY USE OF EXISTING ELEVATORS**

- A. Contractor will not be allowed the use of existing elevators. Outside type hoist shall be used by Contractor for transporting materials and equipment.

A'. DELETED



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.20 TEMPORARY USE OF NEW ELEVATORS**

A. DELETED

**1.21 TEMPORARY TOILETS**

- A. Provide where directed, (for use of all Contractor's workmen) ample temporary sanitary toilet accommodations with suitable sewer and water connections; or, when approved by Resident Engineer, provide suitable dry closets where directed. Keep such places clean and free from flies, and all connections and appliances connected therewith are to be removed prior to completion of contract, and premises left perfectly clean.
- A'. Contractor may have for use of Contractor's workmen, such toilet accommodations as may be assigned to Contractor by Medical Center Contractor shall keep such places clean and be responsible for any damage done thereto by Contractor's workmen. Failure to maintain satisfactory condition in toilets will deprive Contractor of the privilege to use such toilets.

**1.22 AVAILABILITY AND USE OF UTILITY SERVICES**

- A. The Government shall make all reasonably required amounts of utilities available to the Contractor from existing outlets and supplies, as specified in the contract. The amount to be paid by the Contractor for chargeable electrical services shall be the prevailing rates charged to the Government. The Contractor shall carefully conserve any utilities furnished without charge.
- B. The Contractor, at Contractor's expense and in a workmanlike manner satisfactory to the Contracting Officer, shall install and maintain all necessary temporary connections and distribution lines, and all meters required to measure the amount of electricity used for the purpose of determining charges. Before final acceptance of the work by the Government, the Contractor shall remove all the temporary connections, distribution lines, meters, and associated paraphernalia.
- C. Contractor shall install meters at Contractor's expense and furnish the Medical Center a monthly record of the Contractor's usage of electricity as hereinafter specified.

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- D. Heat: Furnish temporary heat necessary to prevent injury to work and materials through dampness and cold. Use of open salamanders or any temporary heating devices which may be fire hazards or may smoke and damage finished work, will not be permitted. Maintain minimum temperatures as specified for various materials:
1. Obtain heat by connecting to Medical Center heating distribution system.
    - a. Steam is available at no cost to Contractor.
- E. Electricity (for Construction and Testing): Furnish all temporary electric services.
1. Obtain electricity by connecting to the Medical Center electrical distribution system. The Contractor shall meter and pay for electricity required for electric cranes and hoisting devices, electrical welding devices and any electrical heating devices providing temporary heat. Electricity for all other uses is available at no cost to the Contractor.
- F. Water (for Construction and Testing): Furnish temporary water service.
1. Obtain water by connecting to the Medical Center water distribution system. Provide reduced pressure backflow preventer at each connection. Water is available at no cost to the Contractor.
  2. Maintain connections, pipe, fittings and fixtures and conserve water-use so none is wasted. Failure to stop leakage or other wastes will be cause for revocation (at Resident Engineer's discretion) of use of water from Medical Center's system.
- G. Steam: Furnish steam system for testing required in various sections of specifications.
1. Obtain steam for testing by connecting to the Medical Center steam distribution system. Steam is available at no cost to the Contractor.
  2. Maintain connections, pipe, fittings and fixtures and conserve steam-use so none is wasted. Failure to stop leakage or other waste will be cause for revocation (at Resident Engineer's discretion), of use of steam from the Medical Center's system.
- H. Fuel: Natural and LP gas and burner fuel oil required for boiler cleaning, normal initial boiler-burner setup and adjusting, and for performing the specified boiler tests will be furnished by the

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Government. Fuel required for prolonged boiler-burner setup, adjustments, or modifications due to improper design or operation of boiler, burner, or control devices shall be furnished by the Contractor at Contractor's expense.

**1.23 NEW TELEPHONE EQUIPMENT**

The contractor shall coordinate with the work of installation of telephone equipment by others. This work shall be completed before the building is turned over to VA.

**1.24 TESTS**

- A. Pre-test mechanical and electrical equipment and systems and make corrections required for proper operation of such systems before requesting final tests. Final test will not be conducted unless pre-tested.
- B. Conduct final tests required in various sections of specifications in presence of an authorized representative of the Contracting Officer. Contractor shall furnish all labor, materials, equipment, instruments, and forms, to conduct and record such tests.
- C. Mechanical and electrical systems shall be balanced, controlled and coordinated. A system is defined as the entire complex which must be coordinated to work together during normal operation to produce results for which the system is designed. For example, air conditioning supply air is only one part of entire system which provides comfort conditions for a building. Other related components are return air, exhaust air, steam, chilled water, refrigerant, hot water, controls and electricity, etc. Another example of a complex which involves several components of different disciplines is a boiler installation. Efficient and acceptable boiler operation depends upon the coordination and proper operation of fuel, combustion air, controls, steam, feedwater, condensate and other related components.
- D. All related components as defined above shall be functioning when any system component is tested. Tests shall be completed within a reasonably short period of time during which operating and environmental conditions remain reasonably constant.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- E. Individual test result of any component, where required, will only be accepted when submitted with the test results of related components and of the entire system.

**1.25 INSTRUCTIONS**

- A. Contractor shall furnish Maintenance and Operating manuals and verbal instructions when required by the various sections of the specifications and as hereinafter specified.
- B. Manuals: Maintenance and operating manuals (four copies each) for each separate piece of equipment shall be delivered to the Resident Engineer coincidental with the delivery of the equipment to the job site. Manuals shall be complete, detailed guides for the maintenance and operation of equipment. They shall include complete information necessary for starting, adjusting, maintaining in continuous operation for long periods of time and dismantling and reassembling of the complete units and sub-assembly components. Manuals shall include an index covering all component parts clearly cross-referenced to diagrams and illustrations. Illustrations shall include "exploded" views showing and identifying each separate item. Emphasis shall be placed on the use of special tools and instruments. The function of each piece of equipment, component, accessory and control shall be clearly and thoroughly explained. All necessary precautions for the operation of the equipment and the reason for each precaution shall be clearly set forth. Manuals must reference the exact model, style and size of the piece of equipment and system being furnished. Manuals referencing equipment similar to but of a different model, style, and size than that furnished will not be accepted.
- C. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed instructions to assigned Department of Veterans Affairs personnel in the operation and complete maintenance for each piece of equipment. All such training will be at the job site. These requirements are more specifically detailed in the various technical sections. Instructions for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a system shall be available until instructions for all items included in the system have been completed. This is to

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

assure proper instruction in the operation of inter-related systems. All instruction periods shall be at such times as scheduled by the Resident Engineer and shall be considered concluded only when the Resident Engineer is satisfied in regard to complete and thorough coverage. The Department of Veterans Affairs reserves the right to request the removal of, and substitution for, any instructor who, in the opinion of the Resident Engineer, does not demonstrate sufficient qualifications in accordance with requirements for instructors above.

**1.26 GOVERNMENT-FURNISHED PROPERTY**

- A. The Government shall deliver to the Contractor, the Government-furnished property shown on the drawings.
- B. Equipment furnished by Government to be installed by Contractor will be furnished to Contractor at the Medical Center.
- C'. Storage space for equipment will be provided by the Government and the Contractor shall be prepared to unload and store such equipment therein upon its receipt at the Medical Center.
- D. Notify Contracting Officer in writing, 60 days in advance, of date on which Contractor will be prepared to receive equipment furnished by Government. Arrangements will then be made by the Government for delivery of equipment.
  - 1. Immediately upon delivery of equipment, Contractor shall arrange for a joint inspection thereof with a representative of the Government. At such time the Contractor shall acknowledge receipt of equipment described, make notations, and immediately furnish the Government representative with a written statement as to its condition or shortages.
  - 2. Contractor thereafter is responsible for such equipment until such time as acceptance of contract work is made by the Government.
- E. Equipment furnished by the Government will be delivered in a partially assembled (knock down) condition in accordance with existing standard commercial practices, complete with all fittings, fastenings, and appliances necessary for connections to respective services installed under contract. All fittings and appliances (i.e., couplings, ells, tees, nipples, piping, conduits, cables, and the like) necessary to make the connection between the Government furnished equipment item and the

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

utility stub-up shall be furnished and installed by the contractor at no additional cost to the Government.

- F. Completely assemble and install the Government furnished equipment in place ready for proper operation in accordance with specifications and drawings.
- G. Furnish supervision of installation of equipment at construction site by qualified factory trained technicians regularly employed by the equipment manufacturer.

**1.27 RELOCATED EQUIPMENT AND OTHER ITEMS**

- A. Contractor shall disconnect, dismantle as necessary, remove and reinstall in new location, all existing equipment and other items indicated by symbol "R" or otherwise shown to be relocated by the Contractor.
- B. Perform relocation of such equipment or items at such times and in such a manner as directed by the Resident Engineer.
- C. Suitably cap existing service lines, such as steam, condensate return, water, drain, gas, air, vacuum and/or electrical, whenever such lines are disconnected from equipment to be relocated. Remove abandoned lines in finished areas and cap as specified herein before under paragraph "Abandoned Lines".
- D. Provide all mechanical and electrical service connections, fittings, fastenings and any other materials necessary for assembly and installation of relocated equipment; and leave such equipment in proper operating condition.
- E. Contractor shall employ services of an installation engineer, who is an authorized representative of the manufacturer of this equipment to supervise assembly and installation as may be applicable of existing remote dictating machine, X-ray, dental and laundry equipment, required to be relocated.
- F. All service lines such as noted above for relocated equipment shall be in place at point of relocation ready for use before any existing equipment is disconnected. Make relocated existing equipment ready for operation or use immediately after reinstallation.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.28 STORAGE SPACE FOR DEPARTMENT OF VETERANS AFFAIRS EQUIPMENT - DELETED**

1. Provide such space with adequate light, ventilation and heat in season and lock for adequate security. Contractor shall also install and connect portion of nearest specified fire protection system including all apparatus for instant use to provide water for adequate fire protection of storage space.
  2. Storage space shall be turned over to Contracting Officer ninety days prior to Completion Date of the buildings involved.
  3. Forward two sets of drawings to Contracting Officer through the Resident Engineer 120 days prior to Completion Date of building; drawings shall indicate those areas which will be made available to Department of Veterans Affairs for temporary storage.
  4. DELETED
- B. "Completion Date" shall mean that date as established by Contracting Officer upon which Contractor will turn over entire project or portions thereof to the Government.

**1.29 CONSTRUCTION SIGN**

- A. Provide a Construction Sign where directed by the Resident Engineer. All wood members shall be of framing lumber. Cover sign frame with 0.7 mm (24 gage) galvanized sheet steel nailed securely around edges and on all bearings. Provide three 100 by 100 mm (4 inch by 4 inch) posts (or equivalent round posts) set 1200 mm (four feet) into ground. Set bottom of sign level at 900 mm (three feet) above ground and secure to posts with through bolts. Make posts full height of sign. Brace posts with 50 x 100 mm (two by four inch) material as directed.
- B. Paint all surfaces of sign and posts two coats of white gloss paint. Border and letters shall be of black gloss paint, except project title which shall be blue gloss paint.
- C. Maintain sign and remove it when directed by the Resident Engineer.
- D. Detail Drawing of construction sign showing required legend and other characteristics of sign is shall be provide by the contractor as so directed by the VA.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.30 SAFETY SIGN**

- A. Provide a Safety Sign where directed by Resident Engineer. Face of sign shall be 19 mm (3/4 inch) thick exterior grade plywood. Provide two 100 mm by 100 mm (four by four inch) posts extending full height of sign and 900 mm (three feet) into ground. Set bottom of sign level at 1200 mm (four feet) above ground.
- B. Paint all surfaces of Safety Sign and posts with one prime coat and two coats of white gloss paint. Letters and design shall be painted with gloss paint of colors noted.
- C. Maintain sign and remove it when directed by Resident Engineer.
- D. Standard Detail Drawing Number SD10000-02 (Found on VA TIL) of safety sign showing required legend and other characteristics of sign shall be provided by the contractor as so directed by the VA.
- E. Post the number of accident free days on a daily basis.

Estimated Cost		No. of Photographs
Up to	\$250,000	50 to 100
" "	\$500,000	100 to 150
" "	\$1,000,000	150 to 200
" "	\$2,000,000	200 to 250
" "	\$5,000,000	250 to 300
" "	\$10,000,000	300 to 400
More than	\$10,000,000	400 to 500

**1.31 PHOTOGRAPHIC DOCUMENTATION - DELETED**

**1.32 FINAL ELEVATION DIGITAL IMAGES - DELETED**

**1.33 HISTORIC PRESERVATION - DELETED**

**1.34 SPECIAL REQUIREMENTS**

**CONSTRUCTION QUALITY ASSURANCE/QUALITY CONTROL**

Contractor to provide full time Quality Assurance/Quality Control inspector on construction site for daily monitoring of quality of work.

- A. Provide Daily Construction Quality Control Report containing preparatory inspection, initial inspection and follow-up inspection.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- B. Contractor shall obtain the services of a third party to provide independent tests required by plans and/or specifications.

**CONSTRUCTION SAFETY PROGRAM**

- A. Contractor to provide OSHA Certified Competent Person (CP) Safety Inspector to ensure that the specific safety requirements for construction operations are implemented during facility projects.
- a. Provide daily monitoring and written report of compliance with safety regulations for construction site. Provide daily reports of safety inspections (include safety violations and corrective actions taken).
  - b. Participates in the VHA facility multidisciplinary team established for the construction safety committee.
- B. Contractor to obtain the services of an independent Construction Safety Officer (CSO) to ensure safety requirements for construction operation is met. CSO shall be knowledgeable in the general inspection of typical work sites during construction and renovation performed by contract staff. The person shall act as the Safety Office in accordance VAAR 836.236-87 and VA Construction Safety Guidebook. This work includes:
- a. Identify work site risks
  - b. Collect deficiency information
  - c. Disseminates actions and results
  - d. Oversee of contract construction safety and review contractor safety program submittals.
  - e. Determine if contractor is meeting VA standards and contractual requirements for safety and OSHA compliance. If/when the standards and contract requirements are not being met, in coordination with the VA COTR or CO, the CSO must take immediate action to prevent injury, exposure, noncompliance, or property damage.
  - f. Requires Contractor's CP to implement and maintain an effective safety program and identifies and controls hazard that may cause injury or illness to VA patients, staff, visitors, and contractor employees.
  - g. Conduct periodic inspections of VHA construction sites to ensure compliance with safety elements. At a minimum, weekly inspections are required with written documentation.
  - h. CSO shall not take the place of the Contractor's CP or act on their behalf.

**PARKING**

1. Contractor shall procure secure offsite parking for the vehicles which have been affected as a result of any phase, activity, specification, or component of this project. Secure offsite parking shall be within ¼ mile of the site, shall be accessible 24 hours per day / 7 days per week for the duration of the project. Contractor shall be responsible for all associated parking fees until completion of the project or related phase, as mutually agreed to, in advance by Contractor and the CO. Parking fees are payable in

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

advance and Contractor is responsible for coordination of activity. In no instance shall Contractor be relieved of these responsibilities. Quantity of spaces and acceptance of proposed offsite parking is subject to the approval of CO.

2. Contractor shall isolate parking that remains from the work zone and shall ensure that safe access is maintained to and from the parking area though or around the work zone.
3. Contractor shall notify the COTR in writing no later than one (1) week in advance of decommissioning any parking spaces due to construction. Contractor shall provide to the COTR a list of all affected parking spaces, no parking space shall be decommissioned without prior written approval from the COTR of record.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 01 33 23  
SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES**

- 1-1. Refer to Articles titled SPECIFICATIONS AND DRAWINGS FOR CONSTRUCTION (FAR 52.236-21) and, SPECIAL NOTES (VAAR 852.236-91), in GENERAL CONDITIONS.
- 1-2. For the purposes of this contract, samples (including laboratory samples to be tested), test reports, certificates, and manufacturers' literature and data shall also be subject to the previously referenced requirements. The following text refers to all items collectively as SUBMITTALS.
- 1-3. Submit for approval, all of the items specifically mentioned under the separate sections of the specification, with information sufficient to evidence full compliance with contract requirements. Materials, fabricated articles and the like to be installed in permanent work shall equal those of approved submittals. After an item has been approved, no change in brand or make will be permitted unless:
  - A. Satisfactory written evidence is presented to, and approved by Contracting Officer, that manufacturer cannot make scheduled delivery of approved item or;
  - B. Item delivered has been rejected and substitution of a suitable item is an urgent necessity or;
  - C. Other conditions become apparent which indicates approval of such substitute item to be in best interest of the Government.
- 1-4. Forward submittals in sufficient time to permit proper consideration and approval action by Government. Time submission to assure adequate lead time for procurement of contract - required items. Delays attributable to untimely and rejected submittals (including any laboratory samples to be tested) will not serve as a basis for extending contract time for completion.
- 1-5. Submittals will be reviewed for compliance with contract requirements by Architect-Engineer, and action thereon will be taken by Resident Engineer on behalf of the Contracting Officer.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- 1-6. Upon receipt of submittals, Architect-Engineer will assign a file number thereto. Contractor, in any subsequent correspondence, shall refer to this file and identification number to expedite replies relative to previously approved or disapproved submittals.
- 1-7. The Government reserves the right to require additional submittals, whether or not particularly mentioned in this contract. If additional submittals beyond those required by the contract are furnished pursuant to request therefor by Contracting Officer, adjustment in contract price and time will be made in accordance with Articles titled CHANGES (FAR 52.243-4) and CHANGES - SUPPLEMENT (VAAR 852.236-88) of the GENERAL CONDITIONS.
- 1-8. Schedules called for in specifications and shown on shop drawings shall be submitted for use and information of Department of Veterans Affairs and Architect-Engineer. However, the Contractor shall assume responsibility for coordinating and verifying schedules. The Contracting Officer and Architect-Engineer assumes no responsibility for checking schedules or layout drawings for exact sizes, exact numbers and detailed positioning of items.
- 1-9. Submittals must be submitted by Contractor only and shipped prepaid. Contracting Officer assumes no responsibility for checking quantities or exact numbers included in such submittals.
  - A. Submit samples required by Section 09 06 00, SCHEDULE FOR FINISHES, in quadruplicate. Submit other samples in single units unless otherwise specified. Submit shop drawings, schedules, manufacturers' literature and data, and certificates in quadruplicate, except where a greater number is specified.
  - B. Submittals will receive consideration only when covered by a transmittal letter signed by Contractor. Letter shall be sent via first class mail and shall contain the list of items, name of Medical Center, name of Contractor, contract number, applicable specification paragraph numbers, applicable drawing numbers (and other information required for exact identification of location for each item), manufacturer and brand, ASTM or Federal Specification Number (if any) and such additional information as may be required by specifications for particular item being

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

furnished. In addition, catalogs shall be marked to indicate specific items submitted for approval.

1. A copy of letter must be enclosed with items, and any items received without identification letter will be considered "unclaimed goods" and held for a limited time only.
2. Each sample, certificate, manufacturers' literature and data shall be labeled to indicate the name and location of the Medical Center, name of Contractor, manufacturer, brand, contract number and ASTM or Federal Specification Number as applicable and location(s) on project.
3. Required certificates shall be signed by an authorized representative of manufacturer or supplier of material, and by Contractor.

C. In addition to complying with the applicable requirements specified in preceding Article 1.9, samples which are required to have Laboratory Tests (those preceded by symbol "LT" under the separate sections of the specification shall be tested, at the expense of Contractor, in a commercial laboratory approved by Contracting Officer.

1. Laboratory shall furnish Contracting Officer with a certificate stating that it is fully equipped and qualified to perform intended work, is fully acquainted with specification requirements and intended use of materials and is an independent establishment in no way connected with organization of Contractor or with manufacturer or supplier of materials to be tested.
2. Certificates shall also set forth a list of comparable projects upon which laboratory has performed similar functions during past five years.
3. Samples and laboratory tests shall be sent directly to approved commercial testing laboratory.
4. Contractor shall send a copy of transmittal letter to both Resident Engineer and to Architect-Engineer simultaneously with submission of material to a commercial testing laboratory.
4. Contractor shall forward a copy of transmittal letter to Resident Engineer simultaneously with submission to a commercial testing laboratory.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

5. Laboratory test reports shall be sent directly to Resident Engineer for appropriate action.
  6. Laboratory reports shall list contract specification test requirements and a comparative list of the laboratory test results. When tests show that the material meets specification requirements, the laboratory shall so certify on test report.
  7. Laboratory test reports shall also include a recommendation for approval or disapproval of tested item.
- D. If submittal samples have been disapproved, resubmit new samples as soon as possible after notification of disapproval. Such new samples shall be marked "Resubmitted Sample" in addition to containing other previously specified information required on label and in transmittal letter.
- E. Approved samples will be kept on file by the Resident Engineer at the site until completion of contract, at which time such samples will be delivered to Contractor as Contractor's property. Where noted in technical sections of specifications, approved samples in good condition may be used in their proper locations in contract work. At completion of contract, samples that are not approved will be returned to Contractor only upon request and at Contractor's expense. Such request should be made prior to completion of the contract. Disapproved samples that are not requested for return by Contractor will be discarded after completion of contract.
- F. Submittal drawings (shop, erection or setting drawings) and schedules, required for work of various trades, shall be checked before submission by technically qualified employees of Contractor for accuracy, completeness and compliance with contract requirements. These drawings and schedules shall be stamped and signed by Contractor certifying to such check.
1. For each drawing required, submit one legible photographic paper or vellum reproducible.
  2. Reproducible shall be full size.
  3. Each drawing shall have marked thereon, proper descriptive title, including Medical Center location, project number, manufacturer's number, reference to contract drawing number, detail Section Number, and Specification Section Number.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

4. A space 120 mm by 125 mm (4-3/4 by 5 inches) shall be reserved on each drawing to accommodate approval or disapproval stamp.
5. Submit drawings, ROLLED WITHIN A MAILING TUBE, fully protected for shipment.
6. One reproducible print of approved or disapproved shop drawings will be forwarded to Contractor.
7. When work is directly related and involves more than one trade, shop drawings shall be submitted to Architect-Engineer under one cover.
- 1-10. Samples (except laboratory samples), shop drawings, test reports, certificates and manufacturers' literature and data, shall be submitted for approval to

Lothrop Associates LLP

(Architect)

333 Westchester Avenue

(A/E P.O. Address)

White Plains, New York 10604

(City, State and Zip Code)

- 1-11. At the time of transmittal to the Architect-Engineer, the Contractor shall also send a copy of the complete submittal directly to the Resident Engineer.

- 1-12. Deleted

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 01 42 19  
REFERENCE STANDARDS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies the availability and source of references and standards specified in the project manual under paragraphs APPLICABLE PUBLICATIONS and/or shown on the drawings.

**1.2 AVAILABILITY OF SPECIFICATIONS LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS FPMR PART 101-29 (FAR 52.211-1) (AUG 1998)**

- A. The GSA Index of Federal Specifications, Standards and Commercial Item Descriptions, FPMR Part 101-29 and copies of specifications, standards, and commercial item descriptions cited in the solicitation may be obtained for a fee by submitting a request to - GSA Federal Supply Service, Specifications Section, Suite 8100, 470 East L'Enfant Plaza, SW, Washington, DC 20407, Telephone (202) 619-8925, Facsimile (202) 619-8978.
- B. If the General Services Administration, Department of Agriculture, or Department of Veterans Affairs issued this solicitation, a single copy of specifications, standards, and commercial item descriptions cited in this solicitation may be obtained free of charge by submitting a request to the addressee in paragraph (a) of this provision. Additional copies will be issued for a fee.

**1.3 AVAILABILITY FOR EXAMINATION OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-4) (JUN 1988)**

The specifications and standards cited in this solicitation can be examined at the following location:

DEPARTMENT OF VETERANS AFFAIRS  
Office of Construction & Facilities Management  
Facilities Quality Service (00CFM1A)  
425 Eye Street N.W, (sixth floor)  
Washington, DC 20001  
Telephone Numbers: (202) 632-5249 or (202) 632-5178  
Between 9:00 AM - 3:00 PM



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.4 AVAILABILITY OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL  
SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-3)  
(JUN 1988)**

The specifications cited in this solicitation may be obtained from the  
associations or organizations listed below.

AA	Aluminum Association Inc. <a href="http://www.aluminum.org">http://www.aluminum.org</a>
AABC	Associated Air Balance Council <a href="http://www.aabchg.com">http://www.aabchg.com</a>
AAMA	American Architectural Manufacturer's Association <a href="http://www.aamanet.org">http://www.aamanet.org</a>
AAN	American Nursery and Landscape Association <a href="http://www.anla.org">http://www.anla.org</a>
AASHTO	American Association of State Highway and Transportation Officials <a href="http://www.aashto.org">http://www.aashto.org</a>
AATCC	American Association of Textile Chemists and Colorists <a href="http://www.aatcc.org">http://www.aatcc.org</a>
ACGIH	American Conference of Governmental Industrial Hygienists <a href="http://www.acgih.org">http://www.acgih.org</a>
ACI	American Concrete Institute <a href="http://www.aci-int.net">http://www.aci-int.net</a>
ACPA	American Concrete Pipe Association <a href="http://www.concrete-pipe.org">http://www.concrete-pipe.org</a>
ACPPA	American Concrete Pressure Pipe Association <a href="http://www.acppa.org">http://www.acppa.org</a>
ADC	Air Diffusion Council <a href="http://flexibleduct.org">http://flexibleduct.org</a>
AGA	American Gas Association <a href="http://www.aga.org">http://www.aga.org</a>
AGC	Associated General Contractors of America <a href="http://www.agc.org">http://www.agc.org</a>
AGMA	American Gear Manufacturers Association, Inc. <a href="http://www.agma.org">http://www.agma.org</a>
AHAM	Association of Home Appliance Manufacturers <a href="http://www.aham.org">http://www.aham.org</a>

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

AISC	American Institute of Steel Construction <a href="http://www.aisc.org">http://www.aisc.org</a>
AISI	American Iron and Steel Institute <a href="http://www.steel.org">http://www.steel.org</a>
AITC	American Institute of Timber Construction <a href="http://www.aitc-glulam.org">http://www.aitc-glulam.org</a>
AMCA	Air Movement and Control Association, Inc. <a href="http://www.amca.org">http://www.amca.org</a>
ANLA	American Nursery & Landscape Association <a href="http://www.anla.org">http://www.anla.org</a>
ANSI	American National Standards Institute, Inc. <a href="http://www.ansi.org">http://www.ansi.org</a>
APA	The Engineered Wood Association <a href="http://www.apawood.org">http://www.apawood.org</a>
ARI	Air-Conditioning and Refrigeration Institute <a href="http://www.ari.org">http://www.ari.org</a>
ASAE	American Society of Agricultural Engineers <a href="http://www.asae.org">http://www.asae.org</a>
ASCE	American Society of Civil Engineers <a href="http://www.asce.org">http://www.asce.org</a>
ASHRAE	American Society of Heating, Refrigerating, and Air-Conditioning Engineers <a href="http://www.ashrae.org">http://www.ashrae.org</a>
ASME	American Society of Mechanical Engineers <a href="http://www.asme.org">http://www.asme.org</a>
ASSE	American Society of Sanitary Engineering <a href="http://www.asse-plumbing.org">http://www.asse-plumbing.org</a>
ASTM	American Society for Testing and Materials <a href="http://www.astm.org">http://www.astm.org</a>
AWI	Architectural Woodwork Institute <a href="http://www.awinet.org">http://www.awinet.org</a>
AWS	American Welding Society <a href="http://www.aws.org">http://www.aws.org</a>
AWWA	American Water Works Association <a href="http://www.awwa.org">http://www.awwa.org</a>

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

BHMA	Builders Hardware Manufacturers Association <a href="http://www.buildershardware.com">http://www.buildershardware.com</a>
BIA	Brick Institute of America <a href="http://www.bia.org">http://www.bia.org</a>
CAGI	Compressed Air and Gas Institute <a href="http://www.cagi.org">http://www.cagi.org</a>
CGA	Compressed Gas Association, Inc. <a href="http://www.cganet.com">http://www.cganet.com</a>
CI	The Chlorine Institute, Inc. <a href="http://www.chlorineinstitute.org">http://www.chlorineinstitute.org</a>
CISCA	Ceilings and Interior Systems Construction Association <a href="http://www.cisca.org">http://www.cisca.org</a>
CISPI	Cast Iron Soil Pipe Institute <a href="http://www.cispi.org">http://www.cispi.org</a>
CLFMI	Chain Link Fence Manufacturers Institute <a href="http://www.chainlinkinfo.org">http://www.chainlinkinfo.org</a>
CPMB	Concrete Plant Manufacturers Bureau <a href="http://www.cpmc.org">http://www.cpmc.org</a>
CRA	California Redwood Association <a href="http://www.calredwood.org">http://www.calredwood.org</a>
CRSI	Concrete Reinforcing Steel Institute <a href="http://www.crsi.org">http://www.crsi.org</a>
CTI	Cooling Technology Institute <a href="http://www.cti.org">http://www.cti.org</a>
DHI	Door and Hardware Institute <a href="http://www.dhi.org">http://www.dhi.org</a>
EGSA	Electrical Generating Systems Association <a href="http://www.egsa.org">http://www.egsa.org</a>
EEI	Edison Electric Institute <a href="http://www.eei.org">http://www.eei.org</a>
EPA	Environmental Protection Agency <a href="http://www.epa.gov">http://www.epa.gov</a>
ETL	ETL Testing Laboratories, Inc. <a href="http://www.etl.com">http://www.etl.com</a>
FAA	Federal Aviation Administration <a href="http://www.faa.gov">http://www.faa.gov</a>

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

FCC	Federal Communications Commission <a href="http://www.fcc.gov">http://www.fcc.gov</a>
FPS	The Forest Products Society <a href="http://www.forestprod.org">http://www.forestprod.org</a>
GANA	Glass Association of North America <a href="http://www.cssinfo.com/info/gana.html/">http://www.cssinfo.com/info/gana.html/</a>
FM	Factory Mutual Insurance <a href="http://www.fmglobal.com">http://www.fmglobal.com</a>
GA	Gypsum Association <a href="http://www.gypsum.org">http://www.gypsum.org</a>
GSA	General Services Administration <a href="http://www.gsa.gov">http://www.gsa.gov</a>
HI	Hydraulic Institute <a href="http://www.pumps.org">http://www.pumps.org</a>
HPVA	Hardwood Plywood & Veneer Association <a href="http://www.hpva.org">http://www.hpva.org</a>
ICBO	International Conference of Building Officials <a href="http://www.icbo.org">http://www.icbo.org</a>
ICEA	Insulated Cable Engineers Association Inc. <a href="http://www.icea.net">http://www.icea.net</a>
\ICAC	Institute of Clean Air Companies <a href="http://www.icac.com">http://www.icac.com</a>
IEEE	Institute of Electrical and Electronics Engineers <a href="http://www.ieee.org/">http://www.ieee.org/</a>
IMSA	International Municipal Signal Association <a href="http://www.imsasafety.org">http://www.imsasafety.org</a>
IPCEA	Insulated Power Cable Engineers Association
NBMA	Metal Buildings Manufacturers Association <a href="http://www.mbma.com">http://www.mbma.com</a>
MSS	Manufacturers Standardization Society of the Valve and Fittings Industry Inc. <a href="http://www.mss-hq.com">http://www.mss-hq.com</a>
NAAMM	National Association of Architectural Metal Manufacturers <a href="http://www.naamm.org">http://www.naamm.org</a>
NAPHCC	Plumbing-Heating-Cooling Contractors Association <a href="http://www.phccweb.org.org">http://www.phccweb.org.org</a>

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

NBS	National Bureau of Standards See - NIST
NBBPVI	National Board of Boiler and Pressure Vessel Inspectors <a href="http://www.nationboard.org">http://www.nationboard.org</a>
NEC	National Electric Code See - NFPA National Fire Protection Association
NEMA	National Electrical Manufacturers Association <a href="http://www.nema.org">http://www.nema.org</a>
NFPA	National Fire Protection Association <a href="http://www.nfpa.org">http://www.nfpa.org</a>
NHLA	National Hardwood Lumber Association <a href="http://www.natlhardwood.org">http://www.natlhardwood.org</a>
NIH	National Institute of Health <a href="http://www.nih.gov">http://www.nih.gov</a>
NIST	National Institute of Standards and Technology <a href="http://www.nist.gov">http://www.nist.gov</a>
NLMA	Northeastern Lumber Manufacturers Association, Inc. <a href="http://www.nelma.org">http://www.nelma.org</a>
NPA	National Particleboard Association 18928 Premiere Court Gaithersburg, MD 20879 (301) 670-0604
NSF	National Sanitation Foundation <a href="http://www.nsf.org">http://www.nsf.org</a>
NWWDA	Window and Door Manufacturers Association <a href="http://www.nwwda.org">http://www.nwwda.org</a>
OSHA	Occupational Safety and Health Administration Department of Labor <a href="http://www.osha.gov">http://www.osha.gov</a>
PCA	Portland Cement Association <a href="http://www.portcement.org">http://www.portcement.org</a>
PCI	Precast Prestressed Concrete Institute <a href="http://www.pci.org">http://www.pci.org</a>
PPI	The Plastic Pipe Institute <a href="http://www.plasticpipe.org">http://www.plasticpipe.org</a>

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

PEI	Porcelain Enamel Institute, Inc. <a href="http://www.porcelainenamel.com">http://www.porcelainenamel.com</a>
PTI	Post-Tensioning Institute <a href="http://www.post-tensioning.org">http://www.post-tensioning.org</a>
RFCI	The Resilient Floor Covering Institute <a href="http://www.rfci.com">http://www.rfci.com</a>
RIS	Redwood Inspection Service See - CRA
RMA	Rubber Manufacturers Association, Inc. <a href="http://www.rma.org">http://www.rma.org</a>
SCMA	Southern Cypress Manufacturers Association <a href="http://www.cypressinfo.org">http://www.cypressinfo.org</a>
SDI	Steel Door Institute <a href="http://www.steeldoor.org">http://www.steeldoor.org</a>
IGMA	Insulating Glass Manufacturers Alliance <a href="http://www.igmaonline.org">http://www.igmaonline.org</a>
SJI	Steel Joist Institute <a href="http://www.steeljoist.org">http://www.steeljoist.org</a>
SMACNA	Sheet Metal and Air-Conditioning Contractors National Association, Inc. <a href="http://www.smacna.org">http://www.smacna.org</a>
SSPC	The Society for Protective Coatings <a href="http://www.sspc.org">http://www.sspc.org</a>
STI	Steel Tank Institute <a href="http://www.steeltank.com">http://www.steeltank.com</a>
SWI	Steel Window Institute <a href="http://www.steelwindows.com">http://www.steelwindows.com</a>
TCA	Tile Council of America, Inc. <a href="http://www.tileusa.com">http://www.tileusa.com</a>
TEMA	Tubular Exchange Manufacturers Association <a href="http://www.tema.org">http://www.tema.org</a>
TPI	Truss Plate Institute, Inc. 583 D'Onofrio Drive; Suite 200 Madison, WI 53719 (608) 833-5900

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

UBC        The Uniform Building Code  
            See ICBO

UL         Underwriters' Laboratories Incorporated  
            <http://www.ul.com>

ULC        Underwriters' Laboratories of Canada  
            <http://www.ulc.ca>

WCLIB      West Coast Lumber Inspection Bureau  
            6980 SW Varns Road, P.O. Box 23145  
            Portland, OR 97223  
            (503) 639-0651

WRCLA     Western Red Cedar Lumber Association  
            P.O. Box 120786  
            New Brighton, MN 55112  
            (612) 633-4334

WWPA      Western Wood Products Association  
            <http://www.wwpa.org>

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 01 45 29  
TESTING LABORATORY SERVICES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

This section specifies materials testing activities and inspection services required during project construction to be provided by a Testing Laboratory retained and paid for by Contractor.

**1.2 APPLICABLE PUBLICATIONS:**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.
- B. American Association of State Highway and Transportation Officials (AASHTO):
  - T27-06.....Sieve Analysis of Fine and Coarse Aggregates
  - T96-02 (R2006).....Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine
  - T99-01 (R2004).....The Moisture-Density Relations of Soils Using a 2.5 Kg (5.5 lb.) Rammer and a 305 mm (12 in.) Drop
  - T104-99 (R2003).....Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate
  - T180-01 (R2004).....Moisture-Density Relations of Soils using a 4.54 kg (10 lb.) Rammer and a 457 mm (18 in.) Drop
  - T191-02 (R2006).....Density of Soil In-Place by the Sand-Cone Method
- C. American Concrete Institute (ACI):
  - 506.4R-94 (R2004).....Guide for the Evaluation of Shotcrete
- D. American Society for Testing and Materials (ASTM):
  - A325-06.....Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength
  - A370-07.....Definitions for Mechanical Testing of Steel Products
  - A416/A416M-06.....Steel Strand, Uncoated Seven-Wire for Prestressed Concrete



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

A490-06.....Heat Treated Steel Structural Bolts, 150 ksi  
Minimum Tensile Strength

C31/C31M-06.....Making and Curing Concrete Test Specimens in the  
Field

C33-03.....Concrete Aggregates

C39/C39M-05.....Compressive Strength of Cylindrical Concrete  
Specimens

C109/C109M-05.....Compressive Strength of Hydraulic Cement Mortars

C138-07.....Unit Weight, Yield, and Air Content  
(Gravimetric) of Concrete

C140-07.....Sampling and Testing Concrete Masonry Units and  
Related Units

C143/C143M-05.....Slump of Hydraulic Cement Concrete

C172-07.....Sampling Freshly Mixed Concrete

C173-07.....Air Content of freshly Mixed Concrete by the  
Volumetric Method

C330-05.....Lightweight Aggregates for Structural Concrete

C567-05.....Density Structural Lightweight Concrete

C780-07.....Pre-construction and Construction Evaluation of  
Mortars for Plain and Reinforced Unit Masonry

C1019-08.....Sampling and Testing Grout

C1064/C1064M-05.....Freshly Mixed Portland Cement Concrete

C1077-06.....Laboratories Testing Concrete and Concrete  
Aggregates for Use in Construction and Criteria  
for Laboratory Evaluation

C1314-07.....Compressive Strength of Masonry Prisms

D698-07.....Laboratory Compaction Characteristics of Soil  
Using Standard Effort

D1143-07.....Piles Under Static Axial Compressive Load

D1188-07.....Bulk Specific Gravity and Density of Compacted  
Bituminous Mixtures Using Paraffin-Coated  
Specimens

D1556-07.....Density and Unit Weight of Soil in Place by the  
Sand-Cone Method

D1557-07.....Laboratory Compaction Characteristics of Soil  
Using Modified Effort

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

D2166-06.....Unconfined Compressive Strength of Cohesive Soil  
D2167-94 (R2001).....Density and Unit Weight of Soil in Place by the  
Rubber Balloon Method  
D2216-05.....Laboratory Determination of Water (Moisture)  
Content of Soil and Rock by Mass  
D2922-05.....Density of soil and Soil-Aggregate in Place by  
Nuclear Methods (Shallow Depth)  
D2974-07.....Moisture, Ash, and Organic Matter of Peat and  
Other Organic Soils  
D3666- (2002).....Minimum Requirements for Agencies Testing and  
Inspection Bituminous Paving Materials  
D3740-07.....Minimum Requirements for Agencies Engaged in the  
Testing and Inspecting Road and Paving Material  
E94-04.....Radiographic Testing  
E164-03.....Ultrasonic Contact Examination of Weldments  
E329-07.....Agencies Engaged in Construction Inspection  
and/or Testing  
E543-06.....Agencies Performing Non-Destructive Testing  
E605-93 (R2006).....Thickness and Density of Sprayed Fire-Resistive  
Material (SFRM) Applied to Structural Members  
E709- (2001).....Guide for Magnetic Particle Examination  
E1155-96 (R2008).....Determining FF Floor Flatness and FL Floor  
Levelness Numbers

E. American Welding Society (AWS):

D1.1-07.....Structural Welding Code-Steel

**1.3 REQUIREMENTS:**

A. Accreditation Requirements: Construction materials testing laboratories must be accredited by a laboratory accreditation authority and will be required to submit a copy of the Certificate of Accreditation and Scope of Accreditation. The laboratory's scope of accreditation must include the appropriate ASTM standards (i.e.; E 329, C 1077, D 3666, D3740, A 880, E 543) listed in the technical sections of the specifications. Laboratories engaged in Hazardous Materials Testing shall meet the requirements of OSHA and EPA. The policy applies to the specific laboratory performing the actual testing, not just the "Corporate Office."

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- B. Inspection and Testing: Testing laboratory shall inspect materials and workmanship and perform tests described herein and additional tests requested by Resident Engineer. When it appears materials furnished, or work performed by Contractor fail to meet construction contract requirements, Testing Laboratory shall direct attention of Resident Engineer to such failure.
- C. Written Reports: Testing laboratory shall submit test reports to Resident Engineer, Contractor, unless other arrangements are agreed to in writing by the Resident Engineer. Submit reports of tests that fail to meet construction contract requirements on colored paper.
- D. Verbal Reports: Give verbal notification to Resident Engineer immediately of any irregularity.

**PART 2 - PRODUCTS (NOT USED)**

**PART 3 - EXECUTION**

- 3.1 EARTHWORK: DELETED
- 3.2 FOUNDATION PILES: DELETED
- 3.3 FOUNDATION CAISSONS: DELETED
- 3.4 LANDSCAPING: DELETED
- 3.5 ASPHALT CONCRETE PAVING: DELETED
- 3.6 SITE WORK CONCRETE: DELETED
- 3.7 POST-TENSIONING OF CONCRETE: DELETED
- 3.8 CONCRETE: DELETED
- 3.9 REINFORCEMENT: DELETED
- 3.10 SHOTCRETE: DELETED
- 3.11 PRESTRESSED CONCRETE: DELETED
- 3.12 ARCHITECTURAL PRECAST CONCRETE: DELETED
- 3.13 MASONRY: DELETED
- 3.14 STRUCTURAL STEEL: DELETED
- 3.15 STEEL DECKING: DELETED
- 3.17 SPRAYED-ON FIREPROOFING:
  - A. Provide field inspection and testing services to certify sprayed-on fireproofing has been applied in accordance with contract documents.
  - B. Obtain a copy of approved submittals from Resident Engineer.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- C. Use approved installation in test areas as criteria for inspection of work.
- D. Test sprayed-on fireproofing for thickness and density in accordance with ASTM E605.
  - 1. Thickness gauge specified in ASTM E605 may be modified for pole extension so that overhead sprayed material can be reached from floor.
- E. Location of test areas for field tests as follows:
  - 1. Thickness: Select one bay per floor, or one bay for each 930 m<sup>2</sup> (10,000 square feet) of floor area, whichever provides for greater number of tests. Take thickness determinations from each of following locations: Metal deck, beam, and column.
  - 2. Density: Take density determinations from each floor, or one test from each 930 m<sup>2</sup> (10,000 square feet) of floor area, whichever provides for greater number of tests, from each of the following areas: Underside of metal deck, beam flanges, and beam web.
- F. Submit inspection reports, certification, and instances of noncompliance to Resident Engineer.

**3.18 TYPE OF TEST:**

- A. Earthwork: DELETED
- B. Landscaping: DELETED
- C. Aggregate Base: DELETED
- D. Asphalt Concrete: DELETED
- E. Concrete: DELETED
- F. Reinforcing Steel: DELETED
- G. Shotcrete: DELETED
- H. Prestressed Concrete: DELETED
- I. Masonry: DELETED
- J. Structural Steel: DELETED
- K. Sprayed-On Fireproofing:
  - Thickness and Density Tests (ASTM E605)..... 4
  - For repaired areas damaged during construction
- L. Inspection: Provide Technical Personnel man days as required

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

L. Technical Personnel:

1. Provide technician time frames and laboratory facilities as required.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 01 57 19  
TEMPORARY ENVIRONMENTAL CONTROLS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies the control of environmental pollution and damage that the Contractor must consider for air, water, and land resources. It includes management of visual aesthetics, noise, solid waste, radiant energy, and radioactive materials, as well as other pollutants and resources encountered or generated by the Contractor. The Contractor is obligated to consider specified control measures with the costs included within the various contract items of work.
- B. Environmental pollution and damage is defined as the presence of chemical, physical, or biological elements or agents which:
  - 1. Adversely effect human health or welfare,
  - 2. Unfavorably alter ecological balances of importance to human life,
  - 3. Effect other species of importance to humankind, or;
  - 4. Degrade the utility of the environment for aesthetic, cultural, and historical purposes.
- C. Definitions of Pollutants:
  - 1. Chemical Waste: Petroleum products, bituminous materials, salts, acids, alkalis, herbicides, pesticides, organic chemicals, and inorganic wastes.
  - 2. Debris: Combustible and noncombustible wastes, such as leaves, tree trimmings, ashes, and waste materials resulting from construction or maintenance and repair work.
  - 3. Sediment: Soil and other debris that has been eroded and transported by runoff water.
  - 4. Solid Waste: Rubbish, debris, garbage, and other discarded solid materials resulting from industrial, commercial, and agricultural operations and from community activities.
  - 5. Surface Discharge: The term "Surface Discharge" implies that the water is discharged with possible sheeting action and subsequent soil erosion may occur. Waters that are surface discharged may terminate in drainage ditches, storm sewers, creeks, and/or "water of the

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

United States" and would require a permit to discharge water from the governing agency.

6. Rubbish: Combustible and noncombustible wastes such as paper, boxes, glass and crockery, metal and lumber scrap, tin cans, and bones.
7. Sanitary Wastes:
  - a. Sewage: Domestic sanitary sewage and human and animal waste.
  - b. Garbage: Refuse and scraps resulting from preparation, cooking, dispensing, and consumption of food.

**1.2 QUALITY CONTROL**

- A. Establish and maintain quality control for the environmental protection of all items set forth herein.
- B. Record on daily reports any problems in complying with laws, regulations, and ordinances. Note any corrective action taken.

**1.3 REFERENCES**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.
- B. U.S. National Archives and Records Administration (NARA):  
33 CFR 328.....Definitions

**1.4 SUBMITTALS**

- A. In accordance with Section, 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:
  1. Environmental Protection Plan: After the contract is awarded and prior to the commencement of the work, the Contractor shall meet with the Resident Engineer to discuss the proposed Environmental Protection Plan and to develop mutual understanding relative to details of environmental protection. Not more than 20 days after the meeting, the Contractor shall prepare and submit to the Resident Engineer for approval, a written and/or graphic Environmental Protection Plan including, but not limited to, the following:
    - a. Name(s) of person(s) within the Contractor's organization who is (are) responsible for ensuring adherence to the Environmental Protection Plan.
    - b. Name(s) and qualifications of person(s) responsible for manifesting hazardous waste to be removed from the site.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- c. Name(s) and qualifications of person(s) responsible for training the Contractor's environmental protection personnel.
  - d. Description of the Contractor's environmental protection personnel training program.
  - e. A list of Federal, State, and local laws, regulations, and permits concerning environmental protection, pollution control, noise control and abatement that are applicable to the Contractor's proposed operations and the requirements imposed by those laws, regulations, and permits.
  - f. Methods for protection of features to be preserved within authorized work areas including trees, shrubs, vines, grasses, ground cover, landscape features, air and water quality, fish and wildlife, soil, historical, and archeological and cultural resources.
  - g. Procedures to provide the environmental protection that comply with the applicable laws and regulations. Describe the procedures to correct pollution of the environment due to accident, natural causes, or failure to follow the procedures as described in the Environmental Protection Plan.
  - h. Permits, licenses, and the location of the solid waste disposal area.
  - i. Drawings showing locations of any proposed temporary excavations or embankments for haul roads, stream crossings, material storage areas, structures, sanitary facilities, and stockpiles of excess or spoil materials. Include as part of an Erosion Control Plan approved by the District Office of the U.S. Soil Conservation Service and the Department of Veterans Affairs.
  - j. Environmental Monitoring Plans for the job site including land, water, air, and noise.
  - k. Work Area Plan showing the proposed activity in each portion of the area and identifying the areas of limited use or nonuse. Plan should include measures for marking the limits of use areas. This plan may be incorporated within the Erosion Control Plan.
- B. Approval of the Contractor's Environmental Protection Plan will not relieve the Contractor of responsibility for adequate and continued control of pollutants and other environmental protection measures.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.5 PROTECTION OF ENVIRONMENTAL RESOURCES**

- A. Protect environmental resources within the project boundaries and those affected outside the limits of permanent work during the entire period of this contract. Confine activities to areas defined by the specifications and drawings.
- B. Protection of Land Resources: Prior to construction, identify all land resources to be preserved within the work area. Do not remove, cut, deface, injure, or destroy land resources including trees, shrubs, vines, grasses, top soil, and land forms without permission from the Resident Engineer. Do not fasten or attach ropes, cables, or guys to trees for anchorage unless specifically authorized, or where special emergency use is permitted.
  - 1. Work Area Limits: Prior to any construction, mark the areas that require work to be performed under this contract. Mark or fence isolated areas within the general work area that are to be saved and protected. Protect monuments, works of art, and markers before construction operations begin. Convey to all personnel the purpose of marking and protecting all necessary objects.
  - 2. Protection of Landscape: Protect trees, shrubs, vines, grasses, land forms, and other landscape features shown on the drawings to be preserved by marking, fencing, or using any other approved techniques.
    - a. Box and protect from damage existing trees and shrubs to remain on the construction site.
    - b. Immediately repair all damage to existing trees and shrubs by trimming, cleaning, and painting with antiseptic tree paint.
    - c. Do not store building materials or perform construction activities closer to existing trees or shrubs than the farthest extension of their limbs.
  - 3. Reduction of Exposure of Unprotected Erodible Soils: Plan and conduct earthwork to minimize the duration of exposure of unprotected soils. Clear areas in reasonably sized increments only as needed to use. Form earthwork to final grade as shown. Immediately protect side slopes and back slopes upon completion of rough grading.
  - 4. Temporary Protection of Disturbed Areas: Construct diversion ditches, benches, and berms to retard and divert runoff from the construction

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

site to protected drainage areas approved under paragraph 208 of the Clean Water Act.

- a. Sediment Basins: Trap sediment from construction areas in temporary or permanent sediment basins that accommodate the runoff of a local 100 (design year) storm. After each storm, pump the basins dry and remove the accumulated sediment. Control overflow/drainage with paved weirs or by vertical overflow pipes, draining from the surface.
  - b. Reuse or conserve the collected topsoil sediment as directed by the Resident Engineer. Topsoil use and requirements are specified in Section 31 20 00, EARTH MOVING.
  - c. Institute effluent quality monitoring programs as required by Federal, State, and local environmental agencies.
5. Erosion and Sedimentation Control Devices: The erosion and sediment controls selected and maintained by the Contractor shall be such that water quality standards are not violated as a result of the Contractor's activities. Construct or install all temporary and permanent erosion and sedimentation control features. Maintain temporary erosion and sediment control measures such as berms, dikes, drains, sedimentation basins, grassing, and mulching, until permanent drainage and erosion control facilities are completed and operative.
  6. Manage borrow areas on Government property to minimize erosion and to prevent sediment from entering nearby water courses or lakes.
  7. Manage and control spoil areas on Government property to limit spoil to areas and prevent erosion of soil or sediment from entering nearby water courses or lakes.
  8. Protect adjacent areas from despoilment by temporary excavations and embankments.
  9. Handle and dispose of solid wastes in such a manner that will prevent contamination of the environment. Place solid wastes (excluding clearing debris) in containers that are emptied on a regular schedule. Transport all solid waste off Government property and dispose of waste in compliance with Federal, State, and local requirements.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

10. Store chemical waste away from the work areas in corrosion resistant containers and dispose of waste in accordance with Federal, State, and local regulations.
11. Handle discarded materials other than those included in the solid waste category as directed by the Resident Engineer.
- C. Protection of Water Resources: Keep construction activities under surveillance, management, and control to avoid pollution of surface and ground waters and sewer systems. Implement management techniques to control water pollution by the listed construction activities that are included in this contract.
  1. Washing and Curing Water: Do not allow wastewater directly derived from construction activities to enter water areas. Collect and place wastewater in retention ponds allowing the suspended material to settle, the pollutants to separate, or the water to evaporate.
  2. Control movement of materials and equipment at stream crossings during construction to prevent violation of water pollution control standards of the Federal, State, or local government.
  3. Monitor water areas affected by construction.
- D. Protection of Fish and Wildlife Resources: Keep construction activities under surveillance, management, and control to minimize interference with, disturbance of, or damage to fish and wildlife. Prior to beginning construction operations, list species that require specific attention along with measures for their protection.
- E. Protection of Air Resources: Keep construction activities under surveillance, management, and control to minimize pollution of air resources. Burning is not permitted on the job site. Keep activities, equipment, processes, and work operated or performed, in strict accordance with the State of New York Air Pollution Statute, Rule, or Regulation and Federal emission and performance laws and standards. Maintain ambient air quality standards set by the Environmental Protection Agency, for those construction operations and activities specified.
  1. Particulates: Control dust particles, aerosols, and gaseous by-products from all construction activities, processing, and preparation of materials (such as from asphaltic batch plants) at all

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- times, including weekends, holidays, and hours when work is not in progress.
2. Particulates Control: Maintain all excavations, stockpiles, haul roads, permanent and temporary access roads, plant sites, spoil areas, borrow areas, and all other work areas within or outside the project boundaries free from particulates which would cause a hazard or a nuisance. Sprinklering, chemical treatment of an approved type, light bituminous treatment, baghouse, scrubbers, electrostatic precipitators, or other methods are permitted to control particulates in the work area.
  3. Hydrocarbons and Carbon Monoxide: Control monoxide emissions from equipment to Federal and State allowable limits.
  4. Odors: Control odors of construction activities and prevent obnoxious odors from occurring.
- F. Reduction of Noise: Minimize noise using every action possible. Perform noise-producing work in less sensitive hours of the day or week as directed by the Resident Engineer. Maintain noise-produced work at or below the decibel levels and within the time periods specified.
1. Perform construction activities involving repetitive, high-level impact noise only between time frames as approved by the VA, and/or as otherwise permitted by local ordinance or the Resident Engineer. Repetitive impact noise on the property shall not exceed the following dB limitations:

Time Duration of Impact Noise	Sound Level in dB
More than 12 minutes in any hour	70
Less than 30 seconds of any hour	85
Less than three minutes of any hour	80
Less than 12 minutes of any hour	75

SPEC WRITER NOTE: Insert additional information as needed when unique to a particular VA Medical Center site.

2. Provide sound-deadening devices on equipment and take noise abatement measures that are necessary to comply with the requirements of this contract, consisting of, but not limited to, the following:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- a. Maintain maximum permissible construction equipment noise levels at 15 m (50 feet) (dBA):

EARTHMOVING		MATERIALS HANDLING	
FRONT LOADERS	75	CONCRETE MIXERS	75
BACKHOES	75	CONCRETE PUMPS	75
DOZERS	75	CRANES	75
TRACTORS	75	DERRICKS IMPACT	75
SCAPERS	80	PILE DRIVERS	95
GRADERS	75	JACK HAMMERS	75
TRUCKS	75	ROCK DRILLS	80
PAVERS, STATIONARY	80	PNEUMATIC TOOLS	80
PUMPS	75	BLASTING	//--//
GENERATORS	75	SAWS	75
COMPRESSORS	75	VIBRATORS	75

- b. Use shields or other physical barriers to restrict noise transmission.
- c. Provide soundproof housings or enclosures for noise-producing machinery.
- d. Use efficient silencers on equipment air intakes.
- e. Use efficient intake and exhaust mufflers on internal combustion engines that are maintained so equipment performs below noise levels specified.
- f. Line hoppers and storage bins with sound deadening material.
- g. Conduct truck loading, unloading, and hauling operations so that noise is kept to a minimum.
3. Measure sound level for noise exposure due to the construction at least once every five successive working days while work is being performed above 55 dB(A) noise level. Measure noise exposure at the property line or 15 m (50 feet) from the noise source, whichever is greater. Measure the sound levels on the A weighing network of a General Purpose sound level meter at slow response. To minimize the effect of reflective sound waves at buildings, take measurements at 900 to 1800 mm (three to six feet) in front of any building face.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Submit the recorded information to the Resident Engineer noting any problems and the alternatives for mitigating actions.

- G. Restoration of Damaged Property: If any direct or indirect damage is done to public or private property resulting from any act, omission, neglect, or misconduct, the Contractor shall restore the damaged property to a condition equal to that existing before the damage at no additional cost to the Government. Repair, rebuild, or restore property as directed or make good such damage in an acceptable manner.
- H. Final Clean-up: On completion of project and after removal of all debris, rubbish, and temporary construction, Contractor shall leave the construction area in a clean condition satisfactory to the Resident Engineer. Cleaning shall include off the station disposal of all items and materials not required to be salvaged, as well as all debris and rubbish resulting from demolition and new work operations.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 01 58 16  
TEMPORARY INTERIOR SIGNAGE**

**PART 1 GENERAL**

**DESCRIPTION**

This section specifies temporary interior signs.

**PART 2 PRODUCTS**

**2.1 TEMPORARY SIGNS**

- A. Fabricate from 50 Kg (110 pound) mat finish white paper.
- B. Cut to 100 mm (4-inch) wide by 300 mm (12 inch) long size tag.
- C. Punch 3 mm (1/8-inch) diameter hole centered on 100 mm (4-inch) dimension of tag. Edge of Hole spaced approximately 13 mm (1/2-inch) from one end on tag.
- D. Reinforce hole on both sides with gummed cloth washer or other suitable material capable of preventing tie pulling through paper edge.
- E. Ties: Steel wire 0.3 mm (0.0120-inch) thick, attach to tag with twist tie, leaving 150 mm (6-inch) long free ends.

**PART 3 EXECUTION**

**3.1 INSTALLATION**

- A. Install temporary signs attached to room door frame or room door knob, lever, or pull for doors on corridor openings.
- B. Mark on signs with felt tip marker having approximately 3 mm (1/8-inch) wide stroke for clearly legible numbers or letters.
- C. Identify room with numbers as designated on floor plans.

**3.2 LOCATION**

- A. Install on doors that have room, corridor, and space numbers shown.
- B. Doors that do not require signs are as follows:
  - 1. Corridor barrier doors (cross-corridor) in corridor with same number.
  - 2. Folding doors or partitions.
  - 3. Toilet or bathroom doors within and between rooms.
  - 4. Communicating doors in partitions between rooms with corridor entrance doors.
  - 5. Closet doors within rooms.
- C. Replace missing, damaged, or illegible signs.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 01 74 19  
CONSTRUCTION WASTE MANAGEMENT**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies the requirements for the management of non-hazardous building construction and demolition waste.
- B. Waste disposal in landfills shall be minimized to the greatest extent possible. Of the inevitable waste that is generated, as much of the waste material as economically feasible shall be salvaged, recycled or reused.
- C. Contractor shall use all reasonable means to divert construction and demolition waste from landfills and incinerators, and facilitate their salvage and recycle not limited to the following:
  - 1. Waste Management Plan development and implementation.
  - 2. Techniques to minimize waste generation.
  - 3. Sorting and separating of waste materials.
  - 4. Salvage of existing materials and items for reuse or resale.
  - 5. Recycling of materials that cannot be reused or sold.
- D. At a minimum the following waste categories shall be diverted from landfills:
  - 1. Soil.
  - 2. Inerts (eg, concrete, masonry and asphalt).
  - 3. Clean dimensional wood and palette wood.
  - 4. Green waste (biodegradable landscaping materials).
  - 5. Engineered wood products (plywood, particle board and I-joists, etc).
  - 6. Metal products (eg, steel, wire, beverage containers, copper, etc).
  - 7. Cardboard, paper and packaging.
  - 8. Bitumen roofing materials.
  - 9. Plastics (eg, ABS, PVC).
  - 10. Carpet and/or pad.
  - 11. Gypsum board.
  - 12. Insulation.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- 13. Paint.
- 14. Fluorescent lamps.

**1.2 RELATED WORK**

- A. Section 02 41 00, DEMOLITION.
- B. Section 01 00 00, GENERAL REQUIREMENTS.

**1.3 QUALITY ASSURANCE**

- A. Contractor shall practice efficient waste management when sizing, cutting and installing building products. Processes shall be employed to ensure the generation of as little waste as possible. Construction /Demolition waste includes products of the following:
  - 1. Excess or unusable construction materials.
  - 2. Packaging used for construction products.
  - 3. Poor planning and/or layout.
  - 4. Construction error.
  - 5. Over ordering.
  - 6. Weather damage.
  - 7. Contamination.
  - 8. Mishandling.
  - 9. Breakage.
- B. Establish and maintain the management of non-hazardous building construction and demolition waste set forth herein. Conduct a site assessment to estimate the types of materials that will be generated by demolition and construction.
- C. Contractor shall develop and implement procedures to reuse and recycle new materials to a minimum of 50 percent.
- D. Contractor shall be responsible for implementation of any special programs involving rebates or similar incentives related to recycling. Any revenues or savings obtained from salvage or recycling shall accrue to the contractor.
- E. Contractor shall provide all demolition, removal and legal disposal of materials. Contractor shall ensure that facilities used for recycling, reuse and disposal shall be permitted for the intended use to the

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

extent required by local, state, federal regulations. The Whole Building Design Guide website <http://www.wbdg.org> provides a Construction Waste Management Database that contains information on companies that haul, collect, and process recyclable debris from construction projects.

- F. Contractor shall assign a specific area to facilitate separation of materials for reuse, salvage, recycling, and return. Such areas are to be kept neat and clean and clearly marked in order to avoid contamination or mixing of materials.
- G. Contractor shall provide on-site instructions and supervision of separation, handling, salvaging, recycling, reuse and return methods to be used by all parties during waste generating stages.
- H. Record on daily reports any problems in complying with laws, regulations and ordinances with corrective action taken.

**1.4 TERMINOLOGY**

- A. Class III Landfill: A landfill that accepts non-hazardous resources such as household, commercial and industrial waste resulting from construction, remodeling, repair and demolition operations.
- B. Clean: Untreated and unpainted; uncontaminated with adhesives, oils, solvents, mastics and like products.
- C. Construction and Demolition Waste: Includes all non-hazardous resources resulting from construction, remodeling, alterations, repair and demolition operations.
- D. Dismantle: The process of parting out a building in such a way as to preserve the usefulness of its materials and components.
- E. Disposal: Acceptance of solid wastes at a legally operating facility for the purpose of land filling (includes Class III landfills and inert fills).
- F. Inert Backfill Site: A location, other than inert fill or other disposal facility, to which inert materials are taken for the purpose of filling an excavation, shoring or other soil engineering operation.
- G. Inert Fill: A facility that can legally accept inert waste, such as asphalt and concrete exclusively for the purpose of disposal.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- H. Inert Solids/Inert Waste: Non-liquid solid resources including, but not limited to, soil and concrete that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality objectives established by a regional water board, and does not contain significant quantities of decomposable solid resources.
- I. Mixed Debris: Loads that include commingled recyclable and non-recyclable materials generated at the construction site.
- J. Mixed Debris Recycling Facility: A solid resource processing facility that accepts loads of mixed construction and demolition debris for the purpose of recovering re-usable and recyclable materials and disposing non-recyclable materials.
- K. Permitted Waste Hauler: A company that holds a valid permit to collect and transport solid wastes from individuals or businesses for the purpose of recycling or disposal.
- L. Recycling: The process of sorting, cleansing, treating, and reconstituting materials for the purpose of using the altered form in the manufacture of a new product. Recycling does not include burning, incinerating or thermally destroying solid waste.
  - 1. On-site Recycling - Materials that are sorted and processed on site for use in an altered state in the work, i.e. concrete crushed for use as a sub-base in paving.
  - 2. Off-site Recycling - Materials hauled to a location and used in an altered form in the manufacture of new products.
- M. Recycling Facility: An operation that can legally accept materials for the purpose of processing the materials into an altered form for the manufacture of new products. Depending on the types of materials accepted and operating procedures, a recycling facility may or may not be required to have a solid waste facilities permit or be regulated by the local enforcement agency.
- N. Reuse: Materials that are recovered for use in the same form, on-site or off-site.
- O. Return: To give back reusable items or unused products to vendors for credit.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- P. Salvage: To remove waste materials from the site for resale or re-use by a third party.
- Q. Source-Separated Materials: Materials that are sorted by type at the site for the purpose of reuse and recycling.
- R. Solid Waste: Materials that have been designated as non-recyclable and are discarded for the purposes of disposal.
- S. Transfer Station: A facility that can legally accept solid waste for the purpose of temporarily storing the materials for re-loading onto other trucks and transporting them to a landfill for disposal, or recovering some materials for re-use or recycling.

**1.5 SUBMITTALS**

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish the following:
- B. Prepare and submit to the Resident Engineer a written demolition debris management plan. The plan shall include, but not be limited to, the following information:
  - 1. Procedures to be used for debris management.
  - 2. Techniques to be used to minimize waste generation.
  - 3. Analysis of the estimated job site waste to be generated:
    - a. List of each material and quantity to be salvaged, reused, recycled.
    - b. List of each material and quantity proposed to be taken to a landfill.
  - 4. Detailed description of the Means/Methods to be used for material handling.
    - a. On site: Material separation, storage, protection where applicable.
    - b. Off site: Transportation means and destination. Include list of materials.
      - 1) Description of materials to be site-separated and self-hauled to designated facilities.
      - 2) Description of mixed materials to be collected by designated waste haulers and removed from the site.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- c. The names and locations of mixed debris reuse and recycling facilities or sites.
- d. The names and locations of trash disposal landfill facilities or sites.
- e. Documentation that the facilities or sites are approved to receive the materials.
- C. Designated Manager responsible for instructing personnel, supervising, documenting and administer over meetings relevant to the Waste Management Plan.
- D. Monthly summary of construction and demolition debris diversion and disposal, quantifying all materials generated at the work site and disposed of or diverted from disposal through recycling.

**1.6 APPLICABLE PUBLICATIONS**

- A Publications listed below form a part of this specification to the extent referenced. Publications are referenced by the basic designation only. In the event that criteria requirements conflict, the most stringent requirements shall be met.
- B. U.S. Green Building Council (USGBC):  
LEED Green Building Rating System for New Construction

**1.7 RECORDS**

Maintain records to document the quantity of waste generated; the quantity of waste diverted through sale, reuse, or recycling; and the quantity of waste disposed by landfill or incineration. Records shall be kept in accordance with the LEED Reference Guide and LEED Template.

**PART 2 - PRODUCTS**

**2.1 MATERIALS**

- A. List of each material and quantity to be salvaged, recycled, reused.
- B. List of each material and quantity proposed to be taken to a landfill.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- C. Material tracking data: Receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices, net total costs or savings.

**PART 3 - EXECUTION**

**3.1 COLLECTION**

- A. Provide all necessary containers, bins and storage areas to facilitate effective waste management.
- B. Clearly identify containers, bins and storage areas so that recyclable materials are separated from trash and can be transported to respective recycling facility for processing.
- C. Hazardous wastes shall be separated, stored, disposed of according to local, state, federal regulations.

**3.2 DISPOSAL**

- A. Contractor shall be responsible for transporting and disposing of materials that cannot be delivered to a source-separated or mixed materials recycling facility to a transfer station or disposal facility that can accept the materials in accordance with state and federal regulations.
- B. Construction or demolition materials with no practical reuse or that cannot be salvaged or recycled shall be disposed of at a landfill or incinerator.

**3.3 REPORT**

- A. With each application for progress payment, submit a summary of construction and demolition debris diversion and disposal including beginning and ending dates of period covered.
- B. Quantify all materials diverted from landfill disposal through salvage or recycling during the period with the receiving parties, dates removed, transportation costs, weight tickets, manifests, invoices.

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Include the net total costs or savings for each salvaged or recycled material.

- C. Quantify all materials disposed of during the period with the receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices. Include the net total costs for each disposal.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 01 81 11**

**SUSTAINABLE DESIGN REQUIREMENTS**

**PART 1 - GENERAL**

**1.1 SUMMARY**

This Section describes general requirements and procedures to comply with the Guiding Principles for Leadership in High Performance and Sustainable Buildings Memorandum of Understanding incorporated in the Executive Orders 13423 and 13514; Energy Policy Act of 2005 (EPA 2005) and the Energy Independence and Security Act of 2007 (EISA 2007).

**1.2 OBJECTIVES**

A. To obtain acceptable Indoor Air Quality (IAQ) for the completed project and minimize the environmental impacts of the construction and operation, the Contractor during the construction phase of this project shall implement the following procedures:

1. Select products that minimize consumption of non-renewable resources, consume reduced amounts of energy and minimize amounts of pollution to produce, and employ recycled and/or recyclable materials. It is the intent of this project to conform with EPA's Five Guiding Principles on environmentally preferable purchasing. The five principles are:
  - a. Include environmental considerations as part of the normal purchasing process.
  - b. Emphasize pollution prevention early in the purchasing process.
  - c. Examine multiple environmental attributes throughout a product's or service's life cycle.
  - d. Compare relevant environmental impacts when selecting products and services.
  - e. Collect and base purchasing decisions on accurate and meaningful information about environmental performance.
2. Control sources for potential IAQ pollutants by controlled selection of materials and processes used in project construction in order to attain superior IAQ.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3. Products and processes that achieve the above objectives to the extent currently possible and practical have been selected and included in these Construction Documents. The Contractor is responsible to maintain and support these objectives in developing means and methods for performing the work of this Contract and in proposing product substitutions and/or changes to specified processes.
4. Use building practices that insure construction debris and particulates do not contaminate or enter duct work prior to system startup and turn over.

**1.3 RELATED DOCUMENTS**

- A. Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT

**1.4 DEFINITIONS**

- A. Agrifiber Products: Composite panel products derived from agricultural fiber
- B. Biobased Product: As defined in the 2002 Farm Bill, a product determined by the Secretary to be a commercial or industrial product (other than food or feed) that is composed, in whole or in significant part, of biological products or renewable domestic agricultural materials (including plant, animal, and marine materials) or forestry materials
- C. Biobased Content: The weight of the biobased material divided by the total weight of the product and expressed as a percentage by weight
- D. Certificates of Chain-of-Custody: Certificates signed by manufacturers certifying that wood used to make products has been tracked through its extraction and fabrication to ensure that it was obtained from forests certified by a specified certification program
- E. Composite Wood: A product consisting of wood fiber or other plant particles bonded together by a resin or binder
- F. Construction and Demolition Waste: Includes solid wastes, such as building materials, packaging, rubbish, debris, and rubble resulting from construction, remodeling, repair and demolition operations. A

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

construction waste management plan is to be provided by the Contractor as defined in Section 01 74 19.

- G. Third Party Certification: Certification of levels of environmental achievement by nationally recognized sustainability rating system.
- H. Light Pollution: Light that extends beyond its source such that the additional light is wasted in an unwanted area or in an area where it inhibits view of the night sky
- I. Recycled Content Materials: Products that contain pre-consumer or post-consumer materials as all or part of their feedstock
- J. Post-Consumer Recycled Content: The percentage by weight of constituent materials that have been recovered or otherwise diverted from the solid-waste stream after consumer use
- K. Pre-Consumer Recycled Content: Materials that have been recovered or otherwise diverted from the solid-waste stream during the manufacturing process. Pre-consumer content must be material that would not have otherwise entered the waste stream as per Section 5 of the FTC Act, Part 260 "Guidelines for the Use of Environmental Marketing Claims": [www.ftc.gov/bcp/grnrule/guides980427](http://www.ftc.gov/bcp/grnrule/guides980427)
- L. Regional Materials: Materials that are extracted, harvested, recovered, and manufactured within a radius of 250 miles (400 km) from the Project site
- M. Salvaged or Reused Materials: Materials extracted from existing buildings in order to be reused in other buildings without being manufactured
- N. Sealant: Any material that fills and seals gaps between other materials
- O. Type 1 Finishes: Materials and finishes which have a potential for short-term levels of off gassing from chemicals inherent in their manufacturing process, or which are applied in a form requiring vehicles or carriers for spreading which release a high level of particulate matter in the process of installation and/or curing.
- P. Type 2 Finishes: "Fuzzy" materials and finishes which are woven, fibrous, or porous in nature and tend to adsorb chemicals offgas

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Q. Volatile Organic Compounds (VOCs): Any compound of carbon, excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate, which participates in atmospheric photochemical reactions. Compounds that have negligible photochemical reactivity, listed in EPA 40 CFR 51.100(s), are also excluded from this regulatory definition.

**1.5 SUBMITTALS**

A. Sustainable Design Submittals:

1. Alternative Transportation: Provide manufacturer's cut sheets for all bike racks installed on site, including the total number of bicycle storage slots provided. Also, provide manufacturer's cut sheets for any alternative-fuel refueling stations installed on site, including fueling capacity information for an 8-hour period.
2. Heat Island Effect:
  - a. Site Paving: Provide manufacturer's cut sheets for all impervious paving materials, highlighting the Solar Reflectance Index (SRI) of the material. Also, provide cut sheets for all pervious paving materials.
  - b. Roofing Materials: Submittals for roofing materials must include manufacturer's cut sheets or product data highlighting the Solar Reflectance Index (SRI) of the material.
3. Exterior Lighting Fixtures: Submittals must include cut sheets with manufacturer's data on initial fixture lumens above 90° from nadir for all exterior lighting fixtures, and, for parking lot lighting, verification that the fixtures are classified by the IESNA as "full cutoff" (FCO); OR provide documentation that exterior luminaires are IDA-Approved as Dark-Sky Friendly by the International Dark Sky Association (IDA) Fixture Seal of Approval Program.
4. Irrigation Systems: Provide manufacturer's cut sheets for all permanent landscape irrigation system components and for any rainwater harvesting system components, such as cisterns.
5. Water Conserving Fixtures: Submittals must include manufacturer's cut sheets for all water-consuming plumbing fixtures and fittings

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- (toilets, urinals, faucets, showerheads, etc.) highlighting maximum flow rates and/or flush rates. Include cut sheets for any automatic faucet-control devices.
6. Process Water Use: Provide manufacturer's cut sheets for all water-consuming commercial equipment (clothes washers, dishwashers, ice machines, etc.), highlighting water consumption performance. Include manufacturer's cut sheets or product data for any cooling towers, highlighting water consumption estimates, water use reduction measures, and corrosion inhibitors.
  7. Elimination of CFCs AND HCFCs: Provide manufacturer's cut sheets for all cooling equipment with manufacturer's product data, highlighting refrigerants; provide manufacturer's cut sheets for all fire-suppression equipment, highlighting fire-suppression agents; provide manufacturer's cut-sheets for all polystyrene insulation (XPS) and closed-cell spray foam polyurethane insulation, highlighting the blowing agent(s).
  8. Appliances and Equipment: Provide copies of manufacturer's product data for all Energy Star eligible equipment and appliances, including office equipment, computers and printers, electronics, and commercial food service equipment (excluding HVAC and lighting components), verifying compliance with EPA's Energy Star program.
  9. On-Site Renewable Energy Systems: Provide cut sheets and manufacturer's product data for all on-site renewable energy generating components and equipment, including documentation of output capacity.
  10. Measurement and Verification Systems: Provide cut sheets and manufacturer's product data for all controls systems, highlighting electrical metering and trending capability components.
  11. Salvaged or Reused Materials: Provide documentation that lists each salvaged or reused material, the source or vendor of the material, the purchase price, and the replacement cost if greater than the purchase price.

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

12. Recycled Content: Submittals for all materials with recycled content (excluding MEP systems equipment and components) must include the following documentation:
  - st of each material or product, excluding cost of labor and equipment for installation
  - a. Manufacturer's product data, product literature, or a letter from the manufacturer verifying the percentage of post-consumer and pre-consumer recycled content (by weight) of each material or product
  - b. An electronic spreadsheet that tabulates the Project's total materials cost and combined recycled content value (defined as the sum of the post-consumer recycled content value plus one-half of the pre-consumer recycled content value) expressed as a percentage of total materials cost. This spreadsheet shall be submitted every third month with the Contractor's Certificate and Application for Payment. It should indicate, on an ongoing basis, line items for each material, including cost, pre-consumer recycled content, post-consumer recycled content, and combined recycled content value.
13. Regional Materials: Submittals for all products or materials expected to contribute to the regional calculation (excluding MEP systems equipment and components) must include the following documentation:
  - a. Cost of each material or product, excluding cost of labor and equipment for installation
  - b. Location of product manufacture and distance from point of manufacture to the Project Site
  - c. Location of point of extraction, harvest, or recovery for each raw material in each product and distance from the point of extraction, harvest, or recovery to the Project Site
  - d. Manufacturer's product data, product literature, or a letter from the manufacturer verifying the location and distance from the

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Project Site to the point of manufacture for each regional material

- e. Manufacturer's product data, product literature, or a letter from the manufacturer verifying the location and distance from the Project Site to the point of extraction, harvest, or recovery for each regional material or product, including, at a minimum, gravel and fill, planting materials, concrete, masonry, and GWB
- f. An electronic spreadsheet that tabulates the Project's total materials cost and regional materials value, expressed as a percentage of total materials cost. This spreadsheet shall be submitted every third month with the Contractor's Certificate and Application for Payment. It should indicate on an ongoing basis, line items for each material, including cost, location of manufacture, distance from manufacturing plant to the Project Site, location of raw material extraction, and distance from extraction point to the Project Site.

14. Biobased Products:

- a. Rapidly Renewable Products: Submittals must include written documentation from the manufacturer declaring that rapidly renewable materials are made from plants harvested within a ten-year or shorter cycle and must indicate the percentage (by weight) of these rapidly renewable components contained in the candidate products, along with the costs of each of these materials, excluding labor and delivery costs.
- b. Certified Wood: Submittals for all wood-based materials must include a statement indicating the cost of each product containing FSC Certified wood, exclusive of labor and delivery costs, and third party verification of certification from one of the following:
  - 1) Documentation from the supplier verifying that 100% of the wood-based content originates from SFI third-party certified forest lands, identifying the company or companies that

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- performed the SFI third-party certification for both the forest land management and the certified product content.
15. Outdoor Air Delivery Monitoring: Provide manufacturer's cut sheets highlighting the installed carbon dioxide monitoring system components and sequence of controls shop drawing documentation, including CO2 differential set-points and alarm capabilities.
  16. Interior Adhesives and Sealants: Submittals for all field-applied adhesives and sealants, which have a potential impact on indoor air, must include manufacturer's MSDSs or other Product Data highlighting VOC content.
    - a. Provide manufacturers' documentation verifying all adhesives used to apply laminates, whether shop-applied or field-applied, contain no urea-formaldehyde.
  17. Interior Paints and Coatings: Submittals for all field-applied paints and coatings, which have a potential impact on indoor air, must include manufacturer's MSDSs or other Product Data highlighting VOC content
  18. Exterior Paints and Coatings: Submittals for all field-applied paints and coatings, which have a potential impact on ambient air quality, must include manufacturer's MSDSs or other manufacturer's Product Data highlighting VOC content.
  19. Floorcoverings:
    - a. Carpet Systems: Submittals for all carpet must include the following:
      - 1) A copy of an assessment from the Building for Environmental and Economic Sustainability (BEES) software model, either Version 3.0 or 4.0, with parameters of the model set as described by this specification section.
      - 2) Manufacturer's product data verifying that all carpet systems meet or exceed the testing and product requirements of the Carpet and Rug Institute Green Label Plus program.
    - b. Engineered Wood Flooring: Submittals for all engineered wood flooring must include manufacturer's product data verifying

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

certification under either the Greenguard or FloorScore indoor emissions testing program.

20. Composite Wood and Agrifiber Binders: Submittals for all composite wood and agrifiber products (including but not limited to particleboard, wheatboard, strawboard, agriboard products, engineered wood components, solid-core wood doors, OSB, MDF, and plywood products) must include manufacturer's product data verifying that these products contain no urea-formaldehyde resins.
21. Systems Furniture and Seating: Provide manufacturer's product data verifying that all systems furniture and seating products meet the requirements of one of the following:
  - a. Greenguard certification
  - b. SCS Indoor Advantage certification
  - c. SCS Indoor Advantage Gold certification
  - d. BIFMA Standard X7.1-2005, as tested to BIFMA method M7.1-2005 and as verified by an independent laboratory
  - d. Calculated indoor air concentration limits for furniture systems and seating determined by the U.S. EPA's Environmental Technology Verification Large Chamber Test Protocol for Measuring Emissions of VOCs and Aldehydes (September 1999) testing protocol as conducted in an independent air quality testing laboratory
22. Entryway Systems: Provide manufacturer's cut sheets for all walk-off systems installed to capture particulates, including permanently installed grates, grilles, slotted systems, direct glue-down walk-off mats, and non-permanent roll-out mats.
23. Air Filtration: Provide manufacturer's cut sheets and product data highlighting the following:
  - a. Minimum Efficiency Reporting Value (MERV) for filtration media in all air handling units (AHUs) per ASHRAE HVAC Design Manual for Hospitals and Clinics.
  - b. Minimum Efficiency Reporting Value (MERV) for filtration media installed at return air grilles during construction if



**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

permanently installed AHUs are used during construction. See  
above for requirements

24. Mercury in Lighting: Provide manufacturer's cut sheets or product data for all fluorescent or HID lamps highlighting mercury content.
25. Lighting Controls: Provide manufacturer's cut sheets and shop drawing documentation highlighting all lighting controls systems components.
26. Thermal Comfort Controls: Provide manufacturer's cut sheets and shop drawing documentation highlighting all thermal comfort-control systems components.
27. Blended Cement: It is the intent of this specification to reduce CO<sub>2</sub> emissions and other environmentally detrimental effects resulting from the production of portland cement by requiring that all concrete mixes, in aggregate, utilize blended cement mixes to displace portland cement as specified in Section 03 30 00, CONCRETE typically included in conventional construction. Provide the following submittals:
  - a. Copies of concrete design mixes for all installed concrete
  - b. Copies of typical regional baseline concrete design mixes for all compressive strengths used on the Project
  - c. Quantities in cubic yards of each installed concrete mix
28. Gypsum Wall Board: Provide manufacturer's cut sheets or product data verifying that all gypsum wallboard products are moisture and mold-resistant.
29. Fiberglass Insulation: Provide manufacturer's cut sheets or product data verifying that fiberglass batt insulation contains no urea-formaldehyde.
30. Duct Acoustical Insulation: Provide manufacturer's cut sheets or product data verifying that mechanical sound insulation materials in air distribution ducts consists of an impervious, non-porous coatings that prevent dust from accumulating in the insulating materials.

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

31. Green Housekeeping: Provide documentation that all cleaning products and janitorial paper products meet the VOC limits and content requirements of this specification section.
- B. Project Materials Cost Data: Provide a spreadsheet in an electronic file indicating the total cost for the Project and the total cost of building materials used for the Project, as follows:
  1. Not more than 60 days after the Preconstruction Meeting, the General Contractor shall provide to the Owner and Architect a preliminary schedule of materials costs for all materials used for the Project organized by specification section. Exclude labor costs and all mechanical, electrical, and plumbing (MEP) systems materials and labor costs. Include the following:
    - a. Identify each reused or salvaged material, its cost, and its replacement value.
    - b. Identify each recycled-content material, its post-consumer and pre-consumer recycled content as a percentage the product's weight, its cost, its combined recycled content value (defined as the sum of the post-consumer recycled content value plus one-half of the pre-consumer recycled content value), and the total combined recycled content value for all materials as a percentage of total materials costs.
    - c. Identify each regional material, its cost, its manufacturing location, the distance of this location from the Project site, the source location for each raw material component of the material, the distance of these extraction locations from the Project site, and the total value of regional materials as a percentage of total materials costs.
    - d. Identify each biobased material, its source, its cost, and the total value of biobased materials as a percentage of total materials costs. Also provide the total value of rapidly renewable materials (materials made from plants that are harvested in less than a 10-year cycle) as a percentage of total materials costs.

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- e. Identify each wood-based material, its cost, the total wood-based materials cost, each FSC Certified wood material, its cost, and the total value of Certified wood as a percentage of total wood-based materials costs.
2. Provide final versions of the above spreadsheets to the Owner and Architect not more than 14 days after Substantial Completion.
- C. Construction Waste Management: See Section 01 74 19 "Construction Waste Management" for submittal requirements.
- D. Construction Indoor Air Quality (IAQ) Management: Submittals must include the following:
  1. Not more than 30 days after the Preconstruction Meeting, prepare and submit for the Architect and Owner's approval, an electronic copy of the draft Construction IAQ Management Plan in an electronic file including, but not limited to, descriptions of the following:
  2. Instruction procedures for meeting or exceeding the minimum requirements of the Sheet Metal and Air Conditioning National Contractors Association (SMACNA) IAQ Guidelines for Occupied Buildings Under Construction, 1995, Chapter 3, including procedures for HVAC Protection, Source Control, Pathway Interruption, Housekeeping, and Scheduling
    - a. Instruction procedures for protecting absorptive materials stored on-site or installed from moisture damage
    - b. Schedule of submission to Architect of photographs of on-site construction IAQ management measures such as protection of ducts and on-site stored oil installed absorptive materials
    - c. Instruction procedures if air handlers must be used during construction, including a description of filtration media to be used at each return air grille
    - d. Instruction procedure for replacing all air-filtration media immediately prior to occupancy after completion of construction, including a description of filtration media to be used at each air handling or air supply unit

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3. Not more than 30 days following receipt of the approved draft CIAQMP, submit an electronic copy of the approved CIAQMP in an electronic file, along with the following:
  - a. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for all filtration media to be installed at return air grilles during construction if permanently installed AHUs are used during construction.
  - b. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for filtration media in all air handling units (AHUs).
4. Not more than 14 days after Substantial Completion provide the following:
  - a. Documentation verifying required replacement of air filtration media in all air handling units (AHUs) after the completion of construction and prior to occupancy and, if applicable, required installation of filtration during construction.
  - b. Minimum of 18 Construction photographs: Six photographs taken on three different occasions during construction of the SMACNA approaches employed, along with a brief description of each approach, documenting implementation of the IAQ management measures, such as protection of ducts and on-site stored or installed absorptive materials.
  - c. A copy of the report from testing and inspecting agency documenting the results of IAQ testing, demonstrating conformance with IAQ testing procedures and requirements defined in Section 01 81 09 "Testing for Indoor Air Quality."
- E. Commissioning: See Section 01 91 00 "General Commissioning Requirements" for submittal requirements.
- F. Sustainable Design Progress Reports: Concurrent with each Application for Payment, submit reports for the following:
  1. Construction Waste Management: Waste reduction progress reports and logs complying with the requirements of Section 01 74 19 "Construction Waste Management."

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. Construction IAQ Management: See details below under Section 3.2 Construction Indoor Air Quality Management for Construction IAQ management progress report requirements.

**1.6 QUALITY ASSURANCE**

- A. Preconstruction Meeting: After award of Contract and prior to the commencement of the Work, schedule and conduct meeting with Owner, Architect, and all Subcontractors to discuss the Construction Waste Management Plan, the required Construction Indoor Air Quality (IAQ) Management Plan, and all other Sustainable Design Requirements. The purpose of this meeting is to develop a mutual understanding of the Project's Sustainable Design Requirements and coordination of the Contractor's management of these requirements with the Contracting Officer and the Construction Quality Manager.
- B. Construction Job Conferences: The status of compliance with the Sustainable Design Requirements of these specifications will be an agenda item at all regular job meetings conducted during the course of work at the site.

**PART 2 - PRODUCTS**

**2.1 PRODUCT ENVIRONMENTAL REQUIREMENTS**

- A. Site Clearing: Topsoil shall be provided by the Contractor from on-site material which has been stockpiled for reuse. Off-site borrow should only be used when on-site sources are exhausted. Chip and/or compost on site all vegetated material identified for removal.
- B. Do not burn rubbish, organic matter, etc. or any material on the site. Dispose of legally in accordance with Specifications Sections 01 74 19.
- C. Site Paving: All site impervious paving must be light colored, with a Solar Reflectance Index (SRI) of at least 29.
- D. Roofing Materials: All roofing systems, other than vegetated roof systems, must comply with the following requirements:
1. Low-Sloped roofing less than or equal to 2:12 slope must have an SRI of at least 78.
  2. Steep-Sloped roofing greater than 2:12 slope must have an SRI of at least 29.

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3. Roofing Materials: Light-colored, reflective, and high-emissivity roofing helps to reduce localized heat build-up from roof surfaces that contribute to the urban heat island effect.
- E. Exterior Lighting Fixtures:
1. All exterior luminaires must emit 0% of the total initial designed fixture lumens at an angle above 90° from nadir and/or meet the requirements of the Dark Sky certification program.
  2. Exterior lighting cannot exceed 80% of the lighting power densities defined by ASHRAE/IESNA Standard 90.1-2004, Exterior Lighting Section, without amendments.
  3. No lighting of building facades or landscape features is permitted.
- F. Herbicides and Pest Control: Herbicides shall not be permitted, and pest control measures shall utilize EPA-registered biopesticides only.
- G. Irrigation Systems: Any permanent landscape irrigation systems must be supplied entirely by collected rainwater or graywater and must be comprised of below-grade drip emitters controlled by moisture sensors. Timer controls shall not be permitted.
- H. Water-Conserving Fixtures: Plumbing fixtures and fittings shall use in aggregate at least 40% less water than the water use baseline calculated for the building after meeting the Energy Policy Act of 1992 fixture performance requirements. Flow and flush rates shall not exceed the following:
1. Toilets: no more than 1.3 gallons per flush, otherwise be dual flush 1.6/0.8 gallons per flush, and have documented bowl evacuation capability per MaP testing of at least 400 grams
  2. Urinals: Water sense rated with no more than 0.125 gallons per flush or use where considered appropriate.
  3. Lavatory Faucets: 0.5 gpm with automatic faucet controls
  4. Kitchen Sink Lavatories: 2.2 gpm
  5. Showerheads: no more than 1.5gpm
- I. Process Water Use: Employ strategies that in aggregate result in 20% less water use than the process water use baseline for the building after meeting the commercial equipment and HVAC performance

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

requirements as listed in the Table below. For equipment not addressed by EPACT 2005 or the list below, additional equipment performance requirements may be proposed provided documentation supporting the proposed benchmark or industry standard is submitted.

1. Clothes Washer: 7.5 gallons/cubic foot/cycle
2. Dishwasher with Racks: 1.0 gallons/rack
3. Ice Machine: 20 gallons/100 pounds ice for machines making over 175 pounds of ice per day; 30 gallons/100 pounds ice for machines making less than 175 ice per day. Avoid water-cooled machines.
4. Food Steamer: 2 gallons/hour. Use only boilerless steamers.
5. Pre-Rinse Spray Valves: 1.4 gallons/minute
6. Kitchen Pot-Washing Sinks: 2.2 gallons/minute
7. Cooling Towers: 2.3 gallons/ton-hr. water loss

J. Elimination of CFCs AND HCFCs:

1. Ozone Protection: Base building cooling equipment shall contain no refrigerants other than the following: HCFC-123, HFC-134a, HFC-245fa, HFC-407c, or HFC 410a.
2. Fire suppression systems may not contain ozone-depleting substances.
3. Extruded polystyrene insulation (XPS) and closed-cell spray foam polyurethane insulation shall not be manufactured with hydrochlorofluorocarbon (HCFC) blowing agents.

K. Appliances and Equipment: All Energy Star eligible equipment and appliances, including office equipment, computers and printers, electronics, and commercial food service equipment (excluding HVAC and lighting components), shall be qualified by EPA's Energy Star program.

L. HVAC Distribution Efficiency:

1. All duct systems shall be constructed of galvanized sheet metal, aluminum, or stainless steel as deemed appropriate based on the application requirements. No fiberglass duct board shall be permitted.
2. All medium- and high-pressure ductwork systems shall be pressure-tested in accordance with the current SMACNA standards.

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3. All ductwork shall be externally insulated. No interior duct liner shall be permitted.
  4. Where possible, all air terminal connections shall be hard-connected with sheet metal ductwork. If flexible ductwork is used, no flexible duct extension shall be more than six feet in length.
  5. All HVAC equipment shall be isolated from the ductwork system with flexible duct connectors to minimize the transmittance of vibration.
  6. All supply and return air branch ducts shall include the appropriate style of volume damper. Air terminal devices such as grilles, registers, and diffusers shall be balanced at duct branch dampers, not at terminal face.
- M. Measurement and Verification: Install controls and monitoring devices as required by MEP divisions order to comply with International Performance Measurement & Verification Protocol (IPMVP), Volume III: Concepts and Options for Determining Energy Savings in New Construction, April 2003, Option D.
1. The IPMVP provides guidance on situation-appropriate application of measurement and verification strategies.
- N. Salvaged or Reused materials: There shall be no substitutions for specified salvaged and reused materials and products.
1. Salvaged materials: Use of salvaged materials reduces impacts of disposal and manufacturing of replacements.
- O. Recycled Content of Materials:
1. Provide building materials with recycled content such that post-consumer recycled content value plus half the pre-consumer recycled content value constitutes a minimum of 30% of the cost of materials used for the Project, exclusive of all MEP equipment, labor, and delivery costs. The Contractor shall make all attempts to maximize the procurement of materials with recycled content.
    - a. e post-consumer recycled content value of a material shall be determined by dividing the weight of post-consumer recycled content by the total weight of the material and multiplying by the cost of the material.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- b. Do not include mechanical and electrical components in the calculations.
- c. Do not include labor and delivery costs in the calculations.
- d. Recycled content of materials shall be defined according to the Federal Trade Commission's "Guide for the Use of Environmental Marketing Claims," 16 CFR 260.7 (e).
- e. Utilize all on-site existing paving materials that are scheduled for demolition as granulated fill, and include the cost of this material had it been purchased in the calculations for recycled content value.
- f. The materials in the following list must contain the minimum recycled content indicated:

<b>Category</b>	<b>Minimum Recycled Content</b>
Compost/mulch	100% post-consumer
Asphaltic Concrete Paving	25% post-consumer
Cast-in-Place Concrete	6% pre-consumer
CMU: Gray Block	20% pre-consumer
Steel Reinforcing Bars	90% combined
Structural Steel Shapes	90% combined
Steel Joists	75% combined
Steel Deck	75% combined
Steel Fabrications	60% combined
Steel Studs	30% combined
Steel Roofing	30% post-consumer
Aluminum Fabrications	35% combined
Rigid Insulation	20% pre-consumer

Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Batt insulation	30% combined
-----------------	--------------

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 02 41 00  
DEMOLITION**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

This section specifies demolition and removal of buildings, portions of buildings, utilities, other structures and debris from trash dumps shown.

**1.2 RELATED WORK:**

- A. DELETED
- B. Safety Requirements: GENERAL CONDITIONS Article, ACCIDENT PREVENTION.
- C. Disconnecting utility services prior to demolition: Section 01 00 00, GENERAL REQUIREMENTS.
- D. Reserved items that are to remain the property of the Government: Section 01 00 00, GENERAL REQUIREMENTS.
- E. Asbestos Removal: Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT.
- G. Environmental Protection: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
- H. Construction Waste Management: Section 017419 CONSTRUCTION WASTE MANAGEMENT.
- I. Infectious Control: Section 01 00 00, GENERAL REQUIREMENTS, Article 1.7, INFECTION PREVENTION MEASURES.

**1.3 PROTECTION:**

- A. Perform demolition in such manner as to eliminate hazards to persons and property; to minimize interference with use of adjacent areas, utilities and structures or interruption of use of such utilities; and to provide free passage to and from such adjacent areas of structures. Comply with requirements of GENERAL CONDITIONS Article, ACCIDENT PREVENTION.
- B. Provide safeguards, including warning signs, barricades, temporary fences, warning lights, and other similar items that are required for protection of all personnel during demolition and removal operations. Comply with requirements of Section 01 00 00, GENERAL REQUIREMENTS,

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Article PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT,  
UTILITIES AND IMPROVEMENTS.

- C. Maintain fences, barricades, lights, and other similar items around exposed excavations until such excavations have been completely filled.
- D. Provide enclosed dust chutes with control gates from each floor to carry debris to truck beds and govern flow of material into truck. Provide overhead bridges of tight board or prefabricated metal construction at dust chutes to protect persons and property from falling debris.
- E. Prevent spread of flying particles and dust. Sprinkle rubbish and debris with water to keep dust to a minimum. Do not use water if it results in hazardous or objectionable condition such as, but not limited to; ice, flooding, or pollution. Vacuum and dust the work area daily.
- F. In addition to previously listed fire and safety rules to be observed in performance of work, include following:
  - 1. No wall or part of wall shall be permitted to fall outwardly from structures.
  - 2. DELETED
  - 3. Wherever a cutting torch or other equipment that might cause a fire is used, provide and maintain fire extinguishers nearby ready for immediate use. Instruct all possible users in use of fire extinguishers.
  - 4. Keep hydrants clear and accessible at all times. Prohibit debris from accumulating within a radius of 4500 mm (15 feet) of fire hydrants.
- G. Before beginning any demolition work, the Contractor shall survey the site and examine the drawings and specifications to determine the extent of the work. The contractor shall take necessary precautions to avoid damages to existing items to remain in place, to be reused, or to remain the property of the Medical Center; any damaged items shall be repaired or replaced as approved by the Resident Engineer. The Contractor shall coordinate the work of this section with all other work and shall construct and maintain shoring, bracing, and supports as required. The Contractor shall ensure that structural elements are not overloaded and shall be responsible for increasing structural supports or adding new supports as may be required as a result of any cutting, removal, or demolition work performed under this contract. Do not overload structural elements. Provide new supports and reinforcement for existing

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

construction weakened by demolition or removal works. Repairs, reinforcement, or structural replacement must have Resident Engineer's approval.

- H. The work shall comply with the requirements of Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
- I. The work shall comply with the requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article 1.7 INFECTION PREVENTION MEASURES.

**1.4 UTILITY SERVICES:**

- A. Demolish and remove outside utility service lines shown to be removed.
- B. Remove abandoned outside utility lines that would interfere with installation of new utility lines and new construction.

**PART 2 - PRODUCTS (NOT USED)**

**PART 3 - EXECUTION**

**3.1 DEMOLITION:**

- A. Completely demolish and remove buildings and structures, including all appurtenances related or connected thereto, as noted below:
  - 1. As required for installation of new utility service lines.
  - 2. To full depth within an area defined by hypothetical lines located 1500 mm (5 feet) outside building lines of new structures.
- B. Debris, including brick, concrete, stone, metals and similar materials shall become property of Contractor and shall be disposed of by him daily, off the Medical Center to avoid accumulation at the demolition site. Materials that cannot be removed daily shall be stored in areas specified by the Resident Engineer. Break up concrete slabs below grade that do not require removal from present location into pieces not exceeding 600 mm (24 inches) square to permit drainage. Contractor shall dispose debris in compliance with applicable federal, state or local permits, rules and/or regulations.
- C. In removing buildings and structures of more than two stories, demolish work story by story starting at highest level and progressing down to third floor level. Demolition of first and second stories may proceed simultaneously.
- D. Remove and legally dispose of all materials, other than earth to remain as part of project work, from any trash dumps shown. Materials removed shall become property of contractor and shall be disposed of in compliance with applicable federal, state or local permits, rules and/or

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

regulations. All materials in the indicated trash dump areas, including above surrounding grade and extending to a depth of 1500mm (5feet) below surrounding grade, shall be included as part of the lump sum compensation for the work of this section. Materials that are located beneath the surface of the surrounding ground more than 1500 mm (5 feet), or materials that are discovered to be hazardous, shall be handled as unforeseen. The removal of hazardous material shall be referred to Hazardous Materials specifications.

- E. Remove existing utilities as indicated or uncovered by work and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the Resident Engineer. When Utility lines are encountered that are not indicated on the drawings, the Resident Engineer shall be notified prior to further work in that area.

**3.2 CLEAN-UP:**

On completion of work of this section and after removal of all debris, leave site in clean condition satisfactory to Resident Engineer. Clean-up shall include off the Medical Center Property disposal of all items and materials not required to remain property of the Government as well as all debris and rubbish resulting from demolition operations.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 02 82 11  
TRADITIONAL ASBESTOS ABATEMENT**

**TABLE OF CONTENTS**

PART 1 - GENERAL.....	1
1.1 SUMMARY OF THE WORK.....	1
1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS.....	1
1.1.2 EXTENT OF WORK.....	1
1.1.3 RELATED WORK.....	3
1.1.4 TASKS.....	3
1.1.5 CONTRACTORS USE OF PREMISES.....	3
1.2 VARIATIONS IN QUANTITY.....	4
1.3 STOP ASBESTOS REMOVAL.....	4
1.4 DEFINITIONS.....	5
1.4.1 GENERAL.....	5
1.4.2 GLOSSARY.....	5
1.4.3 REFERENCED STANDARDS ORGANIZATIONS.....	14
1.5 APPLICABLE CODES AND REGULATIONS.....	16
1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS.....	16
1.5.2 ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITY.....	16
1.5.3 FEDERAL REQUIREMENTS.....	17
1.5.4 STATE REQUIREMENTS.....	17
1.5.5 LOCAL REQUIREMENTS.....	17
1.5.6 STANDARDS.....	17
1.5.7 EPA GUIDANCE DOCUMENTS.....	18
1.5.8 NOTICES.....	18
1.5.9 PERMITS/LICENSES.....	18
1.5.10 POSTING AND FILING OF REGULATIONS.....	18
1.5.11 VA RESPONSIBILITIES.....	18
1.5.12 SITE SECURITY.....	19
1.5.13 EMERGENCY ACTION PLAN AND ARRANGEMENTS.....	20
1.5.14 PRE-CONSTRUCTION MEETING.....	21
1.6 PROJECT COORDINATION.....	22
1.6.1 PERSONNEL.....	22
1.7 RESPIRATORY PROTECTION.....	24

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM.....	24
1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR.....	24
1.7.3 SELECTION AND USE OF RESPIRATORS.....	24
1.7.4 MINIMUM RESPIRATORY PROTECTION.....	24
1.7.5 MEDICAL WRITTEN OPINION.....	24
1.7.6 RESPIRATOR FIT TEST.....	25
1.7.7 RESPIRATOR FIT CHECK.....	25
1.7.8 MAINTENANCE AND CARE OF RESPIRATORS.....	25
1.7.9 SUPPLIED AIR SYSTEMS.....	25
1.8 WORKER PROTECTION.....	25
1.8.1 TRAINING OF ABATEMENT PERSONNEL.....	25
1.8.2 MEDICAL EXAMINATIONS.....	26
1.8.3 PERSONAL PROTECTIVE EQUIPMENT.....	26
1.8.4 REGULATED AREA ENTRY PROCEDURE.....	26
1.8.5 DECONTAMINATION PROCEDURE - PAPR.....	26
1.8.6 REGULATED AREA REQUIREMENTS.....	27
1.9 DECONTAMINATION FACILITIES.....	27
1.9.1 DESCRIPTION.....	27
1.9.2 GENERAL REQUIREMENTS.....	27
1.9.3 TEMPORARY FACILITIES TO THE PDF AND W/EDF.....	28
1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF).....	28
1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF).....	31
1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES.....	32
PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT.....	32
2.1 MATERIALS AND EQUIPMENT.....	32
2.1.1 GENERAL REQUIREMENTS.....	32
2.1.2 NEGATIVE PRESSURE FILTRATION SYSTEM.....	34
2.1.3 DESIGN AND LAYOUT.....	35
2.1.4 NEGATIVE AIR MACHINES (HEPA UNITS).....	35
2.1.5 PRESSURE DIFFERENTIAL.....	37
2.1.6 MONITORING.....	37
2.1.7 AUXILIARY GENERATOR.....	37
2.1.8 SUPPLEMENTAL MAKE-UP AIR INLETS.....	37
2.1.9 TESTING THE SYSTEM.....	37
2.1.10 DEMONSTRATION OF THE NEGATIVE AIR PRESSURE SYSTEM.....	38



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2.1.11 USE OF SYSTEM DURING ABATEMENT OPERATIONS.....	38
2.1.12 DISMANTLING THE SYSTEM.....	38
2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA.....	39
2.2.1 GENERAL.....	39
2.2.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA.....	39
2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA.....	39
2.2.4 CRITICAL BARRIERS.....	39
2.2.5 PRIMARY BARRIERS.....	40
2.2.6 SECONDARY BARRIERS.....	40
2.2.7 EXTENSION OF THE REGULATED AREA.....	40
2.2.8 FIRESTOPPING.....	40
2.3 MONITORING, INSPECTION AND TESTING.....	41
2.3.1 GENERAL.....	41
2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT.....	42
2.3.3 MONITORING, INSPECTION AND TESTING BY CONTRACTOR CPIH.....	43
2.4 STANDARD OPERATING PROCEDURES.....	44
2.5 SUBMITTALS.....	45
2.5.1 PRE-START MEETING SUBMITTALS.....	45
2.5.2 SUBMITTALS DURING ABATEMENT.....	47
2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT.....	48
2.6 ENCAPSULANTS.....	48
2.6.1 TYPES OF ENCAPSULANTS.....	48
2.6.2 PERFORMANCE REQUIREMENTS.....	49
2.6.3 CERTIFICATES OF COMPLIANCE.....	49
PART 3 - EXECUTION.....	49
3.1 PRE-ABATEMENT ACTIVITIES.....	49
3.1.1 PRE-ABATEMENT MEETING.....	49
3.1.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS.....	50
3.1.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS.....	51
3.2 REGULATED AREA PREPARATIONS.....	51
3.3 CONTAINMENT BARRIERS AND COVERINGS FOR THE REGULATED AREA GENERAL:.....	53
3.4 REMOVAL OF ACM.....	53
3.4.1 WETTING ACM.....	53
3.4.2 SECONDARY BARRIER AND WALKWAYS.....	53
3.4.3 WET REMOVAL OF ACM.....	54

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3.4.4 REMOVAL OF CLASS II ASBESTOS FLOORING MATERIALS.....	51
3.4.4A REMOVAL OF ASBESTOS FLOORING MATERIALS .....	51
3.4.5 REMOVAL OF ASBESTOS FLOOR TILE MASTIC .....	52
3.4.6 REMOVAL OF ACM PIPING - GLOVEBAG METHOD.....	56
3.4.7 SECONDARY BARRIER.....	53
3.4.8 WET GLOVEBAG REMOVAL OF ACM.....	57
3.4.9 GLOVEBAG REMOVAL PROCEDURES.....	57
3.4.10 NEGATIVE PRESSURE GLOVEBAG PROCEDURE.....	55
3.5 LOCKDOWN ENCAPSULATION.....	59
3.5.1 GENERAL.....	59
3.5.2 DELIVERY AND STORAGE.....	59
3.5.3 WORKER PROTECTION.....	59
3.5.4 ENCAPSULATION OF SCRATCH COAT PLASTER OR PIPING.....	60
3.5.5 SEALING EXPOSED EDGES.....	60
3.6 DISPOSAL OF ACM WASTE MATERIALS.....	60
3.6.1 GENERAL.....	60
3.6.2 PROCEDURES.....	60
3.7 PROJECT DECONTAMINATION.....	61
3.7.1 GENERAL.....	61
3.7.2 REGULATED AREA CLEARANCE.....	61
3.7.3 WORK DESCRIPTION.....	62
3.7.4 PRE-DECONTAMINATION CONDITIONS.....	62
3.7.5 FIRST CLEANING.....	62
3.7.6 PRE-CLEARANCE INSPECTION AND TESTING.....	62
3.7.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES.....	63
3.8 FINAL VISUAL INSPECTION AND AIR CLEARANCE TESTING.....	63
3.8.1 GENERAL.....	63
3.8.2 FINAL VISUAL INSPECTION.....	63
3.8.3 FINAL AIR CLEARANCE TESTING.....	63
3.8.4 FINAL AIR CLEARANCE PROCEDURES.....	64
3.8.5 CLEARANCE SAMPLING USING PCM - LESS THAN 260LF/160SF.....	64
3.8.6 CLEARANCE SAMPLING USING TEM - EQUAL TO OR MORE THAN 260LF/160SF ...	60
3.8.7 LABORATORY TESTING OF PCM CLEARANCE SAMPLES .....	60
3.8.8 LABORATORY TESTING OF TEM SAMPLES.....	65
3.9 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE.....	65

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3.9.1 COMPLETION OF ABATEMENT WORK.....	65
3.9.2 CERTIFICATE OF COMPLETION BY CONTRACTOR.....	65
3.9.3 WORK SHIFTS.....	66
3.9.4 RE-INSULATION.....	66
ATTACHMENT #1.....	67
ATTACHMENT #2.....	68
ATTACHMENT #3.....	69
ATTACHMENT #4.....	70

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**PART 1 - GENERAL**

**1.1 SUMMARY OF THE WORK**

**1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS**

Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Asbestos Abatement Contractor. All costs incurred due to such action are also the responsibility of the Asbestos Abatement Contractor.

**1.1.2 EXTENT OF WORK**

- A. Below is a brief description of the estimated quantities of asbestos containing materials to be abated. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.
- B. Removal, clean-up and disposal of asbestos containing materials (ACM) and asbestos/waste contaminated elements in an appropriate regulated area for the following approximate quantities listed in Table One on the following page.

Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**MANHATTAN VA MEDICAL CENTER**  
**423 EAST 23<sup>RD</sup> STREET**  
**NEW YORK, NEW YORK 10010**  
**RENOVATE WOMEN'S HEALTH CLINIC**

**TABLE ONE**

**ESTIMATED QUANTITIES OF ASBESTOS CONTAINING MATERIALS TO BE REMOVED**

<b><u>LOCATION</u></b>	<b><u>ASBESTOS CONTAINING MATERIAL</u></b>	<b><u>QUANTITY</u></b>
Room #'s 6007-W, 6012-W, 6026-W, 6028-W And Pipe Shaft Adjacent Room #6004-W	Asbestos Pipe And Fitting Insulation	200 LF
Medical Media Room #'s 7007-W, 7008-W, 7009-W, 7010-W, 7011-W, 7013-W, 7015-W, 7017-W, 7019-W And Corridor 7030-W	Asbestos Pipe And Fitting Insulation 12" x 12" Asbestos Floor Tile And Asbestos Mastic	400 LF 2,800 SF
Men's And Women's Bathroom And Locker Room #'s 7003-W, 7004-W, 7005-W And 7006-W	Asbestos Pipe And Fitting Insulation 12" x 12" Asbestos Floor Tile And Asbestos Mastic	400 LF 430 SF
Room #'s 7027-W, 7028-W, 7028-AW, 7029-W, 7030-W, 7031-W, 7032-W And 7033-W	Asbestos Pipe And Fitting Insulation Asbestos Radiator Heat Shields	300 LF 20 SF
<b><u>TOTAL:</u></b>	Asbestos Pipe And Fitting Insulation 12" x 12" Asbestos Floor Tile And Asbestos Mastic Asbestos Radiator Heat Shields	<b>1,300 LF</b> <b>3,230 SF</b> <b>20 SF</b>

- NOTES:**
- 1) Demolish all walls, columns and ceilings as necessary to gain access to asbestos containing materials.**
  - 2) All quantities are estimates only and should be field verified prior to abatement budgeting estimation.**
  - 3) There are multiple layers of floor tiles and mastics in some areas. Remove at no additional cost.**

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- 4) **All asbestos pipe and fitting insulation to be removed under full containment by the asbestos abatement contractor.**
- 5) **All asbestos pipe and fitting insulation inside perimeter columns and above suspended and plaster ceilings and inside pipe chases are to be removed and reinsulated.**

**1.1.1.3 RELATED WORK**

- A. Section 07 84 00, FIRESTOPPING.
- B. Section 02 41 00, DEMOLITION.
- C. Division 09, FINISHES
- D. Division 22, PLUMBING.
- E. Section 21 05 11, COMMON WORK RESULTS FOR FIRE SUPPRESSION / Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING / Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.
- F. Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.
- G. Section 23 21 13, HYDRONIC PIPING / Section 23 22 13, STEAM AND CONDENSATE HEATING PIPING.
- H. Section 23 31 00, HVAC DUCTS AND CASINGS / Section 23 37 00, AIR OUTLETS AND INLETS.

**1.1.1.4 TASKS**

The work tasks are summarized briefly as follows:

- A. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, regulated area preparations, emergency procedures arrangements, and standard operating procedures for asbestos abatement work.
- B. Abatement activities including removal, encapsulation, clean-up and disposal of ACM waste, recordkeeping, security, monitoring, and inspections.
- C. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.

**1.1.1.5 CONTRACTORS USE OF PREMISES**

- A. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State and Local regulations and requirements.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- B. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved pre-abatement work plan. Asbestos abatement drawings of partially occupied buildings will show the limits of regulated areas; the placement of decontamination facilities; the temporary location of bagged waste ACM; the path of transport to outside the building; and the temporary waste storage area for each building/regulated area. Any variation from the arrangements shown on drawings shall be secured in writing from the VA representative through the pre-abatement plan of action. The following limitations of use shall apply to existing facilities shown on drawings:

**1.2 VARIATIONS IN QUANTITY**

The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimated which are limited by the physical constraints imposed by occupancy of the buildings. Accordingly, minor variations (+/- 10%) in quantities of ACM within the regulated area are considered as having no impact on contract price and time requirements of this contract. Where additional work is required beyond the above variation, the contractor shall provide unit prices for newly discovered materials and those prices shall be used for additional work required under the contractor.

**1.3 STOP ASBESTOS REMOVAL**

If the Contracting Officer; their field representative; or the VPIH/CIH presents a written **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and maintain HEPA filtered air flow and adequately wet any exposed ACM. The Contractor shall not resume any asbestos removal activity until authorized to do so by the VA. A stop asbestos removal order may be issued at any time the VA determines abatement conditions/activities are not within specification requirements. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the industrial hygienist's time. The occurrence of any of the following events shall be reported immediately by the Contractor's competent person in writing to the VA representative and shall require the

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Contractor to immediately stop asbestos removal/disturbance activities and initiate fiber reduction activities:

- A.  $\geq$  0.01 f/cc outside a regulated area or  $>0.05$  f/cc inside a regulated area;
- B. breach/break in regulated area barrier(s);
- C. less than -0.02" WCG pressure in the regulated area;
- D. serious injury/death at the site ;
- E. fire/safety emergency at the site ;
- F. respiratory protection system failure;
- G. power failure or loss of wetting agent; or
- H. any visible emissions observed outside the regulated area.

#### **1.4 DEFINITIONS**

##### **1.4.1 GENERAL**

Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

##### **1.4.2 GLOSSARY**

**Abatement** - Procedures to control fiber release from asbestos-containing materials, typically during removal. Includes removal, encapsulation, enclosure, demolition and renovation activities related to asbestos.

**ACE** - Asbestos contaminated elements.

**ACM** - Asbestos containing material.

**Aerosol** - Solid or liquid particulate suspended in air.

**Adequately wet** - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

**Aggressive method** - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

**Aggressive sampling** - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**AHERA** - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

**Aircell** - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

**Air monitoring** - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 2 is used to determine the fiber levels in air.

**Air sample filter** - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester membrane for PCM (Phase Contrast Microscopy) and polycarbonate for TEM (Transmission Electron Microscopy)

**Amended water** - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

**Asbestos** - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

**Asbestos-containing material (ACM)** - Any material containing more than one percent of asbestos.

**Asbestos contaminated elements (ACE)** - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

**Asbestos-containing waste material** - Asbestos-containing material or asbestos contaminated objects requiring disposal.

**Asbestos waste decontamination facility** - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

**Authorized person** - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

**Authorized visitor** - Any person approved by the VA; the contractor; or any government agency having jurisdiction over the regulated area.

**Barrier** - Any surface that isolates the regulated area and inhibits fiber migration from the regulated area.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**Containment Barrier** - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

**Critical Barrier** - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of plastic sheeting secured in place at openings such as doors, windows, or any other opening into the regulated area.

**Primary Barrier** - Barriers placed over critical barriers and exposed directly to abatement work.

**Secondary Barrier** - Any additional sheeting used to isolate and provide protection from debris during abatement work.

**Breathing zone** - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

**Bridging encapsulant** - An encapsulant that forms a layer on the surface of the ACM.

**Building/facility owner** - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

**Bulk testing** - The collection and analysis of suspect asbestos containing materials.

**Certified Industrial Hygienist (CIH)** - One certified in practice of industrial hygiene by the American Board of Industrial Hygiene. An industrial hygienist Certified in Comprehensive Practice by the American Board of Industrial Hygiene.

**Class I asbestos work** - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

**Class II asbestos work** - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

**Clean room/Changing room** - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**Clearance sample** - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's industrial hygiene consultant (VPIH/CIH).

**Closely resemble** - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

**Competent person** - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

**Contractor's Professional Industrial Hygienist (CPIH)** - The asbestos abatement contractor's industrial hygienist. The industrial hygienist must meet the qualification requirements of the PIH.

**Count** - Refers to the fiber count or the average number of fibers greater than five microns in length per cubic centimeter of air.

**Decontamination area/unit** - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

**Demolition** - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

**Disposal bag** - Typically 6 mil thick siftproof, dustproof, leaktight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

**Disturbance** - Activities that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag in order to access a building component. In no

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag which shall not exceed 60 inches in length or width.

**Drum** - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be siftproof, dustproof, and leaktight.

**Employee exposure** - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

**Encapsulant** - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

**Encapsulation** - Treating ACM with an encapsulant.

**Enclosure** - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

**Equipment room** - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

**Fiber** - A particulate form of asbestos, 5 microns or longer, with a length to width ratio of at least 3 to 1.

**Fibers per cubic centimeter (f/cc)** - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

**Filter** - Media used in respirators, vacuums, or other machines to remove particulate from air.

**Firestopping** - Material used to close the open parts of a structure in order to prevent a fire from spreading.

**Friable asbestos containing material** - Any material containing more than 1 percent asbestos as determined using the method specified in appendix A, Subpart F, 40 CFR 763, section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

**Glovebag** - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**High efficiency particulate air (HEPA) filter** - A filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 microns or greater in diameter.

**HEPA vacuum** - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

**Homogeneous area** - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

**HVAC** - Heating, Ventilation and Air Conditioning

**Industrial hygienist** - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

**Industrial hygienist technician** - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work assigned.

**Intact** - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

**Lockdown** - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

**National Emission Standards for Hazardous Air Pollutants (NESHAP's)** - EPA's rule to control emissions of asbestos to the environment.

**Negative initial exposure assessment** - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PEL's.

**Negative pressure** - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02" water column gauge inside the negative pressure enclosure.

**Negative pressure respirator** - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air outside the respirator.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**Non-friable ACM** - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

**Organic vapor cartridge** - The type of cartridge used on air purifying respirators for organic vapor exposures.

**Outside air** - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

**Owner/operator** - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

**Penetrating encapsulant** - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

**Personal sampling/monitoring** - Representative air samples obtained in the breathing zone of the person using a cassette and battery operated pump to determine asbestos exposure.

**Permissible exposure limit (PEL)** - The level of exposure OSHA allows for an 8 hour time weighted average. For asbestos fibers, the PEL is 0.1 fibers per cc.

**Polarized light microscopy (PLM)** - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type(s) of asbestos present in a bulk sample.

**Polyethylene sheeting** - Strong plastic barrier material 4 to 6 mils thick, semi-transparent, sometimes flame retardant in compliance with NFPA 241.

**Positive/negative fit check** - A method of verifying the fit of a respirator by closing off the filters and breathing in or closing off the exhalation valve and breathing out while detecting leakage of the respirator.

**Presumed ACM (PACM)** - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (k) (5).

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**Professional IH** - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH.

**Project designer** - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Appendix C, Part I; (B) (5).

**Protection factor** - A value assigned by OSHA/NIOSH to indicate the assigned protection a respirator should provide if worn properly. The number indicates the reduction of exposure level from outside to inside the respirator.

**Qualitative fit test (QLFT)** - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

**Quantitative fit test (QNFT)** - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

**Regulated area** - An area established by the employer to demarcate where Class I, II, III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

**Regulated ACM (RACM)** - Friable ACM; Category I nonfriable ACM that has become friable; Category I nonfriable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II nonfriable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

**Removal** - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

**Renovation** - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**Repair** - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

**Shower room** - The portion of the PDF where personnel shower before leaving the regulated area. Also used for bag/drum decontamination in the EDF.

**Standard operating procedures (SOP's)** - Asbestos work procedures required to be submitted by the contractor before work begins.

**Supplied air respirator (SAR)** - A respirator that utilizes an air supply separate from the air in the regulated area.

**Surfacing ACM** - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, fireproofing and other purposes.

**Surfactant** - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

**Thermal system ACM** - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

**Transmission electron microscopy (TEM)** - A microscopy method that can identify and count asbestos fibers.

**VA Industrial Hygienist (VPIH)** - Department of Veterans Affairs Professional Industrial Hygienist.

**VA Certified Industrial Hygienist (VPCIH)** - Department of Veteran's Affairs Professional Certified Industrial Hygienist.

**VA Representative** - The VA official responsible for on-going project work.

**Visible emissions** - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM or ACM waste material.

**Waste/Equipment decontamination facility (W/EDF)** - The area in which equipment is decontaminated before removal from the regulated area.

**Waste generator** - Any owner or operator whose act or process produces asbestos-containing waste material.

**Waste shipment record** - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**Wet cleaning** - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

**1.4.3 REFERENCED STANDARDS ORGANIZATIONS**

The following acronyms or abbreviations as referenced in contract/specification documents are defined to mean the associated names. Names and addresses may be subject to change.

- A. VA Department of Veterans Affairs  
810 Vermont Avenue, NW  
Washington, DC 20420
- B. AIHA American Industrial Hygiene Association  
2700 Prosperity Avenue, Suite 250  
Fairfax, VA 22031  
703-849-8888
- C. ANSI American National Standards Institute  
1430 Broadway  
New York, NY 10018  
212-354-3300
- D. ASTM American Society for Testing and Materials  
1916 Race St.  
Philadelphia, PA 19103  
215-299-5400
- E. CFR Code of Federal Regulations  
Government Printing Office  
Washington, DC 20420
- F. CGA Compressed Gas Association  
1235 Jefferson Davis Highway  
Arlington, VA 22202  
703-979-0900
- G. CS Commercial Standard of the National Institute of Standards and Technology (NIST)  
U. S. Department of Commerce  
Government Printing Office  
Washington, DC 20420
- H. EPA Environmental Protection Agency  
401 M St., SW

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Washington, DC 20460

202-382-3949

I. MIL-STD Military Standards/Standardization Division

Office of the Assistant Secretary of Defense

Washington, DC 20420

J. MSHA Mine Safety and Health Administration

Respiratory Protection Division

Ballston Tower #3

Department of Labor

Arlington, VA 22203

703-235-1452

K. NIST National Institute for Standards and Technology

U. S. Department of Commerce

Gaithersburg, MD 20234

301-921-1000

L. NEC National Electrical Code (by NFPA)

M. NEMA National Electrical Manufacturer's Association

2101 L Street, N.W.

Washington, DC 20037

N. NFPA National Fire Protection Association

1 Batterymarch Park

P.O. Box 9101

Quincy, MA 02269-9101

800-344-3555

O. NIOSH National Institutes for Occupational Safety and Health

4676 Columbia Parkway

Cincinnati, OH 45226

513-533-8236

P. OSHA Occupational Safety and Health Administration

U.S. Department of Labor

Government Printing Office

Washington, DC 20402

Q. UL Underwriters Laboratory

333 Pfingsten Rd.

Northbrook, IL 60062

312-272-8800

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

R. USA United States Army  
Army Chemical Corps  
Department of Defense  
Washington, DC 20420

**1.5 APPLICABLE CODES AND REGULATIONS**

**1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS**

- A. All work under this contract shall be done in strict accordance with all applicable Federal, State, and local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.
- B. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specification exists, the most stringent requirement(s) shall be utilized.
- C. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system.

**1.5.2 ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITY**

The Asbestos Abatement Contractor (Contractor) shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the abatement project. The Contractor is responsible for providing and maintaining training, accreditations, medical exams, medical records, personal protective equipment as required by applicable Federal, State and Local regulations. The Contractor shall hold the VA and VPIH/CIH consultants harmless for any Contractor's failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The Contractor will incur all costs of the CPIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements related to failure to comply with the regulations applicable to the work.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.5.3 FEDERAL REQUIREMENTS**

Federal requirements which govern of asbestos abatement include, but are not limited to, the following regulations.

**A. Occupational Safety and Health Administration (OSHA)**

1. Title 29 CFR 1926.1101 - Construction Standard for Asbestos
2. Title 29 CFR 1910.132 - Personal Protective Equipment
3. Title 29 CFR 1910.134 - Respiratory Protection
4. Title 29 CFR 1926 - Construction Industry Standards
5. Title 29 CFR 1910.20 - Access to Employee Exposure and Medical Records
6. Title 29 CFR 1910.1200 - Hazard Communication
7. Title 29 CFR 1910.151 - Medical and First Aid

**B. Environmental Protection Agency (EPA):**

1. 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.
2. 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)

**C. Department of Transportation (DOT)**

Title 49 CFR 100 - 185 - Transportation

**1.5.4 STATE REQUIREMENTS**

State requirements that apply to the asbestos abatement work, disposal, clearance, etc., include, but are not limited to, the following:  
New York State Industrial Code Rule 56

**1.5.5 LOCAL REQUIREMENTS**

If local requirements are more stringent than federal or state standards, the local standards are to be followed. All work to be done in accordance with New York City Title Fifteen.

**1.5.6 STANDARDS**

**A. Standards which govern asbestos abatement activities include, but are not limited to, the following:**

1. American National Standards Institute (ANSI) Z9.2-79 - Fundamentals Governing the Design and Operation of Local Exhaust Systems Z88.2 - Practices for Respiratory Protection.
2. Underwriters Laboratories (UL) 586-90 - UL Standard for Safety of HEPA Filter Units, 7th Edition.

**B. Standards which govern encapsulation work include, but are not limited to the following:**

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. American Society for Testing and Materials (ASTM)
- C. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:
  1. National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
  2. NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
  3. NFPA 101 - Life Safety Code

**1.5.7 EPA GUIDANCE DOCUMENTS**

- A. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference. EPA publications can be ordered from (800) 424-9065.
- B. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024
- C. Asbestos Waste Management Guidance EPA 530-SW-85-007
- D. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001
- E. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

**1.5.8 NOTICES**

- A. State and Local agencies: Send written notification as required by state and local regulations including the local fire department prior to beginning any work on ACM as follows:
- B. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification is given to EPA, State, and Local authorities.

**1.5.9 PERMITS/LICENSES**

- A. The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations. Contractor must have a valid New York State Asbestos Handling License.

**1.5.10 POSTING AND FILING OF REGULATIONS**

- A. Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each in the clean room at the regulated area where workers will have daily access to the regulations and keep another copy in the Contractor's office.

**1.5.11 VA RESPONSIBILITIES**

Prior to commencement of work:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- A. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior to starting work for relocation of desks, files, equipment and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**
- B. Submit to the Contractor results of background air sampling; including location of samples, person who collected the samples, equipment utilized and method of analysis. During abatement, submit to the Contractor, results of bulk material analysis and air sampling data collected during the course of the abatement. This information shall not release the Contractor from any responsibility for OSHA compliance.

**1.5.12 SITE SECURITY**

- A. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and be posted in the clean room of the decontamination unit.
- B. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent Person shall immediately notify the VA.
- C. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.
- D. Access to the regulated area shall be through a single decontamination unit. All other access (doors, windows, hallways, etc.) shall be sealed or locked to prevent entry to or exit from the regulated area. The only exceptions for this requirement are the waste/equipment load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. Emergency exits shall not be locked from the inside, however, they shall be sealed with poly sheeting and taped until needed.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- E. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24 hour security system shall be provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.
- F. The Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.
- G. The regulated area shall be locked during non-working hours and secured by VA security/police guards.

**1.5.13 EMERGENCY ACTION PLAN AND ARRANGEMENTS**

- A. An Emergency Action Plan shall be developed by prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1910.38 (a); (b) .
- B. Emergency procedures shall be in written form and prominently posted in the clean room and equipment room of the decontamination unit. Everyone, prior to entering the regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.
- C. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule; layout of regulated area; and access to the regulated area, particularly barriers that may affect response capabilities.
- D. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls, confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.
- E. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.
  - 1. For non life-threatening situations - employees injured or otherwise incapacitated shall decontaminate following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
  - 2. For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker,

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

remove them from the regulated area, and secure proper medical treatment.

- F. Telephone numbers of any/all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.
- G. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3-4 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.
- H. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the standard operating procedures during abatement. Such incidents include, but are not limited to, fire; accident; power failure; negative pressure failure; and supplied air system failure. The Contractor shall detail procedures to be followed in the event of an incident assuring that asbestos abatement work is stopped and wetting is continued until correction of the problem.

**1.5.14 PRE-CONSTRUCTION MEETING**

Prior to commencing the work, the Contractor shall meet with the VA Certified Industrial Hygienist (VPCIH) to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:

- A. Proof of Contractor licensing.
- B. Proof the Competent Person(s) is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person(s) shall also be presented.
- C. A list of all workers who will participate in the project, including experience and verification of training and accreditation.
- D. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- E. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).
- F. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.
- G. A copy of the Contractor's Standard Operating Procedures for Asbestos Abatement. In these procedures, the following information must be detailed, specific for this project.
  - 1. Regulated area preparation procedures;
  - 2. Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d);
  - 3. Decontamination area set-up/layout and decontamination procedures for employees;
  - 4. Abatement methods/procedures and equipment to be used;
  - 5. Personal protective equipment to be used;
- H. At this meeting the Contractor shall provide all submittals as required;
- I. Procedures for handling, packaging and disposal of asbestos waste;
- J. Emergency Action Plan and Contingency Plan Procedures;
- K. Copies of New York City, New York State and US EPA project notifications.

**1.6 PROJECT COORDINATION**

The following are the minimum administrative and supervisory personnel necessary for coordination of the work.

**1.6.1 PERSONNEL**

- A. Administrative and supervisory personnel shall consist of a qualified Competent Person(s) as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for compliance with these specifications and all other applicable requirements.
- B. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; social security number; qualifications; accreditation card with color picture; Certificate of Worker's

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.

C. Minimum qualifications for Contractor and assigned personnel are:

1. The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work; is licensed in applicable states; has adequate and qualified personnel available to complete the work; has comprehensive standard operating procedures for asbestos work; has adequate materials, equipment and supplies to perform the work.
2. The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
3. The Contractor Professional Industrial Hygienist (CPIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has developed at least one complete standard operating procedure for asbestos abatement; has trained abatement personnel for three (3) years; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.
4. The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the standard operating procedures of the Contractor; has one year of asbestos abatement experience; has applicable medical and respiratory protection documentation; has certificate of training/current refresher and State accreditation/license.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.7 RESPIRATORY PROTECTION**

**1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM**

The Contractor shall develop and implement a Respiratory Protection Program (RPP) which is in compliance with the January 8, 1998 OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910.132;134. ANSI Standard Z88.2-1992 provides excellent guidance for developing a respiratory protection program. All respirators used must be NIOSH approved for asbestos abatement activities. The written respiratory protection shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c) (1) (i - ix) - Respiratory Protection Program.

**1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR**

The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years experience coordinating the program. The RPPC must submit a signed statement attesting to the fact that the program meets the above requirements.

**1.7.3 SELECTION AND USE OF RESPIRATORS**

The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualification. The procedure must be written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit for reference by employees or authorized visitors.

**1.7.4 MINIMUM RESPIRATORY PROTECTION**

Minimum respiratory protection shall be a full face powered air purifying respirator when fiber levels are maintained consistently at or below 0.5 f/cc. A higher level of respiratory protection may be provided or required, depending on fiber levels. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h); Table 1, except as indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

**1.7.5 MEDICAL WRITTEN OPINION**

No employee shall be allowed to wear a respirator unless a physician has determined they are capable of doing so and has issued a current written opinion for that person.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.7.6 RESPIRATOR FIT TEST**

All personnel wearing respirators shall have a current qualitative/quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Quantitative fit tests shall be done for PAPR's which have been put into a failure mode.

**1.7.7 RESPIRATOR FIT CHECK**

The Competent Person shall assure that the positive/negative fit check is done each time the respirator is donned by an employee. Headcoverings must cover respirator headstraps. Any situation that prevents an effective facepiece to face seal as evidenced by failure of a fit check shall preclude that person from wearing a respirator until resolution of the problem.

**1.7.8 MAINTENANCE AND CARE OF RESPIRATORS**

The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) Maintenance and care of respirators.

**1.7.9 SUPPLIED AIR SYSTEMS**

If a supplied air system is used, the system shall meet all requirements of 29 CFR 1910.134 and the ANSI/Compressed Gas Association (CGA) Commodity Specification for Air current requirements for Type 1 - Grade D breathing air. Low pressure systems are not allowed to be used on asbestos abatement projects. Supplied Air respirator use shall be in accordance with EPA/NIOSH publication EPA-560-OPTS-86-001 "A Guide to Respiratory Protection for the Asbestos Abatement Industry".

**1.8 WORKER PROTECTION**

**1.8.1 TRAINING OF ABATEMENT PERSONNEL**

Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k) (9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k) (9) (viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.8.2 MEDICAL EXAMINATIONS**

Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. A current physician's written opinion as required by 29 CFR 1926.1101 (m) (4) shall be provided for each person and shall include in the opinion the person has been evaluated for working in a heat stress environment while wearing personal protective equipment and is able to perform the work.

**1.8.3 PERSONAL PROTECTIVE EQUIPMENT**

Provide whole body clothing, head coverings, gloves and foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle.

**1.8.4 REGULATED AREA ENTRY PROCEDURE**

The Competent Person shall ensure that each time workers enter the regulated area, they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

**1.8.5 DECONTAMINATION PROCEDURE - PAPR**

The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

- A. When exiting the regulated area, remove disposable coveralls, and ALL other clothes, disposable head coverings, and foot coverings or boots in the equipment room.
- B. Still wearing the respirator and completely naked, proceed to the shower. Showering is MANDATORY. Care must be taken to follow reasonable procedures in removing the respirator to avoid asbestos fibers while showering. The following procedure is required as a minimum:
  1. Thoroughly wet body including hair and face. If using a PAPR hold blower above head to keep filters dry.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. With respirator still in place, thoroughly decontaminate body, hair, respirator face piece, and all other parts of the respirator except the blower and battery pack on a PAPR. Pay particular attention to cleaning the seal between the face and respirator facepiece and under the respirator straps.
3. Take a deep breath, hold it and/or exhale slowly, completely wetting hair, face, and respirator. While still holding breath, remove the respirator and hold it away from the face before starting to breathe.
- C. Carefully decontaminate the facepiece of the respirator inside and out. If using a PAPR, shut down using the following sequence: a) first cap inlets to filters; b) turn blower off to keep debris collected on the inlet side of the filter from dislodging and contaminating the outside of the unit; c) thoroughly decontaminate blower and hoses; d) carefully decontaminate battery pack with a wet rag being cautious of getting water in the battery pack thus preventing destruction. **(THIS PROCEDURE IS NOT A SUBSTITUTE FOR RESPIRATOR CLEANING!)**.
- D. Shower and wash body completely with soap and water. Rinse thoroughly.
- E. Rinse shower room walls and floor to drain prior to exiting.
- F. Proceed from shower to clean room; dry off and change into street clothes or into new disposable work clothing.

**1.8.6 REGULATED AREA REQUIREMENTS**

The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for regulated areas at 29 CFR 1926.1101 (e) are met. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

**1.9 DECONTAMINATION FACILITIES**

**1.9.1 DESCRIPTION**

Provide each regulated area with separate personnel (PDF) and waste/equipment decontamination facilities (W/EDF). Ensure that the PDF are the only means of ingress and egress to the regulated area and that all equipment, bagged waste, and other material exit the regulated area only through the W/EDF.

**1.9.2 GENERAL REQUIREMENTS**

All personnel entering or exiting a regulated area must go through the PDF and shall follow the requirements at 29 CFR 1926.1101 (j)(1) and

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

these specifications. All waste, equipment and contaminated materials must exit the regulated area through the W/EDF and be decontaminated in accordance with these specifications. Walls and ceilings of the PDF and W/EDF must be constructed of a minimum of 3 layers of 6 mil opaque fire retardant polyethylene sheeting and be securely attached to existing building components and/or an adequate temporary framework. A minimum of 3 layers of 6 mil poly shall also be used to cover the floor under the PDF and W/EDF units. Construct doors so that they overlap and secure to adjacent surfaces. Weight inner doorway sheets with layers of duct tape so that they close quickly after release. Put arrows on sheets so they show direction of travel and overlap. If the building adjacent area is occupied, construct a solid barrier on the occupied side(s) to protect the sheeting and reduce potential for non-authorized personnel entering the regulated area.

**1.9.3 TEMPORARY FACILITIES TO THE PDF AND W/EDF**

The Competent Person shall provide temporary water service connections to the PDF and W/EDF. Backflow prevention must be provided at the point of connection to the VA system. Water supply must be of adequate pressure and meet requirements of 29 CFR 1910.141(d)(3). Provide adequate temporary overhead electric power with ground fault circuit interruption (GFCI) protection. Provide a sub-panel for all temporary power in the clean room. Provide adequate lighting to provide a minimum of 50 foot candles in the PDF and W/EDF. Provide temporary heat, if needed, to maintain 70°F throughout the PDF and W/EDF.

**1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF)**

The Competent Person shall provide a PDF consisting of shower room which is contiguous to a clean room and equipment room which is connected to the regulated area. The PDF must be sized to accommodate the number of personnel scheduled for the project. The shower room, located in the center of the PDF, shall be fitted with as many portable showers as necessary to insure all employees can complete the entire decontamination procedure within 15 minutes. The PDF shall be constructed of opaque poly for privacy. The PDF shall be constructed to eliminate any parallel routes of egress without showering.

1. Clean Room: The clean room must be physically and visually separated from the rest of the building to protect the privacy of personnel

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- changing clothes. The clean room shall be constructed of at least 3 layers of 6 mil opaque fire retardant poly to provide an air tight room. Provide a minimum of 2 - 900 mm (3 foot) wide 6 mil poly opaque fire retardant doorways. One doorway shall be the entry from outside the PDF and the second doorway shall be to the shower room of the PDF. The floor of the clean room shall be maintained in a clean, dry condition. Shower overflow shall not be allowed into the clean room. Provide 1 storage locker per person. A portable fire extinguisher, Type ABC, shall be provided in accordance with OSHA and NFPA Standard 10. All persons entering the regulated area shall remove all street clothing in the clean room and dress in disposable protective clothing and respiratory protection. Any person entering the clean room does so either from the outside with street clothing on or is coming from the shower room completely naked and thoroughly washed. Females required to enter the regulated area shall be ensured of their privacy throughout the entry/exit process by posting guards at both entry points to the PDF so no male can enter or exit the PDF during her stay in the PDF.
2. Shower Room: The Competent Person shall assure that the shower room is a completely water tight compartment to be used for the movement of all personnel from the clean room to the equipment room and for the showering of all personnel going from the equipment room to the clean room. Each shower shall be constructed so water runs down the walls of the shower and into a drip pan. Install a freely draining smooth floor on top of the shower pan. The shower room shall be separated from the rest of the building and from the clean room and equipment room using air tight walls made from at least 3 layers of 6 mil opaque fire retardant poly. The shower shall be equipped with a shower head and controls, hot and cold water, drainage, soap dish and continuous supply of soap, and shall be maintained in a sanitary condition throughout its use. The controls shall be arranged so an individual can shower without assistance. Provide a flexible hose shower head, hose bibs and all other items shown on Shower Schematic. Waste water will be pumped to a drain after being filtered through a minimum of a 100 micron sock in the shower drain; a 20 micron filter; and a final 5 micron filter. Filters will be changed a minimum of




**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- daily or more often as needed. Filter changes must be done in the shower to prevent loss of contaminated water. Hose down all shower surfaces after each shift and clean any debris from the shower pan. Residue is to be disposed of as asbestos waste.
3. Equipment Room: The Competent Person shall provide an equipment room which shall be an air tight compartment for the storage of work equipment/tools, reusable personal protective equipment, except for a respirator and for use as a gross decontamination area for personnel exiting the regulated area. The equipment room shall be separated from the regulated area by a minimum 3 foot wide door made with 2 layers of 6 mil opaque fire retardant poly. The equipment room shall be separated from the regulated area, the shower room and the rest of the building by air tight walls and ceiling constructed of a minimum of 3 layers of 6 mil opaque fire retardant poly. Damp wipe all surfaces of the equipment room after each shift change. Provide an additional loose layer of 6 mil fire retardant poly per shift change and remove this layer after each shift. If needed, provide a temporary electrical sub-panel equipped with GFCI in the equipment room to accommodate any equipment required in the regulated area.
4. The PDF shall look like as follows: Clean room at the entrance followed by a shower room followed by an equipment room leading to the regulated area. Each doorway in the PDF is minimum of 2 layers of 6 mil opaque fire retardant poly.

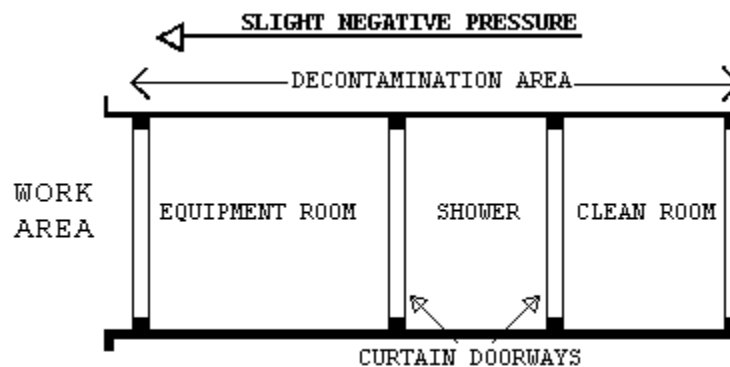

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF)**

The Competent Person shall provide an W/EDF consisting of a wash room, holding room, and clean room for removal of waste, equipment and contaminated material from the regulated area. Personnel shall not enter or exit the W/EDF except in the event of an emergency. Clean debris and residue in the W/EDF daily. All surfaces in the W/EDF shall be wiped/hosed down after each shift and all debris shall be cleaned from the shower pan. The W/EDF shall consist of the following:


1. Wash Down Station: Provide an enclosed shower unit in the regulated area just outside the Wash Room as an equipment bag and container cleaning station.
2. Wash Room: Provide a wash room for cleaning of bagged or containerized asbestos containing waste materials passed from the regulated area. Construct the wash room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. Locate the wash room so that packaged materials, after being wiped clean, can be passed to the Holding Room. Doorways in the wash room shall be constructed of 2 layers of 6 mil fire retardant poly.
3. Holding Room: Provide a holding room as a drop location for bagged materials passed from the wash room. Construct the holding room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. The holding room shall be located so that bagged material cannot be passed from the wash room to the clean room unless it goes through the holding room. Doorways in the holding room shall be constructed of 2 layers of 6 mil fire retardant poly.
4. Clean Room: Provide a clean room to isolate the holding room from the exterior of the regulated area. Construct the clean room using 2 x 4 wood framing and 2 layers of 6 mil fire retardant poly. The clean room shall be located so as to provide access to the holding room from the building exterior. Doorways to the clean room shall be constructed of 2 layers of 6 mil fire retardant poly. When a negative pressure differential system is used, a rigid enclosure separation between the W/EDF clean room and the adjacent areas shall be provided.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

5. The W/EDF shall be provided as follows: Wash Room leading to a Holding Room followed by a Clean Room leading to outside the regulated area. See diagram.

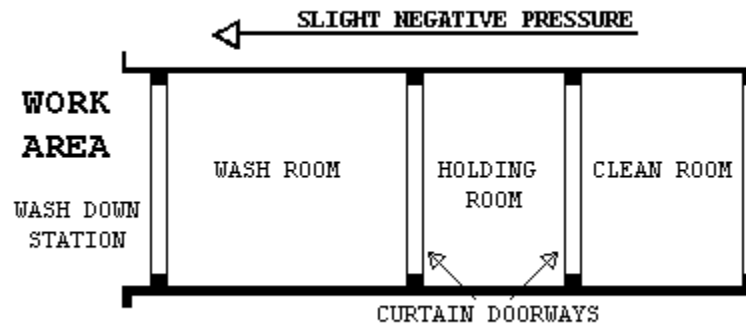

**1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES**

At washdown station in the regulated area, thoroughly wet clean contaminated equipment and/or sealed polyethylene bags and pass into Wash Room after visual inspection. When passing anything into the Wash Room, close all doorways of the W/EDF, other than the doorway between the washdown station and the Wash Room. Keep all outside personnel clear of the W/EDF. Once inside the Wash Room, wet clean the equipment and/or bags. After cleaning and inspection, pass items into the Holding Room. Close all doorways except the doorway between the Holding Room and the Clean Room. Workers from the Clean Room/Exterior shall enter the Holding Room and remove the decontaminated/cleaned equipment/bags for removal and disposal. These personnel will not be required to wear PPE. At no time shall personnel from the clean side be allowed to enter the Wash Room.

**PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT**

**2.1 MATERIALS AND EQUIPMENT**

**2.1.1 GENERAL REQUIREMENTS**

Prior to the start of work, the contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

start unless the following items have been delivered to the site and the CPIH has submitted verification to the VA's representative.

- A. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).
- B. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated area until abatement is completed.
- C. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized place.
- D. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.
- E. Polyethylene sheeting for walls in the regulated area shall be a minimum of 4-mils. For floors and all other uses, sheeting of at least 6-mils shall be used in widths selected to minimize the frequency of joints. Fire retardant poly shall be used throughout.
- F. The method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces. Method of attachment may include any combination of moisture resistant duct tape furring strips, spray glue, staples, nails, screws, lumber and plywood for enclosures or other effective procedures capable of sealing polyethylene to dissimilar finished or unfinished surfaces under both wet and dry conditions.
- G. Polyethylene sheeting utilized for the PDF shall be opaque white or black in color, 6 mil fire retardant poly.
- H. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.
- I. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements, fall protection devices, water hose to reach all areas in

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project. All electrically operated hand tools, equipment, electric cords shall be connected to GFCI protection.

- J. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water and falling material).
- K. Disposal bags - 2 layers of 6 mil, for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.
- L. The VA shall be provided a copy of the MSDS as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication. Chlorinated compounds shall not be used with any spray adhesive or other product. Appropriate encapsulant(s) shall be provided.
- M. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k) (7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.
- N. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a hazard assessment conducted under 29 CFR 1910.132(d).

**2.1.2 NEGATIVE PRESSURE FILTRATION SYSTEM**

The Contractor shall provide enough HEPA negative air machines to completely exchange the regulated area air volume 4 times per hour. The Competent Person shall determine the number of units needed for the regulated area by dividing the cubic feet in the regulated area by 15 and then dividing that result by the cubic feet per minute (CFM) for each unit to determine the number of units needed to effect 4 air changes per hour. Provide a standby unit in the event of machine failure and/or emergency in an adjacent area.

NIOSH has done extensive studies and has determined that negative air machines typically operate at ~50% efficiency. The contractor shall consider this in their determination of number of units needed to provide 4 air changes per hour. The contractor shall use 8 air changes per

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

hour or double the number of machines based on their calculations or submit proof their machines operate at stated capacities at a 2" pressure drop across the filters.

**2.1.3 DESIGN AND LAYOUT**

- A. Before start of work submit the design and layout of the regulated area and the negative air machines. The submittal shall indicate the number of, location of and size of negative air machines. The point(s) of exhaust, air flow within the regulated area, anticipated negative pressure differential, and supporting calculations for sizing shall be provided. In addition, submit the following:
1. Method of supplying power to the units and designation/location of the panels.
  2. Description of testing method(s) for correct air volume and pressure differential.
  3. If auxiliary power supply is to be provided for the negative air machines, provide a schematic diagram of the power supply and manufacturer's data on the generator and switch.

**2.1.4 NEGATIVE AIR MACHINES (HEPA UNITS)**

- A. Negative Air Machine Cabinet: The cabinet shall be constructed of steel or other durable material capable of withstanding potential damage from rough handling and transportation. The width of the cabinet shall be less than 30" in order to fit in standard doorways. The cabinet must be factory sealed to prevent asbestos fibers from being released during use, transport, or maintenance. Any access to and replacement of filters shall be from the inlet end. The unit must be on casters or wheels.
- B. Negative Air Machine Fan: The rating capacity of the fan must indicate the CFM under actual operating conditions. Manufacturer's typically use "free-air" (no resistance) conditions when rating fans. The fan must be a centrifugal type fan.
- C. Negative Air Machine Final Filter: The final filter shall be a HEPA filter. The filter media must be completely sealed on all edges within a structurally rigid frame. The filter shall align with a continuous flexible gasket material in the negative air machine housing to form an air tight seal. Each HEPA filter shall be certified by the manufacturer to have an efficiency of not less than 99.97% when challenged with 0.3

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

µm dioctylphthalate (DOP) particles. Testing shall have been done in accordance with Military Standard MIL-STD-282 and Army Instruction Manual 136-300-175A. Each filter must bear a UL586 label to indicate ability to perform under specified conditions. Each filter shall be marked with the name of the manufacturer, serial number, air flow rating, efficiency and resistance, and the direction of test air flow.

- D. Negative Air Machine Pre-filters: The pre-filters, which protect the final HEPA filter by removing larger particles, are required to prolong the operating life of the HEPA filter. Two stages of pre-filtration are required. A first stage pre-filter shall be a low efficiency type for particles 10 µm or larger. A second stage pre-filter shall have a medium efficiency effective for particles down to 5 µm or larger. Pre-filters shall be installed either on or in the intake opening of the NAM and the second stage filter must be held in place with a special housing or clamps.
- E. Negative Air Machine Instrumentation: Each unit must be equipped with a gauge to measure the pressure drop across the filters and to indicate when filters have become loaded and need to be changed. A table indicating the cfm for various pressure readings on the gauge shall be affixed near the gauge for reference or the reading shall indicate at what point the filters shall be changed, noting cfm delivery. The unit must have an elapsed time meter to show total hours of operation.
- F. Negative Air Machine Safety and Warning Devices: An electrical/mechanical lockout must be provide to prevent the fan from being operated without a HEPA filter. Units must be equipped with an automatic shutdown device to stop the fan in the event of a rupture in the HEPA filter or blockage in the discharge of the fan. Warning lights are required to indicate normal operation; too high a pressure drop across filters; or too low of a pressure drop across filters.
- G. Negative Air Machine Electrical: All electrical components shall be approved by the National Electrical Manufacturer's Association (NEMA) and Underwriter's Laboratories (UL). Each unit must be provided with overload protection and the motor, fan, fan housing, and cabinet must be grounded.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**2.1.1.5 PRESSURE DIFFERENTIAL**

The fully operational negative air system within the regulated area shall continuously maintain a pressure differential of -0.02" water column gauge. Before any disturbance of any asbestos material, this shall be demonstrated to the VA by use of a pressure differential meter/manometer as required by OSHA 29 CFR 1926.1101(e)(5)(i). The Competent Person shall be responsible for providing, maintaining, and documenting the negative pressure and air changes as required by OSHA and this specification.

**2.1.1.6 MONITORING**

The pressure differential shall be continuously monitored and recorded between the regulated area and the area outside the regulated area with a monitoring device that incorporates a strip chart recorder. The strip chart recorder shall become part of the project log and shall indicate at least -0.02" water column gauge for the duration of the project.

**2.1.1.7 AUXILIARY GENERATOR**

If the building is occupied during abatement, provide an auxiliary gasoline/diesel generator located outside the building in an area protected from the weather. In the event of a power failure, the generator must automatically start and supply power to a minimum of 50% of the negative air machines in operation.

**2.1.1.8 SUPPLEMENTAL MAKE-UP AIR INLETS**

Provide, as needed for proper air flow in the regulated area, in a location approved by the VA, openings in the plastic sheeting to allow outside air to flow into the regulated area. Auxiliary makeup air inlets must be located as far from the negative air machines as possible, off the floor near the ceiling, and away from the barriers that separate the regulated area from the occupied clean areas. Cover the inlets with weighted flaps which will seal in the event of failure of the negative pressure system.

**2.1.1.9 TESTING THE SYSTEM**

The negative pressure system must be tested before any ACM is disturbed in any way. After the regulated area has been completely prepared, the decontamination units set up, and the negative air machines installed, start the units up one at a time. Demonstrate and document the operation and testing of the negative pressure system to the VA using smoke tubes



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

and a negative pressure gauge. Testing must also be done at the start of each work shift.

**2.1.10 DEMONSTRATION OF THE NEGATIVE AIR PRESSURE SYSTEM**

The demonstration of the operation of the negative pressure system to the VA shall include, but not be limited to, the following:

- A. Plastic barriers and sheeting move lightly in toward the regulated area.
- B. Curtains of the decontamination units move in toward regulated area.
- C. There is a noticeable movement of air through the decontamination units. Use the smoke tube to demonstrate air movement from the clean room to the shower room to the equipment room to the regulated area.
- D. Use smoke tubes to demonstrate air is moving across all areas in which work is to be done. Use a differential pressure gauge to indicate a negative pressure of at least -0.02" across every barrier separating the regulated area from the rest of the building. Modify the system as necessary to meet the above requirements.

**2.1.11 USE OF SYSTEM DURING ABATEMENT OPERATIONS**

- A. Start units before beginning any disturbance of ACM occurs. After work begins, the units shall run continuously, maintaining 4 actual air changes per hour at a negative pressure differential of -0.02" water column gauge, for the duration of the work until a final visual clearance and final air clearance has been completed.  
The negative air machines shall not be shut down for the duration of the project unless authorized by the VA, in writing.
- B. Abatement work shall begin at a location farthest from the units and proceed towards them. If an electric failure occurs, the Competent Person shall stop all abatement work and immediately begin wetting all exposed asbestos materials for the duration of the power outage. Abatement work shall not resume until power is restored and all units are operating properly again.
- C. The negative air machines shall continue to run after all work is completed and until a final visual clearance and a final air clearance has been completed for that regulated area.

**2.1.12 DISMANTLING THE SYSTEM**

After completion of the final visual and final air clearance has been obtained by the VPIH/CIH, the units may be shut down. The units shall have been **completely decontaminated**, all pre-filters removed and

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

disposed of as asbestos waste, asbestos labels attached and the units inlet/outlet sealed with 2 layers of 6 mil poly.

**2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA**

**2.2.1 GENERAL**

Seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All surfaces in the regulated area must be covered to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated as a result of the work, shall immediately stop work and clean up the contamination at no additional cost to the VA. Provide firestopping and identify all fire barrier penetrations due to abatement work as specified in Section 2.2.8; FIRESTOPPING.

**2.2.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA**

Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. All uncontaminated removable furniture, equipment and/or supplies shall be removed by the VA from the regulated area before commencing work. Any objects remaining in the regulated area shall be completely covered with 2 layers of 6-mil fire retardant poly sheeting and secured with duct tape. Lock out and tag out any HVAC/electrical systems in the regulated area.

**2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA**

Access to the regulated area is allowed only through the personnel decontamination facility (PDF). All other means of access shall be eliminated and OSHA DANGER demarcation signs posted as required by OSHA. If the regulated area is adjacent to or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid, fire resistant and capable of withstanding the negative pressure.

**2.2.4 CRITICAL BARRIERS**

Completely separate any operations in the regulated area from adjacent areas using 2 layers of 6 mil fire retardant poly and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

objects/openings in the regulated area. Heat must be shut off any objects covered with poly.

**2.2.5 PRIMARY BARRIERS**

- A. Cover the regulated area with two layers of 6 mil fire retardant poly on the floors and two layers of 4 mil fire retardant poly on the walls, unless otherwise directed in writing by the VA representative. Floor layers must form a right angle with the wall and turn up the wall at least 300 mm (12"). Seams must overlap at least 1800 mm (6') and must be spray glued and taped. Install sheeting so that layers can be removed independently from each other. Carpeting shall be covered with three layers of 6 mil poly. Corrugated cardboard sheets must be placed between the bottom and middle layers of poly. Mechanically support and seal with duct tape and glue all wall layers.
- B. If stairs and ramps are covered with 6 mil plastic, two layers must be used. Provide 19 mm (3/4") exterior grade plywood treads held in place with duct tape/glue on the plastic. Do not cover rungs or rails with any isolation materials.

**2.2.6 SECONDARY BARRIERS**

A loose layer of 6 mil shall be used as a drop cloth to protect the primary layers from debris generated during the abatement. This layer shall be replaced as needed during the work minimally once per work day.

**2.2.7 EXTENSION OF THE REGULATED AREA**

If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. Decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.

**2.2.8 FIRESTOPPING**

- A. Through penetrations caused by cables, cable trays, pipes, sleeves must be firestopped with a fire-rated firestop system providing an air tight seal.
- B. Firestop materials that are not equal to the wall or ceiling penetrated shall be brought to the attention of the VA Representative. The contractor shall list all areas of penetration, the type of sealant used, and whether or not the location is fire rated. Any discovery of penetrations during abatement shall be brought to the attention of the

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

VA representative immediately. All walls, floors and ceilings are considered fire rated unless otherwise determined by the VA Representative or Fire Marshall.

- C. Any visible openings whether or not caused by a penetration shall be reported by the Contractor to the VA Representative for a sealant system determination. Firestops shall meet ASTM E814 and UL 1479 requirements for the opening size, penetrant, and fire rating needed.

**2.3 MONITORING, INSPECTION AND TESTING**

**2.3.1 GENERAL**

- A. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. The CPIH shall be responsible for and shall inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples to satisfy OSHA requirements. Additional inspection and testing requirements are also indicated in other parts of this specification.
- B. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. The VPIH/CIH will perform the necessary monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, monitoring and testing for the safety of their employees, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

C. If fibers counted by the VPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH with review and approval of the VPIH/CIH. An agreement between the CPIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative.

**2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT**

- A. The purpose of the work of the VPIH/CIH is to: assure quality; adherence to the specification; resolve problems; prevent the spread of contamination beyond the regulated area; and assure clearance at the end of the project. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:
1. Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.
  2. Task 2: Perform continuous air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
  3. Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

4. Task 4: Provide support to the VA representative such as evaluation of submittals from the Contractor, resolution of conflicts, interpret data, etc.
  5. Task 5: Perform, in the presence of the VA representative, final inspection and testing of a decontaminated regulated area at the conclusion of the abatement to certify compliance with all regulations and VA requirements/specifications.
  6. Task 6: Issue certificate of decontamination for each regulated area and project report.
- B. All documentation, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.
- C. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.

**2.3.3 MONITORING, INSPECTION AND TESTING BY CONTRACTOR CPIH**

The Contractor's CPIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor's personnel. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in air sampling and analysis. The IH Technician shall have a NIOSH 582 Course or equivalent and show proof. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytic Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA/State Contractor/Supervisor and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

area samples as well as responsibility for documentation. The analytic laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT. A daily log documenting all OSHA requirements for air monitoring for asbestos in 29 CFR 1926.1101(f), (g) and Appendix A. This log shall be made available to the VA representative and the VPIH/CIH. The log will contain, at a minimum, information on personnel or area sampled, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH shall collect and analyze samples for each representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two personal samples per shift shall be collected and one area sample per 1,000 square feet of regulated area where abatement is taking place and one sample per shift in the clean room area shall be collected. In addition to the continuous monitoring required, the CPIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH responsibilities.

**2.4 STANDARD OPERATING PROCEDURES**

The Contractor shall have established Standard Operating Procedures (SOP's) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the procedures to be followed during all phases of the work by the Contractor's personnel. The SOP's must be modified as needed to address specific requirements of this project and the specifications. The SOP's shall be submitted for review and approval prior to the start of any abatement work. The minimum topics and areas to be covered by the SOP's are:

- A. Minimum Personnel Qualifications
- B. Emergency Action Plan/Contingency Plans and Arrangements
- C. Security and Safety Procedures
- D. Respiratory Protection/Personal Protective Equipment Program and Training
- E. Medical Surveillance Program and Recordkeeping
- F. Regulated Area Requirements - Containment Barriers/Isolation of Regulated Area
- G. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- H. Negative Pressure Systems Requirements
- I. Monitoring, Inspections, and Testing
- J. Removal Procedures for ACM
- K. Removal of Contaminated Soil (if applicable)
- L. Encapsulation Procedures for ACM
- M. Disposal of ACM waste/equipment
- N. Regulated Area Decontamination/Clean-up
- O. Regulated Area Visual and Air Clearance
- P. Project Completion/Closeout

**2.5 SUBMITTALS**

**2.5.1 PRE-START MEETING SUBMITTALS**

Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project:

- A. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
- B. Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.
- C. Submit Standard Operating Procedures developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH.
- D. Submit the specifics of the materials and equipment to be used for this project with brand names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
  - 1. Supplied air system, if used, negative air machines, HEPA vacuums, air monitoring pumps, calibration devices, pressure differential monitoring device and emergency power generating system.
  - 2. Waste water filtration system, shower system, containment barriers.
  - 3. Encapsulants, surfactants, hand held sprayers, airless sprayers, glovebags, fire extinguishers.
  - 4. Respirators, protective clothing, personal protective equipment.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

5. Fire safety equipment to be used in the regulated area.
- E. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.
- F. Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.
- G. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Air monitoring must be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A.
- H. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
1. Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project: Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; Completion Date
  2. List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years: Project Name; Reason; Date; Reference Name/Number; Resolution
  3. List asbestos regulatory citations, penalties, damages paid and legal actions taken against the company in the last 3 years. Provide copies and all information needed for verification.
- I. Submit information on personnel: Provide a resume; address each item completely; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and 29 CFR 1910.20 and that the company has implemented a medical surveillance program and maintains recordkeeping in accordance with the

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.

1. CPIH: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; number of workers trained; samples of training materials; samples of SOP's developed; medical opinion; current respirator fit test.
  2. Competent Person(s)/Supervisor(s): Number; names; social security numbers; years of abatement experience as Competent Person/Supervisor; list of similar projects as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion; current respirator fit test.
  3. Workers: Numbers; names; social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion; current respirator fit test.
- J. Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain english the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of SOP's incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who does and how is air monitoring conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and standard operating procedures; copies of monitoring results of the five referenced projects listed and analytical method(s) used.
- K. Rented equipment must be decontaminated prior to returning to the rental agency.
- L. Submit, before the start of work, the manufacturer's technical data for all types of encapsulants and the MSDS. Provide application instructions also.

**2.5.2 SUBMITTALS DURING ABATEMENT**

- A. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the resolution of unusual events such as barrier breeching, equipment failures, emergencies, and any cause for stopping work; representative air monitoring and results/TWA's/EL's. Submit this information daily to the VPIH/CIH.

- B. The CPIH shall document and maintain the inspection and approval of the regulated area preparation prior to start of work and daily during work.
1. Removal of any poly barriers.
  2. Visual inspection/testing by the CPIH prior to application of lockdown.
  3. Packaging and removal of ACM waste from regulated area.
  4. Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

**2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT**

The CPIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. The report shall include a certificate of completion, signed and dated by the CPIH, in accordance with Attachment #1. All clearance and perimeter samples must be submitted. The VA Representative will retain the abatement report after completion of the project.

**2.6 ENCAPSULANTS**

**2.6.1 TYPES OF ENCAPSULANTS**

- A. The following four types of encapsulants, if used, must comply with performance requirements as stated in paragraph 2.6.2:
1. Removal encapsulant - used as a wetting agent to remove ACM.
  2. Bridging encapsulant - provides a tough, durable coating on ACM.
  3. Penetrating encapsulant - penetrates/encapsulates ACM at least 13 mm (1/2").
  4. Lockdown encapsulant - seals microscopic fibers on surfaces after ACM removal.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**2.6.2 PERFORMANCE REQUIREMENTS**

Encapsulants shall meet the latest requirements of EPA; shall not contain toxic or hazardous substances; or solvents; and shall comply with the following performance requirements:

**A. General Requirements for all Encapsulants:**

1. ASTM E84: Flame spread of 25; smoke emission of 50.
2. University of Pittsburgh Protocol: Combustion Toxicity; zero mortality.
3. ASTM C732: Accelerated Aging Test; Life Expectancy - 20 years.
4. ASTM E96: Permeability - minimum of 0.4 perms.

**B. Bridging/Penetrating Encapsulants:**

1. ASTM E736: Cohesion/Adhesion Test - 24 kPa (50 lbs/ft<sup>2</sup>).
2. ASTM E119: Fire Resistance - 3 hours (Classified by UL for use on fibrous/cementitious fireproofing).
3. ASTM D2794: Gardner Impact Test; Impact Resistance - minimum 11.5 kg-mm (43 in/lb).
4. ASTM D522: Mandrel Bend Test; Flexibility - no rupture or cracking.

**C. Lockdown Encapsulants:**

1. ASTM E119: Fire resistance - 3 hours (tested with fireproofing over encapsulant applied directly to steel member).
2. ASTM E736: Bond Strength - 48 kPa (100 lbs/ft<sup>2</sup>) (test compatibility with cementitious and fibrous fireproofing).
3. In certain situations, encapsulants may have to be applied to hot pipes/equipment. The encapsulant must be able to withstand high temperatures without cracking or off-gassing any noxious vapors during application.

**2.6.3 CERTIFICATES OF COMPLIANCE**

The Contractor shall submit to the VA representative certification from the manufacturer indicating compliance with performance requirements for encapsulants when applied according to manufacturer recommendations.

**PART 3 - EXECUTION**

**3.1 PRE-ABATEMENT ACTIVITIES**

**3.1.1 PRE-ABATEMENT MEETING**

The VA representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH that all materials and equipment required for the project are on the site, will

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

arrange for a pre-abatement meeting between the Contractor, the CPIH, Competent Person(s), the VA representative(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.

**3.1.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS**

Before any work begins on the construction of the regulated area, the Contractor will:

- A. Conduct a space-by-space inspection with an authorized VA representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.
- B. The VA Representative, the Contractor, and the VPIH/CIH must be aware of 10/95 A/E Quality Alert indicating the failure to identify asbestos in the areas listed. Make sure these areas are looked at/reviewed on the project: Lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside chases/walls; transite piping/ductwork/sheets; behind radiators; roofing materials; below window sills; water/sewer lines; electrical conduit coverings; crawl spaces( previous abatement contamination); flooring/mastic covered by carpeting/new flooring; exterior insulated wall panels; on underground fuel tanks; steam line trench coverings.
- C. Ensure that all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects required to be removed from the regulated area have been cleaned and removed or properly protected from contamination.
- D. If present and required, remove and dispose of carpeting from floors in the regulated area.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

E. Inspect existing firestopping in the regulated area. Correct as needed.

**3.1.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS**

- A. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.
- B. Upon completion of all preparatory work, the CPIH will inspect the work and systems and will notify the VA's representative when the work is completed in accordance with this specification. The VA's representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved SOP's, especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation. The operational systems for respiratory protection and the negative pressure system shall be demonstrated for proper performance.
- C. The CPIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.
- D. Upon satisfactory inspection of the installation of and operation of systems the VA's representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification and all applicable regulations.

**3.2 REGULATED AREA PREPARATIONS**

- A. Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos may exceed ambient background levels. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.
- B. Shut down and lock out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code requirements and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.
- C. Shut down and lock out heating, cooling, and air conditioning system (HVAC) components that are in, supply or pass through the regulated area. Investigate the regulated area and agree on pre-abatement condition

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6-mil polyethylene disposal bags for staging and eventual disposal as asbestos waste.

- D. The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.
- E. The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.
- F. Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location. Drapes, clothing, upholstered furniture and other fabric items should be disposed of as asbestos contaminated waste. Cleaning these asbestos contaminated items utilizing HEPA vacuum techniques and off-premises steam cleaning is very difficult and cannot guarantee decontamination. Since adequate cleaning of contaminated fabrics is difficult, the VA will determine whether this option is an appropriate one. If in the regulated area, carpeting will be disposed of by the abatement contractor.
- G. Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grills or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After precleaning, enclose fixed objects with 2 layers of 6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation or enclosure requirements should be designated here along with specified means of protection. Contact the manufacturer for special protection requirements.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- H. Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

**3.3 CONTAINMENT BARRIERS AND COVERINGS FOR THE REGULATED AREA GENERAL:**

Follow requirements of Section 2.2 - Containment Barriers and Coverings.

**3.4 REMOVAL OF ACM**

**3.4.1 WETTING ACM**

- A. Use amended water for the wetting of ACM prior to removal. The Competent Person shall assure the wetting of ACM meets the definition of "adequately wet" in the EPA NESHAP's regulation and OSHA's "wet methods" for the duration of the project. A removal encapsulant may be used instead of amended water with written approval of the VA's representative.
- B. Amended Water: Provide water to which a surfactant has been added shall be used to wet the ACM and reduce the potential for fiber release during disturbance of ACM. The mixture must be equal to or greater than the wetting provided by water amended by a surfactant consisting one ounce of 50% polyoxyethylene ester and 50% polyoxyethylene ether mixed with 5 gallons (19L) of water.
- C. Removal Encapsulant: Provide a penetrating encapsulant designed specifically for the removal of ACM. The material must, when used, result in adequate wetting of the ACM and retard fiber release during removal.

**3.4.2 SECONDARY BARRIER AND WALKWAYS**

- A. Install as a drop cloth a 6 mil poly sheet at the beginning of each work shift where removal is to be done during that shift. Completely cover floors and any walls within 10 feet (3M) of the area where work is to be done. Secure the secondary barrier with duct tape to prevent debris from getting behind it. Remove the secondary barrier at the end of the shift or as work in the area is completed. Keep residue on the secondary barrier wetted. When removing, fold inward to prevent spillage and place in a disposal bag.
- B. Install walkways using 6 mil black poly between the regulated area and the decontamination facilities (PDF and W/EDF) to protect the primary



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

layers from contamination and damage. Install the walkways at the beginning of each shift and remove at the end of each shift.

**3.4.3 WET REMOVAL OF ACM**

- A. Adequately and thoroughly wet the ACM to be removed prior to removal to reduce/prevent fiber release to the air. Adequate time must be allowed for the amended water to saturate the ACM. Abatement personnel must not disturb dry ACM. Use a fine spray of amended water or removal encapsulant. Saturate the material sufficiently to wet to the substrate without causing excessive dripping. The material must be sprayed repeatedly/continuously during the removal process in order to maintain adequately wet conditions. Removal encapsulants must be applied in accordance with the manufacturer's written instructions. Perforate or carefully separate, using wet methods, an outer covering that is painted or jacketed in order to allow penetration and wetting of the material. Where necessary, carefully remove covering while wetting to minimize fiber release. **In no event shall dry removal occur except in the case of electrical hazards or a greater safety issue is possible!**
- B. If ACM does not wet well with amended water due to coating or jacketing, remove as follows:
  1. Mist work area continuously with amended water whenever necessary to reduce airborne fiber levels.
  2. Remove saturated ACM in small sections. Do not allow material to dry out. As material is removed, bag material while still wet into disposal bags. Twist tightly the bag neck, bend over (gooseneck) and seal with a minimum of three tight wraps of duct tape. Clean /decontaminate the outside of any residue and move to washdown station adjacent to W/EDF.
  3. Fireproofing or Architectural Finish on Scratch Coat: Spray with a fine mist of amended water or removal encapsulant. Allow time for saturation to the substrate. Do not oversaturate causing excess dripping. Scrape material from substrate. Remove material in manageable quantities and control falling to staging or floor. If the falling distance is over 20 feet (6M), use a drop chute to contain material through descent. Remove residue remaining on the scratch coat after scraping is done using a stiff bristle hand brush. If a removal encapsulant is used, remove residue completely before the

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- encapsulant dries. Re-wet the substrate as needed to prevent drying before the residue is removed.
4. Fireproofing or Architectural Finish on Wire Lath: Spray with a fine mist of amended water or removal encapsulant. Allow time to completely saturate the material. Do not oversaturate causing excess dripping. If the surface has been painted or otherwise coated, cut small holes as needed and apply amended water or removal encapsulant from above. Cut saturated wire lath into 2' x 6' (50mm x 150mm) sections and cut hanger wires. Roll up complete with ACM, cover in burlap and hand place in disposal bag. Do not drop to floor. After removal of lath/ACM, remove any overspray on decking and structure using stiff bristle nylon brushes. Depending on hardness of overspray, scrapers may be needed for removal.
  5. Pipe/Tank/Vessel/Boiler Insulation: Remove the outer layer of wrap while spraying with amended water in order to saturate the ACM. Spray ACM with a fine mist of amended water or removal encapsulant. Allow time to saturate the material to the substrate. Cut bands holding pre-formed pipe insulation sections. Slit jacketing at the seams, remove and hand place in a disposal bag. Do not allow dropping to the floor. Remove molded fitting insulation/mud in large pieces and hand place in a disposal bag. Remove any residue on pipe or fitting with a stiff bristle nylon brush. In locations where pipe fitting insulation is removed from fibrous glass or other non-asbestos insulated straight runs of pipe, remove fibrous material at least 6" from the point it contacts the ACM.

**3.4.4 REMOVAL OF CLASS II ASBESTOS FLOORING MATERIALS**

All applicable requirements of OSHA, EPA, NYS Department of Labor Industrial Code Rule 56 Procedures and DOT shall be followed during Class II work. Keep materials intact; do not disturb; wet while working with it; wrap as soon as possible with 2 layers of 6 mil plastic for disposal.

**3.4.4A REMOVAL OF ASBESTOS FLOORING MATERIALS:**

- A. All requirements of OSHA Flooring agreement provisions shall be followed:
  1. Negative air machine shall be used to effect negative pressure in the regulated area. A spare machine shall be available.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. Flooring shall be removed intact, as much as possible. Do not rip or tear flooring.
3. Mechanical chipping or sanding is not allowed.
4. Flooring shall be manually removed using scrapers. Mist work area with amended water during removal. Remove under full containment.
5. Wet clean and HEPA vacuum the floor before and after removal of flooring.
6. Place a 6 mil poly layer 4' by 10' adjacent to the regulated area for use as a decontaminated area. All waste must be contained in the regulated area.
7. Package all waste in 6 mil poly lined fiberboard drums.
8. Install critical barriers and an attached decontamination chamber.

**3.4.5 REMOVAL OF ASBESTOS FLOOR TILE MASTIC**

- A. Mastic removal material must have a flash point above 140°F.
- B. The mastic removal material must be a "low odor" or "no odor" material.
- C. Negative air machines as required under flooring removal shall be provided.
- D. Follow all manufacturers' instructions in the use of the mastic removal material.
- E. Package all waste in 6 mil poly lined fiberboard drums.
- F. Prior to application of any liquid material, check the floor for penetrations and seal before removing mastic.
- G. Remove asbestos mastic under NYS Industrial Code Rule 56 Procedures.

**3.4.6 REMOVAL OF ACM PIPING - GLOVEBAG METHOD**

- A. Use amended water for the wetting of ACM prior to removal. The Competent Person shall assure the wetting of ACM meets the definition of "adequately wet" in the EPA NESHAP's regulation and OSHA's "wet methods" for the duration of the project. A removal encapsulant may be used instead of amended water with written approval of the VA's representative.
- B. Amended Water: Provide water to which a surfactant has been added shall be used to wet the ACM and reduce the potential for fiber release during disturbance of ACM. The mixture must be equal to or greater than the wetting provided by water amended by a surfactant consisting one ounce of 50% polyoxyethylene ester and 50% polyoxyethylene ether mixed with 5 gallons (19L) of water.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- C. Removal Encapsulant: Provide a penetrating encapsulant designed specifically for the removal of ACM. The material must, when used, result in adequate wetting of the ACM and retard fiber release during disturbance equal to or greater than the amended water described above in B.

**3.4.7 SECONDARY BARRIER**

- A. Glovebag removals shall be performed inside tent containments constructed with two (2) layers of six mil polyethylene sheeting. An attached or remote decon shall be constructed.
- B. Install walkways using 6 mil poly between the regulated area and the decontamination facilities (PDF and W/EDF) to protect the floor from contamination and damage. Install the walkways at the beginning of each shift and remove at the end of each shift.

**3.4.8 WET GLOVEBAG REMOVAL OF ACM**

- A. Using acceptable glovebag procedures, adequately and thoroughly wet the ACM to be removed prior to removal to reduce/prevent fiber release to the air. Adequate time must be allowed for the amended water to saturate the ACM. Abatement personnel must not disturb dry ACM. Use a fine spray of amended water or removal encapsulant. Saturate the material sufficiently to wet to the substrate without causing excessive dripping. The material must be sprayed repeatedly/continuously during the removal process in order to maintain adequately wet conditions. Removal encapsulants must be applied in accordance with the manufacturer's written instructions. Perforate or carefully separate, using wet methods, an outer covering that is painted or jacketed in order to allow penetration and wetting of the material. Where necessary, carefully remove covering while wetting to minimize fiber release. In no event shall dry removal occur except in the case of electrical hazards or a greater safety issue is possible!

**3.4.9 GLOVEBAG REMOVAL PROCEDURES**

**GENERAL**

All applicable OSHA requirements, NYS Industrial Code Rule 56 Procedures and glovebag manufacturer's recommendations shall be met during glovebagging operations.

- 1. Mix the surfactant with water in the garden sprayer, following the manufacturer's directions.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. Have each employee put on a HEPA filtered respirator approved for asbestos and check the fit using the positive/negative fit check.
3. Have each employee put on a disposable full-body suit. Remember, the hood goes over the respirator straps.
4. Check closely the integrity of the glove bag to be used. Check all seams, gloves, sleeves, and glove openings. OSHA requires the bottom of the bag to be seamless.
5. Check the pipe where the work will be performed. If it is damaged (broken lagging, hanging, etc.), wrap the entire length of the pipe in poly sheeting and "candy stripe" it with duct tape.
6. Attach glovebag with required tools per manufacturer's instructions.
7. Using the smoke tube and aspirator bulb, test 10% of glovebags by placing the tube into the water porthole (two-inch opening to glove bag), and fill the bag with smoke and squeeze it. If leaks are found, they should be taped closed using duct tape and the bag should be retested with smoke.
8. Insert the wand from the water sprayer through the water porthole.
9. Insert the hose end from a HEPA vacuum into the upper portion of the glove bag.
10. Wet and remove the pipe insulation.
11. If the section of pipe is covered with an aluminum jacket, remove it first using the wire cutters to cut any bands and the tin snips to remove the aluminum. It is important to fold the sharp edges in to prevent cutting the bag when placing it in the bottom.
12. When the work is complete, spray the upper portion of the bag and clean-push all residue into the bottom of the bag with the other waste material. Be very thorough. Use adequate water.
13. Put all tools, after washing them off in the bag, in one of the sleeves of glove bag and turn it inside out, drawing it outside of the bag. Twist the sleeve tightly several times to seal it and tape it several tight turns with duct tape. Cut through the middle of the duct tape and remove the sleeve. Put the sleeve in the next glove bag or put it in a bucket of water to decontaminate the tools after cutting the sleeve open.
14. Turn on the HEPA vacuum and collapse the bag completely. Remove the vacuum nozzle, seal the hole with duct tape, twist the bag tightly

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

several times in the middle, and tape it to keep the material in the bottom during removal of the glove bag from the pipe.

15. Slip a disposal bag over the glove bag (still attached to the pipe). Remove the tape securing the ends, and slit open the top of the glove bag and carefully fold it down into the disposal bag. Double bag and gooseneck waste materials.

**3.4.10 NEGATIVE PRESSURE GLOVEBAG PROCEDURE**

1. In addition to the above requirements, the HEPA vacuum shall be run continuously during the glovebag procedure until completion at which time the glovebag will be collapsed by the HEPA vacuum prior to removal from the pipe/component.
2. The HEPA vacuum shall be attached and operated as needed to prevent collapse of the glovebag during the removal process.

**3.5 LOCKDOWN ENCAPSULATION**

**3.5.1 GENERAL**

Lockdown encapsulation is an integral part of the ACM removal. At the conclusion of ACM removal and before removal of the primary barriers, all surfaces shall be encapsulated with a bridging encapsulant.

**3.5.2 DELIVERY AND STORAGE**

Deliver materials to the job site in original, new and unopened containers bearing the manufacturer's name and label as well as the following information: name of material, manufacturer's stock number, date of manufacture, thinning instructions, application instructions and the MSDS for the material.

**3.5.3 WORKER PROTECTION**

Before beginning work with any material for which an MSDS has been submitted, provide workers with any required personal protective equipment. The required personal protective equipment shall be used whenever exposure to the material might occur. In addition to OSHA/specification requirements for respiratory protection, a paint pre-filter and an organic vapor cartridge, at a minimum, shall be used in addition to the HEPA filter when a solvent based encapsulant is used. The CPIH shall be responsible for provision of adequate respiratory protection.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**3.5.4 ENCAPSULATION OF SCRATCH COAT PLASTER OR PIPING**

- A. Apply two coats of encapsulant to the scratch coat plaster or piping after all ACM has been removed. Apply in strict accordance with the manufacturer's instructions. Any deviation from the instructions must be approved by the VA's representative in writing prior to commencing the work.
- B. Apply the encapsulant with an airless sprayer at a pressure and using a nozzle orifice as recommended by the manufacturer. Apply the first coat while the scratch coat is still damp from the asbestos removal process, after passing the visual inspection. If the surface has been allowed to dry, wet wipe or HEPA vacuum prior to spraying with encapsulant. Apply a second coat over the first coat in strict conformance with the manufacturer's instructions. Color the encapsulant and contrast the color in the second coat so that visual confirmation of completeness and uniform coverage of each coat is possible. Adhere to the manufacturer's instructions for coloring. At the completion of the encapsulation, the surface must be a uniform third color produced by the mixture.

**3.5.5 SEALING EXPOSED EDGES**

Seal edges of ACM exposed by removal work which is inaccessible, such as a sleeve, wall penetration, etc., with two coats of encapsulant. Prior to sealing, permit the exposed edges to dry completely to permit penetration of the encapsulant. Apply in accordance with 3.5.4 (B).

**3.6 DISPOSAL OF ACM WASTE MATERIALS**

**3.6.1 GENERAL**

Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Disposal shall be done at an approved landfill. Disposal of non-friable ACM shall be done in accordance with applicable regulations.

**3.6.2 PROCEDURES**

- A. Asbestos waste shall be packaged and moved through the W/EDF into a covered transport container in accordance with procedures in this specification. Waste shall be double-bagged prior to disposal. Wetted waste can be very heavy. Bags shall not be overfilled. Bags shall be securely sealed to prevent accidental opening and/or leakage. The top

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

shall be tightly twisted and goosenecked prior to tightly sealing with at least three wraps of duct tape. Ensure that unauthorized persons do not have access to the waste material once it is outside the regulated area. All transport containers must be covered at all times when not in use. NESHAP's signs must be on containers during loading and unloading. Material shall not be transported in open vehicles. If drums are used for packaging, the drums shall be labeled properly and shall not be re-used.

- B. Waste Load Out: Waste load out shall be done in accordance with the procedures in W/EDF Decontamination Procedures. Bags shall be decontaminated on exterior surfaces by wet cleaning and/or HEPA vacuuming before being placed in the second bag.
- C. Asbestos waste with sharp edged components, i.e., nails, screws, lath, strapping, tin sheeting, jacketing, metal mesh, etc., which might tear poly bags shall be wrapped securely in burlap before packaging and, if needed, use a poly lined fiber drum as the second container, prior to disposal.

**3.7 PROJECT DECONTAMINATION**

**3.7.1 GENERAL**

- A. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH.
- B. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleanings of the surfaces of the regulated area after the primary barrier removal.
- C. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

**3.7.2 REGULATED AREA CLEARANCE**

Air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**3.7.3 WORK DESCRIPTION**

Decontamination includes the clearance of the air in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities, and negative pressure systems.

**3.7.4 PRE-DECONTAMINATION CONDITIONS**

- A. Before decontamination starts, all ACM waste from the regulated area shall be removed, all waste collected and removed, and the loose 6 mil layer of poly removed and disposed of along with any gross debris generated by the work.
- B. At the start of decontamination, the following shall be in place:
  - 1. Primary barriers consisting of 2 layers of 6 mil poly on the floor and 4 mil poly on the walls.
  - 2. Critical barriers consisting of 2 layers of 6 mil poly which is the sole barrier between the regulated area and openings to the rest of the building or outside.
  - 4. Decontamination facilities for personnel and equipment in operating condition and the negative pressure system in operation.

**3.7.5 FIRST CLEANING**

Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and/or HEPA vacuuming. Do not use dry dusting/sweeping methods. Use each surface of a cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. Remove all filters in the air handling system and dispose of as ACM waste in accordance with these specifications. The negative pressure system shall remain in operation during this time. If determined by the CPIH/VPIH/CIH additional cleaning(s) may be needed.

**3.7.6 PRE-CLEARANCE INSPECTION AND TESTING**

The CPIH and VPIH/CIH will perform a thorough and detailed visual inspection at the end of the cleaning to determine whether there is any visible residue in the regulated area. If the visual inspection is acceptable, the CPIH will perform pre-clearance sampling using aggressive clearance as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III) (B) (7) (d). If the sampling results show values below

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

0.01 f/cc, then the Contractor shall notify the VA's representative of the results with a brief report from the CPIH documenting the inspection and sampling results and a statement verifying that the regulated area is ready for lockdown encapsulation. The VA reserves the right to utilize their own VPIH/CIH to perform a pre-clearance inspection and testing for verification.

**3.7.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES**

With the express written permission of the VA's representative, perform lockdown encapsulation of all surfaces from which asbestos was abated in accordance with the procedures in this specification. Negative pressure shall be maintained in the regulated area during the lockdown application.

**3.8 FINAL VISUAL INSPECTION AND AIR CLEARANCE TESTING**

**3.8.1 GENERAL**

Notify the VA representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH starting after the final cleaning.

**3.8.2 FINAL VISUAL INSPECTION**

Final visual inspection will include the entire regulated area, the PDF, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the final cleaning shall be repeated at no cost to the VA. Dust/material samples may be collected and analyzed at no cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done.

**3.8.3 FINAL AIR CLEARANCE TESTING**

- A. After an acceptable final visual inspection by the VPIH/CIH and VA Representative AE Project Engineer, the VPIH/CIH will perform the final testing. Air samples will be collected and analyzed in accordance with procedures for AHERA in this specification. If work is less than 260 lf/160 sf, 5 PCM samples may be collected for clearance. If work is equal to or more than 260 lf/160 sf, TEM sampling shall be done for clearance. TEM analysis shall be done in accordance with procedures in this specification. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

until clearance is achieved. All **Additional inspection and testing costs will be borne by the Contractor.**

- B. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

**3.8.4 FINAL AIR CLEARANCE PROCEDURES**

- A. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc as measured with PCM/TEM methods
- B. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH will secure samples and analyze them according to the following procedures:
  - 1. Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method or asbestos fibers counted using the AHERA TEM method.
  - 2. Aggressive Sampling: All final air testing samples shall be collected using aggressive sampling techniques except where soil is not encapsulated or enclosed. Samples will be collected on 0.8µ MCE filters for PCM analysis and 0.45µ Polycarbonate filters for TEM. A minimum of 1200 Liters of air shall be collected for clearance samples. Before pumps are started, initiate aggressive sampling as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III) (B) (7) (d). Air samples will be collected in areas subject to normal air circulation away from corners, obstructed locations, and locations near windows, doors, or vents. After air sampling pumps have been shut off, circulating fans shall be shut off. The negative pressure system shall continue to operate.

**3.8.5 CLEARANCE SAMPLING USING PCM - LESS THAN 260LF/160SF**

- A. The VPIH/CIH will perform clearance samples as indicated by the specification.
- B. The NIOSH 7400 PCM method will be used for clearance sampling with a minimum collection volume of 1200 Liters of air. A minimum of 5 PCM clearance samples shall be collected. All samples must be equal to or less than 0.01 f/cc to clear the regulated area.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**3.8.6 CLEARANCE SAMPLING USING TEM - EQUAL TO OR MORE THAN 260LF/160SF**

TEM clearance requires 13 samples be collected; 5 inside the regulated area; 5 outside the regulated area; and 3 field blanks.

**3.8.7 LABORATORY TESTING OF PCM CLEARANCE SAMPLES**

The services of an AIHA accredited laboratory will be employed by the VA to perform analysis for the air samples. Samples will be sent daily by the VPIH/CIH so that verbal/faxed reports can be received within 24 hours. A complete record, certified by the laboratory, of all air monitoring tests and results will be furnished to the VA's representative and the Contractor.

**3.8.8 LABORATORY TESTING OF TEM SAMPLES**

Samples shall be sent by the VPIH/CIH to an accredited laboratory for analysis by TEM. Verbal/faxed results from the laboratory shall be available within 24 hours after receipt of the samples. A complete record, certified by the laboratory, of all TEM results shall be furnished to the VA's representative and the Contractor.

**3.9 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE**

**3.9.1 COMPLETION OF ABATEMENT WORK**

After thorough decontamination, seal negative air machines with 2 layers of 6 mil poly and duct tape to form a tight seal at the intake/outlet ends before removal from the regulated area. Complete asbestos abatement work upon meeting the regulated area visual and air clearance criteria and fulfilling the following:

- A. Remove all equipment and materials from the project area.
- B. Dispose of all packaged ACM waste as required.
- C. Repair or replace all interior finishes damaged during the abatement work, as required.
- D. Fulfill other project closeout requirements as required in this specification.

**3.9.2 CERTIFICATE OF COMPLETION BY CONTRACTOR**

The CPIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**3.9.3 WORK SHIFTS**

All work shall be done during administrative hours (8:00 AM to 4:30 PM) Monday -Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative.

**3.9.4 RE-INSULATION**

General contractor shall replace all asbestos containing insulation with suitable non-asbestos material. Provide MSDS's for all replacement materials. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**ATTACHMENT #1**

**CERTIFICATE OF COMPLETION**

DATE:

PROJECT NAME:

VAMC/ADDRESS:

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building):  
which took place from /     /     /     to     /     /
2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.
3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.
4. That all employees of the Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.
5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.
6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.
7. That the negative pressure system was installed, operated and maintained in order to provide a minimum of 4 actual air changes per hour with a continuous -0.02" of water column pressure.

Signature/Date:

Signature/Date:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**ATTACHMENT #2**

**CERTIFICATE OF WORKER'S ACKNOWLEDGMENT**

PROJECT NAME:

DATE:

PROJECT ADDRESS:

ABATEMENT CONTRACTOR'S NAME:

WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate you are indicating to the owner that your employer has met these obligations.

RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32 hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

- Physical Characteristics and Background Information on Asbestos
- Potential Health Effects Related to Exposure to Asbestos
- Employee Personal Protective Equipment
- Establishment of a Respiratory Protection Program
- State of the Art Work Practices
- Personal Hygiene
- Additional Safety Hazards
- Medical Monitoring
- Air Monitoring
- Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards
- Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Signature:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Printed Name:

Social Security Number:

Witness:

**ATTACHMENT #3**

**AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND  
TRAINING/ACCREDITATION**

VA PROJECT NAME AND NUMBER:

VA MEDICAL FACILITY:

ABATEMENT CONTRACTOR'S NAME AND ADDRESS:

1. I verify that the following individual

Name:

Social Security Number:

who is proposed to be employed in asbestos abatement work associated with the above project by the named. Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m)(n) and 29 CFR 1910.20 are kept at the offices of the Contractor at the following address.

Address:

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.
3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.
4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

Signature of CPIH:

Date:

Printed Name of CPIH:

Signature of Contractor:

Date:

Printed Name of Contractor:



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**ATTACHMENT #4**

**ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S  
ASBESTOS SPECIFICATIONS**

VA Project Location:

VA Project #:

VA Project Description:

This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature

Date

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Abatement Contractor Competent Person(s)	Date
--	------

	Date
--	------

	Date
--	------

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 07 21 13  
THERMAL INSULATION**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

- A. This section specifies thermal and acoustical insulation for buildings.
- B. Acoustical insulation is identified by thickness and words "Acoustical Insulation".

**1.2 RELATED WORK**

**1.3 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
  - 1. Insulation, each type used
  - 2. Adhesive, each type used.
  - 3. Tape
- C. Certificates: Stating the type, thickness and "R" value (thermal resistance) of the insulation to be installed.

**1.4 STORAGE AND HANDLING:**

- A. Store insulation materials in weathertight enclosure.
- B. Protect insulation from damage from handling, weather and construction operations before, during, and after installation.

**1.5 APPLICABLE PUBLICATIONS:**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - C270-08.....Mortar for Unit Masonry
  - C516-08.....Vermiculite Loose Fill Thermal Insulation
  - C549-06.....Perlite Loose Fill Insulation
  - C552-07.....Cellular Glass Thermal Insulation.
  - C553-08.....Mineral Fiber Blanket Thermal Insulation for  
Commercial and Industrial Applications
  - C578-08.....Rigid, Cellular Polystyrene Thermal Insulation

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

C591-08.....Unfaced Preformed Rigid Cellular  
Polyisocynurate Thermal Insulation  
C612-04.....Mineral Fiber Block and Board Thermal  
Insulation  
C665-06.....Mineral Fiber Blanket Thermal Insulation for  
Light Frame Construction and Manufactured  
Housing  
C728-05.....Perlite Thermal Insulation Board  
C954-07.....Steel Drill Screws for the Application of  
Gypsum Panel Products or Metal Plaster Base to  
Steel Studs From 0.033 (0.84 mm) inch to 0.112  
inch (2.84 mm) in thickness  
C1002-07.....Steel Self-Piercing Tapping Screws for the  
Application of Gypsum Panel Products or Metal  
Plaster Bases to Wood Studs or Steel Studs  
D312-00 (R2006).....Asphalt Used in Roofing  
E84-08.....Surface Burning Characteristics of Building  
Materials  
F1667-05.....Driven Fasteners: Nails, Spikes and Staples.

**PART 2 - PRODUCTS**

**2.1 INSULATION - GENERAL:**

- A. Where thermal resistance ("R" value) is specified or shown for insulation, the thickness shown on the drawings is nominal. Use only insulation with actual thickness that is not less than that required to provide the thermal resistance specified.
- B. Where "R" value is not specified for insulation, use the thickness shown on the drawings.
- C. Where more than one type of insulation is specified, the type of insulation for each use is optional, except use only one type of insulation in any particular area.
- D. Insulation Products shall comply with following minimum content standards for recovered materials:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Material Type	Percent by Weight
Perlite composite board	23 percent post consumer recovered paper
Polyisocyanurate/polyurethane	
Rigid foam	9 percent recovered material
Foam-in-place	5 percent recovered material
Glass fiber reinforced	6 percent recovered material
Phenolic rigid foam	5 percent recovered material
Rock wool material	75 percent recovered material

The minimum-content standards are based on the weight (not the volume) of the material in the insulating core only.

**2.2 MASONRY CAVITY WALL INSULATION:**

- A. Mineral Fiber Board: ASTM C612, Type II, faced with a vapor retarder having a perm rating of not more than 0.5.
- B. Polyurethane or Polyisocyanurate Board: ASTM C591, Type I, faced with a vapor retarder having a perm rating of not more than 0.5.
- C. Polystyrene Board: ASTM C578, Type X.
- D. Perlite Board: ASTM C728.
- E. Cellular Glass Block: ASTM C552, Type I or IV.

**2.3 PERIMETER INSULATION IN CONTACT WITH SOIL:**

- A. Polystyrene Board: ASTM C578, Type IV, V, VI, VII, or IX where covered by soil or concrete.
- B. Cellular Glass Block: ASTM C552, Type I or IV.

**2.4 EXTERIOR FRAMING OR FURRING INSULATION:**

- A. Batt or Blanket: Optional.
- B. Mineral Fiber: ASTM C665, Type II, Class C, Category I where framing is faced with gypsum board.
- C. Mineral Fiber: ASTM C665, Type III, Class A where framing is not faced with gypsum board.

**2.5 ACOUSTICAL INSULATION:**

- A. Mineral Fiber boards: ASTM C553, Type II, flexible, or Type III, semirigid (4.5 pound nominal density).

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- B. Mineral Fiber Batt or Blankets: ASTM C665. Maximum flame spread of 25 and smoke development of 450 when tested in accordance with ASTM E84.
- C. Thickness as shown; of widths and lengths to fit tight against framing.

**2.6 SOUND DEADENING BOARD:**

- A. Mineral Fiber Board: ASTM C612, Type IB, 13 mm (1/2 inch thick).
- B. Perlite Board: ASTM C728, 13 mm (1/2 inch thick).

**2.7 RIGID INSULATION:**

- A. On the inside face of exterior walls, spandrel beams, floors, bottom of slabs, and where shown.
- B. Mineral Fiber Board: ASTM C612, Type IB or 2.
- C. Perlite Board: ASTM C728.
- D. Cellular Glass Block: ASTM C552, Type I.

**2.8 MASONRY FILL INSULATION:**

- A. Vermiculite Insulation: ASTM C516, Type II.
- B. Perlite Insulation: ASTM C549, Type IV.

**2.9 FASTENERS:**

- A. Staples or Nails: ASTM F1667, zinc-coated, size and type best suited for purpose.
- B. Screws: ASTM C954 or C1002, size and length best suited for purpose with washer not less than 50 mm (two inches) in diameter.
- C. Impaling Pins: Steel pins with head not less than 50 mm (two inches) in diameter with adhesive for anchorage to substrate. Provide impaling pins of length to extend beyond insulation and retain cap washer when washer is placed on the pin.

**2.10 ADHESIVE:**

- A. As recommended by the manufacturer of the insulation.
- B. Asphalt: ASTM D312, Type III or IV.
- C. Mortar: ASTM C270, Type 0.

**2.11 TAPE:**

- A. Pressure sensitive adhesive on one face.
- B. Perm rating of not more than 0.50.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**PART 3 - EXECUTION**

**3.1 INSTALLATION - GENERAL**

- A. Install insulation with the vapor barrier facing the heated side, unless specified otherwise.
- B. Install rigid insulating units with joints close and flush, in regular courses and with cross joints broken.
- C. Install batt or blanket insulation with tight joints and filling framing void completely. Seal cuts, tears, and unlapped joints with tape.
- D. Fit insulation tight against adjoining construction and penetrations, unless specified otherwise.

**3.2 MASONRY CAVITY WALLS:**

- A. Mount insulation on exterior faces of inner wythes of masonry cavity walls and brick faced concrete walls. Fill joints with same material used for bonding.
- B. Bond polystyrene board to surfaces with adhesive or Portland cement mortar mixed and applied in accordance with recommendations of insulation manufacturer.
- C. Bond mineral fiberboard, polyurethane or polyisocyanurate board, and perlite board to surfaces with adhesive as recommended by insulation manufacturer.
- D. Bond cellular glass insulation to surfaces with hot asphalt or adhesive cement.

**3.3 PERIMETER INSULATION:**

- A. Vertical insulation:
  - 1. Fill joints of insulation with same material used for bonding.
  - 2. Bond polystyrene board to surfaces with adhesive or Portland cement mortar mixed and applied in accordance with recommendations of insulation manufacturer.
  - 3. Bond cellular glass insulation to surfaces with hot asphalt or adhesive cement.
- B. Horizontal insulation under concrete floor slab:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. Lay insulation boards and blocks horizontally on level, compacted and drained fill.
2. Extend insulation from foundation walls towards center of building not less than 600 mm (24 inches) or as shown.

**3.4 EXTERIOR FRAMING OR FURRING BLANKET INSULATION:**

- A. Pack insulation around door frames and windows and in building expansion joints, door soffits and other voids. Pack behind outlets around pipes, ducts, and services encased in walls. Open voids are not permitted. Hold insulation in place with pressure sensitive tape.
- B. Lap vapor retarder flanges together over face of framing for continuous surface. Seal all penetrations through the insulation.
- C. Fasten blanket insulation between metal studs or framing and exterior wall furring by continuous pressure sensitive tape along flanged edges.
- D. Fasten blanket insulation between wood studs or framing with nails or staples through flanged edges on face of stud. Space fastenings not more than 150 mm (six inches) apart.
- E. Roof Rafter Insulation or Floor Joist Insulation: Place mineral fiber blankets between framing to provide not less than a 50 mm (two inch) air space between insulation and roof sheathing or subfloor.
- F. Ceiling Insulation and Soffit Insulation:
  1. Fasten blanket insulation between wood framing or joist with nails or staples through flanged edges of insulation.
  2. At metal framing or ceilings suspension systems, install blanket insulation above suspended ceilings or metal framing at right angles to the main runners or framing. Tape insulation tightly together so no gaps occur and metal framing members are covered by insulation.
  3. In areas where suspended ceilings adjoin areas without suspended ceilings, install either blanket, batt, or mineral fiberboard extending from the suspended ceiling to underside of deck or slab above. Secure in place to prevent collapse or separation of hung blanket, batt, or board insulation and maintain in vertical position. Secure blanket or batt with continuous cleats to structure above.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**3.5 RIGID INSULATION ON SURFACE OF EXTERIOR WALLS, FLOORS, AND UNDERSIDE OF FLOORS:**

- A. On the interior face of solid masonry and concrete walls, beams, beam soffits, underside of floors, and to the face of studs for interior wall finish where shown.
- B. Bond to solid vertical surfaces with adhesive as recommended by insulation manufacturer. Fill joints with adhesive cement.
- C. Use impaling pins for attachment to underside of horizontal surfaces. Space fastenings as required to hold insulation in place and prevent sagging.
- D. Fasten board insulation to face of studs with screws, nails or staples. Space fastenings not more than 300 mm (12 inches) apart. Stagger fasteners at joints of boards. Install at each corner.
- E. Floor insulation:
  - 1. Bond insulation to concrete floors in attic by coating surfaces with hot steep asphalt applied at rate of not less than 11.5 Kg per m<sup>2</sup> (25 lbs/100 sq. ft.), and firmly bed insulation therein.
  - 2. When applied in more than one layer, bed succeeding layers in hot steep asphalt applied at the rate of not less than 11.5 Kg per m<sup>2</sup> per m<sup>2</sup> lbs/100 sq. ft.).
  - 3. Contractors option: Insulation may be installed with nonflammable adhesive in accordance with the manufacturer's printed instructions when a separate vapor retarder is used.

**3.6 MASONRY FILL INSULATION:**

- A. Pour fill insulation in cavity voids of masonry units from tops of walls, or from sill where windows or other openings occur.
- B. Pour in lifts of not more than 6 m (20 feet).

**3.7 ACOUSTICAL INSULATION:**

- A. Fasten blanket insulation between metal studs and wall furring with continuous pressure sensitive tape along edges or adhesive.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- B. Pack insulation around door frames and windows and in cracks, expansion joints, control joints, door soffits and other voids. Pack behind outlets, around pipes, ducts, and services encased in wall or partition. Hold insulation in place with pressure sensitive tape or adhesive.
- C. Do not compress insulation below required thickness except where embedded items prevent required thickness.
- D. Where acoustical insulation is installed above suspended ceilings install blanket at right angles to the main runners or framing. Extend insulation over wall insulation systems not extending to structure above.
- E. Where semirigid insulation is used which is not full thickness of cavity, adhere to one side of cavity maintaining continuity of insulation and covering penetrations or embedments in insulation.
- F. Where sound deadening board is shown, secure // with adhesive to masonry or concrete walls // and // with screws to metal or wood framing //. Secure sufficiently in place until subsequent cover is installed. Seal all cracks with caulking.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 07 84 00  
FIRESTOPPING**

**PART 1 GENERAL**

**1.1 DESCRIPTION**

- A. Closures of openings in walls, floors, and roof decks against penetration of flame, heat, and smoke or gases in fire resistant rated construction.
- B. Closure of openings in walls against penetration of gases or smoke in smoke partitions.

**1.2 RELATED WORK**

- A. Sealants and application: Section 07 92 00, JOINT SEALANTS.
- B. Fire and smoke damper assemblies in ductwork: Section 23 31 00, HVAC DUCTS AND CASINGS, Section 23 37 00, AIR OUTLETS AND INLETS.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturers literature, data, and installation instructions for types of firestopping and smoke stopping used.
- C. List of FM, UL, or WH classification number of systems installed.
- D. Certified laboratory test reports for ASTM E814 tests for systems not listed by FM, UL, or WH proposed for use.

**1.4 DELIVERY AND STORAGE**

- A. Deliver materials in their original unopened containers with manufacturer's name and product identification.
- B. Store in a location providing protection from damage and exposure to the elements.

**1.5 WARRANTY**

Firestopping work subject to the terms of the Article "Warranty of Construction", FAR clause 52.246-21, except extend the warranty period to five years.

**1.6 QUALITY ASSURANCE**

FM, UL, or WH or other approved laboratory tested products will be acceptable.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.7 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - E84-10.....Surface Burning Characteristics of Building Materials
  - E814-11.....Fire Tests of Through-Penetration Fire Stops
- C. Factory Mutual Engineering and Research Corporation (FM):
  - Annual Issue Approval Guide Building Materials
- D. Underwriters Laboratories, Inc. (UL):
  - Annual Issue Building Materials Directory
  - Annual Issue Fire Resistance Directory
  - 1479-10.....Fire Tests of Through-Penetration Firestops
- E. Warnock Hersey (WH):
  - Annual Issue Certification Listings

**PART 2 - PRODUCTS**

**2.1 FIRESTOP SYSTEMS**

- A. Use either factory built (Firestop Devices) or field erected (through-Penetration Firestop Systems) to form a specific building system maintaining required integrity of the fire barrier and stop the passage of gases or smoke.
- B. Through-penetration firestop systems and firestop devices tested in accordance with ASTM E814 or UL 1479 using the "F" or "T" rating to maintain the same rating and integrity as the fire barrier being sealed. "T" ratings are not required for penetrations smaller than or equal to 100 mm (4 in) nominal pipe or 0.01 m<sup>2</sup> (16 sq. in.) in overall cross sectional area.
- C. Products requiring heat activation to seal an opening by its intumescence shall exhibit a demonstrated ability to function as designed to maintain the fire barrier.
- D. Firestop sealants used for firestopping or smoke sealing shall have following properties:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. Contain no flammable or toxic solvents.
  2. Have no dangerous or flammable out gassing during the drying or curing of products.
  3. Water-resistant after drying or curing and unaffected by high humidity, condensation or transient water exposure.
  4. When used in exposed areas, shall be capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.
- E. Firestopping system or devices used for penetrations by glass pipe, plastic pipe or conduits, unenclosed cables, or other non-metallic materials shall have following properties:
1. Classified for use with the particular type of penetrating material used.
  2. Penetrations containing loose electrical cables, computer data cables, and communications cables protected using firestopping systems that allow unrestricted cable changes without damage to the seal.
  3. Intumescent products which would expand to seal the opening and act as fire, smoke, toxic fumes, and, water sealant.
- F. Maximum flame spread of 25 and smoke development of 50 when tested in accordance with ASTM E84.
- G. FM, UL, or WH rated or tested by an approved laboratory in accordance with ASTM E814.
- H. Materials to be asbestos free.

**2.2 SMOKE STOPPING IN SMOKE PARTITIONS**

- A. Use silicone sealant in smoke partitions as specified in Section 07 92 00, JOINT SEALANTS.
- B. Use mineral fiber filler and bond breaker behind sealant.
- C. Sealants shall have a maximum flame spread of 25 and smoke developed of 50 when tested in accordance with E84.
- D. When used in exposed areas capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**PART 3 - EXECUTION**

**3.1 EXAMINATION**

Submit product data and installation instructions, as required by article, submittals, after an on site examination of areas to receive firestopping.

**3.2 PREPARATION**

- A. Remove dirt, grease, oil, loose materials, or other substances that prevent adherence and bonding or application of the firestopping or smoke stopping materials.
- B. Remove insulation on insulated pipe for a distance of 150 mm (six inches) on either side of the fire rated assembly prior to applying the firestopping materials unless the firestopping materials are tested and approved for use on insulated pipes.

**3.3 INSTALLATION**

- A. Do not begin work until the specified material data and installation instructions of the proposed firestopping systems have been submitted and approved.
- B. Install firestopping systems with smoke stopping in accordance with FM, UL, WH, or other approved system details and installation instructions.
- C. Install smoke stopping seals in smoke partitions.

**3.4 CLEAN-UP AND ACCEPTANCE OF WORK**

- A. As work on each floor is completed, remove materials, litter, and debris.
- B. Do not move materials and equipment to the next-scheduled work area until completed work is inspected and accepted by the Resident Engineer.
- C. Clean up spills of liquid type materials.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 07 92 00  
JOINT SEALANTS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

Section covers all sealant and caulking materials and their application, wherever required for complete installation of building materials or systems.

**1.2 RELATED WORK:**

- A. DELETED
- B. DELETED
- C. Firestopping penetrations: Section 07 84 00, FIRESTOPPING.
- D. Glazing: Section 08 80 00, GLAZING.
- E. DELETED
- F. DELETED
- G. Mechanical Work: Section 21 05 11, COMMON WORK RESULTS FOR FIRE SUPPRESSION Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

**1.3 QUALITY CONTROL:**

- A. Installer Qualifications: An experienced installer who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance.
- B. Source Limitations: Obtain each type of joint sealant through one source from a single manufacturer.
- C. Product Testing: Obtain test results from a qualified testing agency based on testing current sealant formulations within a 12-month period.
  - 1. Testing Agency Qualifications: An independent testing agency qualified according to ASTM C1021.
  - 2. Test elastomeric joint sealants for compliance with requirements specified by reference to ASTM C920, and where applicable, to other standard test methods.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3. Test elastomeric joint sealants according to SWRI's Sealant Validation Program for compliance with requirements specified by reference to ASTM C920 for adhesion and cohesion under cyclic movement, adhesion-in peel, and indentation hardness.
4. Test other joint sealants for compliance with requirements indicated by referencing standard specifications and test methods.
- D. Preconstruction Field-Adhesion Testing: Before installing elastomeric sealants, field test their adhesion to joint substrates in accordance with sealant manufacturer's recommendations:
  1. Locate test joints where indicated or, if not indicated, as directed by Contracting Officer.
  2. Conduct field tests for each application indicated below:
    - a. Each type of elastomeric sealant and joint substrate indicated.
    - b. Each type of non-elastomeric sealant and joint substrate indicated.
  3. Notify Resident Engineer seven days in advance of dates and times when test joints will be erected.
  4. DELETED
- E. VOC: Acrylic latex and Silicon sealants shall have less than 50g/l VOC content.
- F. DELETED

**1.4 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's installation instructions for each product used.
- C. Cured samples of exposed sealants for each color where required to match adjacent material.
- D. Manufacturer's Literature and Data:
  1. Caulking compound
  2. Primers
  3. Sealing compound, each type, including compatibility when different sealants are in contact with each other.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.5 PROJECT CONDITIONS:**

**A. Environmental Limitations:**

1. Do not proceed with installation of joint sealants under following conditions:
  - a. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 4.4 °C (40 °F).
  - b. When joint substrates are wet.

**B. Joint-Width Conditions:**

1. Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.

**C. Joint-Substrate Conditions:**

1. Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

**1.6 DELIVERY, HANDLING, AND STORAGE:**

- A. Deliver materials in manufacturers' original unopened containers, with brand names, date of manufacture, shelf life, and material designation clearly marked thereon.
- B. Carefully handle and store to prevent inclusion of foreign materials.
- C. Do not subject to sustained temperatures exceeding 32° C (90° F) or less than 5° C (40° F).

**1.7 DEFINITIONS:**

- A. Definitions of terms in accordance with ASTM C717 and as specified.
- B. Back-up Rod: A type of sealant backing.
- C. Bond Breakers: A type of sealant backing.
- D. Filler: A sealant backing used behind a back-up rod.

**1.8 WARRANTY:**

- A. Warranty exterior sealing against leaks, adhesion, and cohesive failure, and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be extended to two years.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

B. General Warranty: Special warranty specified in this Article shall not deprive Government of other rights Government may have under other provisions of Contract Documents and shall be in addition to, and run concurrent with, other warranties made by Contractor under requirements of Contract Documents.

**1.9 APPLICABLE PUBLICATIONS:**

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Society for Testing and Materials (ASTM):

C509-06.....Elastomeric Cellular Preformed Gasket and  
Sealing Material.

C612-10.....Mineral Fiber Block and Board Thermal  
Insulation.

C717-10.....Standard Terminology of Building Seals and  
Sealants.

C834-10.....Latex Sealants.

C919-08.....Use of Sealants in Acoustical Applications.

C920-10.....Elastomeric Joint Sealants.

C1021-08.....Laboratories Engaged in Testing of Building  
Sealants.

C1193-09.....Standard Guide for Use of Joint Sealants.

C1330-02 (R2007).....Cylindrical Sealant Backing for Use with Cold  
Liquid Applied Sealants.

D1056-07.....Specification for Flexible Cellular Materials—  
Sponge or Expanded Rubber.

E84-09.....Surface Burning Characteristics of Building  
Materials.

C. Sealant, Waterproofing and Restoration Institute (SWRI).  
The Professionals' Guide

**PART 2 - PRODUCTS**

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**2.1 SEALANTS:**

A. S-1:

1. ASTM C920, polyurethane or polysulfide.
2. Type M.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 20-40

B. S-2:

1. ASTM C920, polyurethane or polysulfide.
2. Type M.
3. Class 25.
4. Grade P.
5. Shore A hardness of 25-40.

C. S-3:

1. ASTM C920, polyurethane or polysulfide.
2. Type S.
3. Class 25, joint movement range of plus or minus 50 percent.
4. Grade NS.
5. Shore A hardness of 15-25.
6. Minimum elongation of 700 percent.

D. S-4:

1. ASTM C920 polyurethane or polysulfide.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-40.

E. S-5:

1. ASTM C920, polyurethane or polysulfide.
2. Type S.
3. Class 25.
4. Grade P.
5. Shore hardness of 15-45.

F. S-6:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. ASTM C920, silicone, neutral cure.
2. Type S.
3. Class: Joint movement range of plus 100 percent to minus 50 percent.
4. Grade NS.
5. Shore A hardness of 15-20.
6. Minimum elongation of 1200 percent.

G. S-7:

1. ASTM C920, silicone, neutral cure.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-30.
6. Structural glazing application.

H. S-8:

1. ASTM C920, silicone, acetoxo cure.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-30.
6. Structural glazing application.

I. S-9:

1. ASTM C920 silicone.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-30.
6. Non-yellowing, mildew resistant.

J. S-10:

1. ASTM C920, coal tar extended fuel resistance polyurethane.
2. Type M/S.
3. Class 25.
4. Grade P/NS.
5. Shore A hardness of 15-20.

K. S-11:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. ASTM C920 polyurethane.
2. Type M/S.
3. Class 25.
4. Grade P/NS.
5. Shore A hardness of 35 to 50.

**L. S-12:**

1. ASTM C920, polyurethane.
2. Type M/S.
3. Class 25, joint movement range of plus or minus 50 percent.
4. Grade P/NS.
5. Shore A hardness of 25 to 50.

**2.2 CAULKING COMPOUND:**

- A. C-1: ASTM C834, acrylic latex.
- B. C-2: One component acoustical caulking, non drying, non hardening, synthetic rubber.

**2.3 COLOR:**

- A. Sealants used with exposed masonry shall match color of mortar joints.
- B. Sealants used with unpainted concrete shall match color of adjacent concrete.
- C. Color of sealants for other locations shall be light gray or aluminum, unless specified otherwise.
- D. Caulking shall be light gray or white, unless specified otherwise.

**2.4 JOINT SEALANT BACKING:**

- A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.
- B. Cylindrical Sealant Backings: ASTM C1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:
  1. Type C: Closed-cell material with a surface skin.
- C. Elastomeric Tubing Sealant Backings: Neoprene, butyl, EPDM, or silicone tubing complying with ASTM D1056, nonabsorbent to water and gas, and capable of remaining resilient at temperatures down to minus 32° C

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

(minus 26° F). Provide products with low compression set and of size and shape to provide a secondary seal, to control sealant depth, and otherwise contribute to optimum sealant performance.

- D. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

**2.5 FILLER:**

- A. Mineral fiber board: ASTM C612, Class 1.
- B. Thickness same as joint width.
- C. Depth to fill void completely behind back-up rod.

**2.6 PRIMER:**

- A. As recommended by manufacturer of caulking or sealant material.
- B. Stain free type.

**2.7 CLEANERS-NON POUROUS SURFACES:**

Chemical cleaners acceptable to manufacturer of sealants and sealant backing material, free of oily residues and other substances capable of staining or harming joint substrates and adjacent non-porous surfaces and formulated to promote adhesion of sealant and substrates.

**PART 3 - EXECUTION**

**3.1 INSPECTION:**

- A. Inspect substrate surface for bond breaker contamination and unsound materials at adherent faces of sealant.
- B. Coordinate for repair and resolution of unsound substrate materials.
- C. Inspect for uniform joint widths and that dimensions are within tolerance established by sealant manufacturer.

**3.2 PREPARATIONS:**

- A. Prepare joints in accordance with manufacturer's instructions and SWRI.
- B. Clean surfaces of joint to receive caulking or sealants leaving joint dry to the touch, free from frost, moisture, grease, oil, wax, lacquer paint, or other foreign matter that would tend to destroy or impair adhesion.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants.
2. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include the following:
  - a. Concrete.
  - b. Masonry.
  - c. Unglazed surfaces of ceramic tile.
3. Remove laitance and form-release agents from concrete.
4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants.
  - a. Metal.
  - b. Glass.
  - c. Porcelain enamel.
  - d. Glazed surfaces of ceramic tile.
- C. Do not cut or damage joint edges.
- D. Apply masking tape to face of surfaces adjacent to joints before applying primers, caulking, or sealing compounds.
  1. Do not leave gaps between ends of sealant backings.
  2. Do not stretch, twist, puncture, or tear sealant backings.
  3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.
- E. Apply primer to sides of joints wherever required by compound manufacturer's printed instructions.
  1. Apply primer prior to installation of back-up rod or bond breaker tape.
  2. Use brush or other approved means that will reach all parts of joints.
- F. Take all necessary steps to prevent three sided adhesion of sealants.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**3.3 BACKING INSTALLATION:**

- A. Install back-up material, to form joints enclosed on three sides as required for specified depth of sealant.
- B. Where deep joints occur, install filler to fill space behind the back-up rod and position the rod at proper depth.
- C. Cut fillers installed by others to proper depth for installation of back-up rod and sealants.
- D. Install back-up rod, without puncturing the material, to a uniform depth, within plus or minus 3 mm (1/8 inch) for sealant depths specified.
- E. Where space for back-up rod does not exist, install bond breaker tape strip at bottom (or back) of joint so sealant bonds only to two opposing surfaces.
- F. Take all necessary steps to prevent three sided adhesion of sealants.

**3.4 SEALANT DEPTHS AND GEOMETRY:**

- A. At widths up to 6 mm (1/4 inch), sealant depth equal to width.
- B. At widths over 6 mm (1/4 inch), sealant depth 1/2 of width up to 13 mm (1/2 inch) maximum depth at center of joint with sealant thickness at center of joint approximately 1/2 of depth at adhesion surface.

**3.5 INSTALLATION:**

- A. General:
  - 1. Apply sealants and caulking only when ambient temperature is between 5° C and 38° C (40° and 100° F).
  - 2. Do not use polysulfide base sealants where sealant may be exposed to fumes from bituminous materials, or where water vapor in continuous contact with cementitious materials may be present.
  - 3. Do not use sealant type listed by manufacture as not suitable for use in locations specified.
  - 4. Apply caulking and sealing compound in accordance with manufacturer's printed instructions.
  - 5. Avoid dropping or smearing compound on adjacent surfaces.
  - 6. Fill joints solidly with compound and finish compound smooth.
  - 7. Tool joints to concave surface unless shown or specified otherwise.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

8. Finish paving or floor joints flush unless joint is otherwise detailed.
  9. Apply compounds with nozzle size to fit joint width.
  10. Test sealants for compatibility with each other and substrate. Use only compatible sealant.
- B. For application of sealants, follow requirements of ASTM C1193 unless specified otherwise.
- C. Where gypsum board partitions are of sound rated, fire rated, or smoke barrier construction, follow requirements of ASTM C919 only to seal all cut-outs and intersections with the adjoining construction unless specified otherwise.
1. Apply a 6 mm (1/4 inch) minimum bead of sealant each side of runners (tracks), including those used at partition intersections with dissimilar wall construction.
  2. Coordinate with application of gypsum board to install sealant immediately prior to application of gypsum board.
  3. Partition intersections: Seal edges of face layer of gypsum board abutting intersecting partitions, before taping and finishing or application of veneer plaster-joint reinforcing.
  4. Openings: Apply a 6 mm (1/4 inch) bead of sealant around all cut-outs to seal openings of electrical boxes, ducts, pipes and similar penetrations. To seal electrical boxes, seal sides and backs.
  5. Control Joints: Before control joints are installed, apply sealant in back of control joint to reduce flanking path for sound through control joint.

**3.6 FIELD QUALITY CONTROL:**

- A. Field-Adhesion Testing: Field-test joint-sealant adhesion to joint substrates as recommended by sealant manufacturer:
1. Extent of Testing: Test completed elastomeric sealant joints as follows:
    - a. Perform 10 tests for first 300 m (1000 feet) of joint length for each type of elastomeric sealant and joint substrate.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- b. Perform one test for each 300 m (1000 feet) of joint length thereafter or one test per each floor per elevation.
- B. Inspect joints for complete fill, for absence of voids, and for joint configuration complying with specified requirements. Record results in a field adhesion test log.
- C. Inspect tested joints and report on following:
  - 1. Whether sealants in joints connected to pulled-out portion failed to adhere to joint substrates or tore cohesively. Include data on pull distance used to test each type of product and joint substrate.
  - 2. Compare these results to determine if adhesion passes sealant manufacturer's field-adhesion hand-pull test criteria.
  - 3. Whether sealants filled joint cavities and are free from voids.
  - 4. Whether sealant dimensions and configurations comply with specified requirements.
- D. Record test results in a field adhesion test log. Include dates when sealants were installed, names of persons who installed sealants, test dates, test locations, whether joints were primed, adhesion results and percent elongations, sealant fill, sealant configuration, and sealant dimensions.
- E. Repair sealants pulled from test area by applying new sealants following same procedures used to originally seal joints. Ensure that original sealant surfaces are clean and new sealant contacts original sealant.
- F. Evaluation of Field-Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements, will be considered satisfactory. Remove sealants that fail to adhere to joint substrates during testing or to comply with other requirements. Retest failed applications until test results prove sealants comply with indicated requirements.

**3.7 CLEANING:**

- A. Fresh compound accidentally smeared on adjoining surfaces: Scrape off immediately and rub clean with a solvent as recommended by the caulking or sealant manufacturer.
- B. After filling and finishing joints, remove masking tape.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

C. Leave adjacent surfaces in a clean and unstained condition.

**3.8 LOCATIONS:**

A. Exterior Building Joints, Horizontal and Vertical: DELETED

B. Metal Reglets and Flashings: DELETED

C. Sanitary Joints:

1. Walls to Plumbing Fixtures: Type S-9

2. Counter Tops to Walls: Type S-9

3. Pipe Penetrations: Type S-9

D. Horizontal Traffic Joints: DELETED

E. High Temperature Joints over 204 degrees C (400 degrees F): DELETED

F. Interior Caulking:

1. Typical Narrow Joint 6 mm, (1/4 inch) or less at Walls and Adjacent Components: Types C-1, C-2 and C-3.

2. Perimeter of Doors, Windows, Access Panels which Adjoin Concrete or Masonry Surfaces: Types C-1, C-2 and C-3.

3. Joints at Masonry Walls and Columns, Piers, Concrete Walls or Exterior Walls: Types C-1, C-2 and C-3.

4. Perimeter of Lead Faced Control Windows and Plaster or Gypsum Wallboard Walls: Types C-1, C-2 and C-3.

5. Exposed Isolation Joints at Top of Full Height Walls: Types C-1, C-2 and C-3.

6. Exposed Acoustical Joint at Sound Rated Partitions Type C-2.

7. Concealed Acoustic Sealant Type S-4, C-1, C-2 and C-3.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 08 11 13  
HOLLOW METAL DOORS AND FRAMES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies steel doors, steel frames and related components.
- B. Terms relating to steel doors and frames as defined in ANSI A123.1 and as specified.

**1.2 RELATED WORK**

- F. Door Hardware: Section 08 71 00, DOOR HARDWARE.
- G. Glazing and ballistic rated glazing: Section 08 80 00, GLAZING.

**1.3 TESTING**

An independent testing laboratory shall perform testing.

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturers Literature and Data:
  - 1. Fire rated doors and frames, showing conformance with NFPA 80 and Underwriters Laboratory, Inc., or Intertek Testing Services or Factory Mutual fire rating requirements
  - 2. Sound rated doors, including test report from Testing Laboratory.

**1.5 SHIPMENT**

- A. Prior to shipment label each door and frame to show location, size, door swing and other pertinent information.
- B. Fasten temporary steel spreaders across the bottom of each door frame.

**1.6 STORAGE AND HANDLING**

- A. Store doors and frames at the site under cover.
- B. Protect from rust and damage during storage and erection until completion.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.7 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. Federal Specifications (Fed. Spec.):
  - L-S-125B.....Screening, Insect, Nonmetallic
- C. Door and Hardware Institute (DHI):
  - A115 Series.....Steel Door and Frame Preparation for Hardware, Series A115.1 through A115.17 (Dates Vary)
- D. Steel Door Institute (SDI):
  - 113-01.....Thermal Transmittance of Steel Door and Frame Assemblies
  - 128-1997.....Acoustical Performance for Steel Door and Frame Assemblies
  - A250.8-03.....Standard Steel Doors and Frames
- E. American Society for Testing and Materials (ASTM):
  - A167-99(R2004).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
  - A568/568-M-07.....Steel, Sheet, Carbon, and High-Strength, Low-alloy, Hot-Rolled and Cold-Rolled
  - A1008-08.....Steel, sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy and High Strength Low Alloy with Improved Formability
  - B209/209M-07.....Aluminum and Aluminum-Alloy Sheet and Plate
  - B221/221M-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles and Tubes
  - D1621-04.....Compressive Properties of Rigid Cellular Plastics
  - D3656-07.....Insect Screening and Louver Cloth Woven from Vinyl Coated Glass Yarns
  - E90-04.....Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions
- F. The National Association Architectural Metal Manufacturers (NAAMM):
  - Metal Finishes Manual (1988 Edition)

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- G. National Fire Protection Association (NFPA):  
80-09.....Fire Doors and Fire Windows
- H. Underwriters Laboratories, Inc. (UL):  
Fire Resistance Directory
- I. Intertek Testing Services (ITS):  
Certifications Listings...Latest Edition
- J. Factory Mutual System (FM):  
Approval Guide

**PART 2 - PRODUCTS**

**2.1 MATERIALS**

- A. Stainless Steel: ASTM A167, Type 302 or 304; finish, NAAMM Number 4.
- B. Sheet Steel: ASTM A1008, cold-rolled for panels (face sheets) of doors.
- C. Anchors, Fastenings and Accessories: Fastenings anchors, clips connecting members and sleeves from zinc coated steel.
- D. Insect Screening: ASTM D3656, 18 by 18 regular mesh.
- E. Aluminum Sheet: ASTM B209/209M.
- F. Aluminum, Extruded: ASTM B221/221M.
- G. Prime Paint: Paint that meets or exceeds the requirements of A250.8.

**2.2 FABRICATION GENERAL**

- A. GENERAL:
  - 1. Follow SDI A250.8 for fabrication of standard steel doors, except as specified otherwise. Doors to receive hardware specified in Section 08 71 00, DOOR HARDWARE. Tolerances as per SDI A250.8. Thickness, 44 mm (1-3/4 inches), unless otherwise shown.
  - 2. Close top edge of exterior doors flush and seal to prevent water intrusion.
  - 3. When vertical steel stiffeners are used for core construction, fill spaces between stiffeners with mineral fiber insulation.
- B. Standard Duty Doors: SDI A250.8, Level 1, Model 2 of size and design shown. Use for interior locations only. Do not use for stairwell doors, security doors and detention doors.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- C. Heavy Duty Doors: SDI A250.8, Level 2, Model 2 of size and design shown. Core construction types a, d, or f, for interior doors, and, types b, c, e, or f, for exterior doors.
- D. Extra Heavy Duty Doors: DELETED
- E. Smoke Doors:
  - 1. Close top and vertical edges flush.
  - 2. Provide seamless vertical edges.
  - 3. Apply Steel astragal to the meeting stile at the active leaf of pair of doors or double egress doors.
  - 4. Provide clearance at head, jamb and sill as specified in NFPA 80.
- F. Fire Rated Doors (Labeled):
  - 1. Conform to NFPA 80 when tested by Underwriters Laboratories, Inc., Inchcape Testing Services, or Factory Mutual for the class of door or door opening shown.
  - 2. Fire rated labels of metal, with raised or incised markings of approving laboratory shall be permanently attached to doors.
  - 3. Close top and vertical edges of doors flush. Vertical edges shall be seamless. Apply steel astragal to the meeting stile of the active leaf of pairs of fire rated doors, except where vertical rod exit devices are specified for both leaves swinging in the same direction.
  - 4. Construct fire rated doors in stairwell enclosures for maximum transmitted temperature rise of 230 °C (450 °F) above ambient temperature at end of 30 minutes of fire exposure when tested in accordance with ASTM E152.
- G. Custom Metal Hollow Doors:
  - 1. Provide custom hollow metal doors where nonstandard steel doors are indicated. At the Contractor's option, custom hollow metal doors may be provided in lieu of standard steel doors. Door size(s), design, materials, construction, gages and finish shall be as specified for standard steel doors.
  - 2. Dutch Doors:
    - a. Construct with two leaves, of same construction as specified for flush doors.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- b. Fabricate shelves of not less than 1.3 mm (0.053 inch) thick steel of size shown.
  - c. Stock type brackets fabricated of the same type metal used to fabricate shelves.
  - d. Shelves and brackets may be either welded, bolted, or screw-attached in place.
- H. Sound Rated Doors:
- 1. SDI 114, except as specified otherwise.
  - 2. Sound Transmission Class minimum of 45 when tested in accordance with ASTM E90.
  - 3. Doors complete with integral spring type automatic door bottom seal and with integral continuous gaskets on the frames. Applied spring type automatic door bottom seal and applied continuous gaskets for the frames for doors that are not sound rated but sealed for flanking noises are specified in Section 08 71 00, DOOR HARDWARE.
  - 4. Fabricate vision panels to receive double glazing where shown.
- I. Detention Doors (Type 22):
- 1. SDI A250.8, Level 3, Model 2 with core Type 'd' or 'f'.
  - 2. Vision panels:
    - a. Weld 3 mm (1/8 inch) thick steel channel reinforcements around cut-outs in doors to accommodate vision lights.
    - b. Fabricate glazing stops on room side of doors, of 3 mm (1/8 inch) thick steel sheets mitered and welded at corners, and continuously welded both sides into doors.
    - c. Fabricate glazing bead for corridor side of doors of 9 mm (3/8 inch) by 19 mm (3/4 inch) steel bar, miter and weld at the corners, and fasten to doors with 6 mm (1/4 inch) countersunk screws near corners and centers of each side. Back-up screw holes with 3 mm (1/8 inch) thick reinforcements, or weld nuts to back of the frames to receive screws.
    - d. Size rabbet to provide for installation of safety glass and glazing cushions specified.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**J. Tubular Steel Doors:**

1. Industrial type.
2. Stiles and rails minimum of 125 mm (5 inches) by 44 mm (1-3/4 inches), formed of 1.3 mm (0.053 inch) thick steel tubular design, with locked seam. Bottom rail be 250 mm (10 inches) wide.
3. Louver and glazed opening sizes as shown.
4. Door panels; consist of two sheets of 1 mm (0.042 inch) thick steel with a resilient separator, nominally 9 mm (3/8 inch) thick, interlocked into the stiles and rails.

**2.3 METAL FRAMES**

**A. General:**

1. SDI A250.8, 1.3 mm (0.053 inch) thick sheet steel, types and styles as shown or scheduled.
2. Frames for exterior doors: Fabricate from 1.7 mm (0.067 inch) thick galvanized steel conforming to ASTM A525.
3. Frames for labeled fire rated doors and windows.
  - a. Comply with NFPA 80. Test by Underwriters Laboratories, Inc., Inchcape Testing Services, or Factory Mutual.
  - b. Fire rated labels of approving laboratory permanently attached to frames as evidence of conformance with these requirements. Provide labels of metal or engraved stamp, with raised or incised markings.
4. Frames for lead-lined doors:
  - a. Frames for doors 900 mm (3 feet) or less in width and having lead lining of 1 mm or less in thickness, and not shown to have structural steel supports: Minimum 1.7 mm (0.067 inch) thick.
  - b. Frames for doors over 900 mm (3 feet) in width or having lead-lining more than 1 mm in thickness shown to be supported by and attached to structural steel subframes: Minimum 1.3 mm (0.053 inch) thick.
  - c. Lead-lining and its application are specified in Section 13 49 00, RADIATION PROTECTION.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

5. Frames for detention door (Type 22): Minimum 2 mm (0.093 inch) thick.
  6. Frames for doors specified to have automatic door operators; Security doors (Type 36); service window: minimum 1.7 mm (0.067 inch) thick.
  7. Knocked-down frames are not acceptable.
- B. Reinforcement and Covers:
1. SDI A250.8 for, minimum thickness of steel reinforcement welded to back of frames.
  2. Provide mortar guards securely fastened to back of hardware reinforcements except on lead-lined frames.
  3. DELETED
- C. Terminated Stops: SDI A250.8.
- D. Glazed Openings:
- a. Integral stop on exterior, corridor, or secure side of door.
  - b. Design rabbet width and depth to receive glazing material or panel shown or specified.
- E. Two piece frames:
- a. One piece unequal leg finished rough buck sub-frames as shown, drilled for anchor bolts.
  - b. Unequal leg finished frames formed to fit subframes and secured to subframe legs with countersunk, flat head screws, spaced 300 mm (12 inches) on center at head and jambs on each side.
  - c. Preassemble at factory for alignment.
- F. Frame Anchors:
1. Floor anchors:
    - a. Where floor fills occur, provide extension type floor anchors to compensate for depth of fill.
    - b. At bottom of jamb use 1.3 mm (0.053 inch) thick steel clip angles welded to jamb and drilled to receive two 6 mm (1/4 inch) floor bolts. Use 50 mm x 50 mm (2 inch by 2 inch) 9 mm by (3/8 inch) clip angle for lead lined frames, drilled for 9 mm (3/8 inch) floor bolts.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- c. Where mullions occur, provide 2.3 mm (0.093 inch) thick steel channel anchors, drilled for two 6 mm (1/4 inch) floor bolts and frame anchor screws.
  - d. Where sill sections occur, provide continuous 1 mm (0.042 inch) thick steel rough bucks drilled for 6 mm (1/4 inch) floor bolts and frame anchor screws. Space floor bolts at 50 mm (2 inches) on center.
2. Jamb anchors:
- a. Locate anchors on jambs near top and bottom of each frame, and at intermediate points not over 600 mm (24 inches) apart, except for fire rated frames space anchors as required by labeling authority.
  - b. Form jamb anchors of not less than 1 mm (0.042 inch) thick steel unless otherwise specified.
  - c. Anchors set in masonry: Use adjustable anchors designed for friction fit against the frame and for extension into the masonry not less than 250 mm (10 inches). Use one of following type:
    - 1) Wire loop type of 5 mm (3/16 inch) diameter wire.
    - 2) T-shape or strap and stirrup type of corrugated or perforated sheet steel.
  - d. Anchors for stud partitions: Either weld to frame or use lock-in snap-in type. Provide tabs for securing anchor to the sides of the studs.
  - e. Anchors for frames set in prepared openings:
    - 1) Steel pipe spacers with 6 mm (1/4 inch) inside diameter welded to plate reinforcing at jamb stops or hat shaped formed strap spacers, 50 mm (2 inches) wide, welded to jamb near stop.
    - 2) Drill jamb stop and strap spacers for 6 mm (1/4 inch) flat head bolts to pass thru frame and spacers.
    - 3) Two piece frames: Subframe or rough buck drilled for 6 mm (1/4 inch) bolts.
  - f. Anchors for observation windows and other continuous frames set in stud partitions.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- 1) In addition to jamb anchors, weld clip anchors to sills and heads of continuous frames over 1200 mm (4 feet) long.
- 2) Anchors spaced 600 mm (24 inches) on centers maximum.
- g. Modify frame anchors to fit special frame and wall construction and provide special anchors where shown or required.

**2.4 TRANSOM PANELS**

- A. Fabricate panels as specified for flush doors.
- B. Fabricate bottom edge with rabbet stop to fit top of door where no transom bar occurs.

**2.5 LOUVERS**

- A. General:
  1. Sight proof type with stationary blades the full thickness of the door.
  2. Design lightproof louvers to exclude passage of light but permit free ventilation.
  3. Provide insect screen and wire guards at exterior doors, except where doors are located below completely enclosed areaways, the wire guard is not required.
- B. Fabrication:
  1. Steel louvers 0.8 mm (0.032 inch) thick for interior doors, and 1.3 mm (0.053 inch) inch thick for exterior doors.
  2. Fabricate louvers as complete units. Install in prepared cutouts in doors.
  3. Weld stationary blades to frames. Weld louvers into door openings.
- C. Screen frames:
  1. Frame of either extruded aluminum or tubular aluminum.
  2. Fabricate frame to hold wire fabric in a channel with a retaining bar anchor and to mount on surface of door with screws.
  3. Do not lap frame over louver opening.
  4. Miter corners of frame members and join by concealed mechanical fastenings extending about 57 mm (2-1/4 inches) into ends of each member.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

5. Drill frame and doors for screw attachment. Space screws 50 mm (2 inches) from end of each leg of frame and not over 300 mm (12 inches) on center between end screws.
6. Finish: Clear anodized finish, 0.4 mils thick.
7. Insect Screens: Fasten insect screens to interior side of doors with retaining bar against door and not exposed to view.
8. Wire Guards:
  - a. Wire fabric shall be wire guard screen as specified.
  - b. Fasten wire guard to exterior side of door with retaining bar against door and not exposed to view.

**2.6 SHOP PAINTING**

Provide shop painting per SDI A250.8.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

- A. Plumb, align and brace frames securely until permanent anchors are set.
  1. Use triangular bracing near each corner on both sides of frames with temporary wood spreaders at midpoint.
  2. Use wood spreaders at bottom of frame if the shipping spreader is removed.
  3. Protect frame from accidental abuse.
  4. Where construction will permit concealment, leave the shipping spreaders in place after installation, otherwise remove the spreaders after the frames are set and anchored.
  5. Remove wood spreaders and braces only after the walls are built and jamb anchors are secured.
- B. Floor Anchors:
  1. Anchor the bottom of door frames to floor with two 6 mm (1/4 inch) diameter expansion bolts. Use 9 mm (3/8 inch) bolts on lead lined frames.
  2. Power actuated drive pins may be used to secure frame anchors to concrete floors.
- C. Jamb Anchors:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. Anchors in masonry walls: Embed anchors in mortar. Fill space between frame and masonry wall with grout or mortar as walls are built.
  2. Coat frame back with a bituminous coating prior to lining of grout filling in masonry walls.
  3. Secure anchors to sides of studs with two fasteners through anchor tabs. Use steel drill screws to steel studs.
  4. Frames set in prepared openings of masonry or concrete: Expansion bolt to wall with 6 mm (1/4 inch) expansion bolts through spacers. Where subframes or rough bucks are used, 6 mm (1/4 inch) expansion bolts on 600 mm (24 inch) centers or power activated drive pins 600 mm (24 inches) on centers. Secure two piece frames to subframe or rough buck with machine screws on both faces.
- D. Install anchors for labeled fire rated doors to provide rating as required.
- E. Frames for Sound Rated Doors: Coordinate to line frames for sound rated doors with insulation.
- F. Overhead Bracing (Lead Lined Frames): Where jamb extensions extend to structure above, anchor clip angles with not less than two, 9 mm (3/8 inch) expansion bolts or power actuated drive pins to concrete slab. Weld to steel overhead members.

**3.2 INSTALLATION OF DOORS AND APPLICATION OF HARDWARE**

Install doors and hardware as specified in Sections Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, or Section 08 14 00, WOOD DOORS, and Section 08 71 00, DOOR HARDWARE.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 08 14 00  
INTERIOR WOOD DOORS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies interior flush doors and stile and rail doors with prefinish, prefit option.
- B. Section includes fire rated doors and smoke doors.

**1.2 RELATED WORK**

- A. Metal door frames: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES.
- B. Doors and frames of a forced entry/ballistic resistant rated: Section 08 34 53, SECURITY DOORS AND FRAMES.
- C. Overhead doors including loading docks: Section 08 33 00, COILING DOORS AND GRILLES.
- D. Windows and frames of a forced entry/ballistic resistant rated: Section 08 56 53, SECURITY WINDOWS
- E. Door hardware including hardware location (height): Section 08 71 00, DOOR HARDWARE.
- F. Installation of doors and hardware: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, Section 08 14 00, WOOD DOORS, or Section 08 71 00, DOOR HARDWARE.
- G. Glazing and ballistic rated glazing: Section 08 80 00, GLAZING.
- H. Finish: Section 09 06 00, SCHEDULE FOR FINISHES.
- I. Metal louvers: Section 08 90 00, LOUVERS AND VENTS.
- J. Lead lined wood door: Section 13 49 00, RADIATION PROTECTION.
- K. Card readers and biometric devices: Section 28 13 00, ACCESS CONTROL
- L. Intrusion alarm: Section 28 16 11, INTRUSION DETECTION SYSTEM
- M. Security monitors: Section 28 51 00, SECURITY CONTROL CENTER

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. Corner section of flush veneered door 300 mm (12 inches) square, showing details of construction, labeled to show grade and type number and conformance to specified standard.
  2. Veneer sample 200 mm (8 inch) by 275 mm (11 inch) by 6 mm (1/4 inch) showing specified wood species sanded to receive a transparent finish. Factory finish veneer sample where the prefinished option is accepted.
- C. Shop Drawings:
1. Show every door in project and schedule location in building.
  2. Indicate type, grade, finish and size; include detail of glazing, louvers, and other pertinent details.
  3. Provide information concerning specific requirements not included in the manufacturer's literature and data submittal.
- D. Manufacturer's Literature and Data:
1. DELETED
  2. Labeled fire rated doors showing conformance with NFPA 80.
- E. Laboratory Test Reports:
1. Screw holding capacity test report in accordance with WDMA T.M.10.
  2. Split resistance test report in accordance with WDMA T.M.5.
  3. Cycle/Slam test report in accordance with WDMA T.M.7.
  4. Hinge-Loading test report in accordance with WDMA T.M.8.

**1.4 WARRANTY**

- A. Doors are subject to terms of Article titled "Warranty of Construction", FAR clause 52.246-21, except that warranty shall be as follows:
1. For interior doors, manufacturer's warranty for lifetime of original installation.
  2. DELETED

**1.5 DELIVERY AND STORAGE**

- A. Factory seal doors and accessories in minimum of 6 mill polyethylene bags or cardboard packages which shall remain unbroken during delivery and storage.
- B. Store in accordance with WDMA I.S.1-A, J-1 Job Site Information.
- C. Label package for door opening where used.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.6 APPLICABLE PUBLICATIONS**

Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

**B. Window and Door Manufacturers Association (WDMA):**

I.S.1-A-04.....Architectural Wood Flush Doors  
I.S.4-07A.....Water-Repellent Preservative Non-Pressure  
Treatment for Millwork  
I.S.6A-01.....Architectural Wood Stile and Rail Doors  
T.M.5-90.....Split Resistance Test Method  
T.M.6-08.....Adhesive (Glue Bond) Durability Test Method  
T.M.7-08.....Cycle-Slam Test Method  
T.M.8-08.....Hinge Loading Test Method  
T.M.10-08.....Screwholding Test Method

**C. National Fire Protection Association (NFPA):**

80-07.....Protection of Buildings from Exterior Fire  
252-08.....Fire Tests of Door Assemblies

**D. ASTM International (ASTM):**

E90-04.....Laboratory Measurements of Airborne Sound  
Transmission Loss

**PART 2 - PRODUCTS**

**2.1 FLUSH DOORS**

**A. General:**

1. Meet requirements of WDMA I.S.1-A, Extra Heavy Duty.
2. Adhesive: Type II
3. Thickness: 45 mm (1-3/4 inches) unless otherwise shown or specified.
4. DELETED

**B. Face Veneer:**

1. In accordance with WDMA I.S.1-A.
2. One species throughout the project unless scheduled or otherwise shown.
3. For transparent finishes: Provide grade, cut, and wood species to match existing.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- a. A grade face veneer standard optional.
  - b. AA grade face veneer
  - c. Match face veneers for doors for uniform effect of color and grain at joints.
  - d. Door edges shall be same species as door face veneer except maple may be used for stile face veneer on birch doors.
  - e. On doors required to have transparent finish on one side and paint finish on other side; use veneers as required for transparent finish on both sides.
  - f. In existing buildings, where doors are required to have transparent finish, use wood species and grade of face veneers to match adjacent existing doors.
4. For painted finishes: Custom Grade, mill option close grained hardwood, premium or medium density overlay. Do not use Lauan.
5. Factory sand doors for finishing.
- C. Wood for stops, louvers, muntins and moldings of flush doors required to have transparent finish:
- 1. Solid Wood of same species as face veneer, except maple may be used on birch doors.
  - 2. Glazing:
    - a. On non-labeled doors use applied wood stops nailed tight on room side and attached on opposite side with flathead, countersunk wood screws, spaced approximately 125 mm (5 inches) on centers.
    - b. Use stainless steel or dull chrome plated brass screws for exterior doors.
  - 3. Wood Louvers:
    - a. Door manufacturer's standard product, fabricated of solid wood sections.
    - b. Wood Slats: Not less than 5 mm (3/16 inch) thick.
    - c. Stiles routed out to receive slats.
    - d. Secure louvers in prepared cutouts with wood stops.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**D. Stiles and Rails:**

1. Option for wood stiles and rails:
  - a. Composite material having screw withdrawal force greater than minimum performance level value when tested in accordance with WDMA T.M.10.
2. Provide adequate blocking for bottom of doors having mechanically operated door bottom seal meeting or exceeding the performance duty level per T.M.10 for horizontal door edge screw holding.
3. Rabbeted transom meeting rail edges match face veneers of doors. Bottom rail of transom panel match face veneer on non rabbeted meeting rail edge.

**E. Fire rated wood doors:**

1. Fire Performance Rating:
  - a. "B" label, 1-1/2 hours.
  - b. "C" label, 3/4 hour.
2. Labels:
  - a. Doors shall conform to the requirements of ASTM E2074, or NFPA 252, and, carry an identifying label from a qualified testing and inspection agency for class of door or opening shown designating fire performance rating.
  - b. Metal labels with raised or incised markings.
3. Performance Criteria for Stiles of doors utilizing standard mortise leaf hinges:
  - a. Hinge Loading: WDMA T.M.8. Average of 10 test samples for Extra Heavy Duty doors.
  - b. Direct screw withdrawal: WDMA T.M.10 for Extra Heavy Duty doors. Average of 10 test samples using a steel, fully threaded #12 wood screw.
  - c. Cycle Slam: 1,000,000 cycles with no loose hinge screws or other visible signs of failure when tested in accordance with WDMA T.M.7.
4. Additional Hardware Reinforcement:
  - a. Provide fire rated doors with hardware reinforcement blocking.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- b. Size of lock blocks as required to secure hardware specified.
- c. Top, bottom and intermediate rail blocks shall measure not less than 125 mm (five inches) minimum by full core width.
- d. Reinforcement blocking in compliance with manufacturer's labeling requirements.
- e. Mineral material similar to core is not acceptable.
- 5. Other Core Components: Manufacturer's standard as allowed by the labeling requirements.
- 6. Provide steel frame approved for use in labeled doors for vision panels.
- 7. Provide steel astragal on pair of doors.
- F. Smoke Barrier Doors:
  - 1. For glazed openings use steel frames approved for use in labeled doors.
  - 2. Provide a steel astragal on one leaf of pairs of doors, including double egress doors.
- G. Sound Rated Doors:
  - 1. Fabricated as specified for flush wood doors with additional construction requirements to meet specified sound transmission class (STC).
  - 2. DELETED
  - 3. Accessories:
    - a. Frame Gaskets: Continuous closed cell sponge neoprene with stop adjusters.
    - b. Automatic Door Bottom Seal:
      - 1) Steel spring operated, closed cell sponge neoprene metal mounted removable in extruded aluminum housing with a medium matte 0.1 mm (4.0 mil) thick clear Anodized finish.
      - 2) Concealed or Surface Mounted.
- H. Dutch Doors:
  - 1. Consist of two sections, each fabricated as specified for flush doors.
  - 2. Construct shelf as detailed, from clear hardwood stock, or laminated plastic door shelf, same species as face veneer of door.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3. Place shelf on top of lower section of door and support as shown with a pair of wood or wrought steel brackets.
4. Prime steel brackets for finish painting.

**2.2 STILE AND RAIL DOORS**

- A. Meeting requirements of WDMA I.S.6A
- B. Ponderosa pine doors of size and design shown.
- C. Grade: NA
- D. Door Panels:
  1. Grain of face of panels parallel with longest dimensions of panel.
  2. Flat panels: Veneered composite core, not less than 6 mm (5/8 inch) thick.
  3. Raised panels: Unless otherwise shown, thickness of raised panels not less than the following:
    - a. For 35 mm (1-3/8 inch) and 45 mm (1-3/4 inch) thick doors: 28 mm (1-1/8 inch) thick
    - b. For 57 mm (2-1/4 inch) thick doors: 41 mm (1-5/8 inch) thick
  4. Where armor plate is required in connection with paneled doors, provide panels with plywood fillers, glued in place, and finished.
- E. Stops and Molds:
  1. Solid sticking both sides, of same material as stiles and rails, coped at intersections.
  2. Glazed openings applied wood stops nailed on interior side of door.
- F. Louvers: Size as shown.

**2.3 PREFINISH, PREFIT OPTION**

- A. Flush doors may be factory machined to receive hardware, bevels, undercuts, cutouts, accessories and fitting for frame.
- B. Factory fitting to conform to specification for shop and field fitting, including factory application of sealer to edge and routings.
- C. Flush doors to receive transparent finish (in addition to being prefit) shall be factory finished as follows:
  1. WDMA I.S.1-A Section F-3 specification for System TR-4, Conversion Varnish or System TR-5, Catalyzed Vinyl.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. Use stain when required to produce the finish specified in Section 09 06 00 SCHEDULE FOR FINISHES.

**2.4 IDENTIFICATION MARK:**

- A. On top edge of door.
- B. Either a stamp, brand or other indelible mark, giving manufacturer's name, door's trade name, construction of door, code date of manufacture and quality.
- C. Accompanied by either of the following additional requirements:
  1. An identification mark or a separate certification including name of inspection organization.
  2. Identification of standards for door, including glue type.
  3. Identification of veneer and quality certification.
  4. Identification of preservative treatment for stile and rail doors.

**2.5 SEALING:**

Give top and bottom edge of doors two coats of catalyzed polyurethane or water resistant sealer before sealing in shipping containers.

**PART 3 - EXECUTION**

**3.1 DOOR PREPARATION**

- A. Field, shop or factory preparation: Do not violate the qualified testing and inspection agency label requirements for fire rated doors.
- B. Clearances between Doors and Frames and Floors:
  1. Maximum 3 mm (1/8 inch) clearance at the jambs, heads, and meeting stiles, and a 19 mm (3/4 inch) clearance at bottom, except as otherwise specified.
  2. Maximum clearance at bottom of sound rated doors, light-proofed doors, doors to operating rooms, and doors designated to be fitted with mechanical seal: 10 mm (3/8 inch).
- C. Provide cutouts for special details required and specified.
- D. Rout doors for hardware using templates and location heights specified in Section, 08 71 00 DOOR HARDWARE.
- E. Fit doors to frame, bevel lock edge of doors 3 mm (1/8 inch) for each 50 mm (two inches) of door thickness, AND undercut where shown.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- F. Immediately after fitting and cutting of doors for hardware, seal cut edges of doors with two coats of water resistant sealer.
- G. Finish surfaces, including both faces, top and bottom and edges of the doors smooth to touch.
- H. Apply a steel astragal on the opposite side of active door on pairs of fire rated doors.
- I. Apply a steel astragal to meeting style of active leaf of pair of doors or double egress smoke doors.

**3.2 INSTALLATION OF DOORS APPLICATION OF HARDWARE**

Install doors and hardware as specified in this Section.

**3.3 DOOR PROTECTION**

- A. As door installation is completed, place polyethylene bag or cardboard shipping container over door and tape in place.
- B. Provide protective covering over knobs and handles in addition to covering door.
- C. Maintain covering in good condition until removal is approved by Resident Engineer.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 08 17 10  
INTEGRATED DOOR ASSEMBLIES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. Work in this section includes integrated door opening systems including metal frame, integrated doors, hanging device, latching mechanism and associated finish hardware, unless specified elsewhere.
- B. Smoke and draft control seals shall be included in this section, unless specifically listed elsewhere.
- C. All glass and glazing are not covered in this section.

**1.2 RELATED WORK**

- A. Key Cylinders: Section 08 71 00, DOOR HARDWARE
- B. Painting: Section 09 91 00, PAINTING.
- C. Electrical: Division 26, ELECTRICAL.
- D. Fire Detection: Section 28 31 00, FIRE DETECTION AND ALARM.

**1.3 QUALITY ASSURANCE**

- A. Hardware shall be installed by people knowledgeable and skilled in the application, installation and adjustment of commercial grade doors and door hardware. Doors and Frames must be installed plumb, square and level.
- B. Doors frames must be properly prepared and reinforced to install hardware per the manufacturer's template and installation instructions. Install door frames in accordance with ANSI/SDI A250.11 - "Recommended Erection Instructions for Steel Frames."
- C. Contractor shall provide and furnish screws, bolts, expansions shields or other fasteners to facilitate the proper installation of products, not furnished as part of the Integrated Door Assembly.

**1.4 WARRANTY**

- A. Provide manufacturer's standard five-year limited warranty against defects in material and workmanship unless noted otherwise.
  - 1. Door Closers: 10 years
  - 2. Steel Pinned Continuous Hinges: 10 years

**1.5 SUBMITTALS**

- A. Submit shop drawings with proposed Integrated Door Assembly system,



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

product and hardware options, in a timely manner to obtain the approval from architect in time to meet construction schedule of other trades.

- B. Provide for each door an frame location; frame type, profile, and installation details, items of finish hardware accessories, finishes, degree of opening and electrical rough-in requirements. Submit required templates to door and frame manufacturers to enable proper and accurate sizing and locations of hardware.
- C. Samples: Provide physical samples as required by Section 01 33 23.
- D. Provide Owner Manual, instruction sheets and installation.

**1.6 DELIVERY, STORAGE AND HANDLING**

- A. Integrated Door Assembly systems shall be delivered to the general contractor at the job site complete with necessary screws, miscellaneous parts, instructions, and installation templates. Each package shall be legibly and properly labeled to correspond to the approved door schedule.
- B. Deliver Integrated Door Assembly system to project site. Contractor will jointly check in hardware with representatives of the supplier to verify shipment is correct and / or note and rectify discrepancies promptly.
- C. Furnish door assemblies with flush operating hardware flush with door skin, using protective wrappings and protective spacers between projecting hardware. Maintain and protect door assemblies using cardboard spacers and protective edge guards along the door edges, to reduce exposure to marring or damage during storage.
- D. Store door assemblies in a dry and secure area. Storage area shall be void of any excess humidity that can cause damage to the product.

**1.7 APPLICABLE PUBLICATIONS**

- A. The following references established standards for architectural hardware as specified in this section.
- B. American National Standards Institute (ANSI)
  - ICC/ANSI A117.1-2003.....Accessible and Usable Buildings and Facilities
  - ANSI/BHMA A156.1-2006.....Butts and Hinges
  - ANSI/BHMA A156.3-2008.....Exit Devices

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

ANSI/BHMA A156.4-2008.....Door Controls - Closers  
ANSI/BHMA A156.5-2001.....Auxiliary Locks and Associated Products  
ANSI/BHMA A156.6-2005.....Architectural Door Trim  
ANSI/BHMA A156.7-2009.....Template Hinge Dimensions  
ANSI/BHMA A156.8-2005.....Door Controls - Overhead Holders  
ANSI/BHMA A156.10-2005.....Power Operated Pedestrian Doors  
ANSI/BHMA A156.13-2002.....Mortise Locks and Latches  
ANSI/BHMA A156.15-2006.....Closer Holder Release Devices  
ANSI/BHMA A156.16-2008.....Auxiliary Hardware  
ANSI/BHMA A156.18-2006.....Materials and Finishes  
ANSI/BHMA A156.19-2007.....Power Assist and Low Energy Power  
Operated Doors  
ANSI/BHMA A156.21-2009.....Thresholds  
ANSI/BHMA A156.22-2005.....Door Gasketing Systems  
ANSI/BHMA A156.23-2004.....Electromagnetic Locks  
ANSI/BHMA A156.24-2003.....Delayed Egress Locking Systems  
ANSI/BHMA A156.25-2007.....Electrified Locking Devices  
ANSI/BHMA A156.26-2006.....Continuous Hinges  
ANSI/BHMA A156.28-2007.....Master Keying Systems  
ANSI/BHMA A156.29-2007.....Exit Locks and Alarms  
ANSI/BHMA A156.30-2003.....High Security Cylinders  
ANSI/BHMA A156.31-2007.....Electric Strikes and Frame Mounted  
Actuators  
ANSI/BHMA A156.32-2008.....Integrated Door Opening Assemblies  
ANSI/SDI A250.4-2001.....Test Procedure and Acceptance Criteria  
for Physical Evidence for Steel Doors,  
Frames, Frame Anchors and Reinforcings  
ANSI/SDI A250.8-2003.....Recommended Specifications for Standard  
Steel Doors and Frames  
ANSI/SDI A250.11-2001.....Recommended Erection Instructions for  
Steel Frames  
UL10C-2009.....Positive Pressure Fire Tests of Door  
Assemblies

C. American Society for Testing and Materials (ASTM)

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. ASTM E2074 (2000): Standard Test Method for Fire Tests of Door Assemblies
  2. ASTM E2180 (2007): Standard Test Method for Determining the Activity of Incorporated Antimicrobial Agent(s) In Polymeric or Hydrophobic Materials
  3. ASTM F476 (2002): Standard Test Method for Security of Swinging Door Assemblies
- D. Door and Hardware Institute (DHI)
1. Recommended Locations for Builder's Hardware for Standard Doors and Frames (2004)
  2. Recommended Locations for Builder's Hardware for Custom Steel Doors and Frames (1996)
- E. Metal Door and Frame Associations
1. Hollow Metal Manufacturing Association (HMMA)
    - a. National Association of Architectural Metal Manufacturers (NAAMM)
  2. Steel Door Institute (SDI)
- F. Approved Testing Laboratories
1. Underwriter's Laboratories, Inc. (UL)
    - a. UL305 (2007): Panic Hardware
    - b. UL1784 (2004): Air Leakage Tests of Door Assemblies
  2. ITS / Intertek Testing Services / Warnock Hersey Inc.
- G. National Fire Protection Association (NFPA)
1. NFPA 70-2008: National Electrical Code
  2. NFPA 80-2010: Standard for Fire Doors and Other Opening Protectives
  3. NFPA 101-2009: Life Safety Code
  4. NFPA 105-2010: Standard for Installation of Smoke Door Assemblies and Other Opening Protectives
  5. NFPA 252-2008: Standard Methods of Fire Tests of Door Assemblies
- H. Building Codes [Applicable Building Code]
1. 2009 International Building Code
  2. All hardware shall comply with UFAS, (Uniform Federal Accessible Standards - 1998) unless specified otherwise

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**PART 2 - PRODUCTS**

**2.1 MATERIAL REQUIREMENTS**

**A. Integrated Door Assembly requirements:**

1. Comply with ANSI/BHMA A156.32a: Grade 1:1,000,000
2. Integrated Door Opening Assemblies shall provide a label for life safety or fire labels as required in door schedule.
3. Integral vision lite provided with door assembly, or field installed lite kit, as required.

**B. Door Frame requirements:**

1. Door Frames shall be 14 gauge ASTM A366, cold roll steel and shall comply to ANSI/SDI A250.8 Level A - Grade III and / or HMMA/NAAMM - 850-99.
2. Door frames shall be furnished with mitered corners, continuously welded, ground smooth on frame face.
3. Prepare frames with 14 gauge reinforcements for applied hardware. Provide 12 gauge reinforcements for continuous hinges.
4. Provide suitable adjustable type anchors, minimum 4 per jamb.

**C. Integrated Hardware Requirements:**

1. Provide a complete Integrated Door Assembly including the installation and adjustment of the latching mechanism within the door construction. The exit device shall be inset in door, clean and unobtrusive in design. The push bar shall comply with ANSI/BHMA Grade 1 Standard for exit devices. End caps shall be metal, plated satin nickel (BHMA 619). The Push and Pull devices shall be clean and unobtrusive in design. Lever handles shall be clean and unobtrusive in design with and shall match style of other hardware furnished on project. Continuous hinges shall comply with ANSI/BHMA A156.26.
  - a. At doors with plastic laminate faces, provide hinges with wrap-around hinge guards and provide stainless steel wrap-around edge guards at the leading edge of the door. Hinges shall comply with ANSI/BHMA A156.26

**2.2 FINISHES**

**A. Finish Symbols**

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

US	BHMA	DESCRIPTION OF FINISH
USP	600	Primed for field painting
US26D	626/652	Satin Chrome
US28	628	Satin Aluminum
US32	629	Bright Stainless
US32D	630	Satin Stainless
N/A	689	Aluminum Painted

**B. Finish Requirements**

1. Door Faces: Provide to match facility standard material and finish.
2. Frames: Prime or factory pre finished as per facility standard.
3. Door Hardware:
  - a. Continuous Hinges: 630
  - b. Push Bar: 630 clad with 619 end caps
  - c. Lever Exit Device Trim: 630
  - d. Push/Pull Trim: 626
  - e. Door Closers: 689
  - f. Miscellaneous: To match other finishes
4. Anti-microbial Coating: All hand-operated hardware (levers, pulls, push bars, push plates, paddles, and panic bars) shall be provided with an anti-microbial/anti-fungal coating that has passed ASTM E2180 tests. Coating to consist of ionic silver (Ag+). Silver ions surround bacterial cells, inhibiting growth of bacteria, mold, and mildew by blockading food and respiration supplies.

**PART 3 - EXECUTION**

**3.1 EXAMINATION**

- A. Contractor is responsible for notification of any wall conditions or building structure that would prevent proper execution of the installation of products produced in accordance with approved hardware schedule.
- B. Note short or damaged deliveries on the bill of lading at the time of delivery.
- C. The fire label is a manufacturer's certification only. Proper installation of products and proper wall construction are requirements

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

to meet fire label.

- D. Unless otherwise required in other sections of the contract specs, provide power supply as required per the manufacturer's installation instructions.
- E. Do not fabricate any product until receipt of approved submittal drawings.
- F. Beginning of installation means acceptance of existing conditions.

**3.2 INSTALLATION**

- A. Mount furnished hardware accessories at heights indicated in "Recommended Locations or Builder's Hardware" for Standard Doors and Frames, Custom Steel Doors and Frames, established by the Door and Hardware Institute (DHI), except if otherwise indicated or to comply with requirements of governing regulations, or if otherwise directed by the architect.
- B. Install furnished hardware accessories in compliance with the manufacturer's instructions, templates and recommendations. Comply with specified degree of opening for doors with automatic operators, overhead door closers, etc. Securely fasten all furnished parts. Make sure all operating parts move freely and smoothly without binding, sticking and void of any excessive clearance.
- C. Coordinate installation and interface wiring with fire alarm and smoke detection systems. Provide all additional auxiliary contacts, relays, or interface for the fire alarm and security system
- D. Remove or protect furnished hardware accessories, prior to any painting or finishing that is to be completed after the installation of the hardware accessories.

**3.3 ADJUSTMENT AND CLEANING**

- A. Adjust and check door assembly and each operating item of hardware to ensure correct operation and function. Units which cannot be adjusted to operate as intended for the application made shall be replaced.
- B. Final Adjustment: Wherever hardware installation is made more than a month prior to building acceptance or occupancy of a space or area, the installer shall return to the work during the week prior to acceptance or occupancy and make final check and adjustment of all hardware items.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Hardware Accessories shall be cleaned as necessary to restore correct operation, function, and finish. Do not use cleaners that will harm finish.

**3.4 PROTECTION**

- A. Whenever furnished hardware accessories are located in areas where it may be subject to damage during construction by handling, cleaning, etc., (e.g. painting, cleaning of bricks) it shall be protected and/or removed from its location until the hazardous condition is terminated.

**3.5 SCHEDULES:**

- A. The following is a general listing of the Integrated Door Assembly requirements and is not intended for use as a final door submittal. Any items of hardware required by established standards or practices, or to meet federal building codes shall be furnished whether or not specifically called out in the following listed groups.

**HW-6D**

<b>Each [ADO] Integrated Door to Have:</b>	<b>RATED</b>
1 Steel Frame	
1 Integrated Door w/Exit Device	Q2131 x TYPE 8 ELECTRIC DEVICE (E04) x F08 LEVER
1 Continuous Transfer Hinge	A51031B x 8-THRUWIRE TRANSFER x IN-HINGE ACCESS PANEL
1 Power Supply	BY EXIT DEVICE MFR. FOR E04 FUNCTION
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

EACH [ADO] INTEGRATED DOOR TO HAVE:

POWER TRANSFER SHARED BY ELECTRIC PANIC AND RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

KEY CYLINDER BY SECTION 08 71 00, DOOR HARDWARE.

AUTO DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

**HW-8**

Each [MHO] Pair Integrated Doors to Have:	RATED
1 Steel Frame	
1 Integrated Pair Doors w/Auto Flush Bolts & Push/Pull Trim	Q2241 x TYPE 25 LESS BOTTOM BOLT AUTO FLUSH BOLT (INACTIVE LEAF) x ACTIVE CONCEALED VERTICAL LATCH (ACTIVE LEAF)
2 Continuous Hinges	A51031B x WIDE THROW AS REQUIRED TO ACHIEVE FULL DOOR SWING
1 Coordinator	TYPE 21A
1 Self-Adhesive Astragal	R0Y_14
2 Closers	C02011 (PT4D, PT4H) x 180° SWING
2 Magnetic Holders	C00011 TRI-VOLTAGE
1 Set Self-Adhesive Seals	R0E154

POWER, WIRING, CONDUIT, AND FIRE ALARM CONNECTION BY DIVISION 26.

**HW-12A**

Each [MHO] Pair Integrated Doors to Have:	RATED
1 Steel Frame	
1 Integrated Pair Doors w/Exit Devices and Pull Trim	Q2231 x TYPE 8 EXIT DEVICES (F01 / ACTIVE FLUSH PULL PASSAGE TRIM)
2 Continuous Hinges	A51031B
1 Self-Adhesive Astragal	R0Y_14
2 Closers	C02011/C02021 (PT4D, PT4H)
2 Magnetic Holders	C00011 TRI-VOLTAGE



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1 Set Self-Adhesive Seals	R0E154
---------------------------	--------

POWER, WIRING, CONDUIT, AND FIRE ALARM CONNECTION BY DIVISION 26.

**HW-12B**

Each [ADO] Pair Integrated Doors to Have:	RATED
1 Steel Frame	
1 Integrated Pair Doors w/Elec Exit Devices	Q2231 x TYPE 8 (E04) ELECTRIC EXIT DEVICES (F01 / F08)
2 Continuous Transfer Hinges	A51031B x 8-THRUWIRE TRANSFER x IN-HINGE ACCESS PANEL
1 Power Supply	BY EXIT DEVICE MFR. FOR E04 FUNCTION
1 Self-Adhesive Astragal	R0Y_14
2 Armor Plates	J101 x 1.275 MM (0.050 INCH) THICKNESS
2 Floor Stops	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

POWER, WIRING, CONDUIT, AND FIRE ALARM CONNECTION BY DIVISION 26.

POWER TRANSFER SHARED BY ELECTRIC PANIC AND RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

KEY CYLINDER BY SECTION 08 71 00, DOOR HARDWARE.

AUTO DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

**HW-12C**

Each [ADO] Pair Integrated Double Egress Doors to Have:	RATED
1 Steel Frame	
1 Integrated Pair Doors w/Exit DEVICES	Q2331 x TYPE 8 EXIT DEVICES (F01)
2 Continuous Hinges	A51031B
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2 Closers	C02011/C02021 (PT4D, PT4H
2 Magnetic Holders	C00011 TRI-VOLTAGE
1 Set Self-Adhesive Seals	R0E154

POWER, WIRING, CONDUIT, AND FIRE ALARM CONNECTION BY DIVISION 26.

**HW-12D**

Each [ADO] Pair Integrated Double Egress Doors to Have:	RATED
1 Steel Frame	
1 Integrated Pair Doors w/Elec Exit Devices	Q2331 x TYPE 8 (E04) ELECTRIC EXIT DEVICES (F01)
2 Continuous Transfer Hinges	A51031B x 8-THRUWIRE TRANSFER x IN-HINGE ACCESS PANEL
1 Power Supply	BY EXIT DEVICE MFR. FOR E04 FUNCTION
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2 Armor Plates	J101 x 1.275 MM (0.050 INCH) THICKNESS
2 Floor Stops	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

POWER, WIRING, CONDUIT, AND FIRE ALARM CONNECTION BY DIVISION 26.

POWER TRANSFER SHARED BY ELECTRIC PANIC AND RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

AUTO DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

**HW-SH-4**

Each [AC, EL, REX, DPS] Integrated Door to Have:	RATED
1 Steel Frame	
1 Integrated Door w/Elec. Exit Device	Q2131 x TYPE 8 ELECTRIC DEVICE (E01, E05/E06-VERIFY)x F13 LEVER
1 Continuous Transfer Hinge	A51031B x 4-THRUWIRE TRANSFER x IN-HINGE ACCESS PANEL
1 Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1 Closer	C02021 (PT4D, PT4F, PT4H)
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154
1 Alarm Contact	

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.

CARD READER BY DIVISION 28.

KEY CYLINDER BY SECTION 08 71 00, DOOR HARDWARE.

**HW-SH-4A**

Each [ADO, AC, ELR, REX, DPS] Integrated Door to Have:	RATED
1 Steel Frame	
1 Integrated Door w/Elec Exit Device	Q2131 x TYPE 8 ELECTRIC DEVICE (E01, E04)x F13 LEVER
1 Continuous Transfer Hinge	A51031B x 12-THRUWIRE TRANSFER x IN- HINGE ACCESS PANEL
1 Power Supply	BY EXIT DEVICE MFR. FOR E04 FUNCTION
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Floor Stop	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154
1 Alarm Contact	

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.

AUTO DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR  
OPERATORS.

CARD READER BY DIVISION 28.

POWER TRANSFER SHARED BY ELECTRIC PANIC AND RE-ACTIVATION SENSOR WIRING (RE-  
ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

KEY CYLINDER BY SECTION 08 71 00, DOOR HARDWARE.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**HW-SH-10**

<b>Each [AC, EL, REX, DPS] Pair Integrated Doors to Have</b>	<b>RATED</b>
1 Steel Frame	
1 Integrated Pair Doors w/Elec Exit Devices	Q2231 x TYPE 8 EXIT DEVICES (F01-E01 / F13-E01, E05/E06-VERIFY)
2 Continuous Transfer Hinges	A51031B x 4-THRUWIRE TRANSFER x IN- HINGE ACCESS PANEL
1 Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE
1 Self-Adhesive Astragal	R0Y_14
2 Closers	C02021 (PT4D, PT4F, PT4H)
2 Armor Plates	J101 x 1.275 MM (0.050 INCH) THICKNESS
2 Floor Stops	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

POWER, WIRING, AND CONDUIT BY DIVISION 26.

KEY CYLINDER BY SECTION 08 71 00, DOOR HARDWARE.

**HW-SH-10A**

<b>Each [AC, ADO, EL, REX, DPS] Pair Integrated Doors to Have:</b>	<b>RATED</b>
1 Steel Frame	
1 Integrated Pair Doors w/Elec. Exit Devices	Q2231 x TYPE 8 (E01, E04) ELECTRIC EXIT DEVICES (F01 / F08)
2 Continuous Transfer Hinges	A51031B x 12-THRUWIRE TRANSFER x IN- HINGE ACCESS PANEL
1 Power Supply	BY EXIT DEVICE MFR. FOR E04 FUNCTION
1 Self-Adhesive Astragal	R0Y_14
2 Armor Plates	J101 x 1.275 MM (0.050 INCH) THICKNESS
2 Floor Stops	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

POWER, WIRING, CONDUIT, AND FIRE ALARM CONNECTION BY DIVISION 26.  
POWER TRANSFER SHARED BY ELECTRIC PANIC AND RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).  
KEY CYLINDER BY SECTION 08 71 00, DOOR HARDWARE.  
AUTO DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

**HW-SH-12**

<b>Each [AC, ADO, EL, REX, DPS] Integrated Door to Have:</b>	<b>NON-RATED</b>
1 Steel Frame	
1 Integrated Door w/Elec. Exit Device	Q2131 x TYPE 8 ELECTRIC DEVICE (E01, E04) x F03 OUTSIDE CYLINDER ONLY
1 Continuous Transfer Hinge	A51031B x 12-THRUWIRE TRANSFER x IN-HINGE ACCESS PANEL
1 Power Supply	BY EXIT DEVICE MFR. FOR E04 FUNCTION
1 Offset Pull	J402 x 1" (25mm) DIAMETER x 12" (305mm) CTC
1 Closer	C02021 (PT4D, PT4F, PT4H
1 Kick Plate	J102
1 Floor Stop	L02121 x 3 FASTENERS
1 Threshold	J35130 x SILICONE GASKET
1 Door Sweep	90100CNB (PEMKO), OR EQUAL
1 Set Frame Seals	2891AS X CSK SCREWS (PEMKO), OR EQUAL
1 Drip	R0Y976
1 Alarm Contact	

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.  
CARD READER BY DIVISION 28.  
KEY CYLINDER BY SECTION 08 71 00, DOOR HARDWARE.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 08 31 13  
ACCESS DOORS AND FRAMES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

Section specifies access doors or panels.

**1.2 RELATED WORK:**

- A. Wire mesh and screen access doors: Section 05 50 00, METAL FABRICATIONS.
- B. Lock Cylinders: Section 08 71 00, DOOR HARDWARE.
- C. Access doors in acoustical ceilings: Section 09 51 00, ACOUSTICAL CEILINGS.
- D. Locations of access doors for duct work cleanouts: Section 23 31 00, HVAC DUCTS AND CASINGS Section 23 37 00, AIR OUTLETS AND INLETS.

**1.3 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Access doors, each type, showing construction, location and installation details.
- C. Manufacturer's Literature and Data: Access doors, each type.

**1.4 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - A167-99(R-2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip
  - A1008-10.....Steel Sheet, Cold-Rolled, Carbon, Structural, High Strength Low-Alloy
- C. American Welding Society (AWS):
  - D1.3-08.....Structural Welding Code Sheet Steel
- D. National Fire Protection Association (NFPA):
  - 80-10.....Fire Doors and Windows
- E. The National Association of Architectural Metal Manufacturers (NAAMM):

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

AMP 500 Series.....Metal Finishes Manual

F. Underwriters Laboratories, Inc. (UL):  
Fire Resistance Directory

**PART 2 - PRODUCTS**

**2.1 FABRICATION, GENERAL**

- A. Fabricate components to be straight, square, flat and in same plane where required.
  - 1. Slightly round exposed edges and without burrs, snags and sharp edges.
  - 2. Exposed welds continuous and ground smooth.
  - 3. Weld in accordance with AWS D1.3.
- B. Number of locks and non-continuous hinges as required to maintain alignment of panel with frame. For fire rated doors, use hinges and locks as required by fire test.
- C. Provide anchors or make provisions in frame for anchoring to adjacent construction. Provide size, number and location of anchors on four sides to secure access door in opening. Provide anchors as required by fire test.

**2.2 ACCESS DOORS, FIRE RATED:**

- A. Shall meet requirements for "B" label 1-1/2 hours with maximum temperature rise of 120 degree C (250 degrees F).
- B. Comply with NFPA 80 and have Underwriters Laboratories Inc., or other nationally recognized laboratory label for Class B opening.
- C. Door Panel: Form of 0.9 mm (0.0359 inch) thick steel (standard) or stainless steel (wet areas) sheet, insulated sandwich type construction.
- D. Frame: Form of 1.5 mm (0.0598 inch) thick steel sheet of depth and configuration to suit material and type of construction where installed. Provide frame flange at perimeter where installed in concrete masonry or gypsum board openings.
  - 1. Weld exposed joints in flange and grind smooth.
  - 2. Provide frame flange at perimeter where installed in concrete masonry or gypsum board.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3. Provide expanded galvanized metal lath perimeter wings when installed in plaster except veneer plaster.

E. Automatic Closing Device: Provide automatic closing device for door.

F. Hinge: Continuous steel hinge with stainless steel pin.

G. Lock:

1. Self-latching, with provision for fitting flush a standard screw-in type lock cylinder. Lock cylinder specified in Section 08 71 00, DOOR HARDWARE.
2. Provide latch release device operable from inside of door. Mortise case in door.

**2.3 ACCESS DOORS, FLUSH PANEL:**

A. Door Panel:

1. Form of 1.9 mm (0.0747 inch) thick steel, or 1.5 mm (0.0598 inch) thick stainless steel sheet.
2. Reinforce to maintain flat surface.

B. Frame:

1. Form of 1.5 mm (0.0598 inch) thick steel or stainless steel sheet of depth and configuration to suit material and type of construction where installed.
2. Provide surface mounted units having frame flange at perimeter where installed in concrete, masonry, or gypsum board construction.
3. Weld exposed joints in flange and grind smooth.
4. Provide expanded galvanized metal lath perimeter wings when installed in plaster except veneer plaster.

C. Hinge:

1. Concealed spring hinge to allow panel to open 175 degrees.
2. Provide removable hinge pin to allow removal of panel from frame.

D. Lock:

1. Flush, screwdriver operated cam lock.
2. DELETED



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**2.4 ACCESS DOOR, RECESSED PANEL: DELETED**

**2.5 FINISH:**

- A. Provide in accordance with NAAMM AMP 500 series on exposed surfaces.
- B. Steel Surfaces: Baked-on prime coat over a protective phosphate coating.
- C. Stainless Steel: No. 4 for exposed surfaces.

**2.6 SIZE:**

Minimum 600 mm (24 inches) square door unless otherwise shown or required to suit opening in suspension system of ceiling.

**PART 3 - EXECUTION**

**3.1 LOCATION:**

- A. Provide access panels or doors wherever any valves, traps, dampers, cleanouts, and other control items of mechanical, electrical and conveyor work are concealed in wall or partition, or are above ceiling of gypsum board or plaster.
- B. Use fire rated doors in fire rated partitions and ceilings.
- C. Use flush panels in partitions and gypsum board or plaster ceilings, except lay-in acoustical panel ceilings or upward access acoustical tile ceilings.
- D. DELETED

**3.2 INSTALLATION, GENERAL:**

- A. Install access doors in openings to have sides vertical in wall installations, and parallel to ceiling suspension grid or side walls when installed in ceiling.
- B. Set frames so that edge of frames without flanges will finish flush with surrounding finish surfaces.
- C. Set frames with flanges to overlap opening and so that face will be uniformly spaced from the finish surface.
- D. Set recessed panel access doors recessed so that face of surrounding materials will finish on the same plane, when finish in door is installed.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**3.3 ANCHORAGE:**

- A. Secure frames to adjacent construction using anchors attached to frames or by use of bolts or screws through the frame members.
- B. Type, size and number of anchoring device suitable for the material surrounding the opening, maintain alignment, and resist displacement during normal use of access door.
- C. Anchors for fire rated access doors shall meet requirements of applicable fire test.

**3.4 ADJUSTMENT:**

- A. Adjust hardware so that door panel will open freely.
- B. Adjust door when closed so door panel is centered in the frame.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 08 71 00  
DOOR HARDWARE**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. Door hardware and related items necessary for complete installation and operation of doors.

**1.2 RELATED WORK**

- A. Caulking: Section 07 92 00 JOINT SEALANTS.
- B. Application of Hardware: Section 08 14 00, WOOD DOORS; Section 08 11 13, HOLLOW METAL DOORS AND FRAMES; Section 08 17 10, INTEGRATED DOOR ASSEMBLIES.
- C. Finishes: Section 09 06 00, SCHEDULE FOR FINISHES.
- D. Painting: Section 09 91 00, PAINTING.
- F. Electrical: Division 26, ELECTRICAL.
- G. Fire Detection: Section 28 31 00, FIRE DETECTION AND ALARM.

**1.3 GENERAL**

- A. All hardware shall comply with UFAS, (Uniform Federal Accessible Standards) unless specified otherwise.
- B. Provide rated door hardware assemblies where required by most current version of the International Building Code (IBC).
- C. Hardware for Labeled Fire Doors and Exit Doors: Conform to requirements of NFPA 80 for labeled fire doors and to NFPA 101 for exit doors, as well as to other requirements specified. Provide hardware listed by UL, except where heavier materials, large size, or better grades are specified herein under paragraph HARDWARE SETS. In lieu of UL labeling and listing, test reports from a nationally recognized testing agency may be submitted showing that hardware has been tested in accordance with UL test methods and that it conforms to NFPA requirements.
- D. Hardware for application on metal and wood doors and frames shall be made to standard templates. Furnish templates to the fabricator of these items in sufficient time so as not to delay the construction.
- E. The following items shall be of the same manufacturer, except as otherwise specified:
  - 1. Mortise locksets.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. Hinges for hollow metal and wood doors.
3. Surface applied overhead door closers.
4. Exit devices.
5. Floor closers.

**1.4 WARRANTY**

- A. Automatic door operators shall be subject to the terms of FAR Clause 52.246-21, except that the Warranty period shall be two years in lieu of one year for all items except as noted below:
1. Locks, latchsets, and panic hardware: 5 years.
  2. Door closers and continuous hinges: 10 years.

**1.5 MAINTENANCE MANUALS**

- A. In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on all door hardware. Provide installation instructions with the submittal documentation.

**1.6 SUBMITTALS**

- A. Submittals shall be in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. Submit 6 copies of the schedule per Section 01 33 23. Submit 2 final copies of the final approved schedules to VAMC Locksmith as record copies (VISN Locksmith if the VAMC does not have a locksmith).
- B. Hardware Schedule: Prepare and submit hardware schedule in the following form:

Hardware Item	Quantity	Size	Reference Publication Type No.	Finish	Mfr. Name and Catalog No.	Key Control Symbols	UL Mark (if fire rated and listed)	ANSI/BHMA Finish Designation

- C. Samples and Manufacturers' Literature:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. Samples: All hardware items (proposed for the project) that have not been previously approved by Builders Hardware Manufacturers Association shall be submitted for approval. Tag and mark all items with manufacturer's name, catalog number and project number.
  2. Samples are not required for hardware listed in the specifications by manufacturer's catalog number, if the contractor proposes to use the manufacturer's product specified.
- D. Certificate of Compliance and Test Reports: Submit certificates that hardware conforms to the requirements specified herein. Certificates shall be accompanied by copies of reports as referenced. The testing shall have been conducted either in the manufacturer's plant and certified by an independent testing laboratory or conducted in an independent laboratory, within four years of submittal of reports for approval.

**1.7 DELIVERY AND MARKING**

- A. Deliver items of hardware to job site in their original containers, complete with necessary appurtenances including screws, keys, and instructions. Tag one of each different item of hardware and deliver to Resident Engineer for reference purposes. Tag shall identify items by Project Specification number and manufacturer's catalog number. These items shall remain on file in Resident Engineer's office until all other similar items have been installed in project, at which time the Resident Engineer will deliver items on file to Contractor for installation in predetermined locations on the project.

**1.8 PREINSTALLATION MEETING**

- A. Convene a preinstallation meeting not less than 30 days before start of installation of door hardware. Require attendance of parties directly affecting work of this section, including Contractor and Installer, Architect, Project Engineer and VA Locksmith, Hardware Consultant, and Hardware Manufacturer's Representative. Review the following:
1. Inspection of door hardware.
  2. Job and surface readiness.
  3. Coordination with other work.
  4. Protection of hardware surfaces.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

5. Substrate surface protection.
6. Installation.
7. Adjusting.
8. Repair.
9. Field quality control.
10. Cleaning.

**1.9 INSTRUCTIONS**

- A. Hardware Set Symbols on Drawings: Except for protective plates, door stops, mutes, thresholds and the like specified herein, hardware requirements for each door are indicated on drawings by symbols. Symbols for hardware sets consist of letters (e.g., "HW") followed by a number. Each number designates a set of hardware items applicable to a door type.
- B. Keying: All cylinders shall be keyed into existing Grand Master Key System. Provide removable core cylinders that are removable only with a special key or tool without disassembly of knob or lockset. Cylinders shall be either 6 or 7 pin type to match existing facility key system. Keying information shall be furnished at a later date by the Resident Engineer.
- C. Keying: DELETED

**1.10 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. In text, hardware items are referred to by series, types, etc., listed in such specifications and standards, except as otherwise specified.
- B. American Society for Testing and Materials (ASTM):
  - F883-04.....Padlocks
  - E2180-07.....Standard Test Method for Determining the  
Activity of Incorporated Antimicrobial Agent(s)  
In Polymeric or Hydrophobic Materials

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

C. American National Standards Institute/Builders Hardware Manufacturers Association (ANSI/BHMA):

- |                  |  |
|------------------|--|
| A156.1-06.....   | Butts and Hinges   |
| A156.2-03.....   | Bored and Pre-assembled Locks and Latches                            |
| A156.3-08.....   | Exit Devices, Coordinators, and Auto Flush Bolts                     |
| A156.4-08.....   | Door Controls (Closers)  |
| A156.5-01.....   | Auxiliary Locks and Associated Products                              |
| A156.6-05.....   | Architectural Door Trim  |
| A156.8-05.....   | Door Controls-Overhead Stops and Holders                             |
| A156.12-05 ..... | Interconnected Locks and Latches                                     |
| A156.13-05.....  | Mortise Locks and Latches Series 1000                                |
| A156.14-07 ..... | Sliding and Folding Door Hardware                                    |
| A156.15-06.....  | Release Devices-Closer Holder, Electromagnetic and Electromechanical |
| A156.16-08.....  | Auxiliary Hardware   |
| A156.17-04 ..... | Self-Closing Hinges and Pivots                                       |
| A156.18-06.....  | Materials and Finishes   |
| A156.20-06 ..... | Strap and Tee Hinges, and Hasps                                      |
| A156.21-09.....  | Thresholds   |
| A156.22-05.....  | Door Gasketing and Edge Seal Systems                                 |
| A156.23-04.....  | Electromagnetic Locks  |
| A156.24-03.....  | Delayed Egress Locking Systems                                       |
| A156.25-07 ..... | Electrified Locking Devices  |
| A156.26-06.....  | Continuous Hinges  |
| A156.28-07 ..... | Master Keying Systems  |
| A156.29-07 ..... | Exit Locks and Alarms  |
| A156.30-03 ..... | High Security Cylinders  |
| A156.31-07 ..... | Electric Strikes and Frame Mounted Actuators                         |
| A250.8-03.....   | Standard Steel Doors and Frames                                      |

- 08 71 00-5

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Building Materials Directory (2008)

**PART 2 - PRODUCTS**

**2.1 BUTT HINGES**

- A. ANSI A156.1. Provide only three-knuckle hinges, except five-knuckle where the required hinge type is not available in a three-knuckle version (e.g., some types of swing-clear hinges). The following types of butt hinges shall be used for the types of doors listed, except where otherwise specified:
1. Exterior Doors: Type A2112/A5112 for doors 900 mm (3 feet) wide or less and Type A2111/A5111 for doors over 900 mm (3 feet) wide. Hinges for exterior outswing doors shall have non-removable pins. Hinges for exterior fire-rated doors shall be of stainless steel material.
  2. Interior Doors: Type A8112/A5112 for doors 900 mm (3 feet) wide or less and Type A8111/A5111 for doors over 900 mm (3 feet) wide. Hinges for doors exposed to high humidity areas (shower rooms, toilet rooms, kitchens, janitor rooms, etc. shall be of stainless steel material.
- B. Provide quantity and size of hinges per door leaf as follows:
1. Doors up to 1210 mm (4 feet) high: 2 hinges.
  2. Doors 1210 mm (4 feet) to 2260 mm (7 feet 5 inches) high: 3 hinges minimum.
  3. Doors greater than 2260 mm (7 feet 5 inches) high: 4 hinges.
  4. Doors up to 900 mm (3 feet) wide, standard weight: 114 mm x 114 mm (4-1/2 inches x 4-1/2 inches) hinges.
  5. Doors over 900 mm (3 feet) to 1065 mm (3 feet 6 inches) wide, standard weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
  6. Doors over 1065 mm (3 feet 6 inches) to 1210 mm (4 feet), heavy weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
  7. Provide heavy-weight hinges where specified.
  8. At doors weighing 330 kg (150 lbs.) or more, furnish 127 mm (5 inch) high hinges.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- C. See Articles "MISCELLANEOUS HARDWARE" and "HARDWARE SETS" for pivots and hinges other than butts specified above and continuous hinges specified below.

**2.2 CONTINUOUS HINGES**

- A. ANSI/BHMA A156.26, Grade 1-600.
1. Listed under Category N in BHMA's "Certified Product Directory."
- B. General: Minimum 0.120-inch- (3.0-mm-) thick, hinge leaves with minimum overall width of 4 inches (102 mm); fabricated to full height of door and frame and to template screw locations; with components finished after milling and drilling are complete
- C. Continuous, Barrel-Type Hinges: Hinge with knuckles formed around a Teflon-coated 6.35mm (0.25-inch) minimum diameter pin that extends entire length of hinge.
1. Base Metal for Exterior Hinges: Stainless steel.
  2. Base Metal for Interior Hinges: Steel.
  3. Base Metal for Hinges for Fire-Rated Assemblies: Steel.
  4. Provide with non-removable pin (hospital tip option) at lockable outswing doors.
  5. Where required to clear adjacent casing, trim, and wall conditions and allow full door swing, provide wide throw hinges of minimum width required.
  6. Provide with manufacturer's cut-outs for separate mortised power transfers and/or mortised automatic door bottoms where they occur.
  7. Where thru-wire power transfers are integral to the hinge, provide hinge with easily removable portion to allow easy access to wiring connections.
  8. Where models are specified that provide an integral wrap-around edge guard for the hinge edge of the door, provide manufacturer's adjustable threaded stud and machine screw mechanism to allow the door to be adjusted within the wrap-around edge guard.

**2.3 DOOR CLOSING DEVICES**

- A. Closing devices shall be products of one manufacturer for each type specified.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**2.4 OVERHEAD CLOSERS**

- A. Conform to ANSI A156.4, Grade 1.
- B. Closers shall conform to the following:
  - 1. The closer shall have minimum 50 percent adjustable closing force over minimum value for that closer and have adjustable hydraulic back check effective between 60 degrees and 85 degrees of door opening.
  - 2. Where specified, closer shall have hold-open feature.
  - 3. Size Requirements: Provide multi-size closers, sizes 1 through 6, except where multi-size closer is not available for the required application.
  - 4. Material of closer body shall be forged or cast.
  - 5. Arm and brackets for closers shall be steel, malleable iron or high strength ductile cast iron.
  - 6. Where closers are exposed to the exterior or are mounted in rooms that experience high humidity, provide closer body and arm assembly of stainless steel material.
  - 7. Closers shall have full size metal cover; plastic covers will not be accepted.
  - 8. Closers shall have adjustable hydraulic back-check, separate valves for closing and latching speed, adjustable back-check positioning valve, and adjustable delayed action valve.
  - 9. Provide closers with any accessories required for the mounting application, including (but not limited to) drop plates, special soffit plates, spacers for heavy-duty parallel arm fifth screws, bull-nose or other regular arm brackets, longer or shorter arm assemblies, and special factory templating. Provide special arms, drop plates, and templating as needed to allow mounting at doors with overhead stops and/or holders.
  - 10. Closer arms or backcheck valve shall not be used to stop the door from overswing, except in applications where a separate wall, floor, or overhead stop cannot be used.
  - 11. Provide parallel arm closers with heavy duty rigid arm.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

12. Where closers are to be installed on the push side of the door, provide parallel arm type except where conditions require use of top jamb arm.
13. Provide all surface closers with the same body attachment screw pattern for ease of replacement and maintenance.
14. All closers shall have a 1 ½" (38mm) minimum piston diameter.

**2.5 FLOOR CLOSERS AND FLOOR PIVOT SETS**

- A. Comply with ANSI A156.4. Provide stainless steel floor plates for floor closers and floor pivots, except where metal thresholds occur. Provide cement case for all floor closers. Floor closers specified for fire doors shall comply with Underwriters Laboratories, Inc., requirements for concealed type floor closers for classes of fire doors indicated on drawings. Hold-open mechanism, where required, shall engage when door is opened 105 degrees, except when door swing is limited by building construction or equipment, the hold-open feature shall engage when door is opened approximately 90 degrees. The hold-open mechanism shall be selectable on/off by turning a screw through the floor plate. Floor closers shall have adjustable hydraulic back-check, adjustable close speed, and adjustable latch speed. Provide closers with delayed action where a hold-open mechanism is not required. Floor closers shall be multi-sized. Single acting floor closers shall also have built in dead stop. Where required, provide closers with special cement cases appropriate for shallow deck installation or where concrete joint lines run through the floor blockout. At offset-hung doors installed in deep reveals, provide special closer arm and spindle to allow for installation. Where stone or terrazzo is applied over the floor closer case, provide closer without floor plate and with extended spindle (length as required) and special cover pan (depth as required) to allow closer to be accessed without damaging the material applied over the closer. Pivots for non-labeled doors shall be cast, forged or extruded brass or bronze.
- B. Where floor closer appears in hardware set provide the following as applicable.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. Double Acting Floor Closers: Type C06012.
2. Single Acting Floor Closer: Type C06021 (center pivoted).  
(Intermediate pivot is not required).
3. Single Acting Floor Closers: Type C06041 (offset pivoted).
4. Single Acting Floor Closer for Labeled Fire Doors: Type C06051  
(offset pivoted).
5. Single Acting Floor Closers For Lead Lined Doors: Type C06071  
(offset pivoted).

**2.6 DOOR STOPS**

- A. Conform to ANSI A156.16.
- B. Provide door stops wherever an opened door or any item of hardware thereon would strike a wall, column, equipment or other parts of building construction. For concrete, masonry or quarry tile construction, use lead expansion shields for mounting door stops.
- C. Where cylindrical locks with turn pieces or pushbuttons occur, equip wall bumpers Type L02251 (rubber pads having concave face) to receive turn piece or button.
- D. Provide floor stops (Type L02141 or L02161 in office areas; Type L02121 x 3 screws into floor elsewhere. Wall bumpers, where used, must be installed to impact the trim or the door within the leading half of its width. Floor stops, where used, must be installed within 4-inches of the wall face and impact the door within the leading half of its width.
- E. Where drywall partitions occur, use floor stops, Type L02141 or L02161 in office areas, Type L02121 elsewhere.
- F. Provide stop Type L02011, as applicable for exterior doors. At outswing doors where stop can be installed in concrete, provide stop mated to concrete anchor set in 76mm (3-inch) core-drilled hole and filled with quick-setting cement.
- G. Omit stops where floor mounted door holders are required and where automatic operated doors occur.
- H. Provide appropriate roller bumper for each set of doors (except where closet doors occur) where two doors would interfere with each other in swinging.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- I. Provide appropriate door mounted stop on doors in individual toilets where floor or wall mounted stops cannot be used.
- J. Provide overhead surface applied stop Type C02541, ANSI A156.8 on patient toilet doors in bedrooms where toilet door could come in contact with the bedroom door.
- K. Provide door stops on doors where combination closer magnetic holders are specified, except where wall stops cannot be used or where floor stops cannot be installed within 4-inches of the wall.
- L. Where the specified wall or floor stop cannot be used, provide concealed overhead stops (surface-mounted where concealed cannot be used).

**2.7 OVERHEAD DOOR STOPS AND HOLDERS**

- A. Conform to ANSI Standard A156.8. Overhead holders shall be of sizes recommended by holder manufacturer for each width of door. Set overhead holders for 110 degree opening, unless limited by building construction or equipment. Provide Grade 1 overhead concealed slide type: stop-only at rated doors and security doors, hold-open type with exposed hold-open on/off control at all other doors requiring overhead door stops.

**2.8 FLOOR DOOR HOLDERS**

- A. Conform to ANSI Standard A156.16. Provide extension strikes for Types L01301 and L01311 holders where necessary.

**2.9 LOCKS AND LATCHES**

- A. Conform to ANSI A156.2. Locks and latches for doors 45 mm (1-3/4 inch) thick or over shall have beveled fronts. Lock cylinders shall have not less than six pins or seven pins as required to conform with the existing facility keying system. Cylinders for all locksets shall be removable core type. Cylinders shall be furnished with construction removable cores and construction master keys. Cylinder shall be removable by special key or tool. Construct all cores so that they will be interchangeable into the core housings of all mortise locks, rim locks, cylindrical locks, and any other type lock included in the Great Grand Master Key System. Disassembly of lever or lockset shall not be required to remove core from lockset. All locksets or latches on double

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

doors with fire label shall have latch bolt with 19 mm (3/4 inch) throw, unless shorter throw allowed by the door manufacturer's fire label. Provide temporary keying device or construction core of allow opening and closing during construction and prior to the installation of final cores.

- B. In addition to above requirements, locks and latches shall comply with following requirements:
1. Mortise Lock and Latch Sets: Conform to ANSI/BHMA A156.13. Mortise locksets shall be series 1000, minimum Grade 2. All locksets and latchsets, except on designated doors in Psychiatric (Mental Health) areas, shall have lever handles fabricated from cast stainless steel. Provide sectional (lever x rose) lever design matching facility standard. No substitute lever material shall be accepted. All locks and latchsets shall be furnished with 122.55 mm (4-7/8-inch) curved lip strike and wrought box. At outswing pairs with overlapping astragals, provide flat lip strip with 21mm (7/8-inch) lip-to-center dimension. Lock function F02 shall be furnished with emergency tools/keys for emergency entrance. All lock cases installed on lead lined doors shall be lead lined before applying final hardware finish. Furnish armored fronts for all mortise locks. Where mortise locks are installed in high-humidity locations or where exposed to the exterior on both sides of the opening, provide non-ferrous mortise lock case.
  2. Cylindrical Lock and Latch Sets: levers shall meet ADA (Americans with Disabilities Act) requirements. Cylindrical locksets shall be series 4000 Grade I. All locks and latchsets shall be furnished with 122.55 mm (4-7/8-inch) curved lip strike and wrought box. At outswing pairs with overlapping astragals, provide flat lip strip with 21mm (7/8-inch) lip-to-center dimension. Provide lever design to match design selected by Architect or to match existing lever design. Where two turn pieces are specified for lock F76, turn piece on inside knob shall lock and unlock inside knob, and turn piece on outside knob shall unlock outside knob when inside knob is in the locked position. (This function is intended to allow

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

emergency entry into these rooms without an emergency key or any special tool.)

3. Auxiliary locks shall be as specified under hardware sets and conform to ANSI A156.5.
4. Locks on designated doors in Psychiatric (Mental Health) areas shall be paddle type with arrow projection covers and be UL Listed. Provide these locks with paddle in the down position on both sides of the door. Locks shall be fabricated of wrought stainless steel.
5. Privacy locks in non-mental-health patient rooms shall have an inside thumbturn for privacy and an outside thumbturn for emergency entrance. Single occupancy patient privacy doors shall typically swing out; where such doors cannot swing out, provide center-pivoted doors with rescue hardware (see HW-2B).

**2.10 PUSH-BUTTON COMBINATION LOCKS**

- A. ANSI/BHMA A156.13, Grade 1. Battery operated pushbutton entry.
- B. Construction: Heavy duty mortise lock housing conforming to ANSI/BHMA A156.13, Grade 1. Lever handles and operating components in compliance with the UFAS and the ADA Accessibility Guidelines. Match lever handles of locks and latchsets on adjacent doors.
- C. Special Features: Key override to permit a master keyed security system and a pushbutton security code activated passage feature to allow access without using the entry code.

**2.11 ELECTROMAGNETIC LOCKS**

- A. ANSI/BHMA A156.23; electrically powered, of strength and configuration indicated; with electromagnet attached to frame and armature plate attached to door. Listed under Category E in BHMA's "Certified Product Directory."
1. Type: Full exterior or full interior, as required by application indicated.
2. Strength Ranking: 1500 lbf (6672 N)
3. Inductive Kickback Peak Voltage: Not more than 0 V.
4. Residual Magnetism: Not more than 0 lbf (0 N) to separate door from magnet.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

B. Delayed-Egress Locks: BHMA A156.24. Listed under Category G in BHMA's "Certified Product Directory".

1. Means of Egress Doors: Lock releases within 15 seconds after applying a force not more than 15 lbf (67 N) for not more than 3 seconds, as required by NFPA 101.
2. Security Grade: Activated from secure side of door by initiating device.
3. Movement Grade: Activated by door movement as initiating device.
4. The lock housing shall not project more than 4-inches (101mm) from the underside of the frame head stop.

**2.12 ELECTRIC STRIKES**

- A. ANSI/ BHMA A156.31 Grade 1.
- B. General: Use fail-secure electric strikes at fire-rated doors.

**2.13 KEYS**

- A. Stamp all keys with change number and key set symbol. Furnish keys in quantities as follows:

Locks/Keys	Quantity
Cylinder locks	2 keys each
Cylinder lock change key blanks	100 each different key way
Master-keyed sets	6 keys each
Grand Master sets	6 keys each
Great Grand Master set	5 keys
Control key	2 keys

- B. Psychiatric keys shall be cut so that first two bittings closest to the key shoulder are shallow to provide greater strength at point of greatest torque.

**2.14 KEY CABINET**

- A. ANSI Standard A156.5. Provide key cabinet made of cold rolled, 1.2 mm (0.0478 inch) thick furniture steel electro-welded. Doors shall have "no sag" continuous brass-pin piano type hinge and be equipped with chrome plated locking door handles, hook cam and mechanical pushbutton door lock. Key Cabinet and Key Control System shall accommodate all



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

keys for this project plus 25 percent. Provide minimum number of multiple cabinets where a single cabinet of largest size will not accommodate the required number of keys.

- B. Key tags shall consist of two sets: Permanent self-locking and loan key snaphook type with tag colors as follows: Red fiber marker of the permanent self-locking type approximately 32 mm (1-1/4 inch) in diameter engraved with the legend "FILE KEY MUST NOT BE LOANED." Also furnish for each hook a white cloverleaf key marker with snap-hooks engraved with the legend "LOAN KEY."
- C. The manufacturer of the lock cylinders and locks shall attach a key tag to keys of each lock cylinder and shall mark thereon the respective item number and key change number. Provide each group of keys in a key gathering envelope (supplied by Key Cabinet Manufacturer) in which the lock manufacturer shall include the following information: Item number, key change number and door number. The contractor shall furnish the Key Cabinet Manufacturer the hardware and keying schedules and change keys.
- D. The Key Cabinet Manufacturer shall set up a three-way cross index system, including master keys, listing the keys alphabetically, the hooks numerically and the key changes numerically on different colored index cards. Index cards shall be typewritten and inserted in a durable binder. Attach the keys to the two sets of numbered tags supplied with the cabinet. (The permanent tag and the loan key tag). Instruct the owner in proper use of the system. Install cabinet as directed by the Resident Engineer.

**2.15 ARMOR PLATES, KICK PLATES, MOP PLATES AND DOOR EDGING**

- A. Conform to ANSI Standard A156.6.
- B. Provide protective plates as specified below:
  - 1. Kick plates, mop plates and armor plates of metal, Type J100 series.
  - 2. Provide kick plates and mop plates where specified. Kick plates shall be 254 mm (10 inches) or 305 mm (12 inches) high. Mop plates shall be 152 mm (6 inches) high. Both kick and mop plates shall be minimum 1.27 mm (0.050 inches) thick. Provide kick and mop plates beveled on all 4 edges (B4E). On push side of doors where jamb stop

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- extends to floor, make kick plates 38 mm (1-1/2 inches) less than width of door, except pairs of metal doors which shall have plates 25 mm (1 inch) less than width of each door. Extend all other kick and mop plates to within 6 mm (1/4 inch) of each edge of doors. Kick and mop plates shall butt astragals. For jamb stop requirements, see specification sections pertaining to door frames.
3. Kick plates and/or mop plates are not required on following door sides:
    - a. Armor plate side of doors;
    - b. Exterior side of exterior doors;
    - c. Closet side of closet doors;
    - d. Both sides of aluminum entrance doors.
  4. Armor plates for doors are listed under Article "Hardware Sets". Armor plates shall be thickness as noted in the hardware set, 875 mm (35 inches) high and 38 mm (1-1/2 inches) less than width of doors, except on pairs of metal doors. Provide armor plates beveled on all 4 edges (B4E). Plates on pairs of metal doors shall be 25 mm (1 inch) less than width of each door. Where top of intermediate rail of door is less than 875 mm (35 inches) from door bottom, extend armor plates to within 13 mm (1/2 inch) of top of intermediate rail. On doors equipped with panic devices, extend armor plates to within 13 mm (1/2 inch) of panic bolt push bar.
  5. Where louver or grille occurs in lower portion of doors, substitute stretcher plate and kick plate in place of armor plate. Size of stretcher plate and kick plate shall be 254 mm (10 inches) high.
  6. Provide stainless steel edge guards where so specified at wood doors. Provide mortised type instead of surface type except where door construction and/or ratings will not allow. Provide edge guards of bevel and thickness to match wood door. Provide edge guards with factory cut-outs for door hardware that must be installed through or extend through the edge guard. Provide full-height edge guards except where door rating does not allow; in such cases, provide edge guards to height of bottom of typical lockset

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

armor front. Forward edge guards to wood door manufacturer for factory installation on doors.

**2.16 EXIT DEVICES**

- A. Conform to ANSI Standard A156.3. Exit devices shall be Grade 1; type and function are specified in hardware sets. Provide flush with finished floor strikes for vertical rod exit devices in interior of building. Trim shall have cast satin stainless steel lever handles of design similar to locksets, unless otherwise specified. Provide key cylinders for keyed operating trim and, where specified, cylinder dogging.
- B. Surface vertical rod panics shall only be provided less bottom rod; provide fire pins as required by exit device and door fire labels. Do not provide surface vertical rod panics at exterior doors.
- C. Concealed vertical rod panics shall be provided less bottom rod at interior doors, unless lockable or otherwise specified; provide fire pins as required by exit device and door fire labels. Where concealed vertical rod panics are specified at exterior doors, provide with both top and bottom rods.
- D. Where removable mullions are specified at pairs with rim panic devices, provide mullion with key-removable feature.
- E. At non-rated openings with panic hardware, provide panic hardware with key cylinder dogging feature.
- F. Exit devices for fire doors shall comply with Underwriters Laboratories, Inc., requirements for Fire Exit Hardware. Submit proof of compliance.

**2.17 FLUSH BOLTS (LEVER EXTENSION)**

- A. Conform to ANSI A156.16. Flush bolts shall be Type L24081 unless otherwise specified. Furnish proper dustproof strikes conforming to ANSI A156.16, for flush bolts required on lower part of doors.
- B. Lever extension manual flush bolts shall only be used at non-fire-rated pairs for rooms only accessed by maintenance personnel.
- C. Face plates for cylindrical strikes shall be rectangular and not less than 25 mm by 63 mm (1 inch by 2-1/2 inches).

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- D. Friction-fit cylindrical dustproof strikes with circular face plate may be used only where metal thresholds occur.
- E. Provide extension rods for top bolt where door height exceeds 2184 mm (7 feet 2 inches).

**2.18 FLUSH BOLTS (AUTOMATIC)**

- A. Conform to ANSI A156.3. Dimension of flush bolts shall conform to ANSI A115. Bolts shall conform to Underwriters Laboratories, Inc., requirements for fire door hardware. Flush bolts shall automatically latch and unlatch. Furnish dustproof strikes conforming to ANSI A156.16 for bottom flushbolt. Face plates for dustproof strike shall be rectangular and not less than 38 mm by 90 mm (1-1/2 by 3-1/2 inches).
- B. At interior doors, provide auto flush bolts less bottom bolt, unless otherwise specified, except at wood pairs with fire-rating greater than 20 minutes; provide fire pins as required by auto flush bolt and door fire labels.

**2.19 DOOR PULLS WITH PLATES**

- A. Conform to ANSI A156.6. Pull Type J401, 152 mm (6 inches) high by 19 mm (3/4 inches) diameter with plate Type J302, 90 mm by 350 mm (3-1/2 inches by 14 inches), unless otherwise specified. Provide pull with projection of 70 mm (2 3/4 inches) and a clearance of 51 mm (2 inches). Cut plates of door pull plate for cylinders, or turn pieces where required.

**2.20 PUSH PLATES**

- A. Conform to ANSI A156.6. Metal, Type J302, 200 mm (8 inches) wide by 350 mm (14 inches) high. Provide metal Type J302 plates 100 mm (4 inches wide by 350 mm (14 inches) high) where push plates are specified for doors with stiles less than 200 mm (8 inches) wide. Cut plates for cylinders, and turn pieces where required.

**2.21 COMBINATION PUSH AND PULL PLATES**

- A. Conform to ANSI 156.6. Type J303, stainless steel 3 mm (1/8 inch) thick, 80 mm (3-1/3 inches) wide by 800 mm (16 inches) high), top and bottom edges shall be rounded. Secure plates to wood doors with 38 mm (1-1/2 inch) long No. 12 wood screws. Cut plates for turn pieces, and cylinders where required. Pull shall be mounted down.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**2.22 COORDINATORS**

- A. Conform to ANSI A156.16. Coordinators, when specified for fire doors, shall comply with Underwriters Laboratories, Inc., requirements for fire door hardware. Coordinator may be omitted on exterior pairs of doors where either door will close independently regardless of the position of the other door. Coordinator may be omitted on interior pairs of non-labeled open where open back strike is used. Open back strike shall not be used on labeled doors. Paint coordinators to match door frames, unless coordinators are plated. Provide bar type coordinators, except where gravity coordinators are required at acoustic pairs. For bar type coordinators, provide filler bars for full width and, as required, brackets for push-side surface mounted closers, overhead stops, and vertical rod panic strikes.

**2.23 THRESHOLDS**

- A. Conform to ANSI A156.21, mill finish extruded aluminum, except as otherwise specified. In existing construction, thresholds shall be installed in a bed of sealant with ¼-20 stainless steel machine screws and expansion shields. In new construction, embed aluminum anchors coated with epoxy in concrete to secure thresholds. Furnish thresholds for the full width of the openings.
- B. For thresholds at elevators entrances see other sections of specifications.
- C. At exterior doors and any interior doors exposed to moisture, provide threshold with non-slipabrasive finish.
- D. Provide with miter returns where threshold extends more than 12 mm (0.5 inch) from fame face.

**2.24 AUTOMATIC DOOR BOTTOM SEAL AND RUBBER GASKET FOR LIGHT PROOF OR SOUND CONTROL DOORS**

- A. Conform to ANSI A156.22. Provide mortise or under-door type, except where not practical. For mortise automatic door bottoms, provide type specific for door construction (wood or metal).

**2.25 WEATHERSTRIPS (FOR EXTERIOR DOORS)**

- A. Conform to ANSI A156.22. Air leakage shall not to exceed 0.50 CFM per foot of crack length ( $0.000774\text{m}^3/\text{s/m}$ ).

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**2.26 MISCELLANEOUS HARDWARE**

- A. Access Doors (including Sheet Metal, Screen and Woven Wire Mesh Types):  
Except for fire-rated doors and doors to Temperature Control Cabinets, equip each single or double metal access door with Lock Type E76213, conforming to ANSI A156.5. Key locks as directed. Ship lock prepaid to the door manufacturer. Hinges shall be provided by door manufacturer.
- B. Cylinders for Various Partitions and Doors: Key cylinders same as entrance doors of area in which partitions and door occur, except as otherwise specified. Provide cylinders to operate locking devices where specified for following partitions and doors:
  - 1. Folding doors and partitions.
  - 2. Wicket door (in roll-up door assemblies).
  - 3. Slide-up doors.
  - 4. Swing-up doors.
  - 5. Fire-rated access doors-Engineer's key set.
  - 6. Doors from corridor to electromagnetic shielded room.
  - 7. Day gate on vault door.
- C. Mutes: Conform to ANSI A156.16. Provide door mutes or door silencers Type L03011 or L03021, depending on frame material, of white or light gray color, on each steel or wood door frame, except at fire-rated frames, lead-lined frames and frames for sound-resistant, lightproof and electromagnetically shielded doors. Furnish 3 mutes for single doors and 2 mutes for each pair of doors, except double-acting doors. Provide 4 mutes or silencers for frames for each Dutch type door. Provide 2 mutes for each edge of sliding door which would contact door frame.

**2.27 PADLOCKS FOR VARIOUS DOORS, GATES AND HATCHES**

- A. ASTM E883, size 50 mm (2 inch) wide chain; furnish extended shackles as required by job conditions. Provide padlocks, with key cylinders, for each door in following areas as noted.
- B. Key padlocks as follows:
  - 1. Constant Temperature and Cold Rooms in Research Departments:  
Research Laboratory Set.
  - 2. Cold Room in Morgue Department: Autopsy Set.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3. Refrigerators in Canteen Department: Canteen Storage Set.
4. All Refrigerator Rooms in Main Kitchen Department: Kitchen Storage Set.
5. Chain Link Fence Gates for Electrical Substation and other Fenced Buildings or Areas: Engineer's set, except as otherwise specified.
6. Chain Link Fence Gates for Oxygen Storage Buildings: Maintenance supply set.
7. Roof Access and Scuttles: Engineer's set.
8. Hinged Wicket in Post Office Partitions: Post Office set.

C. Omit padlocks on communicating refrigerator doors.

**2.28 THERMOSTATIC TEMPERATURE CONTROL VALVE CABINETS**

- A. Where lock is shown, equip each cabinet door (metal) with lock Type E06213, conforming to ANSI A156.5. Key locks in Key Sets approved by Contracting Officer. See mechanical drawings and specifications for location of cabinets.
- B. Cabinet manufacturer shall supply the hinges, bolts and pulls. Ship locks to cabinet manufacturer for installation.

**2.29 HINGED WIRE GUARDS (FOR WINDOWS, DOORS AND TRANSOMS) AND WIRE PARTITION DOORS**

- A. Butt hinges, type A8133 (special swaging) 100 mm by 90 mm (4 inches by 3-1/2 inches), Finish US2C.
  1. 3 hinges for guards over 1060 mm (3-1/2 feet) high.
  2. 2 hinges for guards less than 1060 mm (3-1/2 feet) high.
- B. Conform to ANSI A156.5. Lock Type E06081 for guards and Type E06061 for partitions.
  1. Keying: Except as noted otherwise, key locks like entrance door or space wherein guards and partitions are located except as otherwise specified.
  2. Key locks for partitions enclosing mechanical and electrical equipment in Engineer's Set. (See detailed drawings for number of locks and butt hinges required for each guard).

**2.30 FINISHES**

- A. Exposed surfaces of hardware shall have ANSI A156.18, finishes as specified below. Finishes on all hinges, pivots, closers, thresholds,

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

etc., shall be as specified below under "Miscellaneous Finishes." For field painting (final coat) of ferrous hardware, see Section 09 91 00, PAINTING.

- B. 626 or 630: All surfaces on exterior and interior of buildings, except where other finishes are specified.
- C. Miscellaneous Finishes:
1. Hinges --exterior doors: 626 or 630.
  2. Hinges --interior doors: 652 or 630.
  3. Pivots: Match door trim.
  4. Door Closers: Factory applied paint finish. Dull or Satin Aluminum color.
  5. Thresholds: Mill finish aluminum.
  6. Cover plates for floor hinges and pivots: 630.
  7. Other primed steel hardware: 600.
- D. Hardware Finishes for Existing Buildings: U.S. Standard finishes shall match finishes of hardware in (similar) existing spaces except where otherwise specified.
- E. Special Finish: Exposed surfaces of hardware for dark bronze anodized aluminum doors shall have oxidized oil rubbed bronze finish (dark bronze) finish on door closers shall closely match doors.
- F. Anti-microbial Coating: All hand-operated hardware (levers, pulls, push bars, push plates, paddles, and panic bars) shall be provided with an anti-microbial/anti-fungal coating that has passed ASTM E2180 tests. Coating to consist of ionic silver (Ag+). Silver ions surround bacterial cells, inhibiting growth of bacteria, mold, and mildew by blockading food and respiration supplies.

**2.31 BASE METALS**

- A. Apply specified U.S. Standard finishes on different base metals as following:

Finish	Base Metal
652	Steel
626	Brass or bronze
630	Stainless steel



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**PART 3 - EXECUTION**

**3.1 HARDWARE HEIGHTS**

- A. For existing buildings locate hardware on doors at heights to match existing hardware. The Contractor shall visit the site, verify location of existing hardware and submit locations to VA Resident Engineer for approval.
- A. DELETED
- B. Hardware Heights from Finished Floor:
  - 1. Exit devices centerline of strike (where applicable) 1024 mm (40-5/16 inches).
  - 2. Locksets and latch sets centerline of strike 1024 mm (40-5/16 inches).
  - 3. Deadlocks centerline of strike 1219 mm (48 inches).
  - 4. Hospital arm pull 1168 mm (46 inches) to centerline of bottom supporting bracket.
  - 5. Centerline of door pulls to be 1016 mm (40 inches).
  - 6. Push plates and push-pull shall be 1270 mm (50 inches) to top of plate.
  - 7. Push-pull latch to be 1024 mm (40-5/16 inches) to centerline of strike.
  - 8. Locate other hardware at standard commercial heights. Locate push and pull plates to prevent conflict with other hardware.

**3.2 INSTALLATION**

- A. Closer devices, including those with hold-open features, shall be equipped and mounted to provide maximum door opening permitted by building construction or equipment. Closers shall be mounted on side of door inside rooms, inside stairs, and away from corridors except security bedroom, bathroom and anteroom doors which shall have closer installed parallel arm on exterior side of doors. At exterior doors, closers shall be mounted on interior side. Where closers are mounted on doors they shall be mounted with sex nuts and bolts; foot shall be fastened to frame with machine screws.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**B. Hinge Size Requirements:**

<b>Door Thickness</b>	<b>Door Width</b>	<b>Hinge Height</b>
45 mm (1-3/4 inch)	900 mm (3 feet) and less	113 mm (4-1/2 inches)
45 mm (1-3/4 inch)	Over 900 mm (3 feet) but not more than 1200 mm (4 feet)	125 mm (5 inches)
35 mm (1-3/8 inch) (hollow core wood doors)	Not over 1200 mm (4 feet)	113 mm (4-1/2 inches)

C. Hinge leaves shall be sufficiently wide to allow doors to swing clear of door frame trim and surrounding conditions.

D. Where new hinges are specified for new doors in existing frames or existing doors in new frames, sizes of new hinges shall match sizes of existing hinges; or, contractor may reuse existing hinges provided hinges are restored to satisfactory operating condition as approved by Resident Engineer. Existing hinges shall not be reused on door openings having new doors and new frames. Coordinate preparation for hinge cut-outs and screw-hole locations on doors and frames.

**E. Hinges Required Per Door:**

Doors 1500 mm (5 ft) or less in height	2 butts
Doors over 1500 mm (5 ft) high and not over 2280 mm (7 ft 6 in) high	3 butts
Doors over 2280 mm (7 feet 6 inches) high	4 butts
Dutch type doors	4 butts
Doors with spring hinges 1370 mm (4 feet 6 inches) high or less	2 butts
Doors with spring hinges over 1370 mm (4 feet 6 inches)	3 butts

F. Fastenings: Suitable size and type and shall harmonize with hardware as to material and finish. Provide machine screws and lead expansion shields to secure hardware to concrete, ceramic or quarry floor tile, or solid masonry. Fiber or rawl plugs and adhesives are not permitted. All fastenings exposed to weather shall be of nonferrous metal.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

G. After locks have been installed; show in presence of Resident Engineer that keys operate their respective locks in accordance with keying requirements. (All keys, Master Key level and above shall be sent Registered Mail to the Medical Center Director along with the bitting list. Also a copy of the invoice shall be sent to the Resident Engineer for his records.) Installation of locks which do not meet specified keying requirements shall be considered sufficient justification for rejection and replacement of all locks installed on project.

**3.3 FINAL INSPECTION**

- A. Installer to provide letter to VA Resident/Project Engineer that upon completion, installer has visited the Project and has accomplished the following:
1. Re-adjust hardware.
  2. Evaluate maintenance procedures and recommend changes or additions, and instruct VA personnel.
  3. Identify items that have deteriorated or failed.
  4. Submit written report identifying problems.

**3.4 DEMONSTRATION**

- A. Demonstrate efficacy of mechanical hardware and electrical, and electronic hardware systems, including adjustment and maintenance procedures, to satisfaction of Resident/Project Engineer and VA Locksmith.

**3.5 HARDWARE SETS**

- A. Hardware sets schedule is shown on drawing AE102

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 08 80 00  
GLAZING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies glass, plastic, related glazing materials and accessories. Glazing products specified apply to factory or field glazed items.

**1.2 RELATED WORK**

A. Factory glazed by manufacturer in following units:

1. Sound resistant doors: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, and Section 08 14 00, WOOD DOORS.

**1.3 LABELS**

A. Temporary labels:

1. Provide temporary label on each light of glass and plastic material identifying manufacturer or brand and glass type, quality and nominal thickness.
2. Label in accordance with NFRC (National Fenestration Rating Council) label requirements.
3. Temporary labels shall remain intact until glass and plastic material is approved by Resident Engineer.

B. Permanent labels:

1. Locate in corner for each pane.
2. Label in accordance with ANSI Z97.1 and SGCC (Safety Glass Certification Council) label requirements.
  - a. Tempered glass.
  - b. Laminated glass or have certificate for panes without permanent label.
  - c. Organic coated glass.
3. Bullet resistance glass or plastic assemblies:
  - a. Bullet resistance glass or plastic assemblies in accordance with UL 752 requirements for power rating specified.
  - b. Identify each security glazing permanently with glazing manufacturer's name, date of manufacture, product number, and DOS

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Code number inconspicuously located in lower corner on protective side and visible after glazing is framed.

- c. The "attack (threat) side" shall be identified in bold lettering on each side of glazing with removable label.

**1.4 PERFORMANCE REQUIREMENTS**

**A. Building Enclosure Vapor Retarder and Air Barrier:**

1. Utilize the inner pane of multiple pane sealed units for the continuity of the air barrier and vapor retarder seal.
2. Maintain a continuous air barrier and vapor retarder throughout the glazed assembly from glass pane to heel bead of glazing sealant.

**B. Glass Thickness:**

1. Select thickness of exterior glass to withstand dead loads and wind loads acting normal to plane of glass at design pressures calculated in accordance with NA.
2. Test in accordance with ASTM E 1300.
3. Thicknesses listed are minimum. Coordinate thicknesses with framing system manufacturers.

**C. Bullet resistance glass or plastic assemblies:**

1. For blast resistant windows follow Unified Facilities Criteria, DOD Minimum Antiterrorism Standards for Buildings UFC4-010-01.
2. Spall Resistance: Laminated glazing shall not produce spall to interior (protected side) when impacted with scheduled ballistics.  
Tolerances:
  3. Outside dimensions: Overall outside dimensions (height and width) of laminated security glazing shall maintain tolerance of  $\pm 3$  mm.
  4. Warpage: Out-of-flat (warpage or bowing) condition of laminates shall not exceed 2.5 mm per lineal meter. The condition, if present, shall be localized to extent not greater than 0.75 mm for any 0.3 meter section.
  5. Coordinate with Physical Security Design Manual requirements.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.5 SUBMITTALS**

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Certificates:
  - 1. Certificates stating that wire glass, meets requirements for safety glazing material as specified in ANSI Z97.1.
  - 2. Certificate on shading coefficient.
  - 3. Certificate on "R" value when value is specified.
  - 4. Certificate test reports confirming compliance's with specified bullet resistive rating.
  - 5. Certificate that blast resistant glass meets the requirements of UFC4-010-01.
- C. Warranty: Submit written guaranty, conforming to General Condition requirements, and to "Warranty of Construction" Article in this Section.
- D. Manufacturer's Literature and Data:
  - 1. Glass, each kind required.
  - 2. Insulating glass units.
  - 3. Transparent (one-way vision glass) mirrors.
  - 4. Elastic compound for metal sash glazing.
  - 5. Putty, for wood sash glazing.
  - 6. Glazing cushion.
  - 7. Sealing compound.
  - 8. Bullet resistive material.
  - 9. Plastic glazing material, each type required.
- E. Samples:
  - 1. Size: 150 mm by 150 mm (6 inches by 6 inches).
  - 2. Tinted glass.
  - 3. Reflective glass.
  - 4. Transparent (one-way vision glass) mirrors.
- F. Preconstruction Adhesion and Compatibility Test Report: Submit glazing sealant manufacturer's test report indicating glazing sealants were tested for adhesion to glass and glazing channel substrates and for compatibility with glass and other glazing materials.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.6 DELIVERY, STORAGE AND HANDLING**

- A. Delivery: Schedule delivery to coincide with glazing schedules so minimum handling of crates is required. Do not open crates except as required for inspection for shipping damage.
- B. Storage: Store cases according to printed instructions on case, in areas least subject to traffic or falling objects. Keep storage area clean and dry.
- C. Handling: Unpack cases following printed instructions on case. Stack individual windows on edge leaned slightly against upright supports with separators between each.
- D. Protect laminated security glazing units against face and edge damage during entire sequence of fabrication, handling, and delivery to installation location. Provide protective covering on exposed faces of glazing plastics, and mark inside as "INTERIOR FACE" or "PROTECTED FACE":
  - 1. Treat security glazing as fragile merchandise, and packaged and shipped in export wood cases with width end in upright position and blocked together in a mass. Storage and handling shall comply with Manufacturer's directions and as required to prevent edge damage or other damage to glazing resulting from effects of moisture, condensation, temperature changes, direct exposure to sun, other environmental conditions, and contact with chemical solvents.
  - 2. Protect sealed-air-space insulating glazing units from exposure to abnormal pressure changes, as could result from substantial changes in altitude during delivery by air freight. Provide temporary breather tubes which do not nullify applicable warranties on hermetic seals.
  - 3. Temporary protections: The glass front and polycarbonate back of glazing shall be temporarily protected with compatible, peelable, heat-resistant film which will be peeled for inspections and re-applied and finally removed after doors and windows are installed at destination. Since many adhesives will attack polycarbonate, the film used on exposed polycarbonate surfaces shall be approved and applied by manufacturer.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

4. Edge protection: To cushion and protect glass clad, polycarbonate, and Noviflex edges from contamination or foreign matter, the four edges shall be sealed the depth of glazing with continuous standard-thickness Santoprene tape. Alternatively, continuous channel shaped extrusion of Santoprene shall be used, with flanges extending into face sides of glazing.
5. Protect "Constant Temperature" units including every unit where glass sheet is directly laminated to or directly sealed with metal-tube type spacer bar to polycarbonate sheet, from exposures to ambient temperatures outside the range of 16 to 24 C, during the fabricating, handling, shipping, storing, installation, and subsequent protection of glazing.

**1.7 PROJECT CONDITIONS**

Field Measurements: Field measure openings before ordering tempered glass products. Be responsible for proper fit of field measured products.

**1.8 WARRANTY**

- A. Warranty: Conform to terms of "Warranty of Construction", FAR clause 52.246-21, except extend warranty period for the following:
  1. Bullet resistive plastic material to remain visibly clear without discoloration for 10 years.
  2. Insulating glass units to remain sealed for 10 years.
  3. Laminated glass units to remain laminated for 5 years.
  4. Polycarbonate to remain clear and ultraviolet light stabilized for 5 years.
  5. Insulating plastic to not have more than 6 percent decrease in light transmission and be ultraviolet light stabilized for 10 years.

**1.9 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):



**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Z97.1-04.....Safety Glazing Material Used in Building -  
Safety Performance Specifications and Methods  
of Test.

C. American Society for Testing and Materials (ASTM):

C1363-05.....Thermal Performance of Building Assemblies, by  
Means of A Hot Box Apparatus

C542-05.....Lock-Strip Gaskets.

C716-06.....Installing Lock-Strip Gaskets and Infill  
Glazing Materials.

C794-06.....Adhesion-in-Peel of Elastomeric Joint Sealants.

C864-05.....Dense Elastomeric Compression Seal Gaskets,  
Setting Blocks, and Spacers.

C920-08.....Elastomeric Joint Sealants.

C964-07.....Standard Guide for Lock-Strip Gasket Glazing.

C1036-06.....Flat Glass.

C1048-04.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated  
and Uncoated Glass.

C1172-09.....Laminated Architectural Flat Glass.

C1376-10.....Pyrolytic and Vacuum Deposition Coatings on  
Flat Glass.

D635-06.....Rate of Burning and/or Extent and Time of  
Burning of Self-Supporting Plastic in a  
Horizontal Position.

D4802-02.....Poly (Methyl Methacrylate) Acrylic Plastic  
Sheet.

E84-09.....Surface Burning Characteristics of Building  
Materials.

E1300-09.....Determining Load Resistance of Glass in  
Buildings.

E2190-08.....Insulating Glass Unit

D. Commercial Item Description (CID):

A-A-59502.....Plastic Sheet, Polycarbonate

E. Code of Federal Regulations (CFR):

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

16 CFR 1201 - Safety Standard for Architectural Glazing Materials;  
1977, with 1984 Revision.

F. National Fire Protection Association (NFPA):

80-08.....Fire Doors and Windows.

G. National Fenestration Rating Council (NFRC)

H. Safety Glazing Certification Council (SGCC) 2009:

Certified Products Directory (Issued Semi-Annually).

I. Underwriters Laboratories, Inc. (UL):

752-06.....Bullet-Resisting Equipment.

J. Unified Facilities Criteria (UFC):

4-010-01-2007.....DOD Minimum Antiterrorism Standards for  
Buildings

K. Glass Association of North America (GANA):

Glazing Manual (Latest Edition)

Sealant Manual (2008)

L. American Society of Civil Engineers (ASCE):

ASCE 7-10.....Wind Load Provisions

**PART 2 - PRODUCT**

**2.1 GLASS**

A. Use thickness stated unless specified otherwise in assemblies.

B. Clear Glass:

1. ASTM C1036, Type I, Class 1, Quality q3.

2. Thickness, 6 mm (1/4 inch) as indicated.

3. Coordinate color/tint/coating to accommodate required security monitoring.

C. Tinted Heat reflective and low emissivity coated glass:

1. ASTM C1036, Type I, Class 2, Quality q3.

2. Color:

3. Thickness, 6 mm (1/4 inch) as indicated.

D. Patterned and Wired Flat Glass:

1. ASTM C1036, Type II, Class 1, Form 1, Pattern Pl, Finish F1, Quality  
Q5, and m1 for fire rated locations.

2. Thickness, 6 mm (1/4 inch) as indicated.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**2.2 HEAT-TREATED GLASS**

A. Clear Heat Strengthened Glass:

1. ASTM C1048, Kind HS, Condition A, Type I, Class 1, Quality q3.
2. Thickness, 6 mm (1/4 inch) as indicated.

B. Tinted Heat Strengthened Glass: DELETED

C. Clear Tempered Glass:

1. ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3.
2. Thickness, 6 mm (1/4 inch) as indicated.

D. Tinted Tempered Glass.DELETED

E. Tempered Patterned Glass (obscure):DELETED

**2.3 COATED GLASS DELETED**

**2.4 PLASTIC**

Thickness	Long Dimension of Sheet
3 mm (0.125 inch)	600 mm (24 inches or less)
5 mm (0.187 inch)	600 - 900 mm (24 through 36 inches).
6.5 mm (0.250 inch)	900 - 1500 mm (36 through 60 inches).

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

4. For polycarbonate use not less than the following minimum thickness:

Thickness	Long Dimension of Sheet	Edge Lap
3 mm (0.125 inch)	600 - 1200 mm (24 through 48 inches).	19 mm (3/4 inch)
9.5 mm (0.375 inch)	1200 - 1500 mm (48 through 60 inches).	25 mm (3/4 inch)
13 mm (0.50 inch)	1500 mm (Over 60 inches).	25 mm (1 inch)

5. Check: Window, door, and plastic manufacturer for glazing rabbet depth allowing for expansion and edge lap required for plastic.
6. Acrylic plastics have flame spreads that limit use on interior spaces.
- A. Clear Acrylic Sheet:
1. ASTM D4802. Type UVF, Category A-1, clear, smooth both sides, and formulated with ultraviolet absorber.
  2. Thickness, as indicated.
- B. Clear Acrylic Sheet, Abrasion Resistant:
1. ASTM D4802. Type UVF, Category A-1, Finish 3, clear, smooth, formulated with ultraviolet absorber, and having an abrasive resistant coating on both sides.
  2. Thickness, as indicated.
- C. Clear Polycarbonate Sheet:
1. Fed. Spec. A-A-59502, Type I, standard sheet, Class 1, ultraviolet light stabilized. Flame spread of 10 or less when tested per ASTM E84.
  2. Thickness, as indicated.
- D. Clear Polycarbonate Sheet, Abrasion Resistant:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. Fed. Spec. A-A-59502, Type III, coated mar resistant, Class 1, ultraviolet light stabilized, Grade A, High abrasion resistance. Flame spread of 10 or less when tested per ASTM E84.
2. Thickness, as indicated.

**2.5 LAMINATED GLASS**

- A. Two or more lites of glass bonded with an interlayer material for use in building glazing
- B. Colored Interlayer:
  1. Use color interlayer ultraviolet light color stabilization.
  2. Option: Use colored interlayer with clear glass in lieu of tinted glass and clear interlayer.
  3. Option: Use white interlayer with clear glass in lieu of obscure glass and clear interlayer.
  4. The interlayer assembly shall have uniform color presenting same appearance as tinted glass assembly.
- C. Use 1.5 mm (0.060 inch) thick interlayer for:
  1. Horizontal or Sloped glazing.
  2. Acoustical glazing.
  3. Heat strengthened or fully tempered glass assemblies.
- D. Use min. 0.75 mm (0.030 inch) thick interlayer for vertical glazing where 1.5 mm (0.060 inch) interlayer is not otherwise shown or required.

**2.6 LAMINATED GLAZING ASSEMBLIES**

- A. Clear Glazing:
  1. Both panes clear glass ASTM C1036, Type I, Class 1, Quality q3.
  2. Thickness: Each pane, 3 mm (1/8 inch) thick as indicated.
- B. Clear Tempered Glazing:
  1. Both panes ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3.
  2. Thickness: Each pane 4.8 mm (3/16 inch) thick as indicated.
- C. Tinted Tempered Glazing: DELETED

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- D. Clear Heat Strengthened Glazing: DELETED
- E. Tinted Heat Strengthened Glazing: DELETED
- F. Tempered Obscure Glazing: DELETED

**2.7 BULLET RESISTIVE ASSEMBLY DELETED**

**2.8 GLASS CLAD POLYCARBONATE SECURITY GLAZING ASSEMBLY DELETED**

**2.9 INSULATING GLASS UNITS DELETED**

**2.10 FIRE RESISTANT GLASS WITHOUT WIRE MESH DELETED**

**2.11 SWITCHABLE PRIVACY GLASS DELETED**

**2.12 INSULATING PLASTIC SHEETS DELETED**

**2.13 GLAZING ACCESSORIES**

- A. As required to supplement the accessories provided with the items to be glazed and to provide a complete installation. Ferrous metal accessories exposed in the finished work shall have a finish that will not corrode or stain while in service.
- B. Setting Blocks: ASTM C864:
  - 1. Channel shape; having 6 mm (1/4 inch) internal depth.
  - 2. Shore a hardness of 80 to 90 Durometer.
  - 3. Block lengths: 50 mm (two inches) except 100 to 150 mm (four to six inches) for insulating glass.
  - 4. Block width: Approximately 1.6 mm (1/16 inch) less than the full width of the rabbet.
  - 5. Block thickness: Minimum 4.8 mm (3/16 inch). Thickness sized for rabbet depth as required.
- C. Spacers: ASTM C864:
  - 1. Channel shape having a 6 mm (1/4 inch) internal depth.
  - 2. Flanges not less 2.4 mm (3/32 inch) thick and web 3 mm (1/8 inch) thick.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3. Lengths: One to 25 to 76 mm (one to three inches).
4. Shore a hardness of 40 to 50 Durometer.
- D. Sealing Tapes:
  1. Semi-solid polymeric based material exhibiting pressure-sensitive adhesion and withstanding exposure to sunlight, moisture, heat, cold, and aging.
  2. Shape, size and degree of softness and strength suitable for use in glazing application to prevent water infiltration.
- E. Spring Steel Spacer: Galvanized steel wire or strip designed to position glazing in channel or rabbeted sash with stops.
- F. Glazing Clips: Galvanized steel spring wire designed to hold glass in position in rabbeted sash without stops.
- G. Glazing Points (Sprigs): Pure zinc stock, thin, flat, triangular or diamond shaped pieces, 6 mm (1/4 inch) minimum size.
- H. Glazing Gaskets: ASTM C864:
  1. Firm dense wedge shape for locking in sash.
  2. Soft, closed cell with locking key for sash key.
  3. Flanges may terminate above the glazing-beads or terminate flush with top of beads.
- I. Lock-Strip Glazing Gaskets: ASTM C542, shape, size, and mounting as indicated.
- J. Glazing Sealants: ASTM C920, silicone neutral cure:
  1. Type S.
  2. Class 25
  3. Grade NS.
  4. Shore A hardness of 25 to 30 Durometer.
- K. Structural Sealant: ASTM C920, silicone acetoxycure:
  1. Type S.
  2. Class 25.
  3. Grade NS.
  4. Shore a hardness of 25 to 30 Durometer.
- L. Neoprene, EPDM, or Vinyl Glazing Gasket: ASTM C864.
  1. Channel shape; flanges may terminate above the glazing channel or flush with the top of the channel.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. Designed for dry glazing.

**M. Color:**

1. Color of glazing compounds, gaskets, and sealants used for aluminum color frames shall match color of the finished aluminum and be nonstaining.
2. Color of other glazing compounds, gaskets, and sealants which will be exposed in the finished work and unpainted shall be black, gray, or neutral color.

**N. Smoke Removal Unit Targets:** Adhesive targets affixed to glass to identify glass units intended for removal for smoke control. Comply with requirements of local Fire Department.

**PART 3 - EXECUTION**

**3.1 EXAMINATION**

**A. Verification of Conditions:**

1. Examine openings for glass and glazing units; determine they are proper size; plumb; square; and level before installation is started.
2. Verify that glazing openings conform with details, dimensions and tolerances indicated on manufacturer's approved shop drawings.

**B. Advise Contractor of conditions which may adversely affect glass and glazing unit installation, prior to commencement of installation:** Do not proceed with installation until unsatisfactory conditions have been corrected.

**C. Verify that wash down of adjacent masonry is completed prior to erection of glass and glazing units to prevent damage to glass and glazing units by cleaning materials.**

**3.2 PREPARATION**

- A. For sealant glazing, prepare glazing surfaces in accordance with GANA-02 Sealant Manual.**
- B. Determine glazing unit size and edge clearances by measuring the actual unit to receive the glazing.**
- C. Shop fabricate and cut glass with smooth, straight edges of full size required by openings to provide GANA recommended edge clearances.**



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- D. Verify that components used are compatible.
- E. Clean and dry glazing surfaces.
- F. Prime surfaces scheduled to receive sealants, as determined by preconstruction sealant-substrate testing.

**3.3 INSTALLATION - GENERAL**

- A. Install in accordance with GANA-01 Glazing Manual and GANA-02 Sealant Manual unless specified otherwise.
- B. Glaze in accordance with recommendations of glazing and framing manufacturers, and as required to meet the Performance Test Requirements specified in other applicable sections of specifications.
- C. Set glazing without bending, twisting, or forcing of units.
- D. Do not allow glass to rest on or contact any framing member.
- E. Glaze doors and operable sash, in a securely fixed or closed and locked position, until sealant, glazing compound, or putty has thoroughly set.
- F. Patterned Glass:
  - 1. Install units with one patterned surface with smooth surface on the weather side.
  - 2. Install units in interior partitions with pattern in same direction in all openings.
- G. Tempered Glass: Install with roller distortions in horizontal position unless otherwise directed.
- H. Transparent (One-Way Vision Glass) Mirror: Use continuous channel glazing gasket.
- I. Plastic:
  - 1. Use dry glazing method.
  - 2. Use only neoprene or EPDM gaskets.
- J. Laminated Glass:
  - 1. Tape edges to seal interlayer and protect from glazing sealants.
  - 2. Do not use putty or glazing compounds.
- K. Insulating Glass Units:
  - 1. Glaze in compliance with glass manufacturer's written instructions.
  - 2. When glazing gaskets are used, they shall be of sufficient size and depth to cover glass seal or metal channel frame completely.
  - 3. Do not use putty or glazing compounds.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

4. Do not grind, nip, cut, or otherwise alter edges and corners of fused glass units after shipping from factory.
5. Install with tape or gunnable sealant in wood sash.

**L. Fire Resistant Glass:**

1. Wire glass: Glaze in accordance with NFPA 80.
2. Other fire resistant glass: Glaze in accordance with UL design requirements.

**M. Bullet Resisting Material:**

1. Glaze as recommended by manufacturer, using glazing material which will permit expansion and contraction of the bullet resistive material in the frame.
2. The polycarbonate surface shall not be cleaned by scraping, razor blade, squeegee, or use of highly alkaline cleaner. At no time shall polycarbonate material be exposed to chemical solvents (benzene, gasoline, acetone, paint thinners) or aromatic hydrocarbons (toluene or xylene), nor shall any of these solvents or fumes be used or present in confined area such as Marine Guard Booth. Due care shall be exercised (paint formula, ventilation, protection of polycarbonate) when painting becomes necessary to interiors of rooms of hardline glazed units; exposure to chemical solvents could result in irreparable damage to security glazings (delaminations, distortions, cracks, severe stress crazing, air bubbles).

**3.4 INSTALLATION - DRY METHOD (TAPE AND GASKET SPLINE GLAZING) DELETED**

**3.5 INSTALLATION - WET/DRY METHOD (PREFORMED TAPE AND SEALANT) DELETED**

**3.6 INSTALLATION - WET METHOD (SEALANT AND SEALANT) DELETED**

**3.7 INSTALLATION - EXTERIOR BUTT GLAZED METHOD (SEALANT ONLY) DELETED**

**3.8 INSTALLATION - INTERIOR WET/DRY METHOD (TAPE AND SEALANT)**

- A. Cut glazing tape to length and install against permanent stops, projecting 1.6 mm (1/16 inch) above sight line.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- B. Place setting blocks at 1/4 points with edge block no more than 150 mm (6 inches) from corners.
- C. Rest glazing on setting blocks and push against tape to ensure full contact at perimeter of pane or unit.
- D. Install removable stops, spacer shims inserted between glazing and applied stops at 600 mm (24 inch) intervals, 6 mm (1/4 inch) below sight line.
- E. Fill gaps between pane and applied stop with paintable silicone type sealant to depth equal to bite on glazing, to uniform and level line.
- F. Trim protruding tape edge.

**3.9 INSTALLATION - INTERIOR WET METHOD (COMPOUND AND COMPOUND) DELETED**

**3.10 INSTALLATION - REGLAZING HISTORIC FRAMING DELETED**

**3.11 REPLACEMENT AND CLEANING**

- A. Clean new glass surfaces removing temporary labels, paint spots, and defacement after approval by Resident Engineer.
- B. Replace cracked, broken, and imperfect glass, or glass which has been installed improperly.
- C. Leave glass, putty, and other setting material in clean, whole, and acceptable condition.

**3.12 PROTECTION**

Protect finished surfaces from damage during erection, and after completion of work. Strippable plastic coatings on colored anodized finish are not acceptable.

**3.13 GLAZING SCHEDULE**

- A. Fire Resistant Glass:
  - 1. Install clear wire glass in interior fire rated or labeled doors and windows.
  - 2. Install clear wire glass in exterior windows and doors indicated to receive wire glass.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3. DELETED

4. Use Fire Resistant Glass without wire mesh in the following: DELETED

**B. Tempered Glass:**

1. Install in full and half glazed doors unless indicated otherwise.
2. Install in storefront, windows, and door sidelights adjacent to doors.
3. Use clear tempered glass on interior side lights and doors, and on exterior doors and sidelights unless otherwise indicated or specified.

**D. Clear Glass:**

1. Interior observation windows not specified otherwise.
2. Interior pane of dual glazed windows not receiving tempered, laminated or organic coated glass, or other special glass indicated or specified.

**E. Tinted Glass: DELETED**

**F. Insulating Glass: DELETED**

**G. Laminated Glass: Install as specified in doors, observation windows and interior pane of dual glazed windows where indicated.**

1. Provide laminated glass for all windows in Psychiatric Nursing Units, Alcohol Dependency Treatment Nursing Units, Drug Abuse Treatment Nursing Units and Security Bedrooms. Laminated glass shall be 7/16-in thick in locked patient units and security rooms, 5/16-in thick elsewhere. (min. 1.5 mm interlayer).
2. If laminated glass is required for double glazed windows, provide it for interior panes only.
3. Where laminated glass is required for blast-resistant windows, follow UFC4-010-01, DOD Minimum Antiterrorism Standards for Buildings.

**H. Bullet Resisting Assembly, DELETED**

**I. Transparent Mirror (One-Way-Vision Glass): DELETED**

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. Install in interior pane of dual glazed windows of toilets, baths,  
and locker rooms and where indicated.
2. Pattern Glass (obscure), unless specified otherwise.
3. Fire Rated Doors: Use patterned (obscure) wire glass.
4. Other Doors: Use tempered patterned glass.

K. DELETED

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 09 06 00  
SCHEDULE FOR FINISHES**

SEE ARCHITECTURAL DRAWING AF101 FINISH PLAN AND FINISH TAG LEGEND

**PART I - GENERAL**

**1.1 DESCRIPTION**

This section contains a coordinated system in which requirements for materials specified in other sections shown are identified by abbreviated material names and finish codes in the room finish schedule or shown for other locations.

**1.2 MANUFACTURERS**

Manufacturer's trade names and numbers used herein are only to identify colors, finishes, textures and patterns. Products of other manufacturer's equivalent to colors, finishes, textures and patterns of manufacturers listed that meet requirements of technical specifications will be acceptable upon approval in writing by contracting officer for finish requirements.

**1.3 SUBMITALS**

Submit in accordance with SECTION 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES—provide quadruplicate samples for color approval of materials and finishes specified in this section.

**1.4 APPLICABLE PUBLICATIONS**

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**B. MASTER PAINTING INSTITUTE: (MPI)**

2001.....Architectural Painting Specification Manual

**PART 2- PRODUCTS**

2.1 SEE ARCHITECTURAL DRAWING AF101 FINISH PLAN AND "FINISH TAG LEGEND"

**PART III EXECUTION**

3.1 SEE ARCHITECTURAL DRAWING AF101 FINISH PLAN AND "FINISH TAG LEGEND"

**3.3 ROOM FINISH SCHEDULE**

A. Match adjoining or existing similar surfaces colors, textures or patterns where disturbed or damaged by alterations or new work when not scheduled.

**B. ROOM FINISH SCHEDULE**

1. See architectural drawing AF101 FINISH PLAN AND "FINISH TAG LEGEND"

**--- E N D---**

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 09 22 16  
NON-STRUCTURAL METAL FRAMING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies steel studs wall systems, shaft wall systems, ceiling or soffit suspended or furred framing, wall furring, fasteners, and accessories for the screw attachment of gypsum board, plaster bases or other building boards.

**1.2 RELATED WORK**

- A. Ceiling suspension systems for acoustical tile or panels and lay in gypsum board panels: Section 09 51 00, ACOUSTICAL CEILINGS// Section 09 29 00, GYPSUM BOARD.

**1.3 TERMINOLOGY**

- A. Description of terms shall be in accordance with ASTM C754, ASTM C11, ASTM C841 and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by beams, trusses, or bar joists. In interstitial spaces with walk-on floors the underside of the walk-on floor is the underside of structure overhead.
- C. Thickness of steel specified is the minimum bare (uncoated) steel thickness.

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
  - 1. Studs, runners and accessories.
  - 2. Hanger inserts.
  - 3. Channels (Rolled steel).
  - 4. Furring channels.
  - 5. Screws, clips and other fasteners.
- C. Shop Drawings:
  - 1. Typical ceiling suspension system.
  - 2. Typical metal stud and furring construction system including details around openings and corner details.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- 3. Typical shaft wall assembly
- 4. Typical fire rated assembly and column fireproofing showing details of construction same as that used in fire rating test.
- D. Test Results: Fire rating test designation, each fire rating required for each assembly.

**1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE**

In accordance with the requirements of ASTM C754.

**1.6 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society For Testing And Materials (ASTM)
  - A123-09.....Zinc (Hot-dip Galvanized) Coatings on Iron and Steel Products
  - A653/A653M-09.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot-Dip Process
  - A641-09.....Zinc-Coated (Galvanized) Carbon Steel Wire
  - C11-10.....Terminology Relating to Gypsum and Related Building Materials and Systems
  - C635-07.....Manufacture, Performance, and Testing of Metal Suspension System for Acoustical Tile and Lay-in Panel Ceilings
  - C636-06.....Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels
  - C645-09.....Non-Structural Steel Framing Members
  - C754-09.....Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products
  - C841-03 (R2008).....Installation of Interior Lathing and Furring
  - C954-07.....Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness
  - C1002-07.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

E580-09.....Application of Ceiling Suspension Systems for  
Acoustical Tile and Lay-in Panels in Areas  
Requiring Moderate Seismic Restraint.

**PART 2 - PRODUCTS**

**2.1 PROTECTIVE COATING**

Galvanize steel studs, runners (track), rigid (hat section) furring channels, "Z" shaped furring channels, and resilient furring channels, with coating designation of G-60 minimum, per ASTM 123.

**2.2 STEEL STUDS AND RUNNERS (TRACK)**

- A. ASTM C645, modified for thickness specified and sizes as shown.
  - 1. Use ASTM A525 steel, 0.8 mm (0.0329-inch) thick bare metal (33 mil).
  - 2. Runners same thickness as studs.
- B. Provide not less than two cutouts in web of each stud, approximately 300 mm (12 inches) from each end, and intermediate cutouts on approximately 600 mm (24-inch) centers.
- C. Doubled studs for openings and studs for supporting concrete backer-board.
- D. Studs 3600 mm (12 feet) or less in length shall be in one piece.
- E. Shaft Wall Framing:
  - 1. Conform to rated wall construction.
  - 2. C-H Studs.
  - 3. E Studs.
  - 4. J Runners.
  - 5. Steel Jamb-Strut.

**2.3 FURRING CHANNELS**

- A. Rigid furring channels (hat shape): ASTM C645.
- B. Resilient furring channels:
  - 1. Not less than 0.45 mm (0.0179-inch) thick bare metal.
  - 2. Semi-hat shape, only one flange for anchorage with channel web leg slotted on anchorage side, channel web leg on other side stiffens fastener surface but shall not contact anchorage surface other channel leg is attached to.
- C. "Z" Furring Channels:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. Not less than 0.45 mm (0.0179-inch)-thick bare metal, with 32 mm (1-1/4 inch) and 19 mm (3/4-inch) flanges.
  2. Web furring depth to suit thickness of insulation with slotted perforations.
- D. Rolled Steel Channels: ASTM C754, cold rolled; or, ASTM C841, cold rolled.

**2.4 FASTENERS, CLIPS, AND OTHER METAL ACCESSORIES**

- A. ASTM C754, except as otherwise specified.
- B. For fire rated construction: Type and size same as used in fire rating test.
- C. Fasteners for steel studs thicker than 0.84 mm (0.033-inch) thick. Use ASTM C954 steel drill screws of size and type recommended by the manufacturer of the material being fastened.
- D. Clips: ASTM C841 (paragraph 6.11), manufacturer's standard items. Clips used in lieu of tie wire shall have holding power equivalent to that provided by the tie wire for the specific application.
- E. Concrete ceiling hanger inserts (anchorage for hanger wire and hanger straps): Steel, zinc-coated (galvanized), manufacturers standard items, designed to support twice the hanger loads imposed and the type of hanger used.
- F. Tie Wire and Hanger Wire:
  1. ASTM A641, soft temper, Class 1 coating.
  2. Gage (diameter) as specified in ASTM C754 or ASTM C841.
- G. Attachments for Wall Furring:
  1. Manufacturers standard items fabricated from zinc-coated (galvanized) steel sheet.
  2. For concrete or masonry walls: Metal slots with adjustable inserts or adjustable wall furring brackets. Spacers may be fabricated from 1 mm (0.0396-inch) thick galvanized steel with corrugated edges.
- H. Power Actuated Fasteners: Type and size as recommended by the manufacturer of the material being fastened.

**2.5 SUSPENDED CEILING SYSTEM FOR GYPSUM BOARD (OPTION)**

- A. Conform to ASTM C635, heavy duty, with not less than 35 mm (1-3/8 inch) wide knurled capped flange face designed for screw attachment of gypsum board.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- B. Wall track channel with 35 mm (1-3/8 inch) wide flange.

**PART 3 - EXECUTION**

**3.1 INSTALLATION CRITERIA**

- A. Where fire rated construction is required for walls, partitions, columns, beams and floor-ceiling assemblies, the construction shall be same as that used in fire rating test.
- B. Construction requirements for fire rated assemblies and materials shall be as shown and specified, the provisions of the Scope paragraph (1.2) of ASTM C754 and ASTM C841 regarding details of construction shall not apply.

**3.2 INSTALLING STUDS**

- A. Install studs in accordance with ASTM C754, except as otherwise shown or specified.
- B. Space studs not more than 610 mm (24 inches) on center.
- C. Cut studs 6 mm to 9 mm (1/4 to 3/8-inch) less than floor to underside of structure overhead when extended to underside of structure overhead.
- D. Where studs are shown to terminate above suspended ceilings, provide bracing as shown or extend studs to underside of structure overhead.
- E. Extend studs to underside of structure overhead for fire, rated partitions, smoke partitions, shafts, and sound rated partitions and insulated exterior wall furring.
- F. At existing plaster ceilings and where shown, studs may terminate at ceiling as shown.
- G. Openings:
  - 1. Frame jambs of openings in stud partitions and furring with two studs placed back to back or as shown.
  - 2. Fasten back to back studs together with 9 mm (3/8-inch) long Type S pan head screws at not less than 600 mm (two feet) on center, staggered along webs.
  - 3. Studs fastened flange to flange shall have splice plates on both sides approximately 50 X 75 mm (2 by 3 inches) screwed to each stud with two screws in each stud. Locate splice plates at 600 mm (24 inches) on center between runner tracks.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**H. Fastening Studs:**

1. Fasten studs located adjacent to partition intersections, corners and studs at jambs of openings to flange of runner tracks with two screws through each end of each stud and flange of runner.
2. Do not fasten studs to top runner track when studs extend to underside of structure overhead.

**I. Chase Wall Partitions:**

1. Locate cross braces for chase wall partitions to permit the installation of pipes, conduits, carriers and similar items.
2. Use studs or runners as cross bracing not less than 63 mm (2-1/2 inches wide).

**J. Form building seismic or expansion joints with double studs back to back spaced 75 mm (three inches) apart plus the width of the seismic or expansion joint.**

**K. Form control joint, with double studs spaced 13 mm (1/2-inch) apart.**

**3.3 INSTALLING WALL FURRING FOR FINISH APPLIED TO ONE SIDE ONLY**

**A. In accordance with ASTM C754, or ASTM C841 except as otherwise specified or shown.**

**B. Wall furring-Stud System:**

1. Framed with 63 mm (2-1/2 inch) or narrower studs, 600 mm (24 inches) on center.
2. Brace as specified in ASTM C754 for Wall Furring-Stud System or brace with sections or runners or studs placed horizontally at not less than three foot vertical intervals on side without finish.
3. Securely fasten braces to each stud with two Type S pan head screws at each bearing.

**C. Direct attachment to masonry or concrete; rigid channels or "Z" channels:**

1. Install rigid (hat section) furring channels at 600 mm (24 inches) on center, horizontally or vertically.
2. Install "Z" furring channels vertically spaced not more than 600 mm (24 inches) on center.
3. At corners where rigid furring channels are positioned horizontally, provide mitered joints in furring channels.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

4. Ends of spliced furring channels shall be nested not less than 200 mm (8 inches).
  5. Fasten furring channels to walls with power-actuated drive pins or hardened steel concrete nails. Where channels are spliced, provide two fasteners in each flange.
  6. Locate furring channels at interior and exterior corners in accordance with wall finish material manufacturers printed erection instructions. Locate "Z" channels within 100 mm (4 inches) of corner.
- D. Installing Wall Furring-Bracket System: Space furring channels not more than 400 mm (16 inches) on center.

**3.4 INSTALLING SUPPORTS REQUIRED BY OTHER TRADES**

- A. Provide for attachment and support of electrical outlets, plumbing, laboratory or heating fixtures, recessed type plumbing fixture accessories, access panel frames, wall bumpers, wood seats, toilet stall partitions, dressing booth partitions, urinal screens, chalkboards, tackboards, wall-hung casework, handrail brackets, recessed fire extinguisher cabinets and other items like auto door buttons and auto door operators supported by stud construction.
- B. Provide additional studs where required. Install metal backing plates, or special metal shapes as required, securely fastened to metal studs.

SPEC WRITER NOTE:

**3.5 INSTALLING SHAFT WALL SYSTEM DELETED**

**3.6 INSTALLING FURRED AND SUSPENDED CEILINGS OR SOFFITS**

- A. Install furred and suspended ceilings or soffits in accordance with ASTM C754 or ASTM C841 except as otherwise specified or shown for screw attached gypsum board ceilings and for plaster ceilings or soffits.
  1. Space framing at 400 mm (16-inch) centers for metal lath anchorage.
  2. Space framing at 600 mm (24-inch) centers for gypsum board anchorage.
- B. New exposed concrete slabs:
  1. Use metal inserts required for attachment and support of hangers or hanger wires with tied wire loops for embedding in concrete.
  2. Furnish for installation under Division 3, CONCRETE.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3. Suspended ceilings under concrete rib construction shall have runner channels at right angles to ribs and be supported from ribs with hangers at ends and at 1200 mm (48-inch) maximum intervals along channels. Stagger hangers at alternate channels.
- C. Concrete slabs on steel decking composite construction:
  1. Use pull down tabs when available.
  2. Use power activated fasteners when direct attachment to structural framing can not be accomplished.
- D. Where bar joists or beams are more than 1200 mm (48 inches) apart, provide intermediate hangers so that spacing between supports does not exceed 1200 mm (48 inches). Use clips, bolts, or wire ties for direct attachment to steel framing.
- E. Existing concrete construction exposed or concrete on steel decking:
  1. Use power actuated fasteners either eye pin, threaded studs or drive pins for type of hanger attachment required.
  2. Install fasteners at approximate mid height of concrete beams or joists. Do not install in bottom of beams or joists.
- F. Steel decking without concrete topping:
  1. Do not fasten to steel decking 0.76 mm (0.0299-inch) or thinner.
  2. Toggle bolt to decking 0.9 mm (0.0359-inch) or thicker only where anchorage to steel framing is not possible.
- G. Installing suspended ceiling system for gypsum board (ASTM C635 Option):
  1. Install only for ceilings to receive screw attached gypsum board.
  2. Install in accordance with ASTM C636.
    - a. Install main runners spaced 1200 mm (48 inches) on center.
    - b. Install 1200 mm (four foot) tees not over 600 mm (24 inches) on center; locate for edge support of gypsum board.
    - c. Install wall track channel at perimeter.
- H. Installing Ceiling Bracing System:
  1. Construct bracing of 38 mm (1-1/2 inch) channels for lengths up to 2400 mm (8 feet) and 50 mm (2 inch) channels for lengths over 2400 mm (8 feet) with ends bent to form surfaces for anchorage to carrying channels and over head construction. Lap channels not less than 600 mm (2 feet) at midpoint back to back. Screw or bolt lap together with two fasteners.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. Install bracing at an approximate 45 degree angle to carrying channels and structure overhead; secure as specified to structure overhead with two fasteners and to carrying channels with two fasteners or wire ties.
3. Brace suspended ceiling or soffit framing in seismic areas in accordance with ASTM E580.

**3.7 TOLERANCES**

- A. Fastening surface for application of subsequent materials shall not vary more than 3 mm (1/8-inch) from the layout line.
- B. Plumb and align vertical members within 3 mm (1/8-inch.)
- C. Level or align ceilings within 3 mm (1/8-inch.)

- - - E N D - - -



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 09 29 00  
GYPSUM BOARD**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies installation and finishing of gypsum board.

**1.2 RELATED WORK**

- A. Installation of steel framing members for walls, partitions, furring, soffits, and ceilings: Section 09 22 16, NON-STRUCTURAL METAL FRAMING.
- B. Sound deadening board: Section 07 21 13, THERMAL INSULATION.
- C. Acoustical Sealants: Section 07 92 00, JOINT SEALANTS.
- E. Lay in gypsum board ceiling panels: Section 09 51 00, ACOUSTICAL CEILING.

**1.3 TERMINOLOGY**

- A. Definitions and description of terms shall be in accordance with ASTM C11, C840, and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by the trusses or bar joists.
- C. "Yoked": Gypsum board cut out for opening with no joint at the opening (along door jamb or above the door).

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES
- B. Manufacturer's Literature and Data:
  - 1. Cornerbead and edge trim.
  - 2. Finishing materials.
  - 3. Laminating adhesive.
  - 4. Gypsum board, each type.
- C. Shop Drawings:
  - 1. Typical gypsum board installation, showing corner details, edge trim details and the like.
  - 2. Typical sound rated assembly, showing treatment at perimeter of partitions and penetrations at gypsum board.
  - 3. Typical shaft wall assembly.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

4. Typical fire rated assembly and column fireproofing, indicating details of construction same as that used in fire rating test.

D. Samples:

1. Cornerbead.
2. Edge trim.
3. Control joints.

E. Test Results:

1. Fire rating test, each fire rating required for each assembly.
2. Sound rating test.

**1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE**

In accordance with the requirements of ASTM C840.

**1.6 ENVIRONMENTAL CONDITIONS**

In accordance with the requirements of ASTM C840.

**1.7 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing And Materials (ASTM):

- C11-08.....Terminology Relating to Gypsum and Related Building Materials and Systems
- C475-02.....Joint Compound and Joint Tape for Finishing Gypsum Board
- C840-08.....Application and Finishing of Gypsum Board
- C919-08.....Sealants in Acoustical Applications
- C954-07.....Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Stud from 0.033 in. (0.84mm) to 0.112 in. (2.84mm) in thickness
- C1002-07.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs
- C1047-05.....Accessories for Gypsum Wallboard and Gypsum Veneer Base
- C1177-06.....Glass Mat Gypsum Substrate for Use as Sheathing
- C1658-06.....Glass Mat Gypsum Panels
- C1396-06.....Gypsum Board

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

E84-08.....Surface Burning Characteristics of Building  
Materials

- C. Underwriters Laboratories Inc. (UL):  
Latest Edition.....Fire Resistance Directory
- D. Inchcape Testing Services (ITS):  
Latest Editions.....Certification Listings

**PART 2 - PRODUCTS**

**2.1 GYPSUM BOARD**

- A. Gypsum Board: ASTM C1396, Type X, 16 mm (5/8 inch) thick unless shown otherwise. Shall contain a minimum of 20 percent recycled gypsum.
- B. Coreboard or Shaft Wall Liner Panels.
  - 1. ASTM C1396, Type X.
  - 2. ASTM C1658: Glass Mat Gypsum Panels,
  - 3. Coreboard for shaft walls 300, 400, 600 mm (12, 16, or 24 inches) wide by required lengths 25 mm (one inch) thick with paper faces treated to resist moisture.
- C. Water Resistant Gypsum Backing Board: ASTM C620, Type X, 16 mm (5/8 inch) thick.
- D. Gypsum cores shall contain a minimum of 95 percent post industrial recycled gypsum content. Paper facings shall contain 100 percent post-consumer recycled paper content.

**2.2 GYPSUM SHEATHING BOARD**

- A. ASTM C1396, Type X, water-resistant core, 16 mm (5/8 inch) thick.
- B. ASTM C1177, Type X.

**2.3 ACCESSORIES**

- A. ASTM C1047, except form of 0.39 mm (0.015 inch) thick zinc coated steel sheet or rigid PVC plastic.
- B. Flanges not less than 22 mm (7/8 inch) wide with punchouts or deformations as required to provide compound bond.

**2.4 FASTENERS**

- A. ASTM C1002 and ASTM C840, except as otherwise specified.
- B. ASTM C954, for steel studs thicker than 0.04 mm (0.33 inch).
- C. Select screws of size and type recommended by the manufacturer of the material being fastened.
- D. For fire rated construction, type and size same as used in fire rating test.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- E. Clips: Zinc-coated (galvanized) steel; gypsum board manufacturer's standard items.

**2.5 FINISHING MATERIALS AND LAMINATING ADHESIVE**

ASTM C475 and ASTM C840. Free of antifreeze, vinyl adhesives, preservatives, biocides and other VOC. Adhesive shall contain a maximum VOC content of 50 g/l.

**PART 3 - EXECUTION**

**3.1 GYPSUM BOARD HEIGHTS**

- A. Extend all layers of gypsum board from floor to underside of structure overhead on following partitions and furring:
1. Two sides of partitions:
    - a. Fire rated partitions.
    - b. Smoke partitions.
    - c. Sound rated partitions.
    - d. Full height partitions shown (FHP).
    - e. DELETED.
  2. One side of partitions or furring:
    - a. Inside of exterior wall furring or stud construction.
    - b. Room side of room without suspended ceilings.
    - c. Furring for pipes and duct shafts, except where fire rated shaft wall construction is shown.
  3. Extend all layers of gypsum board construction used for fireproofing of columns from floor to underside of structure overhead, unless shown otherwise.
- B. In locations other than those specified, extend gypsum board from floor to heights as follows:
1. Not less than 100 mm (4 inches) above suspended acoustical ceilings.
  2. At ceiling of suspended gypsum board ceilings.
  3. At existing ceilings.

**3.2 INSTALLING GYPSUM BOARD**

- A. Coordinate installation of gypsum board with other trades and related work.
- B. Install gypsum board in accordance with ASTM C840, except as otherwise specified.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- C. Moisture and Mold-Resistant Assemblies: Provide and install moisture and mold-resistant glass mat gypsum wallboard products with moisture-resistant surfaces complying with ASTM C1658 where shown and in locations which might be subject to moisture exposure during construction.
- D. Use gypsum boards in maximum practical lengths to minimize number of end joints.
- E. Bring gypsum board into contact, but do not force into place.
- F. Ceilings:
  - 1. For single-ply construction, use perpendicular application.
  - 2. For two-ply assemblies:
    - a. Use perpendicular application.
    - b. Apply face ply of gypsum board so that joints of face ply do not occur at joints of base ply with joints over framing members.
- G. Walls (Except Shaft Walls):
  - 1. When gypsum board is installed parallel to framing members, space fasteners 300 mm (12 inches) on center in field of the board, and 200 mm (8 inches) on center along edges.
  - 2. When gypsum board is installed perpendicular to framing members, space fasteners 300 mm (12 inches) on center in field and along edges.
  - 3. Stagger screws on abutting edges or ends.
  - 4. For single-ply construction, apply gypsum board with long dimension either parallel or perpendicular to framing members as required to minimize number of joints except gypsum board shall be applied vertically over "Z" furring channels.
  - 5. For two-ply gypsum board assemblies, apply base ply of gypsum board to assure minimum number of joints in face layer. Apply face ply of wallboard to base ply so that joints of face ply do not occur at joints of base ply with joints over framing members.
  - 6. For three-ply gypsum board assemblies, apply plies in same manner as for two-ply assemblies, except that heads of fasteners need only be driven flush with surface for first and second plies. Apply third ply of wallboard in same manner as second ply of two-ply assembly, except use fasteners of sufficient length enough to have the same penetration into framing members as required for two-ply assemblies.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

7. No offset in exposed face of walls and partitions will be permitted because of single-ply and two-ply or three-ply application requirements.
8. Installing Two Layer Assembly Over Sound Deadening Board:
  - a. Apply face layer of wallboard vertically with joints staggered from joints in sound deadening board over framing members.
  - b. Fasten face layer with screw, of sufficient length to secure to framing, spaced 300 mm (12 inches) on center around perimeter, and 400 mm (16 inches) on center in the field.
9. Control Joints ASTM C840 and as follows:
  - a. Locate at both side jambs of openings if gypsum board is not "yoked". Use one system throughout.
  - b. Not required for wall lengths less than 9000 mm (30 feet).
  - c. Extend control joints the full height of the wall or length of soffit/ceiling membrane.
- H. Acoustical or Sound Rated Partitions, Fire and Smoke Partitions:
  1. Cut gypsum board for a space approximately 3 mm to 6 mm (1/8 to 1/4 inch) wide around partition perimeter.
  2. Coordinate for application of caulking or sealants to space prior to taping and finishing.
  3. For sound rated partitions, use sealing compound (ASTM C919) to fill the annular spaces between all receptacle boxes and the partition finish material through which the boxes protrude to seal all holes and/or openings on the back and sides of the boxes. STC minimum values as shown.
- I. Electrical and Telecommunications Boxes:
  1. Seal annular spaces between electrical and telecommunications receptacle boxes and gypsum board partitions.
- J. Accessories:
  1. Set accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces as specified.
  2. Install in one piece, without the limits of the longest commercially available lengths.
  3. Corner Beads:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- a. Install at all vertical and horizontal external corners and where shown.
- b. Use screws only. Do not use crimping tool.
- 4. Edge Trim (casings Beads):
  - a. At both sides of expansion and control joints unless shown otherwise.
  - b. Where gypsum board terminates against dissimilar materials and at perimeter of openings, except where covered by flanges, casings or permanently built-in equipment.
  - c. Where gypsum board surfaces of non-load bearing assemblies abut load bearing members.
  - d. Where shown.

**3.3 INSTALLING GYPSUM SHEATHING**

- A. Install in accordance with ASTM C840, except as otherwise specified or shown.
- B. Use screws of sufficient length to secure sheathing to framing.
- C. Space screws 9 mm (3/8 inch) from ends and edges of sheathing and 200 mm (8 inches) on center. Space screws a maximum of 200 mm (8 inches) on center on intermediate framing members.
- D. Apply 600 mm by 2400 mm (2 foot by 8 foot) sheathing boards horizontally with tongue edge up.
- E. Apply 1200 mm by 2400 mm or 2700 mm (4 ft. by 8 ft. or 9 foot) gypsum sheathing boards vertically with edges over framing.

**3.4 CAVITY SHAFT WALL DELETED**

**3.5 FINISHING OF GYPSUM BOARD**

- A. Finish joints, edges, corners, and fastener heads in accordance with ASTM C840. Use Level 4 finish for all finished areas open to public view.
- B. Before proceeding with installation of finishing materials, assure the following:
  - 1. Gypsum board is fastened and held close to framing or furring.
  - 2. Fastening heads in gypsum board are slightly below surface in dimple formed by driving tool.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- C. Finish joints, fasteners, and all openings, including openings around penetrations, on that part of the gypsum board extending above suspended ceilings to seal surface of non decorated smoke barrier and fire rated gypsum board construction as may apply. After the installation of hanger rods, hanger wires, supports, equipment, conduits, piping and similar work, seal remaining openings and maintain the integrity of the smoke barrier and fire rated construction. Sanding is not required of non decorated surfaces.

**3.6 REPAIRS**

- A. After taping and finishing has been completed, and before decoration, repair all damaged and defective work, including nondecorated surfaces.
- B. Patch holes or openings 13 mm (1/2 inch) or less in diameter, or equivalent size, with a setting type finishing compound or patching plaster.
- C. Repair holes or openings over 13 mm (1/2 inch) diameter, or equivalent size, with 16 mm (5/8 inch) thick gypsum board secured in such a manner as to provide solid substrate equivalent to undamaged surface.
- D. Tape and refinish scratched, abraded or damaged finish surfaces including cracks and joints in non decorated surface to provide smoke tight construction and fire protection equivalent to the fire rated construction as may apply.

**3.7 UNACCESSIBLE CEILINGS**

At Mental Health and Behavioral Nursing Units, areas accessible to patients and not continuously observable by staff (e.g., patient bedrooms, day rooms), ceilings should be a solid material such as gypsum board. This will limit patient access. Access doors are needed to access electrical and mechanical equipment above the ceiling. These doors should be locked to prevent unauthorized access and secured to ceiling using tamper resistant fasteners.

- - - E N D - - -



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 09 30 13  
CERAMIC/PORCELAIN TILING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies ceramic, porcelain and quarry tile, marble thresholds and window stools, waterproofing membranes for thin-set applications, crack isolation membranes, and tile backer board.

**1.2 RELATED WORK**

- A. Sealing of joints where specified: Section 07 92 00, JOINT SEALANTS.
- B. Metal and resilient edge strips at joints with new resilient flooring, and carpeting as may apply; Section 09 65 19, RESILIENT TILE FLOORING;

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
  - 1. Base tile, each type, each color, each size.
  - 2. Mosaic floor tile panels, 225 mm by 225 mm (9 inches by 9 inches), each type, color, size and pattern.
  - 3. Paver tile, each size, type, color and pattern.
  - 4. Quarry tile, each type, color, and size.
  - 5. Porcelain tile, each type, color, patterns and size.
  - 6. Wall (or wainscot) tile, each color, size and pattern.
  - 7. Trim shapes, bullnose cap and cove including bullnose cap and base pieces at internal and external corners of vertical surfaces, each type, color, and size.
  - 8. Therapeutic pool tile, panels 300 mm (12 inches) square, each type, size, color, typical lettering and special shapes.
- C. Product Data:
  - 1. Ceramic and porcelain tile, marked to show each type, size, and shape required.
  - 2. Chemical resistant mortar and grout (Epoxy and Furan).
  - 3. Cementitious backer unit.
  - 4. Dry-set Portland cement mortar and grout.
  - 5. Divider strip.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

6. Elastomeric membrane and bond coat.
7. Reinforcing tape.
8. Leveling compound.
9. Latex-Portland cement mortar and grout.
10. Commercial Portland cement grout.
11. Organic adhesive.
12. Slip resistant tile.
13. Waterproofing isolation membrane.
14. Fasteners.

**D. Certification:**

1. Master grade, ANSI A137.1.
2. Manufacturer's certificates indicating that the following materials comply with specification requirements:
  - a. Chemical resistant mortar and grout (epoxy and furan).
  - b. Modified epoxy emulsion.
  - c. Commercial Portland cement grout.
  - d. Cementitious backer unit.
  - e. Dry-set Portland cement mortar and grout.
  - f. Elastomeric membrane and bond coat.
  - g. Reinforcing tape.
  - h. Latex-Portland cement mortar and grout.
  - i. Leveling compound.
  - j. Organic adhesive.
  - k. Waterproof isolation membrane.
  - l. Factory mounted tile suitability for application in wet area specified under 2.1, A, 3 with list of successful in-service performance locations.

**1.4 DELIVERY AND STORAGE**

- A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.
- B. Store material to prevent damage or contamination.

**1.5 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

B. American National Standards Institute (ANSI):

- A10.20-05.....Safety Requirements for Ceramic Tile, Terrazzo,  
and Marble Works
- A108.1A-05.....Installation of Ceramic Tile in the Wet-Set  
Method with Portland Cement Mortar
- A108.1B-05.....Installation of Ceramic Tile on a Cured Portland  
Cement Mortar Setting Bed with dry-Set or latex-  
Portland Cement Mortar
- A108.1C-05.....Contractors Option; Installation of Ceramic Tile  
in the Wet-Set method with Portland Cement  
Mortar or Installation of Ceramic Tile on a  
Cured Portland Cement Mortar Setting Bed with  
Dry-Set or Latex-Portland Cement Mortar
- A108.4-05.....Installation of Ceramic Tile with Organic  
Adhesives or Water Cleanable Tile Setting Epoxy  
Adhesives
- A108.5-05.....Installation of Ceramic Tile with Dry-Set  
Portland Cement Mortar or Latex-Portland Cement  
Mortar
- A108.6-05.....Installation of Ceramic Tile with Chemical  
Resistant, Water Cleanable Tile-Setting and  
Grouting Epoxy
- A108.8-05.....Installation of Ceramic Tile with Chemical  
Resistant Furan Resin Mortar and Grout
- A108.10-05.....Installation of Grout in Tilework
- A108.11-05.....Interior Installation of Cementitious Backer  
Units
- A108.13-05.....Installation of Load Bearing, Bonded, Waterproof  
Membranes for Thin-Set Ceramic Tile and  
Dimension Stone
- A118.1-05.....Dry-Set Portland Cement Mortar
- A118.3-05.....Chemical Resistant, Water Cleanable Tile-Setting  
Epoxy and Water Cleanable Tile-Setting and  
Grouting Epoxy Adhesive
- A118.4-05.....Latex-Portland Cement Mortar

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- A118.5-05.....Chemical Resistant Furan Mortars and Grouts for  
Tile Installation
- A118.6-05.....Standard Cement Grouts for Tile Installation
- A118.9-05.....Cementitious Backer Units
- A118.10-05.....Load Bearing, Bonded, Waterproof Membranes for  
Thin-Set Ceramic Tile and Dimension Stone  
Installation
- A136.1-05.....Organic Adhesives for Installation of Ceramic  
Tile
- A137.1-88.....Ceramic Tile
- C. American Society For Testing And Materials (ASTM):
- A185-07.....Steel Welded Wire Fabric, Plain, for Concrete  
Reinforcing
- C109/C109M-07.....Standard Test Method for Compressive Strength of  
Hydraulic Cement Mortars (Using 2 inch. or [50-  
mm] Cube Specimens)
- C241-90 (R2005).....Abrasion Resistance of Stone Subjected to Foot  
Traffic
- C348-02.....Standard Test Method for Flexural Strength of  
Hydraulic-Cement Mortars
- C627-93 (R2007).....Evaluating Ceramic Floor Tile Installation  
Systems Using the Robinson-Type Floor Tester
- C954-07.....Steel Drill Screws for the Application of Gypsum  
Board on Metal Plaster Base to Steel Studs from  
0.033 in (0.84 mm) to 0.112 in (2.84 mm) in  
thickness
- C979-05.....Pigments for Integrally Colored Concrete
- C1002-07.....Steel Self-Piercing Tapping Screws for the  
Application of Panel Products
- C1027-99 (R2004).....Determining "Visible Abrasion Resistance on  
Glazed Ceramic Tile"
- C1028-07.....Determining the Static Coefficient of Friction  
of Ceramic Tile and Other Like Surfaces by the  
Horizontal Dynamometer Pull Meter Method

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- C1127-01.....Standard Guide for Use of High Solids Content,  
Cold Liquid-Applied Elastomeric Waterproofing  
Membrane with an Integral Wearing Surface
- C1178/C1178M-06.....Standard Specification for Coated Glass Mat  
Water-Resistant Gypsum Backing Panel
- D4397-02.....Standard Specification for Polyethylene Sheeting  
for Construction, Industrial and Agricultural  
Applications
- D5109-99 (R2004).....Standard Test Methods for Copper-Clad  
Thermosetting Laminates for Printed Wiring  
Boards
- D. Marble Institute of America (MIA): Design Manual III-2007
- E. Tile Council of America, Inc. (TCA):  
2007.....Handbook for Ceramic Tile Installation

**PART 2 - PRODUCTS**

**2.1 TILE**

- A. Comply with ANSI A137.1, Standard Grade, except as modified:
1. Inspection procedures listed under the Appendix of ANSI A137.1.
  2. Abrasion Resistance Classification:
    - a. Tested in accordance with values listed in Table 1, ASTM C 1027.
    - b. Class V, 12000 revolutions for floors in Corridors, Kitchens,  
Storage including Refrigerated Rooms
    - c. Class IV, 6000 revolutions for remaining areas.
  3. Slip Resistant Tile for Floors:
    - a. Coefficient of friction, when tested in accordance with ASTM  
C1028, required for level of performance:
      - 1) Not less than 0.7 (wet condition) for bathing areas.
      - 2) Not less than 0.8 on ramps for wet and dry conditions.
      - 3) Not less than 0.6, except 0.8 on ramps as stated above, for wet  
and dry conditions for other areas.
    - b. Tile Having Abrasive Grains:
      1. Unglazed Ceramic Mosaic Tile: Abrasive grains throughout body  
of the tile.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. Quarry Tile: Abrasive grains uniformly embedded in face at rate of approximately 7.5 percent of surface area.
- c. Porcelain Paver Tile: Matte surface finish with raised ridges spaced uniformly over tile surface.
4. Mosaic tile may be mounted or joined together by a resinous bonding material along tile edges.
5. Do not use back mounted tiles in showers, therapeutic pools, natatorium, hydrotherapy, whirlpool baths, and congregate baths unless certified by manufacturer as noted in paragraph 1.3.D.
6. Factory Blending: For tile with color variations, within the ranges selected during sample submittals blend tile in the factory and package so tile units taken from one package show the same range in colors as those taken from other packages and match approved samples.
7. Factory-Applied Temporary Protective Coating:
  - a. Protect exposed face surfaces (top surface) of tile against adherence of mortar and grout by pre-coating with a continuous film of petroleum paraffin wax, applied hot.
  - b. Do not coat unexposed tile surfaces.
  - c. Pre-wax tiles set or grouted with furan, epoxy, or latex modified mortars.
- B. Unglazed Ceramic Mosaic Tile: Nominal 6 mm (1/4 inch) thick with cushion edges.
- C. Unglazed Quarry Tile: Nominal 13 mm (1/2 inch) thick, square edges.
- D. Glazed Wall Tile: Cushion edges, glazing, as specified in Section 09 06 00, SCHEDULE FOR FINISHES.
- E. Porcelain Paver Tile: Nominal 8 mm (5/16 inch) thick, with cushion edges. Porcelain tile produced by the dust pressed method shall be made of approximately 50% feldspar; the remaining 50% shall be made up of various high-quality light firing ball clays yielding a tile with a water absorption rate of 0.5% or less and a breaking strength of between 390 to 400 pounds.
- F. Trim Shapes:
  1. Conform to applicable requirements of adjoining floor and wall tile.
  2. Use slip resistant trim shapes for horizontal surfaces of showers, congregate baths, natatorium, hydrotherapy, therapeutic pool,

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- overflow ledges, recessed steps, shower curbs, drying area curbs, and seats.
3. Use trim shapes sizes conforming to size of adjoining field wall tile including existing spaces unless detailed or specified otherwise in Section 09 06 00, SCHEDULE FOR FINISHES.
  4. Internal and External Corners:
    - a. Square internal and external corner joints are not acceptable.
    - b. External corners including edges: Use bullnose shapes.
    - c. Internal corners: Use cove shapes.
    - d. Base to floor internal corners: Use special shapes providing integral cove vertical and horizontal joint.
    - e. Base to floor external corners: Use special shapes providing bullnose vertical edge with integral cove horizontal joint. Use stop at bottom of openings having bullnose return to wall.
    - f. Wall top edge internal corners: Use special shapes providing integral cove vertical joint with bullnose top edge.
    - g. Wall top edge external corners: Use special shapes providing bullnose vertical and horizontal joint edge.
    - h. For unglazed ceramic mosaic and glazed wall tile installed in Portland cement mortar setting bed, use cove and bullnose shapes as applicable. When ceramic mosaic wall and base tile is required, use C Series cove and bullnose shapes.
    - i. For unglazed ceramic mosaic and glazed wall tile installed in dry-set Portland cement mortar, latex-Portland cement mortar, and organic adhesive (thin set methods), use cove and surface bullnose shapes as applicable.
    - j. For quarry tile work, use cove and bullnose shapes as applicable.
    - k. Provide cove and bullnose shapes for countertops, stools, saddles, and where shown, and as required to complete tile work.

**2.2 CEMENTITIOUS BACKER UNITS**

- A. Use in showers or wet areas.
- B. ANSI A118.9.
- C. Use Cementitious backer units in maximum available lengths.
- D. Backer unit meet or exceed the following additional physical properties:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

<u>Property</u>	<u>Test Method</u>	<u>Value</u>
Water absorption	ASTM C948	Less than 20 percent by weight

**2.3 JOINT MATERIALS FOR CEMENTITIOUS BACKER UNITS**

- A. Reinforcing Tape: Vinyl coated woven glass fiber mesh tape, open weave, 50 mm (2 inches) wide. Tape with pressure sensitive adhesive backing will not be permitted.
- B. Tape Embedding Material: Latex-Portland cement mortar complying with ANSI A118.4.
- C. Joint material, including reinforcing tape, and tape embedding material, shall be as specifically recommended by the backer unit manufacturer.

**2.4 FASTENERS**

- A. Screws for Cementitious Backer Units.
  - 1. Standard screws for gypsum board are not acceptable.
  - 2. Minimum 11 mm (7/16 inch) diameter head, corrosion resistant coated, with washers.
  - 3. ASTM C954 for steel 1 mm (0.033 inch) thick.
  - 4. ASTM C1002 for steel framing less than 0.0329 inch thick.
- B. Washers: Galvanized steel, 13 mm (1/2 inch) minimum diameter.

**2.5 GLASS MAT WATER RESISTANT GYPSUM BACKER BOARD**

Confirm to ASTM C1178/C1178M, Optional System for Cementitious Backer Units.

**2.6 SETTING MATERIALS OR BOND COATS**

- A. Conform to TCA Handbook for Ceramic Tile Installation.
- B. Portland Cement Mortar: ANSI A108.1.
- C. Latex-Portland Cement Mortar: ANSI A118.4.
  - 1. For wall applications, provide non-sagging, latex-Portland cement mortar complying with ANSI A118.4.
  - 2. Prepackaged Dry-Mortar Mix: Factory-prepared mixture of Portland cement; dry, redispersible, ethylene vinyl acetate additive; and other ingredients to which only water needs to be added at Project site.
- D. Dry-Set Portland Cement Mortar: ANSI A118.1. For wall applications, provide non-sagging, latex-Portland cement mortar complying with ANSI A118.4.
- E. Organic Adhesives: ANSI A136.1, Type 1.
- F. Chemical-Resistant Bond Coat:



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. Epoxy Resin Type: ANSI A118.3.
2. Furan Resin Type: ANSI A118.5.
- G. Elastomeric Waterproofing Membrane and Bond Coat:
  1. TCA F122-02.
  2. ANSI A118.10.
  3. One component polyurethane, liquid applied material having the following additional physical properties:
    - a. Hardness: Shore "A" between 40-60.
    - b. Elongation: Between 300-600 percent.
    - c. Tensile strength: Between 40-60 psig.
    - d. No volatile compounds.
  4. Coal tar modified urethanes are not acceptable.
- H. Waterproofing Isolation Membrane:
  1. Sheet System TCA F122-02.
  2. Optional System to elastomeric waterproof membrane.
  3. Composite sheet consisting of ASTM D5109, Type II, Grade I Chlorinated Polyethylene (CM) sheet reinforced on both sides with a non-woven polyester fiber.
  4. Designed for use in wet areas as an isolation and positive waterproofing membranes for thin-set bonding of sheet to substrate and thin-set bonding of ceramic and porcelain tile or marble to sheet. Suited for both horizontal and vertical applications.
  5. Conform to the following additional physical properties:

Property	Units	Results	Test Method
Hardness Shore A	Points	70-80	ASTM D2240 (10 Second Reading)
Shrinkage	Percent	5 maximum	ASTM D1204
Brittleness		No crack remains flexible at temperature-37 degrees C (-25 degrees F)	ASTM D2497 13 mm (1/2- inch) Mandrel Bend
Retention of Properties after Heat Aging	Percent of original	80 Tensile 80 Breaking 80 Elongation	ASTM D3045, 90 degrees C (194 degrees F) for 168 hours

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

6. Manufacturer's standard sheet size with prefabricated or preformed inside and outside corners.
7. Sheet manufacturer's solvent welding liquid or xylene and edge sealant.

**2.7 GROUTING MATERIALS**

A. Coloring Pigments:

1. Pure mineral pigments, limeproof and nonfading, complying with ASTM C979.
2. Add coloring pigments to grout by the manufacturer.
3. Job colored grout is not acceptable.
4. Use is required in Commercial Portland Cement Grout, Dry-Set Grout, and Latex-Portland Cement Grout.

B. White Portland Cement Grout:

1. ANSI A118.6.
2. Use one part white Portland cement to one part white sand passing a number 30 screen.
3. Color additive not permitted.

C. Commercial Portland Cement Grout: ANSI A118.6 color as specified.

D. Dry-Set Grout: ANSI A118.6 color as specified.

E. Latex-Portland Cement Grout: ANSI A118.6 color as specified.

1. Unsanded grout mixture for joints 3.2 mm (1/8 inch) and narrower.
2. Sanded grout mixture for joints 3.2 mm (1/8 inch) and wider.

F. Chemical-Resistant Grout:

1. Epoxy grout, ANSI A118.3.
2. Furan grout, ANSI A118.5.

**2.8 PATCHING AND LEVELING COMPOUND**

- A. Portland cement base, polymer-modified, self-leveling compound, manufactured specifically for resurfacing and leveling concrete floors. Products containing gypsum are not acceptable.

B. Shall have minimum following physical properties:

1. Compressive strength - 25 MPa (3500 psig) per ASTM C109/C109M.
2. Flexural strength - 7 MPa (1000 psig) per ASTM C348 (28 day value).
3. Tensile strength - 600 psi per ANSI 118.7.
4. Density - 1.9.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- C. Capable of being applied in layers up to 38 mm (1-1/2 inches) thick without fillers and up to 100 mm (four inches) thick with fillers, being brought to a feather edge, and being trowelled to a smooth finish.
- D. Primers, fillers, and reinforcement as required by manufacturer for application and substrate condition.
- E. Ready for use in 48 hours after application.

**2.9 MARBLE**

- A. Soundness Classification in accordance with MIA Design Manual III Groups.
- B. Thresholds:
  - 1. Group A, Minimum abrasive hardness (Ha) of 10.0 per ASTM C241.
  - 2. Honed finish on exposed faces.
  - 3. Thickness and contour as shown.
  - 4. Fabricate from one piece without holes, cracks, or open seams; full depth of wall or frame opening by full width of wall or frame opening; 19 mm (3/4-inch) minimum thickness and 6 mm (1/4-inch) minimum thickness at beveled edge.
  - 5. Set not more than 13 mm (1/2-inch) above adjoining finished floor surfaces, with transition edges beveled on a slope of no greater than 1:2. On existing floor slabs provide 13 mm (1/2-inch) above ceramic tile surface with bevel edge joint top flush with adjacent floor.
  - 6. One piece full width of door opening. Notch thresholds to match profile of door jambs.
- C. Window Stools:
  - 1. Group A or B.
  - 2. Polished finish on exposed faces.
  - 3. Size and thickness as shown.

**2.10 METAL DIVIDER STRIPS**

- A. Terrazzo type divider strips.
- B. Heavy top type strip with 5 mm (3/16 inch) wide top and 38 mm (1-1/2 inch) long leg.
- C. Embedded leg perforated and deformed for keying to mortar.
- D. Aluminum or brass as specified in Section 09 06 00, SCHEDULE FOR FINISHES.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**2.11 WATER**

Clean, potable and free from salts and other injurious elements to mortar and grout materials.

**2.12 CLEANING COMPOUNDS**

- A. Specifically designed for cleaning masonry and concrete and which will not prevent bond of subsequent tile setting materials including patching and leveling compounds and elastomeric waterproofing membrane and coat.
- B. Materials containing acid or caustic material not acceptable.

**2.13 FLOOR MORTAR BED REINFORCING**

ASTM A185 welded wire fabric without backing, MW3 x MW3 (2 x 2-W0.5 x W0.5).

**2.14 POLYETHYLENE SHEET**

- A. Polyethylene sheet conforming to ASTM D4397.
- B. Nominal thickness: 0.15 mm (six mils).
- C. Use sheet width to minimize joints.

**PART 3 - EXECUTION**

**3.1 ENVIRONMENTAL REQUIREMENTS**

- A. Maintain ambient temperature of work areas at not less than 16 degree C (60 degrees F), without interruption, for not less than 24 hours before installation and not less than three days after installation.
- B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation and ANSI Specifications for installation.
- C. Do not install tile when the temperature is above 38 degrees C (100 degrees F).
- D. Do not install materials when the temperature of the substrate is below 16 degrees C (60 degrees F).
- E. Do not allow temperature to fall below 10 degrees C (50 degrees F) after fourth day of completion of tile work.

**3.2 ALLOWABLE TOLERANCE**

- A. Variation in plane of sub-floor, including concrete fills leveling compounds and mortar beds:
  - 1. Not more than 1 in 500 (1/4 inch in 10 feet) from required elevation where Portland cement mortar setting bed is used.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. Not more than 1 in 1000 (1/8 inch in 10 feet) where dry-set Portland cement, and latex-Portland cement mortar setting beds and chemical-resistant bond coats are used.

**B. Variation in Plane of Wall Surfaces:**

1. Not more than 1 in 400 (1/4 inch in eight feet) from required plane where Portland cement mortar setting bed is used.
2. Not more than 1 in 800 (1/8 inch in eight feet) where dry-set or latex-Portland cement mortar or organic adhesive setting materials is used.

**3.3 SURFACE PREPARATION**

**A. Cleaning New Concrete or Masonry:**

1. Chip out loose material, clean off all oil, grease dirt, adhesives, curing compounds, and other deterrents to bonding by mechanical method, or by using products specifically designed for cleaning concrete and masonry.
2. Use self-contained power blast cleaning systems to remove curing compounds and steel trowel finish from concrete slabs where ceramic tile will be installed directly on concrete surface with thin-set materials.
3. Steam cleaning or the use of acids and solvents for cleaning will not be permitted.

**B. Patching and Leveling:**

1. Mix and apply patching and leveling compound in accordance with manufacturer's instructions.
2. Fill holes and cracks and align concrete floors that are out of required plane with patching and leveling compound.
  - a. Thickness of compound as required to bring finish tile system to elevation shown.
  - b. Float finish, except finish smooth for elastomeric waterproofing.
  - c. At substrate expansion, isolation, and other moving joints, allow joint of same width to continue through underlayment.
3. Apply patching and leveling compound to concrete and masonry wall surfaces that are out of required plane.
4. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

C. Mortar Bed for Slopes to Drains:

1. Slope compound to drain where drains are shown.
2. Install mortar bed in depressed slab sloped to drains not less than 1 in 200 (1/16 inch per foot).
3. Allow not less than 50 mm (2 inch) depression at edge of depressed slab.
4. Screed for slope to drain and float finish.
5. Cure mortar bed for not less than seven days. Do not use curing compounds or coatings.

D. Additional preparation of concrete floors for tile set with epoxy, or furan-resin shall be in accordance with the manufacturer's printed instructions.

E. Cleavage Membrane:

1. Install polythene sheet as cleavage membrane in depressed slab when waterproof membrane is not scheduled or indicated.
2. Turn up at edge of depressed floor slab to top of floor.

F. Walls:

1. In showers or other wet areas cover studs with polyethylene sheet.
2. Apply patching and leveling compound to concrete and masonry surfaces that are out of required plane.
3. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.
4. Apply metal lath to framing in accordance with ANSI A108.1:
  - a. Use fasteners specified in paragraph "Fasteners." Use washers when lath opening is larger than screw head.
  - b. Apply scratch and leveling coats to metal lath in accordance with ANSI A108.1.C.
  - c. Total thickness of scratch and leveling coats:
    - 1) Apply 9 mm to 16 mm (3/8 inch to 5/8 inch) thick over solid backing.
    - 2) 16 mm to 19 mm (5/8 to 3/4 inch) thick on metal lath over studs.
    - 3) Where wainscots are required to finish flush with wall surface above, adjust thickness required for flush finish.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- d. Apply scratch and leveling coats more than 19 mm (3/4 inch) thick in two coats.

**G. Existing Floors and Walls:**

1. Remove existing composition floor finishes and adhesive. Prepare surface by grinding, chipping, self-contained power blast cleaning or other suitable mechanical methods to completely expose uncontaminated concrete or masonry surfaces. Follow safety requirements of ANSI A10.20.
2. Remove existing concrete fill or topping to structural slab. Clean and level the substrate for new setting bed and waterproof membrane or cleavage membrane.
3. Where new tile bases are required to finish flush with plaster above or where they are extensions of similar bases in conjunction with existing floor tiles cut channel in floor slab and expose rough wall construction sufficiently to accommodate new tile base and setting material.

**3.4 CEMENTITIOUS BACKER UNITS**

- A. Remove polyethylene wrapping from cementitious backer units and separate to allow for air circulation. Allow moisture content of backer units to dry down to a maximum of 35 percent before applying joint treatment and tile.
- B. Install in accordance with ANSI A108.11 except as specified otherwise.
- C. Install units horizontally or vertically to minimize joints with end joints over framing members. Units with rounded edges; face rounded edge away from studs to form a V joint for joint treatment.
- D. Secure cementitious backer units to each framing member with screws spaced not more than 200 mm (eight inches) on center and not closer than 13 mm (1/2 inch) from the edge of the backer unit or as recommended by backer unit manufacturer. Install screws so that the screw heads are flush with the surface of the backer unit.
- E. Where backer unit joins shower pans or waterproofing, lap backer unit over turned up waterproof system. Install fasteners only through top one-inch of turned up waterproof systems.
- F. Do not install joint treatment for seven days after installation of cementitious backer unit.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**G. Joint Treatment:**

1. Fill horizontal and vertical joints and corners with latex-Portland cement mortar. Apply fiberglass tape over joints and corners and embed with same mortar.
2. Leave 6 mm (1/4 inch) space for sealant at lips of tubs, sinks, or other plumbing receptors.

**3.5 GLASS MAT WATER-RESISTANT GYPSUM BACKER BOARD**

- A. Install in accordance with manufacturer's instructions. TCA Systems W245-01.
- B. Treat joints with tape and latex-Portland cement mortar or adhesive.

**3.6 MARBLE**

- A. Secure thresholds and stools in position with minimum of two stainless steel dowels.
- B. Set in dry-set Portland cement mortar or latex-Portland cement mortar bond coat.
- C. Set threshold to finish 12mm (1/2 inch) above ceramic tile floor unless shown otherwise, with bevel edge joint top flush with adjacent floor similar to TCA detail TR611-02.

**3.7 METAL DIVIDER STRIPS**

- A. Install metal divider strips in floor joints between ceramic and quarry tile floors and between tile floors and adjacent flooring of other materials where the finish floors are flush unless shown otherwise.
- B. Set divider strip in mortar bed to line and level centered under doors or in openings.
- C. DELETED

**3.8 CERAMIC TILE - GENERAL**

- A. Comply with ANSI A108 series of tile installation standards in "Specifications for Installation of Ceramic Tile" applicable to methods of installation.
- B. Comply with TCA Installation Guidelines:
- C. Installing Mortar Beds for Floors:
  1. Install mortar bed to not damage cleavage or waterproof membrane; 32 mm (1-1/2 inch) minimum thickness.
  2. Install floor mortar bed reinforcing centered in mortar fill.
  3. Screed finish to level plane or slope to drains where shown, float finish.



**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

4. For thin set systems cure mortar bed not less than seven days. Do not use curing compounds or coatings.
5. For tile set with Portland cement paste over plastic mortar bed coordinate to set tile before mortar bed sets.

**D. Setting Beds or Bond Coats:**

1. Where recessed or depressed floor slabs are filled with Portland cement mortar bed, set ceramic mosaic floor tile in either Portland cement paste over plastic mortar bed or latex-Portland cement mortar over cured mortar bed except as specified otherwise, ANSI A108-1C, TCA System F121-02 or F111-02.
2. Use quarry tile in chemical-resistant bond coat, except in floor of walk-in refrigerator rooms use: TCA system R 612-02.
  - a. Portland cement paste over plastic mortar bed. ANSI A108.1A.
  - b. Dry-set Portland cement mortar over cured mortar bed. ANSI A108.1B.
3. Pools Holding Water: ANSI A108. 1C. Do not use Latex Portland cement mortar.
4. Set floor tile in elastomeric bond coat over elastomeric membrane ANSI 108. 13, TCA System F122 where scheduled, and where shown.
5. Set wall tile installed over concrete or masonry in dry-set Portland cement mortar, or latex-Portland cement mortar, ANSI 108.1B.and TCA System W211-02, W221-02 or W222-02.
6. Set wall tile installed over concrete backer board in latex-Portland cement mortar, ANSI A108.1B.
7. Set wall tile installed over Portland cement mortar bed on metal lath base in Portland cement paste over plastic mortar bed, or dry-set Portland cement mortar or latex-Portland cement mortar over a cured mortar bed, ANSI A108.1C, TCA System W231-02, W241-02.
8. Set tile over concrete in therapeutic pools in Portland cement paste or dry set Portland cement mortar, ANSI A108.1C, TCA System S151-02
9. Set tile installed over gypsum board and gypsum plaster in organic adhesive, ANSI A108.4, TCA System W242-02.
10. Set trim shapes in same material specified for setting adjoining tile.

**E. Workmanship:**

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. Lay out tile work so that no tile less than one-half full size is used. Make all cuts on the outer edge of the field. Align new tile work scheduled for existing spaces to the existing tile work unless specified otherwise.
2. Set tile firmly in place with finish surfaces in true planes. Align tile flush with adjacent tile unless shown otherwise.
3. Form intersections and returns accurately.
4. Cut and drill tile neatly without marring surface.
5. Cut edges of tile abutting penetrations, finish, or built-in items:
  - a. Fit tile closely around electrical outlets, piping, fixtures and fittings, so that plates, escutcheons, collars and flanges will overlap cut edge of tile.
  - b. Seal tile joints water tight as specified in Section 07 92 00, JOINT SEALANTS, around electrical outlets, piping fixtures and fittings before cover plates and escutcheons are set in place.
6. Completed work shall be free from hollow sounding areas and loose, cracked or defective tile.
7. Remove and reset tiles that are out of plane or misaligned.
8. Floors:
  - a. Extend floor tile beneath casework and equipment, except those units mounted in wall recesses.
  - b. Align finish surface of new tile work flush with other and existing adjoining floor finish where shown.
  - c. In areas where floor drains occur, slope to drains where shown.
  - d. Shove and vibrate tiles over 200 mm (8 inches) square to achieve full support of bond coat.
9. Walls:
  - a. Cover walls and partitions, including pilasters, furred areas, and freestanding columns from floor to ceiling, or from floor to nominal wainscot heights shown with tile.
  - b. Finish reveals of openings with tile, except where other finish materials are shown or specified.
  - c. At window openings, provide tile stools and reveals, except where other finish materials are shown or specified.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- d. Finish wall surfaces behind and at sides of casework and equipment, except those units mounted in wall recesses, with same tile as scheduled for room proper.
- 10. Joints:
  - a. Keep all joints in line, straight, level, perpendicular and of even width unless shown otherwise.
  - b. Make joints 2 mm (1/16 inch) wide for glazed wall tile and mosaic tile work.
  - c. Make joints in quarry tile work not less than 6 mm (1/4 inch) nor more than 9 mm (3/8 inch) wide. Finish joints flush with surface of tile.
  - d. Make joints in Paver tile, porcelain type; maximum 3 mm (1/8 inch) wide.
- 11. Back Buttering: For installations indicated below, obtain 100 percent mortar coverage by complying with applicable special requirements for back buttering of tile in referenced ANSI A108 series of tile installation standards:
  - a. Tile wall installations in wet areas, including showers, tub enclosures, laundries and swimming pools.
  - b. Tile installed with chemical-resistant mortars and grouts.
  - c. Tile wall installations composed of tiles 200 by 200 mm (8 by 8 inches or larger).
  - d. Exterior tile wall installations.

**3.9 CERAMIC TILE INSTALLED WITH PORTLAND CEMENT MORTAR**

- A. Mortar Mixes for Floor, Wall And Base Tile (including Showers, and Therapeutic Pools): ANSI A108.1, except specified otherwise.
- B. Installing Wall and Base Tile: ANSI A108.1, except specified otherwise.
- C. Installing Floor Tile: ANSI A108.1, except as specified otherwise. Slope mortar beds to floor drains a minimum of 1 in 100 (1/8 inch per foot).

**3.10 PORCELAIN TILE INSTALLED WITH LATEX PORTLAND CEMENT BONDING MORTAR**

Due to the denseness of porcelain tile use latex Portland cement bonding mortar that meets the requirements of ANSI A118.4. Bonding mortars shall be mixed in accordance with manufacturer's instructions. Improper liquid ratios and dwell time before placement of bonding mortar and tile shall affect bond.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**3.11 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH DRY-SET PORTLAND CEMENT AND LATEX-PORTLAND CEMENT MORTAR**

- A. Installation of Tile: ANSI A108.5, except as specified otherwise.
- B. Slope tile work to drains not less than 1 in 100 (1/8 inch per foot).

**3.12 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH ORGANIC ADHESIVE**

Installation of Tile: ANSI A108.4.

**3.13 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH CHEMICAL-RESISTANT BOND COAT**

- A. Epoxy Resin Type: Install tile in accordance with Installation of Tile with Epoxy Mortar; ANSI A108.6.
- B. Furan Resin Type: Proportion, mix and place in accordance with the manufacturer's printed instructions. Set tile in accordance with ANSI A108.8.

**3.14 CERAMIC AND PORCELAIN TILE INSTALLED WITH ELASTOMERIC BOND COAT**

- A. Surface Preparation: Prepare surfaces as specified in paragraph 3.3G
- B. Installation of Elastomeric Membrane: ANSI A108.13 and TCA F122-02.
  - 1. Prime surfaces, where required, in accordance with manufacturer's instructions.
  - 2. Install first coat of membrane material in accordance with manufacturer's instructions, in thickness of 0.75 to 1.3 mm (30 to 50 mils).
  - 3. Extend material over flashing rings of drains and turn up vertical surfaces not less than 100 mm (four inches) above finish floor surface.
  - 4. When material has set, recoat areas with a second coat of elastomeric membrane material for a total thickness of 1.3 to 1.9 mm (50 to 75 mils).
  - 5. After curing test for leaks with 25 mm (one inch) of water for 24 hours.
- C. Installation of Tile in Elastomeric Membrane:
  - 1. Spread no more material than can be covered with tile before material starts to set.
  - 2. Apply tile in second coat of elastomeric membrane material in accordance with the coating manufacturer's instructions in lieu at aggregate surfacing specified in ASTM C1127. Do not install top coat over tile.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**3.15 GROUTING**

**A. Grout Type and Location:**

1. Grout for glazed wall and base tile, paver tile and unglazed mosaic tile, except for therapeutic pool, Portland cement grout, latex-Portland cement grout, dry-set grout, or commercial Portland cement grout.
2. Grout for quarry tile floor and base:
  - a. Grout for floors of walk-in refrigerated rooms: Epoxy grout.
  - b. Therapeutic pool areas: Portland cement grout.
  - c. Grout for Kitchens:
    - 1) Chemical-resistant grout as specified and recommended by manufacturer of bond coat.
    - 2) Use only furan resin grout within 600 mm (2 feet) of ovens, steam kettles, water heaters, steam pipes.
    - 3) Epoxy grout designed for equivalent heat resistance to furan resin grout may be used for furan resin grout.
3. Grout for tile of therapeutic pools: Portland cement grout.

**B. Workmanship:**

1. Install and cure grout in accordance with the applicable standard.
2. Portland Cement grout: ANSI A108.10.
3. Epoxy Grout: ANSI A108.6.
4. Furan and Commercial Portland Cement Grout: ANSI A108.8 and in accordance with the manufacturer's printed instructions.
5. Dry-set grout: ANSI A108.5.

**3.16 MOVEMENT JOINTS**

- A. Prepare tile expansion, isolation, construction and contraction joints for installation of sealant. Refer to Section 07 92 00, JOINT SEALANTS.
- B. TCA details EJ 171-02.
- C. At expansion joints, rake out joint full depth of tile and setting bed and mortar bed. Do not cut waterproof or isolation membrane.
- D. Rake out grout at joints between tile, tub, service sink, at toe of base, and where shown not less than 6 mm (1/4 inch) deep.

**3.17 CLEANING**

- A. Thoroughly sponge and wash tile. Polish glazed surfaces with clean dry cloths.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- B. Methods and materials used shall not damage or impair appearance of tile surfaces.
- C. The use of acid or acid cleaners on glazed tile surfaces is prohibited.
- D. Clean tile grouted with epoxy, furan and commercial Portland cement grout and tile set in elastomeric bond coat as recommended by the manufacturer of the grout and bond coat.

**3.18 PROTECTION**

- A. Keep traffic off tile floor, until grout and setting material is firmly set and cured.
- B. Where traffic occurs over tile floor, cover tile floor with not less than 9 mm (3/8 inch) thick plywood, wood particle board, or hardboard securely taped in place. Do not remove protective cover until time for final inspection. Clean tile of any tape, adhesive and stains.

**3.19 TESTING FINISH FLOOR**

- A. Test floors in accordance with ASTM C627 to show compliance with codes 1 through 10.
- B. Test kitchen and storage rooms.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 09 51 00  
ACOUSTICAL CEILINGS**

**PART 1- GENERAL**

**1.1 DESCRIPTION**

- A. Metal ceiling suspension system for acoustical ceilings.
- B. Acoustical units.
- C. Adhesive application.

**1.2 RELATED WORK**

- A. Color, pattern, and location of each type of acoustical unit:  
Section 09 06 00, SCHEDULE FOR FINISHES.
- B. DELETED
- C. DELETED

**1.3 SUBMITTAL**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
  - 1. Acoustical units, each type, with label indicating conformance to specification requirements, including units specified to match existing.
  - 2. Colored markers for units providing access.
- C. Manufacturer's Literature and Data:
  - 1. Ceiling suspension system, each type, showing complete details of installation, including suspension system specified to match existing and upward access system details for concealed grid systems.
  - 2. Acoustical units, each type
  - 3. DELETED
- D. Manufacturer's Certificates: Acoustical units, each type, in accordance with specification requirements.

**1.4 DEFINITIONS**

- A. Standard definitions as defined in ASTM C634.
- B. Terminology as defined in ASTM E1264.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.5 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - A641/A641M-03.....Zinc-coated (Galvanized) Carbon Steel Wire
  - A653/A653M-07.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-coated (Galvannealed) by the Hot-Dip Process
  - C423-07.....Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
  - C634-02 (E2007).....Standard Terminology Relating to Environmental Acoustics
  - C635-04.....Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings
  - C636-06.....Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels
  - E84-07.....Surface Burning Characteristics of Building Materials
  - E119-07.....Fire Tests of Building Construction and Materials
  - E413-04.....Classification for Rating Sound Insulation.
  - E580-06.....Application of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Requiring Seismic Restraint
  - E1264- (R2005).....Classification for Acoustical Ceiling Products

**PART 2- PRODUCTS**

**2.1 METAL SUSPENSION SYSTEM**

- A. ASTM C635, heavy-duty system, except as otherwise specified.
  - 1. Ceiling suspension system members may be fabricated from either of the following unless specified otherwise.
    - a. Galvanized cold-rolled steel, bonderized.
    - b. Extruded aluminum.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- c. Fire resistant plastic (glass fiber) having a flame spread and smoke developed rating of not more than 25 when tested in accordance with ASTM E84.
- 2. Use same construction for cross runners as main runners. Use of lighter-duty sections for cross runners is not acceptable.
- 3. Use aluminum suspension in kitchens and aluminum or fire resistant plastic in toilets adjacent to shower areas, hydrotherapy, and swimming pools.
- B. Exposed grid suspension system for support of lay-in panels:
  - 1. Exposed grid width not less than 22 mm (7/8 inch) with not less than 8 mm (5/16 inch) panel bearing surface.
  - 2. Fabricate wall molding and other special molding from the same material with same exposed width and finish as the exposed grid members.
  - 3. On exposed metal surfaces apply baked-on enamel flat texture finish in color to match adjacent acoustical units unless specified otherwise in Section 09 06 00, SCHEDULE FOR FINISHES.
- C. Concealed grid suspension system for support of mineral base acoustical tile:
  - 1. Concealed grid upward access suspension system to provide an initial opening of 300 mm by 600 mm (12 by 24 inches) and for removal of adjacent runners and tile without the use of special tools, and without damage to suspension system and acoustical tile.
  - 2. Minimum flange width of 22 mm (7/8 inch) except for access hook and angle.
  - 3. Minimum flange width of 11 mm (7/16 inch) for access hook and angle.
- D. Suspension system for support of Metal Type V, VI, and VII tiles:  
Concealed grid type having runners designed for the snap-in attachment of metal tile (pans).

**2.2 PERIMETER SEAL**

- A. Vinyl, polyethylene or polyurethane open cell sponge material having density of 1.3 plus or minus 10 percent, compression set less than 10 percent with pressure sensitive adhesive coating on one side.
- B. Thickness as required to fill voids between back of wall molding and finish wall.
- C. Not less than 9 mm (3/8 inch) wide strip.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**2.3 WIRE**

- A. ASTM A641.
- B. For wire hangers: Minimum diameter 2.68 mm (0.1055 inch).
- C. For bracing wires: Minimum diameter 3.43 mm (0.1350 inch).

**2.4 ANCHORS AND INSERTS**

- A. Use anchors or inserts to support twice the loads imposed by hangers attached thereto.
- B. Hanger Inserts:
  - 1. Fabricate inserts from steel, zinc-coated (galvanized after fabrication).
  - 2. Nailing type option for wood forms:
    - a. Upper portion designed for anchorage in concrete and positioning lower portion below surface of concrete approximately 25 mm (one inch).
    - b. Lower portion provided with not less than 8 mm (5/16 inch) hole to permit attachment of hangers.
  - 3. Flush ceiling insert type:
    - a. Designed to provide a shell covered opening over a wire loop to permit attachment of hangers and keep concrete out of insert recess.
    - b. Insert opening inside shell approximately 16 mm (5/8 inch) wide by 9 mm (3/8 inch) high over top of wire.
    - c. Wire 5 mm (3/16 inch) diameter with length to provide positive hooked anchorage in concrete.
- C. Clips:
  - 1. Galvanized steel.
  - 2. Designed to clamp to steel beam or bar joists, or secure framing member together.
  - 3. Designed to rigidly secure framing members together.
  - 4. Designed to sustain twice the loads imposed by hangers or items supported.
- D. Tile Splines: ASTM C635.

**2.5 CARRYING CHANNELS FOR SECONDARY FRAMING**

- A. Fabricate from cold-rolled or hot-rolled steel, black asphaltic paint finish, free of rust.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- B. Weighing not less than the following, per 300 m (per thousand linear feet):

Size mm	Size Inches	Cold-rolled		Hot-rolled	
		Kg	Pound	Kg	Pound
38	1 1/2	215.4	475	508	1120
50	2	267.6	590	571.5	1260

**2.6 ADHESIVE**

- A. ASTM D1779, having flame spread index of 25 or less when tested in accordance with ASTM E84.
- B. Developing minimum strength of 7 kg/m<sup>2</sup> (one psi) of contact surface 48 hours after installation in temperature of 21 °C (70 °F).

**2.7 ACOUSTICAL UNITS (MATCH BUILDING STANDARD A.C.T., OR MATCH EXISTING ADJACENT A.C.T. IN AREA OF EXISTING A.C.T. TO REMAIN UNLESS OTHERWISE NOTED ON THE CONSTRUCTION DRAWINGS)**

A. General:

1. Ceiling Tile shall meet minimum 37% bio-based content in accordance with USDA Bio-Preferred Product requirements.
2. ASTM E1264, weighing 3.6 kg/m<sup>2</sup> (3/4 psf) minimum for mineral fiber panels or tile.
3. Class A Flame Spread: ASTM 84
4. Minimum NRC (Noise Reduction Coefficient): 0.55 unless specified otherwise: ASTM C423.
5. Minimum CAC (Ceiling Attenuation Class): 40-44 range unless specified otherwise: ASTM E413.
6. Manufacturers standard finish, minimum Light Reflectance (LR) coefficient of 0.75 on the exposed surfaces, except as specified otherwise in Section 09 06 00, SCHEDULE FOR FINISHES. Colored units TO BE integrally colored throughout.
7. Lay-in panels: Sizes as shown, with facility standard square edge or reveal edges to match existing.
8. Tile for concealed grid upward access system: Optional 300 by 300 or 300 by 600 mm (12 by 12 or 12 by 24 inch) size.
  - a. Cross score 300 by 600 mm (12 by 24 inch) tile to simulate 300 by 300 mm (12 by 12 inch) tile edges.

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- b. Provide tile with beveled or square edges and joints as noted above with appropriate facility standard suspension and access system.
- 9. Perforated metal facing (pan); tile or panels:
  - a. Tiles: Size of units optional, 300 by 300, 300 by 600, 300 by 900, and 300 by 1200 mm (12 by 12, 12 by 24, 12 by 36, and 12 by 48 inches). Cross score units larger than 300 by 300 mm (12 by 12 inches) to simulate 300 by 300 mm (12 by 12 inch) units. Use beveled edge units. Design joints for snap-in attachment to suspension system.
  - b. Panels: Sizes as shown with facility standard recessed reveal edges or flat panel with square edges to finish flush with exposed grid suspension system.
  - c. Sound absorbent element; either non-sifting mineral wool or glass fiber (free of formaldehyde) of density and thickness to provide specified noise reduction coefficient. Enclosure sound absorbent elements within plastic envelopes.
  - d. Support sound absorbent elements on wire spacer about 6 mm (1/4 inch) high. Fit both the sound absorbent element and the spacer into the unit.
- 10. Adhesive applied tile ~~DELETED~~:
  - B. Type III Units - Mineral base with water-based painted finish less than 10 g/l VOC, Form 2 - Water felted, minimum 16 mm (5/8 inch) thick. Mineral base to contain minimum 65 percent recycled content.
  - C. Type IV Units - Mineral base with membrane-faced overlay, Form 2 - Water felted, minimum 16 mm (5/8 inch) thick. Apply over the paint coat on the face of the unit a poly (vinyl) chloride overspray having a flame spread index of 25 or less when tested in accordance with ASTM E84.
  - D. Type V Units - Perforated steel facing (pan) with mineral or glass fiber base backing.
    - 1. Steel ASTM A653, not less than 0.38 mm (0.015 inch) thick, minimum G30 galvanizing.
    - 2. Bonderize both sides of sheet and apply two coats of baked-on enamel finish, free from gloss or sheen, on surfaces exposed to view and at least one coat on concealed surfaces.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- E. Type VI Units - Perforated stainless steel facing (pan) with mineral or glass fiber base backing.
- F. Type VII Units - Perforated aluminum facing (pan) with mineral or glass fiber base backing.
  - 1. Fabricated from aluminum sheets not less than 0.635 mm (0.025 inch) thick.
  - 2. Apply two coats of baked-on enamel finish, free from gloss or sheen, on face and flanges.
- G. Type XX-A Units - Perforated Ceramic Units for Wet Service.
  - 1. Conform to requirements of Part 2 - Article "ACOUSTICAL UNITS," subparagraphs Paragraph A, 1, 2, 3, 4, 5 and 6.
  - 2. Formulated of mineral wool material and fired in a kiln to produce a stable panel which is totally unaffected by moisture even when submerged in water.
  - 3. No damage when subjected to 10 cycles of steam at 135 °C (275 °F) and cooling to 10 °C (50 °F).
  - 4. Minimum of 16 mm (5/8 inch) thick.
  - 5. Not affected when immersed in five percent chlorine solution, except for paint finish.
- H. Type III-A Units - Mineral base with painted finish.
  - 1. Form 1, modular, cast or molded.
  - 2. Minimum NRC of 0.75.
  - 3. Minimum thickness of 19 mm (3/4 inch) and weight of 4.9 Kg/sq m (one pound per square foot).
- I. Type XX-B Units - Combination mineral base and glass fiber with fabric finish.
  - 1. Back half of panel: Perforated water felted mineral fiber.
  - 2. Face half of panel: Glass fiber with glass cloth face.
  - 3. Minimum NRC of 0.75.
  - 4. Minimum thickness of 28 mm (1 1/8 inches).

**2.9 ACCESS IDENTIFICATION**

**A. Markers:**

- 1. Use colored markers with pressure sensitive adhesive on one side.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. Make colored markers of paper or plastic, 6 to 9 mm (1/4 to 3/8 inch) in diameter.
- B. Use markers of the same diameter throughout building.
- C. Color Code: Use following color markers for service identification:  
Color.....Service  
Red.....Sprinkler System: Valves and Controls  
Green.....Domestic Water: Valves and Controls  
Yellow.....Chilled Water and Heating Water  
Orange.....Ductwork: Fire Dampers  
Blue.....Ductwork: Dampers and Controls  
Black.....Gas: Laboratory, Medical, Air and Vacuum

**PART 3 EXECUTION**

**3.1 CEILING TREATMENT**

- A. Treatment of ceilings shall include sides and soffits of ceiling beams, furred work 600 mm (24 inches) wide and over, and vertical surfaces at changes in ceiling heights unless otherwise shown. Install acoustic tiles after wet finishes have been installed and solvents have cured.
- B. Lay out acoustical units symmetrically about center lines of each room or space unless shown otherwise on reflected ceiling plan.
- C. Moldings:
  1. Install metal wall molding at perimeter of room, column, or edge at vertical surfaces.
  2. Install special shaped molding at changes in ceiling heights and at other breaks in ceiling construction to support acoustical units and to conceal their edges.
- D. Perimeter Seal:
  1. Install perimeter seal between vertical leg of wall molding and finish wall, partition, and other vertical surfaces.
  2. Install perimeter seal to finish flush with exposed faces of horizontal legs of wall molding.
- E. Existing ceiling:
  1. Where extension of existing ceilings occur, match existing.
  2. Where acoustical units are salvaged and reinstalled or joined, use salvaged units within a space. Do not mix new and salvaged units

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

within a space which results in contrast between old and new acoustic units.

3. Comply with specifications for new acoustical units for new units required to match appearance of existing units.

F. Fire-Rated System: NA DELETED

### **3.2 CEILING SUSPENSION SYSTEM INSTALLATION**

#### **A. General:**

1. Install metal suspension system for acoustical tile and lay-in panels in accordance with ASTM C636, except as specified otherwise.
2. Use direct or indirect hung suspension system or combination thereof as defined in ASTM C635.
3. Support a maximum area of 1.48 m<sup>2</sup> (16 sf) of ceiling per hanger.
4. Prevent deflection in excess of 1/360 of span of cross runner and main runner.
5. Provide extra hangers, minimum of one hanger at each corner of each item of mechanical, electrical and miscellaneous equipment supported by ceiling suspension system not having separate support or hangers.
6. Provide not less than 100 mm (4 inch) clearance from the exposed face of the acoustical units to the underside of ducts, pipe, conduit, secondary suspension channels, concrete beams or joists; and steel beam or bar joist unless furred system is shown,
7. Use main runners not less than 1200 mm (48 inches) in length.
8. Install hanger wires vertically. Angled wires are not acceptable except for seismic restraint bracing wires.

#### **B. Anchorage to Structure:**

##### **1. Concrete:**

- a. Install hanger inserts and wire loops required for support of hanger and bracing wire in concrete forms before concrete is placed. Install hanger wires with looped ends through steel deck if steel deck does not have attachment device.
- b. Use eye pins or threaded studs with screw-on eyes in existing or already placed concrete structures to support hanger and bracing wire. Install in sides of concrete beams or joists at mid height.

##### **2. Steel:**

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- a. When steel framing does not permit installation of hanger wires at spacing required, install carrying channels for attachment of hanger wires.
    - (1) Size and space carrying channels to insure that the maximum deflection specified will not be exceeded.
    - (2) Attach hangers to steel carrying channels, spaced four feet on center, unless area supported or deflection exceeds the amount specified.
  - b. Attach carrying channels to the bottom flange of steel beams spaced not 1200 mm (4 feet) on center before fire proofing is installed. Weld or use steel clips to attach to beam to develop full strength of carrying channel.
  - c. Attach hangers to bottom chord of bar joists or to carrying channels installed between the bar joists when hanger spacing prevents anchorage to joist. Rest carrying channels on top of the bottom chord of the bar joists, and securely wire tie or clip to joist.
- B. Direct Hung Suspension System:
1. As illustrated in ASTM C635.
  2. Support main runners by hanger wires attached directly to the structure overhead.
  3. Maximum spacing of hangers, 1200 mm (4 feet) on centers unless interference occurs by mechanical systems. Use indirect hung suspension system where not possible to maintain hanger spacing.
- C. Indirect Hung Suspension System:
1. As illustrated in ASTM C635.
  2. Space carrying channels for indirect hung suspension system not more than 1200 mm (4 feet) on center. Space hangers for carrying channels not more than 2400 mm (8 feet) on center or for carrying channels less than 1200 mm (4 feet) on center so as to insure that specified requirements are not exceeded.
  3. Support main runners by specially designed clips attached to carrying channels.
- D. Seismic Ceiling Bracing System (provide as and if required by the seismic zone in which the building is located):
1. Construct system in accordance with ASTM E580.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. Connect bracing wires to structure above as specified for anchorage to structure and to main runner or carrying channels of suspended ceiling at bottom.

**3.3 ACOUSTICAL UNIT INSTALLATION**

- A. Cut acoustic units for perimeter borders and penetrations to fit tight against penetration for joint not concealed by molding.
- B. Install lay-in acoustic panels in exposed grid with not less than 6 mm (1/4 inch) bearing at edges on supports.
  1. Install tile to lay level and in full contact with exposed grid.
  2. Replace cracked, broken, stained, dirty, or tile not cut for minimum bearing.
- C. Tile in concealed grid upward access suspension system:
  1. Install acoustical tile with joints close, straight and true to line, and with exposed surfaces level and flush at joints.
  2. Make corners and arises full, and without worn or broken places.
  3. Locate acoustical units providing access as specified under Article, ACCESS.
- D. Adhesive applied tile:
  1. Condition of surface shall be in accordance with ASTM D1779, Note 1, Cleanliness of Surface, and Note 4, Rigidity of Base Surface.
  2. Size or seal surface as recommended by manufacturer of adhesive and allow to dry before installing units.
- E. Markers:
  1. Install markers of color code specified to identify the various concealed piping, mechanical, and plumbing systems.
  2. Attach colored markers to exposed grid on opposite sides of the units providing access.
  3. Attach marker on exposed ceiling surface of upward access acoustical unit.

**3.5 CLEAN-UP AND COMPLETION**

- A. Replace damaged, discolored, dirty, cracked and broken acoustical units.
- B. Leave finished work free from defects.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 09 65 13  
RESILIENT BASE AND ACCESSORIES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies the installation of vinyl or rubber base and resilient stair treads with sheet rubber flooring on landings.

**1.2 RELATED WORK**

- A. Color and texture: Section 09 06 00, SCHEDULE FOR FINISHESS.
- B. Integral base with sheet flooring: Section 09 65 16, RESILIENT SHEET FLOORING.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
  - 1. Description of each product.
  - 2. Base and stair material manufacturer's recommendations for adhesives.
  - 3. Application and installation instructions.
- C. Samples:
  - 1. Base: 150 mm (6 inches) long, each type and color.
  - 2. Resilient Stair Treads: 150 mm (6 inches) long.
  - 3. Sheet Rubber Flooring: 300 mm (12 inches) square.
  - 4. Adhesive: Literature indicating each type.

**1.4 DELIVERY**

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.
- B. Materials from containers which have been distorted, damaged or opened prior to installation will be rejected.

**1.5 STORAGE**

- A. Store materials in weather tight and dry storage facility.
- B. Protect material from damage by handling and construction operations before, during, and after installation.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.6 APPLICABLE PUBLICATIONS**

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - F1344-10.....Rubber Floor Tile
  - F1859-10.....Rubber Sheet Floor Covering without Backing
  - F1860-10.....Rubber Sheet Floor Covering with Backing
  - F1861-08.....Resilient Wall Base
- C. Federal Specifications (Fed. Spec.):
  - RR-T-650E.....Treads, Metallic and Non-Metallic, Nonskid

**PART 2 - PRODUCTS**

**2.1 GENERAL**

Use only products by the same manufacturer and from the same production run.

**2.2 RESILIENT BASE**

- A. ASTM F1861, 3 mm (1/8 inch) thick, 100 mm (4 inches) high, Thermoplastics, Group 2-layered. Style B-cove.
- B. Where carpet occurs, use Style A-straight.
- C. Use only one type of base throughout.

**2.3 RESILIENT TREADS**

- A. Fed. Spec. RR-T-650, Composition A, Type 2, 5 mm (3/16 inch) thick on wear surface tapering to 3 mm (1/8 inch) thick at riser end.
- B. Nosing shape to conform to sub-tread nosing shape.

**2.4 SHEET RUBBER FLOORING**

- A. ASTM F1344, F1859 or F1860, 900 mm (36 inches) wide, 3 mm (1/8 inch) thick, smooth face, material by the same manufacturer as the rubber treads, color and pattern to match treads.
- B. Use for stair landings.
- C. Use rubber flooring made with a minimum of 90% consumer rubber where possible.

**2.5 PRIMER (FOR CONCRETE FLOORS)**

As recommended by the adhesive and tile manufacturer.

**2.6 LEVELING COMPOUND (FOR CONCRETE FLOORS)**

Provide products with latex or polyvinyl acetate resins in the mix.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**2.7 ADHESIVES**

- A. Use products recommended by the material manufacturer for the conditions of use.
- B. Use low-VOC adhesive during installation. Water based adhesive with low VOC is preferred over solvent based adhesive.

**PART 3 - EXECUTION**

**3.1 PROJECT CONDITIONS**

- A. Maintain temperature of materials above 21° C (70 °F), for 48 hours before installation.
- B. Maintain temperature of rooms where work occurs, between 21° C and 27° C (70°F and 80°F) for at least 48 hours, before, during, and after installation.
- C. Do not install materials until building is permanently enclosed and wet construction is complete, dry, and cured.

**3.2 INSTALLATION REQUIREMENTS**

- A. The respective manufacturer's instructions for application and installation will be considered for use when approved by the Resident Engineer.
- B. Submit proposed installation deviation from this specification to the Resident Engineer indicating the differences in the method of installation.
- C. The Resident Engineer reserves the right to have test portions of material installation removed to check for non-uniform adhesion and spotty adhesive coverage.

**3.3 PREPARATION**

- A. Examine surfaces on which material is to be installed.
- B. Fill cracks, pits, and dents with leveling compound.
- C. Level to 3 mm (1/8 inch) maximum variations.
- D. Do not use adhesive for leveling or filling.
- E. Grind, sand, or cut away protrusions; grind high spots.
- F. Clean substrate area of oil, grease, dust, paint, and deleterious substances.
- G. Substrate area dry and cured. Perform manufacturer's recommended bond and moisture test.
- H. Preparation of existing installation:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. Remove existing base and stair treads including adhesive.
2. Do not use solvents to remove adhesives.
3. Prepare substrate as specified.

**3.4 BASE INSTALLATION**

**A. Location:**

1. Unless otherwise specified or shown, where base is scheduled, install base over toe space of base of casework and over other exposed cabinet surfaces including cabinet sides exposed under counter tops and over exposed cabinet end/side panels, lockers, laboratory, pharmacy furniture island cabinets and where other equipment occurs.
2. Extend base scheduled for room into adjacent closet, alcoves, and around columns.

**B. Application:**

1. Apply adhesive uniformly with no bare spots.
2. Set base with joints aligned and butted to touch for entire height.
3. Before starting installation, layout base material to provide the minimum number of joints with no strip less than 600 mm (24 inches) length.
  - a. Short pieces to save material will not be permitted.
  - b. Locate joints as remote from corners as the material lengths or the wall configuration will permit.

**C. Form corners and end stops as follows:**

1. Score back of outside corner.
2. Score face of inside corner and notch cove.

**D. Roll base for complete adhesion.**

**3.5 STAIR TREAD INSTALLATION DELETED**

**3.6 SHEET RUBBER INSTALLATION DELETED**

**3.7 CLEANING AND PROTECTION**

- A. Clean all exposed surfaces of base and adjoining areas of adhesive spatter before it sets.
- B. Keep traffic off resilient material for at least 72 hours after installation.
- C. Clean and polish materials in the following order:

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. After two weeks, scrub resilient base, sheet rubber and treads materials with a minimum amount of water and a mild detergent. Leave surfaces clean and free of detergent residue. Polish resilient base to a gloss finish.
2. Do not polish tread and sheet rubber materials.
- D. When construction traffic is anticipated, cover tread materials with reinforced kraft paper and plywood or hardboard properly secured and maintained until removal is directed by the Resident Engineer.
- E. Where protective materials are removed and immediately prior to acceptance, replace damaged materials and re-clean resilient materials. Damaged materials are defined as having cuts, gouges, scrapes or tears and not fully adhered.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 09 65 16  
RESILIENT SHEET FLOORING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This Section specifies the installation of sheet flooring.
- B. Grades of resilient sheet vinyl floor covering without backing having vinyl plastic wearlayer with backing.
- C. Installation of sheet flooring including following:
  - 1. Heat welded seams.
  - 2. DELETED

**1.2 RELATED WORK**

- A. Concrete floors: Section 03 30 00, CAST-IN-PLACE CONCRETE.
- B. Color, pattern and texture: Section 09 06 00, SCHEDULE FOR FINISHES.
- C. Resilient base required over metal base of casework: Section 12 31 00, MANUFACTURED METAL CASEWORK.
- D. Resilient base over base of lockers, equipment and casework: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.
- E. Unbacked vinyl (homogenous) sheet flooring with welded seams: Section 09 65 16, RESILIENT SHEET FLOORING.

**1.3 QUALITY CONTROL-QUALIFICATIONS:**

- A. The Contracting Officer shall approve products or service of proposed manufacturer, suppliers, and installers, and the Contractor shall submit certification that:
  - 1. Heat welded seaming is manufacturer's prescribed method of installation.
  - 2. Installer is approved by manufacturer of materials and has technical qualifications, experience, trained personnel, and facilities to install specified items.
  - 3. Manufacturer's product submitted has been in satisfactory operation, on three installations similar and equivalent in size to this project for three years. Submit list of installations.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- B. The sheet vinyl floor coverings shall meet fire performance characteristics as determined by testing products, per ASTM test method, indicated below by Underwriters Laboratories, Inc. (UL) or another recognized testing and inspecting agency acceptable to authorities having jurisdiction.
  - 1. Critical Radiant Flux: 0.45 watts per sq. cm or more, Class I, per ASTM E648.
  - 2. Smoke Density: Less than 450 per ASTM E662.
- C. The floor covering manufacturer shall certify that products supplied for installation comply with local regulations controlling use of volatile organic compounds (VOC's).

**1.4 SUBMITTALS**

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, submit following:
- B. Manufacturer's Literature and Data:
  - 1. Description of resilient material and accessories to be provided.
  - 2. Resilient material manufacturer's recommendations for adhesives, weld rods, sealants, and underlayment.
  - 3. Application and installation instructions.
- C. Samples:
  - 1. Sheet material, 38 mm by 300 mm (1-1/2 inch by 12 inch), of each color and pattern with a welded seam using proposed welding rod // 300 mm (12 inches) square for each type, pattern and color//.
  - 2. Cap strip and fillet strip, 300 mm (12 inches) for integral base.
  - 3. Shop Drawings and Certificates: Layout of joints showing patterns where joints are expressed, and type and location of obscure type joints. Indicate orientation of directional patterns.
  - 4. Certificates: Quality Control Certificate Submittals and lists specified in paragraph, QUALIFICATIONS.
  - 5. Edge strips: 150 mm (6 inches) long each type.
  - 6. Adhesive, underlayment and primer: Pint container, each type.

**1.5 PROJECT CONDITIONS**

- A. Maintain temperature of floor materials and room, where work occurs, above 18 ° C (65 °F) and below 38 °C (100 °F) for 48 hours before, during



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

and for 48 hours after installation. After above period, room temperature shall not fall below 13 °C (55 °F).

- B. Construction in or near areas to receive flooring work shall be complete, dry and cured. Do not install resilient flooring over slabs until they have been cured and are sufficiently dry to achieve a bond with adhesive. Follow flooring manufacturer's recommendations for bond and moisture testing.
- C. Building shall be permanently enclosed. Schedule construction so that floor receives no construction traffic when completed.

**1.6 DELIVERY, STORAGE AND HANDLING**

- A. Deliver materials to site in original sealed packages or containers; labeled for identification with manufacturer's name and brand.
- B. Deliver sheet flooring full width roll, completely enclosed in factory wrap, clearly marked with the manufacturer's number, type and color, production run number and manufacture date.
- C. Store materials in weathertight and dry storage facility. Protect from damage due to handling, weather, and construction operations before, during and after installation. Store sheet flooring on end with ambient temperatures maintained as recommended by manufacturer.
- D. Store sheet flooring on end.
- E. Move sheet vinyl floor coverings and installation accessories into spaces where they will be installed at least 48 hours in advance of installation.

**1.7 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society For Testing Materials (ASTM):
  - E648-09.....Critical Radiant Flux of Floor-Covering Systems  
Using a Radiant Energy Source.
  - E662-09.....Specific Optical Density of Smoke Generated by  
Solid Materials.
  - F710-08.....Practice for Preparing Concrete Floors and Other  
Monolithic Floors to Receive Resilient Flooring.
  - F1303-04.....Sheet Vinyl Floor Covering with Backing.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

F1869-04.....Moisture Vapor Emission Rate of Concrete  
Subfloor using Anhydrous Calcium Chloride  
F1913-04.....Sheet Vinyl Flooring without Backing  
F2170-09.....Determining Relative Humidity in Concrete Floor  
Slabs using In-situ Probes

**C. Resilient Floor Covering Institute (RFCI):**

Recommended Work Practices for Removal of Resilient Floor Coverings.

**1.8 SCHEDULING**

Interior finish work such as plastering, drywall finishing, concrete, terrazzo, ceiling work, and painting work shall be complete and dry before installation. Mechanical, electrical, and other work above ceiling line shall be completed. Heating, ventilating, and air conditioning systems shall be installed and operating in order to maintain temperature and humidity requirements.

**1.9 WARRANTY:**

Submit written warranty, in accordance with FAR clause 52.246-21, Warranty of Construction requirements except that warranty period shall be extended to include two (2) years.

**PART 2 - PRODUCTS**

**2.1 SHEET VINYL FLOOR COVERINGS**

- A. Sheet Vinyl Floor Coverings: Smooth face, minimum thickness nominal 2 mm (0.08 inch). Sheet flooring shall conform to ASTM F1913 and material requirements specified in ASTM F1303, Type II, Grade 1, backing classification not applicable. Foam backed sheet flooring is not acceptable.
- B. Size: Provide maximum size sheet vinyl material produced by manufacturer to provide minimum number of joints. Minimum size width acceptable - 1200 mm (48 inches).
- C. Each color and pattern of sheet flooring shall be of same production run.

**2.2 WELDING ROD:**

Product of floor covering manufacturer in color shall match field color of sheet vinyl covering.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**2.3 APPLICATION MATERIALS AND ACCESSORIES**

- A. Floor and Base Adhesive: Type recommended by sheet flooring material manufacturer for conditions of use.
- B. Mastic Underlayment (for concrete floors): Provide products with latex or polyvinyl acetate resins in mix. Condition to be corrected shall determine type of underlayment selected for use.
- C. Base Accessories: DELETED

**2.4 SHEET FLOORING**

- A. ASTM F1303, Type II, Grade 1, except for backing requirements. Foam backed sheet flooring is not acceptable.
- B. Minimum nominal thickness 2 mm (0.08 inch); 1800 mm (6 ft) minimum width.
- C. Critical Radiant Flux: 0.45 watts per sq.cm or more, Class I, per ASTM E648.
- D. Smoke density: less than 450 per ASTM E662.
- E. Color and pattern of sheet flooring of the same production run.

**2.5 ADHESIVES**

Water resistant type recommended by the sheet flooring manufacturer for the conditions of use. VOC not to exceed 50g/L

**2.6 BASE CAP STRIP AND COVE STRIP DELETED**

**2.7 LEVELING COMPOUND (FOR CONCRETE FLOORS)**

Provide cementitious products with latex or polyvinyl acetate resins in the mix.

**2.8 PRIMER (FOR CONCRETE SUBFLOORS)**

As recommended by the adhesive or sheet flooring manufacturer.

**2.9 EDGE STRIPS**

- A. Extruded aluminum, mill finish, mechanically cleaned.
- B. 28 mm (1-1/8 inch) wide, 6 mm (1/4 inch) thick, bevel one edge to 3 mm (1/8 inch) thick.
- C. Drill and counter sink edge strips for flat head screws. Space holes near ends and approximately 225 mm (9 inches) on center in between.

**2.10 SEALANT**

- A. As specified in Section 07 92 00, JOINT SEALANTS.
- B. Compatible with sheet flooring.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**PART 3 - EXECUTION**

**3.1 PROJECT CONDITIONS**

- A. Maintain temperature of sheet flooring above 36 °C (65 °F), for 48 hours before installation.
- B. Maintain temperature of rooms where sheet flooring work occurs above 36 °C (65 °F), for 48 hours, before installation and during installation.
- C. After installation, maintain temperature at or above 36 °C (65 °F.)
- D. Building is permanently enclosed.
- E. Wet construction in or near areas to receive sheet flooring is complete, dry and cured.

**3.2 SUBFLOOR PREPARATION**

- A. Concrete Subfloors: Verify that concrete slabs comply with ASTM F710.
  - 1. Installer shall examine surfaces on which resilient sheet flooring is to be installed, and shall advise Contractor, in writing, of areas which are unacceptable for installation of flooring material. Installer shall advise Contractor which methods are to be used to correct conditions that will impair proper installation. Installation shall not proceed until unsatisfactory conditions have been corrected.
  - 2. Slab substrates dry, free of curing compounds, sealers, hardeners, and other materials which would interfere with bonding of adhesive. Determine adhesion and dryness characteristics by performing bond and moisture tests recommended by Resilient Floor Covering Institute recommendations in manual RFCI-MRP.
- B. Broom or vacuum clean substrates to be covered by sheet vinyl floor coverings immediately before installation. Following cleaning, examine substrates to determine if there is visually any evidence of moisture, alkaline salts, carbonation, or dust.
- C. Primer: If recommended by flooring manufacturer, prior to application of adhesive, apply concrete slab primer in accordance with manufacturer's directions.
- D. Correct conditions which will impair proper installation, including trowel marks, pits, dents, protrusions, cracks or joints.
- E. Fill cracks, joints, depressions, and other irregularities in concrete with leveling compound.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. Do not use adhesive for filling or leveling purposes.
  2. Do not use leveling compound to correct imperfections which can be corrected by spot grinding.
  3. Trowel to smooth surface free of trowel marks, pits, dents, protrusions, cracks or joint lines.
- F. Clean floor of oil, paint, dust and deleterious substances. Leave floor dry and cured free of residue from existing curing or cleaning agents.
- G. Moisture Testing: Perform moisture and pH test as recommended by the flooring and adhesive manufacturers. Perform test locations starting on the deepest part of the concrete structure. Proceed with installation only after concrete substrates meet or exceed the manufacturer's requirements. In the absence of specific guidance from the flooring or adhesive manufacturer the following requirements are to be met:
1. Perform moisture vapor emission tests in accordance with ASTM F1869. Proceed with installation only after substrates have a maximum moisture-vapor-emission rate of 1.36 kg of water/92.9 sq. m (3lb of water/1000 sq. ft.) in 24 hours.
  2. Perform concrete internal relative humidity testing using situ probes in accordance with ASTM F2170. Proceed with installation only after concrete reaches maximum 75 percent relative humidity level measurement.
- H. Preparation shall include the removal of existing resilient floor and existing adhesive. Do not use solvents to remove adhesives. Coordinate with Asbestos Abatement Section if asbestos abatement procedures will be involved.
- I. Remove existing resilient flooring and adhesive completely in accordance with Resilient Floor Covering Institute recommendations in manual RFCI-WP. Solvents shall not be used.

**3.3 INSTALLATION OF FLOORING**

- A. Install work in strict compliance with manufacturer's instructions and approved layout drawings.
- B. Maintain uniformity of sheet vinyl floor covering direction and avoid cross seams.
- C. Arrange for a minimum number of seams and place them in inconspicuous and low traffic areas, but in no case less than 150 mm (6 inches) away from parallel joints in flooring substrates.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- D. Match edges of resilient floor coverings for color shading and pattern at seams.
- E. Where resilient sheet flooring abuts other flooring material floors shall finish level.
- F. Extend sheet vinyl floor coverings into toe spaces, door reveals, closets, and similar openings.
- G. Inform the Resident Engineer of conflicts between this section and the manufacturer's instructions or recommendations for auxiliary materials, or installation methods, before proceeding.
- H. Install sheet in full coverage adhesives.
  - 1. Air pockets or loose edges will not be accepted.
  - 2. Trim sheet materials to touch in the length of intersection at pipes and vertical projections; seal joints at pipe with waterproof cement or sealant.
- I. Keep joints to a minimum; avoid small filler pieces or strips.
- J. Follow manufacturer's recommendations for seams at butt joints. Do not leave any open joints that would be readily visible from a standing position.
- K. Follow manufacturer's recommendations regarding pattern match, if applicable.
- L. Installation of Edge Strips:
  - 1. Locate edge strips under center lines of doors unless otherwise indicated.
  - 2. Set aluminum strips in adhesive, anchor with lead anchors and stainless steel Phillips screws.
- M. Integral Cove Base Installation: DELETED

**3.4 INSTALLATION OF INTEGRAL COVED BASE DELETED**

**3.5 WELDING**

- A. Heat weld all joints of flooring and base using equipment and procedures recommended by flooring manufacturer.
- B. Welding shall consist of routing joint, inserting a welding rod into routed space, and terminally fusing into a homogeneous joint.
- C. Upon completion of welding, surface across joint shall finish flush, free from voids, and recessed or raised areas.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- D. Fusion of Material: Joint shall be fused a minimum of 65 percent through thickness of material, and after welding shall meet specified characteristics for flooring.

**3.6 CLEANING**

- A. Clean small adhesive marks during application of sheet flooring and base before adhesive sets, excessive adhesive smearing will not be accepted.
- B. Remove visible adhesive and other surface blemishes using methods and cleaner recommended by floor covering manufacturers.
- C. Clean and polish materials per flooring manufacturer's written recommendations.
- D. Vacuum floor thoroughly.
- E. Do not wash floor until after period recommended by floor covering manufacturer and then prepare in accordance with manufacturer's recommendations.
- F. Upon completion, Resident Engineer shall inspect floor and base to ascertain that work was done in accordance with manufacturer's printed instructions.
- G. Perform initial maintenance according to flooring manufacturer's written recommendations.

**3.7 PROTECTION:**

- A. Protect installed flooring as recommended by flooring manufacturer against damage from rolling loads, other trades, or placement of fixtures and furnishings.
- B. Keep traffic off sheet flooring for 24 hours after installation.
- C. Where construction traffic is anticipated, cover sheet flooring with reinforced kraft paper properly secured and maintained until removal is authorized by the Resident Engineer.
- D. Where protective materials are removed and immediately prior to acceptance, repair any damage, re-clean sheet flooring, lightly re-apply polish and buff floor.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 09 65 19  
RESILIENT TILE FLOORING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies the installation of solid vinyl tile flooring, vinyl composition tile flooring, rubber tile flooring, and accessories.

**1.2 RELATED WORK**

- A. Color and pattern and location in room finish schedule: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Resilient Base: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
  - 1. Description of each product.
  - 2. Resilient material manufacturers recommendations for adhesives, underlayment, primers and polish.
  - 3. Application and installation instructions.
- C. Samples:
  - 1. Tile: 300 mm by 300 mm (12 inches by 12 inches) for each type, pattern and color.
  - 2. Edge Strips: 150 mm (6 inches) long, each type.
  - 3. Feature Strips: 150 mm (6 inches) long.
- D. Shop Drawings:
  - 1. Layout of patterns shown on the drawings and in Section 09 06 00, SCHEDULE FOR FINISHES.
  - 2. Edge strip locations showing types and detail cross sections.
- E. Test Reports:
  - 1. Abrasion resistance: Depth of wear for each tile type and color and volume loss of tile, certified by independent laboratory.
  - 2. Tested per ASTM F510.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.4 DELIVERY**

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.
- B. Materials from containers which have been distorted, damaged or opened prior to installation will be rejected.

**1.5 STORAGE**

- A. Store materials in weathertight and dry storage facility.
- B. Protect from damage from handling, water, and temperature.

**1.6 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - D4078-02 (2008).....Water Emulsion Floor Finish
  - E648-10.....Critical Radiant Flux of Floor Covering Systems  
Using a Radiant Energy Source
  - E662-09.....Specific Optical Density of Smoke Generated by  
Solid Materials
  - E1155-96 (R2008).....Determining Floor Flatness and Floor Levelness  
Numbers
  - F510-93 (R 2008).....Resistance to Abrasion of Resilient Floor  
Coverings Using an Abrader with a Grit Feed  
Method
  - F710-08.....Preparing Concrete Floors to Receive Resilient  
Flooring
  - F1066-04 (R2010).....Vinyl Composition Floor Tile
  - F1344-10.....Rubber Floor Tile
  - F1700-04 (R2010).....Solid Vinyl Floor Tile
- C. Resilient Floor Covering Institute (RFCI):
  - IP #2.....Installation Practice for Vinyl Composition Tile  
(VCT)
- D. Federal Specifications (Fed. Spec.):

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

SS-T-312.....Tile Floor: Asphalt, Rubber, Vinyl and Vinyl  
Composition

**PART 2 - PRODUCTS**

**2.1 GENERAL**

- A. Furnish product type, materials of the same production run and meeting following criteria.
- B. Use adhesives, underlayment, primers and polish recommended by the floor resilient material manufacturer.
- C. Critical Radiant Flux: 0.45 watts per sq. cm or more, Class I, per ASTM E 648.
- D. Smoke density: Less than 450 per ASTM E662.

**2.2 VINYL COMPOSITION TILE**

- A. ASTM F1066, Composition 1, Class I (solid color) or Class 2 (through pattern), 300 mm (12 inches) square, 3 mm (1/8 inch) thick.
- B. Color and pattern uniformly distributed throughout thickness.

**2.3 SOLID VINYL-TILE**

- A. ASTM F1700, 300 mm (12 by 12 inches) square, 3 mm (1/8 inch) thick, homogenous throughout.
- B. Color and Pattern uniformly distributed throughout thickness.
- C. Where solid vinyl tiles are specified, seek products with recycled content.

**2.4 RUBBER TILE**

- A. ASTM F1344, Class 1, homogenous rubber tile, B, through mottled, 300 mm (12 inches) square, 3 mm (1/8 inch) thick.
- B. Color and pattern uniformly distributed throughout tile.
- C. Molded pattern wearing surface base thickness 3 mm (1/8 inch) thick.
- D. Where rubber tile is used provide tiles with a minimum of 90% post consumer rubber.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**2.5 ADHESIVES**

- A. Comply with applicable regulations regarding toxic and hazardous materials Green Seal (GS-36) for commercial adhesive.
- B. Use low-VOC adhesive during installation. Water based is preferred over solvent based adhesives.

**2.6 PRIMER (FOR CONCRETE SUBFLOORS)**

As recommended by the adhesive and tile manufacturer.

**2.7 LEVELING COMPOUND (FOR CONCRETE FLOORS)**

- A. Provide cementitious products with latex or polyvinyl acetate resins in the mix.
- B. Determine the type of underlayment selected for use by the condition to be corrected.

**2.8 POLISH AND CLEANERS**

- A. Cleaners RFCI CL-1.
- B. Polish: ASTM D4078.

**2.9 EDGE STRIPS**

- A. 28 mm (1-1/8 inch) wide unless shown otherwise.
- B. Bevel from maximum thickness to minimum thickness for flush joint unless shown otherwise.
- C. Extruded aluminum, mill finish, mechanically cleaned:
  - 1. Drill and counter sink edge strip for flat head screws.
  - 2. Space holes near ends and approximately 225 mm (9 inches) on center between.
- D. Resilient Edge Strip or Reducer Strip: Fed. Specs. SS-T-312, Solid vinyl.

**2.10 SCREWS**

Stainless steel flat head screw.

**2.11 FEATURE STRIPS**

- A. Use same material as floor tile.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

B. Sizes and shapes as shown.

**PART 3 - EXECUTION**

**3.1 PROJECT CONDITIONS**

- A. Maintain temperature of materials a minimum of 22 °C (70 °F,) for 48 hours before installation.
- B. Maintain temperature of rooms where work occurs between 21 °C and 27 °C (70 °F and 80 °F), for at least 48 hours, before, during and after installation.
- C. Do not install flooring until building is permanently enclosed and wet construction in or near areas to receive tile materials is complete, dry and cured.

**3.2 SUBFLOOR PREPARATION**

- A. Verify that concrete slabs comply with ASTM F710. At existing slabs, determine levelness by F-number method in accordance with ASTM E1155. Overall value shall not exceed as follows:  
FF30/FL20
- B. Correct conditions which will impair proper installation.
- C. Fill cracks, joints and other irregularities in concrete with leveling compound:
  - 1. Do not use adhesive for filling or leveling purposes.
  - 2. Do not use leveling compound to correct imperfections which can be corrected by spot grinding.
  - 3. Trowel to smooth surface free of trowel marks, pits, dents, protrusions, cracks or joints.
- D. Clean floor of oil, paint, dust, and deleterious substances: Leave floor dry and cured free of residue from existing curing or cleaning agents.
- E. Concrete Subfloor Testing:  
Determine Adhesion and dryness of the floor by bond and moisture tests as recommended by RFCI manual MRP.
- F. Perform additional subfloor preparation to obtain satisfactory adherence of flooring if subfloor test patches allows easy removal of tile.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- G. Prime the concrete subfloor if the primer will seal slab conditions that would inhibit bonding, or if priming is recommended by the tile or adhesive manufacturers.
- H. Preparation of existing installation shall include the removal of existing resilient floor and existing adhesive. Do not use solvents to remove adhesives.

**3.3 INSTALLATION**

- A. Install in accordance with manufacturer's instructions for application and installation unless specified otherwise.
- B. Mix tile from at least two containers. An apparent line either of shades or pattern variance will not be accepted.
- C. Tile Layout:
  - 1. If layout is not shown on drawings, lay tile symmetrically about center of room or space with joints aligned.
  - 2. No tile shall be less than 150 mm (6 inches) and of equal width at walls.
  - 3. Place tile pattern in the same direction; do not alternate tiles.
- D. Trim tiles to touch for the length of intersections at pipes and vertical projections, seal joints at pipes with waterproof cement.
- E. Application:
  - 1. Apply adhesive uniformly with no bare spots.
    - a. Conform to RFC1-TM-6 for joint tightness and for corner intersection unless layout pattern shows random corner intersection.
    - b. More than 5 percent of the joints not touching will not be accepted.
  - 2. Roll tile floor with a minimum 45 kg (100 pound) roller. No exceptions.
  - 3. The Resident Engineer may have test tiles removed to check for non-uniform adhesion, spotty adhesive coverage, and ease of removal. Install new tile for broken removed tile.
- F. Installation of Edge Strips:
  - 1. Locate edge strips under center line of doors unless otherwise shown.
  - 2. Set resilient edge strips in adhesive. Anchor metal edge strips with anchors and screws specified.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3. Where tile edge is exposed, butt edge strip to touch along tile edge.
4. Where thin set ceramic tile abuts resilient tile, set edge strip against floor file and against the ceramic tile edge.

**3.4 CLEANING AND PROTECTION**

- A. Clean adhesive marks on exposed surfaces during the application of resilient materials before the adhesive sets. Exposed adhesive is not acceptable.
- B. Keep traffic off resilient material for a minimum 72 hours after installation.
- C. Clean and polish materials in the following order:
  1. For the first two weeks sweep and damp mopped only.
  2. After two weeks, scrub resilient materials with a minimum amount of water and a mild detergent. Leave surface clean and free of detergent residue.
  3. Apply polish to the floors in accordance with the polish manufacturer's instructions.
- D. When construction traffic occurs over tile, cover resilient materials with reinforced kraft paper properly secured and maintained until removal is directed by Resident Engineer. At entrances and where wheeled vehicles or carts are used, cover tile with plywood, hardboard, or particle board over paper, secured and maintained until removal is directed by Resident Engineer.
- E. When protective materials are removed and immediately prior to acceptance, replace any damage tile, re-clean resilient materials, lightly re-apply polish and buff floors.

**3.6 LOCATION**

- A. Unless otherwise specified or shown, install tile flooring, on floor under areas where casework, laboratory and pharmacy furniture and other equipment occurs, except where mounted in wall recesses.
- B. Extend tile flooring for room into adjacent closets and alcoves.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 09 91 00  
PAINTING**

**PART 1-GENERAL**

**1.1 DESCRIPTION**

- A. Section specifies field painting.
- B. Section specifies prime coats which may be applied in shop under other sections.
- C. Painting includes shellacs, stains, varnishes, coatings specified, and striping or markers and identity markings.

**1.2 RELATED WORK**

- A. Shop prime painting of steel and ferrous metals: Division 05 - METALS, Division 08 - OPENINGS, Division 10 - SPECIALTIES, Division 11 - EQUIPMENT, Division 12 - FURNISHINGS, Division 13 - SPECIAL CONSTRUCTION, Division 14 - CONVEYING EQUIPMENT, Division 21 - FIRE SUPPRESSION, Division 22 - PLUMBING, Division 23 - HEATING, VENTILATION AND AIR-CONDITIONING, Division 26 - ELECTRICAL, Division 27 - COMMUNICATIONS, and Division 28 - ELECTRONIC SAFETY AND SECURITY sections.
- B. Contractor option: Prefinished flush doors with transparent finishes: Section 08 14 00, WOOD DOORS.
- C. Type of Finish, Color, and Gloss Level of Finish Coat: Section 09 06 00, SCHEDULE FOR FINISHES.
- D. Glazed wall surfacing or tile like coatings: Section 09 96 59, HIGH-BUILD GLAZED COATINGS.
- E. Multi-color Textured Wall Finish: Section 09 94 19, MULTICOLOR INTERIOR FINISHING.
- F. Asphalt and concrete pavement marking: Section 32 17 23, PAVEMENT MARKINGS.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:  
Before work is started, or sample panels are prepared, submit manufacturer's literature, the current Master Painters Institute (MPI) "Approved Product List" indicating brand label, product name and product code as of the date of contract award, will be used to determine

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

compliance with the submittal requirements of this specification. The Contractor may choose to use subsequent MPI "Approved Product List", however, only one list may be used for the entire contract and each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer. No variation from the MPI "Approved Product List" where applicable is acceptable.

**C. Sample Panels:**

1. After painters' materials have been approved and before work is started submit sample panels showing each type of finish and color specified.
2. Panels to show color: Composition board, 100 by 250 by 3 mm (4 inch by 10 inch by 1/8 inch).
3. Panel to show transparent finishes: Wood of same species and grain pattern as wood approved for use, 100 by 250 by 3 mm (4 inch by 10 inch face by 1/4 inch) thick minimum, and where both flat and edge grain will be exposed, 250 mm (10 inches) long by sufficient size, 50 by 50 mm (2 by 2 inch) minimum or actual wood member to show complete finish.
4. Attach labels to panel stating the following:
  - a. Federal Specification Number or manufacturers name and product number of paints used.
  - b. Specification code number specified in Section 09 06 00, SCHEDULE FOR FINISHES.
  - c. Product type and color.
  - d. Name of project.
5. Strips showing not less than 50 mm (2 inch) wide strips of undercoats and 100 mm (4 inch) wide strip of finish coat.

**D. Sample of identity markers if used.**

**E. Manufacturers' Certificates indicating compliance with specified requirements:**

1. Manufacturer's paint substituted for Federal Specification paints meets or exceeds performance of paint specified.
2. High temperature aluminum paint.
3. Epoxy coating.
4. Intumescent clear coating or fire retardant paint.
5. Plastic floor coating.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.4 DELIVERY AND STORAGE**

- A. Deliver materials to site in manufacturer's sealed container marked to show following:
  - 1. Name of manufacturer.
  - 2. Product type.
  - 3. Batch number.
  - 4. Instructions for use.
  - 5. Safety precautions.
- B. In addition to manufacturer's label, provide a label legibly printed as following:
  - 1. Federal Specification Number, where applicable, and name of material.
  - 2. Surface upon which material is to be applied.
  - 3. If paint or other coating, state coat types; prime, body or finish.
- C. Maintain space for storage, and handling of painting materials and equipment in a neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.
- D. Store materials at site at least 24 hours before using, at a temperature between 18 and 30 degrees C (65 and 85 degrees F).

**1.5 MOCK-UP PANEL**

- A. Before starting application of paint mixtures, apply paint as specified to an area, not to exceed 9 m<sup>2</sup> (100 ft<sup>2</sup>), selected by Resident Engineer.
- B. Finish and texture approved by Resident Engineer will be used as a standard of quality for remainder of work.

**1.6 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.
- B. American Conference of Governmental Industrial Hygienists (ACGIH):
  - ACGIH TLV-BKLT-2008.....Threshold Limit Values (TLV) for Chemical Substances and Physical Agents and Biological Exposure Indices (BEIs)
  - ACGIH TLV-DOC-2008.....Documentation of Threshold Limit Values and Biological Exposure Indices, (Seventh Edition)
- C. American National Standards Institute (ANSI):
  - A13.1-07.....Scheme for the Identification of Piping Systems
- D. American Society for Testing and Materials (ASTM):

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

D260-86.....Boiled Linseed Oil

**E. Commercial Item Description (CID):**

A-A-1555.....Water Paint, Powder (Cementitious, White and  
Colors) (WPC) (cancelled)

A-A-3120.....Paint, For Swimming Pools (RF) (cancelled)

**F. Federal Specifications (Fed Spec):**

TT-P-1411A.....Paint, Copolymer-Resin, Cementitious (For  
Waterproofing Concrete and Masonry Walls) (CEP)

**G. Master Painters Institute (MPI):**

No. 1-07.....Aluminum Paint (AP)

No. 4-07.....Interior/ Exterior Latex Block Filler

No. 5-07.....Exterior Alkyd Wood Primer

No. 7-07.....Exterior Oil Wood Primer

No. 8-07.....Exterior Alkyd, Flat MPI Gloss Level 1 (EO)

No. 9-07.....Exterior Alkyd Enamel MPI Gloss Level 6 (EO)

No. 10-07.....Exterior Latex, Flat (AE)

No. 11-07.....Exterior Latex, Semi-Gloss (AE)

No. 18-07.....Organic Zinc Rich Primer

No. 22-07.....Aluminum Paint, High Heat (up to 590° - 1100F)  
(HR)

No. 26-07.....Cementitious Galvanized Metal Primer

No. 27-07.....Exterior / Interior Alkyd Floor Enamel, Gloss (FE)

No. 31-07.....Polyurethane, Moisture Cured, Clear Gloss (PV)

No. 36-07.....Knot Sealer

No. 43-07.....Interior Satin Latex, MPI Gloss Level 4

No. 44-07.....Interior Low Sheen Latex, MPI Gloss Level 2

No. 45-07.....Interior Primer Sealer

No. 46-07.....Interior Enamel Undercoat

No. 47-07.....Interior Alkyd, Semi-Gloss, MPI Gloss Level 5 (AK)

No. 48-07.....Interior Alkyd, Gloss, MPI Gloss Level 6 (AK)

No. 49-07.....Interior Alkyd, Flat, MPI Gloss Level 1 (AK)

No. 50-07.....Interior Latex Primer Sealer

No. 51-07.....Interior Alkyd, Eggshell, MPI Gloss Level 3

No. 52-07.....Interior Latex, MPI Gloss Level 3 (LE)

No. 53-07.....Interior Latex, Flat, MPI Gloss Level 1 (LE)

No. 54-07.....Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- No. 59-07.....Interior/Exterior Alkyd Porch & Floor Enamel, Low Gloss (FE)
- No. 60-07.....Interior/Exterior Latex Porch & Floor Paint, Low Gloss
- No. 66-07.....Interior Alkyd Fire Retardant, Clear Top-Coat (ULC Approved) (FC)
- No. 67-07.....Interior Latex Fire Retardant, Top-Coat (ULC Approved) (FR)
- No. 68-07.....Interior/ Exterior Latex Porch & Floor Paint, Gloss
- No. 71-07.....Polyurethane, Moisture Cured, Clear, Flat (PV)
- No. 74-07.....Interior Alkyd Varnish, Semi-Gloss
- No. 77-07.....Epoxy Cold Cured, Gloss (EC)
- No. 79-07.....Marine Alkyd Metal Primer
- No. 90-07.....Interior Wood Stain, Semi-Transparent (WS)
- No. 91-07.....Wood Filler Paste
- No. 94-07.....Exterior Alkyd, Semi-Gloss (EO)
- No. 95-07.....Fast Drying Metal Primer
- No. 98-07.....High Build Epoxy Coating
- No. 101-07.....Epoxy Anti-Corrosive Metal Primer
- No. 108-07.....High Build Epoxy Coating, Low Gloss (EC)
- No. 114-07.....Interior Latex, Gloss (LE) and (LG)
- No. 119-07.....Exterior Latex, High Gloss (acrylic) (AE)
- No. 135-07.....Non-Cementitious Galvanized Primer
- No. 138-07.....Interior High Performance Latex, MPI Gloss Level 2 (LF)
- No. 139-07.....Interior High Performance Latex, MPI Gloss Level 3 (LL)
- No. 140-07.....Interior High Performance Latex, MPI Gloss Level 4
- No. 141-07.....Interior High Performance Latex (SG) MPI Gloss Level 5
- H. Steel Structures Painting Council (SSPC):
- SSPC SP 1-04 (R2004)....Solvent Cleaning
- SSPC SP 2-04 (R2004)....Hand Tool Cleaning
- SSPC SP 3-04 (R2004)....Power Tool Cleaning

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**PART 2 - PRODUCTS**

**2.1 MATERIALS**

- A. Cementitious Paint (CEP): TT-P-1411A [Paint, Copolymer-Resin, Cementitious (CEP)], Type 1 for exterior use, Type II for interior use.
- B. Wood Sealer: MPI 31 (gloss) or MPI 71 (flat) thinned with thinner recommended by manufacturer at rate of about one part of thinner to four parts of varnish.
- C. Plastic Tape:
  - 1. Pigmented vinyl plastic film in colors as specified in Section 09 06 00, SCHEDULE FOR FINISHES or specified.
  - 2. Pressure sensitive adhesive back.
  - 3. Widths as shown.
- D. Identity markers options:
  - 1. Pressure sensitive vinyl markers.
  - 2. Snap-on coil plastic markers.
- E. Aluminum Paint (AP): MPI 1.
- F. Interior/Exterior Latex Block Filler: MPI 4.
- G. Exterior Alkyd Wood Primer: MPI 5.
- H. Exterior Oil Wood Primer: MPI 7.
- I. Exterior Alkyd, Flat (EO): MPI 8.
- J. Exterior Alkyd Enamel (EO): MPI 9.
- K. Exterior Latex, Flat (AE): MPI 10.
- L. Exterior Latex, Semi-Gloss (AE): MPI 11.
- M. Organic Zinc rich Coating (HR): MPI 22.
- N. High Heat Resistant Coating (HR): MPI 22.
- O. Cementitious Galvanized Metal Primer: MPI 26.
- P. Exterior/ interior Alkyd Floor Enamel, Gloss (FE): MPI 27.
- Q. Knot Sealer: MPI 36.
- R. Interior Satin Latex: MPI 43.
- S. Interior Low Sheen Latex: MPI 44.
- T. Interior Primer Sealer: MPI 45.
- U. Interior Enamel Undercoat: MPI 47.
- V. Interior Alkyd, Semi-Gloss (AK): MPI 47.
- W. Interior Alkyd, Gloss (AK): MPI 49.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- x. Interior Latex Primer Sealer: MPI 50.
- Y. Interior Alkyd, Eggshell: MPI 51
- Z. Interior Latex, MPI Gloss Level 3 (LE): MPI 52.
- AA. Interior Latex, Flat, MPI Gloss Level 1 (LE): MPI 53.
- BB. Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE): MPI 54.
- DD. Interior / Exterior Alkyd Porch & Floor Enamel, Low Gloss (FE): MPI 59.
- EE. Interior/ Exterior Latex Porch & Floor Paint, Low Gloss: MPI 60.
- FF. Interior Alkyd Fire Retardant, Clear Top-Coat (ULC Approved) (FC): MPI 66.
- GG. Interior Latex Fire Retardant, Top-Coat (ULC Approved) (FR): MPI 67.
- HH. Interior/ Exterior Latex Porch & Floor Paint, gloss: MPI 68.
- II. Epoxy Cold Cured, Gloss (EC): MPI 77.
- JJ. Marine Alkyd Metal primer: MPI 79.
- KK. Interior Wood Stain, Semi-Transparent (WS): MPI 90.
- LL. Wood Filler Paste: MPI 91.
- MM. Exterior Alkyd, Semi-Gloss (EO): MPI 94.
- NN. Fast Drying Metal Primer: MPI 95.
- OO. High Build Epoxy Coating: MPI 98.
- PP. Epoxy Anti-Corrosive Metal Primer: MPI 101.
- QQ. High Build Epoxy Marine Coating (EC): MPI 108.
- RR. Interior latex, Gloss (LE) and (LG): MPI 114.
- SS. Exterior Latex, High Gloss (acrylic) (AE): MPI 119.
- TT. Waterborne Galvanized Primer: MPI 134.
- UU. Non-Cementitious Galvanized Primer: MPI 135.
- VV. Interior High Performance Latex, MPI Gloss Level 2 (LF): MPI 138.
- WW. Interior High Performance Latex, MPI Gloss Level 3 (LL): MPI 139.
- XX. Interior High Performance Latex, MPI Gloss Level 4: MPI 140.
- YY. Interior High Performance Latex (SG), MPI Gloss Level 5: MPI 141.

**2.2 PAINT PROPERTIES**

- A. Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately and paints requiring specified additives.
- B. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**2.3 REGULATORY REQUIREMENTS/QUALITY ASSURANCE**

- A. Paint materials shall conform to the restrictions of the local Environmental and Toxic Control jurisdiction.
  - 1. Volatile Organic Compounds (VOC): VOC content of paint materials shall not exceed 10g/l for interior latex paints/primers and 50g/l for exterior latex paints and primers.
  - 2. Lead-Base Paint:
    - a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.
    - b. Regulations concerning prohibition against use of lead-based paint in federal and federally assisted construction, or rehabilitation of residential structures are set forth in Subpart F, Title 24, Code of Federal Regulations, Department of Housing and Urban Development.
    - c. For lead-paint removal, see Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.
  - 3. Asbestos: Materials shall not contain asbestos.
  - 4. Chromate, Cadmium, Mercury, and Silica: Materials shall not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or free crystalline silica.
  - 5. Human Carcinogens: Materials shall not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.
  - 6. Use high performance acrylic paints in place of alkyd paints, where possible.
  - 7. VOC content for solvent-based paints shall not exceed 250g/l and shall not be formulated with more than one percent aromatic hydro carbons by weight.

**PART 3 - EXECUTION**

**3.1 JOB CONDITIONS**

- A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.
  - 1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each days work.

**B. Atmospheric and Surface Conditions:**

1. Do not apply coating when air or substrate conditions are:
  - a. Less than 3 degrees C (5 degrees F) above dew point.
  - b. Below 10 degrees C (50 degrees F) or over 35 degrees C (95 degrees F), unless specifically pre-approved by the Contracting Officer and the product manufacturer. Under no circumstances shall application conditions exceed manufacturer recommendations.
2. Maintain interior temperatures until paint dries hard.
3. Do no exterior painting when it is windy and dusty.
4. Do not paint in direct sunlight or on surfaces that the sun will soon warm.
5. Apply only on clean, dry and frost free surfaces except as follows:
  - a. Apply water thinned acrylic and cementitious paints to damp (not wet) surfaces where allowed by manufacturer's printed instructions.
  - b. Dampened with a fine mist of water on hot dry days concrete and masonry surfaces to which water thinned acrylic and cementitious paints are applied to prevent excessive suction and to cool surface.
6. Varnishing:
  - a. Apply in clean areas and in still air.
  - b. Before varnishing vacuum and dust area.
  - c. Immediately before varnishing wipe down surfaces with a tack rag.

**3.2 SURFACE PREPARATION**

- A. Method of surface preparation is optional, provided results of finish painting produce solid even color and texture specified with no overlays.
- B. General:
  1. Remove prefinished items not to be painted such as lighting fixtures, escutcheon plates, hardware, trim, and similar items for reinstallation after paint is dried.
  2. Remove items for reinstallation and complete painting of such items and adjacent areas when item or adjacent surface is not accessible or finish is different.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3. See other sections of specifications for specified surface conditions and prime coat.
4. Clean surfaces for painting with materials and methods compatible with substrate and specified finish. Remove any residue remaining from cleaning agents used. Do not use solvents, acid, or steam on concrete and masonry.

**C. Wood:**

1. Sand to a smooth even surface and then dust off.
2. Sand surfaces showing raised grain smooth between each coat.
3. Wipe surface with a tack rag prior to applying finish.
4. Surface painted with an opaque finish:
  - a. Coat knots, sap and pitch streaks with MPI 36 (Knot Sealer) before applying paint.
  - b. Apply two coats of MPI 36 (Knot Sealer) over large knots.
5. After application of prime or first coat of stain, fill cracks, nail and screw holes, depressions and similar defects with wood filler paste. Sand the surface to make smooth and finish flush with adjacent surface.
6. Before applying finish coat, reapply wood filler paste if required, and sand surface to remove surface blemishes. Finish flush with adjacent surfaces.
7. Fill open grained wood such as oak, walnut, ash and mahogany with MPI 91 (Wood Filler Paste), colored to match wood color.
  - a. Thin filler in accordance with manufacturer's instructions for application.
  - b. Remove excess filler, wipe as clean as possible, dry, and sand as specified.

**D. Ferrous Metals:**

1. Remove oil, grease, soil, drawing and cutting compounds, flux and other detrimental foreign matter in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Remove loose mill scale, rust, and paint, by hand or power tool cleaning, as defined in SSPC-SP 2 (Hand Tool Cleaning) and SSPC-SP 3 (Power Tool Cleaning). Exception: where high temperature aluminum paint is used, prepare surface in accordance with paint manufacturer's instructions.



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3. Fill dents, holes and similar voids and depressions in flat exposed surfaces of hollow steel doors and frames, access panels, roll-up steel doors and similar items specified to have semi-gloss or gloss finish with TT-F-322D (Filler, Two-Component Type, For Dents, Small Holes and Blow-Holes). Finish flush with adjacent surfaces.
  - a. This includes flat head countersunk screws used for permanent anchors.
  - b. Do not fill screws of item intended for removal such as glazing beads.
4. Spot prime abraded and damaged areas in shop prime coat which expose bare metal with same type of paint used for prime coat. Feather edge of spot prime to produce smooth finish coat.
5. Spot prime abraded and damaged areas which expose bare metal of factory finished items with paint as recommended by manufacturer of item.
- E. Zinc-Coated (Galvanized) Metal, Aluminum, Copper and Copper Alloys Surfaces Specified Painted:
  1. Clean surfaces to remove grease, oil and other deterrents to paint adhesion in accordance with SSPC-SP 1 (Solvent Cleaning).
  2. Spot coat abraded and damaged areas of zinc-coating which expose base metal on hot-dip zinc-coated items with MPI 18 (Organic Zinc Rich Coating). Prime or spot prime with MPI 134 (Waterborne Galvanized Primer) or MPI 135 (Non- Cementitious Galvanized Primer) depending on finish coat compatibility.
- F. Masonry, Concrete, Cement Board, Cement Plaster and Stucco:
  1. Clean and remove dust, dirt, oil, grease efflorescence, form release agents, laitance, and other deterrents to paint adhesion.
  2. Use emulsion type cleaning agents to remove oil, grease, paint and similar products. Use of solvents, acid, or steam is not permitted.
  3. Remove loose mortar in masonry work.
  4. Replace mortar and fill open joints, holes, cracks and depressions with new mortar specified in Section 04 05 13, MASONRY MORTARING; Section 04 05 16, MASONRY GROUTING. Do not fill weep holes. Finish to match adjacent surfaces.
  5. Neutralize Concrete floors to be painted by washing with a solution of 1.4 Kg (3 pounds) of zinc sulfate crystals to 3.8 L (1 gallon) of water, allow to dry three days and brush thoroughly free of crystals.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

6. Repair broken and spalled concrete edges with concrete patching compound to match adjacent surfaces as specified in CONCRETE Sections. Remove projections to level of adjacent surface by grinding or similar methods.

**G. Gypsum Plaster and Gypsum Board:**

1. Remove efflorescence, loose and chalking plaster or finishing materials.
2. Remove dust, dirt, and other deterrents to paint adhesion.
3. Fill holes, cracks, and other depressions with CID-A-A-1272A [Plaster, Gypsum (Spackling Compound) finished flush with adjacent surface, with texture to match texture of adjacent surface. Patch holes over 25 mm (1-inch) in diameter as specified in Section for plaster or gypsum board.

**3.3 PAINT PREPARATION**

- A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.
- B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturer's printed instructions.
- C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.
- D. Mix two component and two part paint and those requiring additives in such a manner as to uniformly blend as specified in manufacturer's printed instructions unless specified otherwise.
- E. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

**3.4 APPLICATION**

- A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.
- B. Unless otherwise specified, apply paint in three coats; prime, body, and finish. When two coats applied to prime coat are the same, first coat applied over primer is body coat and second coat is finish coat.
- C. Apply each coat evenly and cover substrate completely.
- D. Allow not less than 48 hours between application of succeeding coats, except as allowed by manufacturer's printed instructions, and approved by Resident Engineer.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- E. Finish surfaces to show solid even color, free from runs, lumps, brushmarks, laps, holidays, or other defects.
- F. Apply by brush, roller or spray, except as otherwise specified.
- G. Do not spray paint in existing occupied spaces unless approved by Resident Engineer, except in spaces sealed from existing occupied spaces.
  - 1. Apply painting materials specifically required by manufacturer to be applied by spraying.
  - 2. In areas, where paint is applied by spray, mask or enclose with polyethylene, or similar air tight material with edges and seams continuously sealed including items specified in WORK NOT PAINTED, motors, controls, telephone, and electrical equipment, fronts of sterilizes and other recessed equipment and similar prefinished items.
- I. Do not paint in closed position operable items such as access doors and panels, window sashes, overhead doors, and similar items except overhead roll-up doors and shutters.

**3.5 PRIME PAINTING**

- A. After surface preparation prime surfaces before application of body and finish coats, except as otherwise specified.
- B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.
- C. Additional field applied prime coats over shop or factory applied prime coats are not required except for exterior exposed steel apply an additional prime coat.
- D. Prime rebates for stop and face glazing of wood, and for face glazing of steel.
- E. Wood and Wood Particleboard:
  - 1. Use same kind of primer specified for exposed face surface.
    - a. Exterior wood: MPI 7 (Exterior Oil Wood Primer) for new construction and MPI 5 (Exterior Alkyd Wood Primer) for repainting bare wood primer except where MPI 90 (Interior Wood Stain, Semi-Transparent (WS)) is scheduled.
    - b. Interior wood except for transparent finish: MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat), thinned if recommended by manufacturer.
    - c. Transparent finishes as specified under Transparent Finishes on Wood except Floors and Finish for Wood Floors.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. Apply two coats of primer MPI 7 (Exterior Oil Wood Primer) or MPI 5 (Exterior Alkyd Wood Primer) or sealer MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat) to surfaces of wood doors, including top and bottom edges, which are cut for fitting or for other reason.
  3. Apply one coat of primer MPI 7 (Exterior Oil Wood Primer) or MPI 5 (Exterior Alkyd Wood Primer) or sealer MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat) as soon as delivered to site to surfaces of unfinished woodwork, except concealed surfaces of shop fabricated or assembled millwork and surfaces specified to have varnish, stain or natural finish.
  4. Back prime and seal ends of exterior woodwork, and edges of exterior plywood specified to be finished.
  5. Apply MPI 67 (Interior Latex Fire Retardant, Top-Coat (ULC Approved) (FR) to wood for fire retardant finish.
- F. Metals except boilers, incinerator stacks, and engine exhaust pipes:
1. Steel and iron: MPI 95 (Fast Drying Metal Primer).
  2. Zinc-coated steel and iron: DELETED
  3. Aluminum scheduled to be painted: MPI 95 (Fast Drying Metal Primer).
  4. Terne Metal: DELETED
  5. Copper and copper alloys scheduled to be painted: MPI 95 (Fast Drying Metal Primer).
  6. Machinery not factory finished: DELETED
  7. Asphalt coated metal: DELETED
  8. DELETED
- G. Gypsum Board:
1. Surfaces scheduled to have MPI 53 (Interior Latex, Flat), MPI 54 (Interior Latex, Semi-Gloss).
  2. Primer: MPI 50 (Interior Latex Primer Sealer) except use MPI 45 (Interior Primer Sealer) and MPI 46 (Interior Enamel Undercoat) in shower and bathrooms.
  3. Surfaces scheduled to receive vinyl coated fabric wallcovering: Use MPI 45 (Interior Primer Sealer) and MPI 46 (Interior Enamel Undercoat).

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

4. Use MPI 101 (Cold Curing Epoxy Primer) for surfaces scheduled to receive MPI 77 (Epoxy Cold Cured, Gloss (EC)), MPI 98 (High Build Epoxy Coating), MPI 108 (High Build Epoxy Marine Coating (EC)) finish.
- H. Gypsum Plaster and Veneer Plaster:
  1. Surfaces scheduled to receive vinyl coated fabric wallcovering: Use MPI 45 (Interior Primer Sealer).
  2. MPI 45 (Interior Primer Sealer), except use MPI 50 (Interior Latex Primer Sealer) when an alkyd flat finish is specified.
  3. Surfaces scheduled to have MPI 53 (Interior Latex, Flat), MPI 54 (Interior Latex, Semi-Gloss)
  4. DELETED
- I. Concrete Masonry Units except glazed or integrally colored and decorative units:
  1. MPI 4 (Block Filler) on interior surfaces.
  2. Prime exterior surface as specified for exterior finishes.
- J. Cement Plaster or stucco, Concrete Masonry, Brick Masonry, and Cement board interior Surfaces of Ceilings and Walls:
  1. MPI 53 (Interior Latex, Flat, MPI Gloss Level 1 LE)), MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)), except use two coats where substrate has aged less than six months.
  2. DELETED
- K. Concrete Floors: MPI 60 (Interior/ Exterior Latex Porch & Floor Paint, Low Gloss).

**3.6 EXTERIOR FINISHES NA**

- A. Apply following finish coats where specified in Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Wood:
  1. Do not apply finish coats on surfaces concealed after installation, top and bottom edges of wood doors and sash, or on edges of wood framed insect screens.
  2. Portion of sash runs of double hung wood windows, concealed by sash when in a closed position: Apply two coats of ASTM D260 mixed with not more than 0.12L (1/4 pint) of dryer per 3.89L (gallon).
  3. Two coats of // MPI 10 Exterior Latex, Flat (AE)) // MPI 11 (Exterior Latex, Semi-Gloss (AE)) // MPI 119 (Exterior Latex, High Gloss

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- (acrylic) (AE)) // on exposed surfaces, except where transparent finish is specified.
4. Two coats of // MPI 31 (Polyurethane, Moisture Cured, Clear Gloss (PV)) // MPI 71 (Polyurethane, Moisture Cured, Clear Flat (PV)) // for transparent finish.
- C. Steel and Ferrous Metal, // Including Tern //:
1. Two coats of MPI 8 (Exterior Alkyd, Flat (EO)) // MPI 9 (Exterior Alkyd Enamel (EO)) // MPI 94 (Exterior Alkyd, Semi-Gloss (EO)) on exposed surfaces, except on surfaces over 94 degrees C (200 degrees F).
2. One coat of MPI 22 (High Heat Resistant Coating (HR)) on surfaces over 94 degrees K (200 degrees F) and on surfaces of boiler // incinerator // stacks // engine exhaust pipes.
- D. Machinery without factory finish except for primer: One coat MPI 8 (Exterior Alkyd, Flat (EO)) // MPI 9 (Exterior Alkyd Enamel (EO)) // MPI 94 (Exterior Alkyd, Semi-Gloss (EO)) //.
- E. Concrete Masonry Units: NA
1. General:
- a. Where specified in Section 09 06 00, SCHEDULE FOR FINISHES or shown.
- b. Mix as specified in manufacturer's printed directions.
- c. Do not mix more paint at one time than can be used within four hours after mixing. Discard paint that has started to set.
- d. Dampen warm surfaces above 24 degrees C (75 degrees F) with fine mist of water before application of paint. Do not leave free water on surface.
- e. Cure paint with a fine mist of water as specified in manufacturer's printed instructions.
2. Use two coats of TT-P-1411 (Paint, Co-polymer-Resin, Cementitious (CEP)), unless specified otherwise.

**3.7 INTERIOR FINISHES**

- A. Apply following finish coats over prime coats in spaces or on surfaces specified in Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Metal Work:
1. Apply to exposed surfaces.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. Omit body and finish coats on surfaces concealed after installation except electrical conduit containing conductors over 600 volts.
3. Ferrous Metal, Galvanized Metal, and Other Metals Scheduled:
  - a. Apply two coats of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) unless specified otherwise.
  - b. Two coats of MPI 51 (Interior Alkyd, Eggshell (AK)).
  - c. One coat of MPI 46 (Interior Enamel Undercoat) plus one coat of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) on exposed interior surfaces of alkyd-amine enamel prime finished windows.
  - d. Two coats of CID-A-A3120 Type E (RP) on exposed surfaces in battery rooms, pool area, and chlorinator rooms.
  - e. Machinery: One coat MPI 9 (Exterior Alkyd Enamel (EO)).
  - f. Asphalt Coated Metal: One coat MPI 1 (Aluminum Paint (AP)).
  - g. Ferrous Metal over 94 degrees K (200 degrees F): Boilers, Incinerator Stacks, and Engine Exhaust Pipes: One coat MPI 22 (High Heat Resistant Coating (HR)).

**C. Gypsum Board:**

1. One coat of MPI 45 (Interior Primer Sealer) plus one coat of MPI 139 (Interior High Performance Latex, MPI Gloss level 3 (LL)).
2. Two coats of MPI 138 (Interior High Performance Latex, MPI Gloss Level 2 (LF)).
3. One coat of MPI 45 (Interior Primer Sealer) plus one coat of MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)) or MPI 114 (Interior Latex, Gloss (LE) and (LG)).
4. One coat of MPI 45 (Interior Primer Sealer) plus one coat of MPI 48 (Interior Alkyd Gloss (AK)).

**D. Plaster:**

1. One coat of MPI 45 (Interior Primer Sealer) plus one coat of MPI 139 (Interior High Performance Latex, MPI Gloss level 3 (LL)).
2. Two coats of MPI 51 (Interior Alkyd, Eggshell) (AK)).
3. One coat of MPI 45 (Interior Primer Sealer) plus one coat of 139 (Interior High Performance Latex, MPI Gloss level 3 (LL)).
4. One coat MPI 101 (Cold Curing Epoxy Prime (EC)).

**E. Masonry and Concrete Walls:**

1. Over MPI 4 (Interior/Exterior Latex Block Filler) on CMU surfaces.
2. Two coats of MPI 53 (Interior Latex, Flat, MPI Gloss Level 1 (LE))

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**F. Wood:**

1. Sanding:
  - a. Use 220-grit sandpaper.
  - b. Sand sealers and varnish between coats.
  - c. Sand enough to scarify surface to assure good adhesion of subsequent coats, to level roughly applied sealer and varnish, and to knock off "whiskers" of any raised grain as well as dust particles.
2. Sealers:
  - a. Apply sealers specified except sealer may be omitted where pigmented, penetrating, or wiping stains containing resins are used.
  - b. Allow manufacturer's recommended drying time before sanding, but not less than 24 hours or 36 hours in damp or muggy weather.
  - c. Sand as specified.
3. Paint Finish:
  - a. One coat of MPI 45 (Interior Primer Sealer) plus one coat of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) (SG).
  - b. DELETED
  - c. One coat of MPI 45 Interior Primer Sealer) plus one coat of MPI 48 (Interior Alkyd Gloss (AK)).
  - d. Two coats of MPI 51 (Interior Alkyd, Eggshell) (AK)).
4. Transparent Finishes on Wood Except Floors.
  - a. Natural Finish:
    - 1) One coat of sealer as written in 2.1 E.
    - 2) Two coats of MPI 71 (Polyurethane, Moisture Cured, Clear Flat (PV))//MPI 31 (Polyurethane, Moisture Cured, Clear Gloss (PV)).
  - b. Stain Finish:
    - 1) One coat of MPI 90 (Interior Wood Stain, Semi-Transparent (WS)).
    - 2) Use wood stain of type and color required to achieve finish specified. Do not use varnish type stains.
    - 3) One coat of sealer as written in 2.1 E.
    - 4) Two coats of MPI 71 (Polyurethane, Moisture Cured, Clear Flat (PV))
  - c. Varnish Finish:
    - 1) One coat of sealer as written in 2.1 E.



**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- 2) Two coats of // MPI 71 (Polyurethane, Moisture Cured, Clear Flat (PV) .
- d. MPI 66 (Interior Alkyd Fire Retardant, Clear Top-Coat (ULC Approved) (FC)) Intumescent Type, Fire Retardant Coating (FC) where scheduled:  
Two coats.
5. Finish for Wood Floors:
  - a. Hardwood Flooring:
    - 1) Apply MPI 91 (Wood Filler Paste) to open grained wood. Remove surplus filler and wipe clean.
    - 2) Sand lightly when dry. Remove dust.
    - 3) Apply two coats of CID-A-A-2335 (Sealer, Surface).
    - 4) Apply two thin coats of P-W-155 (Wax Floor, Water Emulsion) and machine buff to uniform luster.
  - b. DELETED
  - c. DELETED
  - d. Striping:
    - 1) Where striping is shown for wood floors apply plastic tape stripes as written in 2.1 F.
    - 2) Do striping when floor coating is dry.
    - 3) Install stripes to straight lines and true curves as shown.
- G. Cement Board: One coat of MPI 138 (Interior High Performance Latex, MPI Gloss Level 2 (LF))
- H. Concrete Floors: One coat of MPI 68 (Interior/ Exterior Latex Porch & Floor Paint, Gloss (FE)).
- I. Miscellaneous:
  1. Apply where specified in Section 09 06 00, SCHEDULE FOR FINISHES.
  2. MPI 1 (Aluminum Paint): Two coats of aluminum paint.
  3. Gold Paint (GP): Two coats of gold paint.
  4. Existing acoustical units scheduled to be repainted except acoustical units with a vinyl finish:
    - a. Clean units free of dust, dirt, grease, and other deterrents to paint adhesion.
    - b. Mineral fiber units: One coat of MPI 53 (Interior Latex, Flat, MPI Gloss Level 1 (LE))

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- c. Units of organic fiber or other material not having a class A rating: One coat of MPI 66 (Interior Alkyd Fire Retardant, Clear Top-Coat (ULC Approved) (FC)).

**3.8 REFINISHING EXISTING PAINTED SURFACES**

- A. Clean, patch and repair existing surfaces as specified under surface preparation.
- B. Remove and reinstall items as specified under surface preparation.
- C. Remove existing finishes or apply separation coats to prevent non compatible coatings from having contact.
- D. Patched or Replaced Areas in Surfaces and Components: Apply spot prime and body coats as specified for new work to repaired areas or replaced components.
- E. Except where scheduled for complete painting apply finish coat over plane surface to nearest break in plane, such as corner, reveal, or frame.
- F. In existing rooms and areas where alterations occur, clean existing stained and natural finished wood retouch abraded surfaces and then give entire surface one coat of finish to match existing to be MPI 31 (Polyurethane, Moisture Cured, Clear Gloss), MPI 71 (Polyurethane, Moisture Cured, Clear Flat (PV)), or as required to match existing.
- G. Refinish areas as specified for new work to match adjoining work unless specified or scheduled otherwise.
- H. Coat knots and pitch streaks showing through old finish with MPI 36 (Knot Sealer) before refinishing.
- I. Sand or dull glossy surfaces prior to painting.
- J. Sand existing coatings to a feather edge so that transition between new and existing finish will not show in finished work.

**3.9 PAINT COLOR**

- A. Color and gloss of finish coats is specified in Section 09 06 00, SCHEDULE FOR FINISHES.
- B. For additional requirements regarding color see Articles, REFINISHING EXISTING PAINTED SURFACE and MECHANICAL AND ELECTRICAL FIELD PAINTING SCHEDULE.
- C. Coat Colors:
  - 1. Color of priming coat: Lighter than body coat.
  - 2. Color of body coat: Lighter than finish coat.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

3. Color prime and body coats to not show through the finish coat and to mask surface imperfections or contrasts.

D. Painting, Caulking, Closures, and Fillers Adjacent to Casework:

1. Paint to match color of casework where casework has a paint finish.
2. Paint to match color of wall where casework is stainless steel, plastic laminate, or varnished wood.

**3.10 MECHANICAL AND ELECTRICAL WORK FIELD PAINTING SCHEDULE**

- A. Field painting of mechanical and electrical consists of cleaning, touching-up abraded shop prime coats, and applying prime, body and finish coats to materials and equipment if not factory finished in space scheduled to be finished.
- B. In spaces not scheduled to be finish painted in Section 09 06 00, SCHEDULE FOR FINISHES paint as specified under paragraph H, colors.
- C. Paint various systems specified in Division 02 - EXISTING CONDITIONS, Division 21 - FIRE SUPPRESSION, Division 22 - PLUMBING, Division 23 - HEATING, VENTILATION AND AIR-CONDITIONING, Division 26 - ELECTRICAL, Division 27 - COMMUNICATIONS, and Division 28 - ELECTRONIC SAFETY AND SECURITY.
- D. Paint after tests have been completed.
- E. Omit prime coat from factory prime-coated items.
- F. Finish painting of mechanical and electrical equipment is not required when located in interstitial spaces, above suspended ceilings, in concealed areas such as pipe and electric closets, pipe basements, pipe tunnels, trenches, attics, roof spaces, shafts and furred spaces except on electrical conduit containing feeders 600 volts or more.
- G. Omit field painting of items specified in paragraph, Building and Structural WORK NOT PAINTED.
- H. Color:
  1. Paint items having no color specified in Section 09 06 00, SCHEDULE FOR FINISHES to match surrounding surfaces.
  2. Paint colors as specified in Section 09 06 00, SCHEDULE FOR FINISHES except for following:
    - a. White .....Exterior unfinished surfaces of enameled plumbing fixtures. Insulation coverings on breeching and uptake inside boiler house, drums and drum-heads, oil heaters, condensate tanks and condensate piping.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- b. Gray: .....Heating, ventilating, air conditioning and refrigeration equipment (except as required to match surrounding surfaces), and water and sewage treatment equipment and sewage ejection equipment.
  - c. Aluminum Color: Ferrous metal on outside of boilers and in connection with boiler settings including supporting doors and door frames and fuel oil burning equipment, and steam generation system (bare piping, fittings, hangers, supports, valves, traps and miscellaneous iron work in contact with pipe).
  - d. Federal Safety Red: Exposed fire protection piping hydrants, post indicators, electrical conducts containing fire alarm control wiring, and fire alarm equipment.
  - e. Federal Safety Orange: .Entire lengths of electrical conduits containing feeders 600 volts or more.
  - f. Color to match brickwork sheet metal covering on breeching outside of exterior wall of boiler house.
- I. Apply paint systems on properly prepared and primed surface as follows:
- 1. Exterior Locations: NA
    - a. Apply two coats of // MPI 8 (Exterior Alkyd, Flat (EO)) // MPI 94 (Exterior Alkyd, Semi-gloss (EO)) // MPI 9 (Exterior Alkyd Enamel (EO)) // to the following ferrous metal items:  
Vent and exhaust pipes with temperatures under 94 degrees C (200 degrees F), roof drains, fire hydrants, post indicators, yard hydrants, exposed piping and similar items.
    - b. Apply two coats of // MPI 10 (Exterior Latex, Flat (AE)) // MPI 11 (Exterior Latex, Semi Gloss (AE)) // MPI 119 (Exterior Latex, High Gloss (acrylic) (AE)) to the following metal items:  
Galvanized and zinc-copper alloy metal.
    - c. Apply one coat of MPI 22 (High Heat Resistant Coating (HR)), 650 degrees C (1200 degrees F) to incinerator stacks, boiler stacks, and engine generator exhaust.
  - 2. Interior Locations:
    - a. Apply two coats of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) to following items:
      - 1) Metal under 94 degrees C (200 degrees F) of items such as bare piping, fittings, hangers and supports.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- 2) Equipment and systems such as hinged covers and frames for control cabinets and boxes, cast-iron radiators, electric conduits and panel boards.
- 3) Heating, ventilating, air conditioning, plumbing equipment, and machinery having shop prime coat and not factory finished.
- b. DELETED
- c. DELETED
- d. DELETED
- e. Paint electrical conduits containing cables rated 600 volts or more using two coats of MPI 9 (Exterior Alkyd Enamel (EO)).
3. Other exposed locations:
  - a. Metal surfaces, except aluminum, of cooling towers exposed to view, including connected pipes, rails, and ladders: Two coats of MPI 1 (Aluminum Paint (AP)).
  - b. Cloth jackets of insulation of ducts and pipes in connection with plumbing, air conditioning, ventilating refrigeration and heating systems: One coat of MPI 50 (Interior Latex Primer Sealer) and one coat of MPI 10 (Exterior Latex, Flat (AE)).

**3.11 BUILDING AND STRUCTURAL WORK FIELD PAINTING**

- A. Painting and finishing of interior and exterior work except as specified under paragraph 3.11 B.
  1. Painting and finishing of new and existing work including colors and gloss of finish selected is specified in Finish Schedule, Section 09 06 00, SCHEDULE FOR FINISHES.
  2. Painting of disturbed, damaged and repaired or patched surfaces when entire space is not scheduled for complete repainting or refinishing.
  3. Painting of ferrous metal and galvanized metal.
  4. Painting of wood with fire retardant paint exposed in attics, when used as mechanical equipment space except shingles.
  5. Identity painting and safety painting.
- B. Building and Structural Work not Painted:
  1. Prefinished items:
    - a. Casework, doors, elevator entrances and cabs, metal panels, wall covering, and similar items specified factory finished under other sections.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- b. Factory finished equipment and pre-engineered metal building components such as metal roof and wall panels.
- 2. Finished surfaces:
  - a. Hardware except ferrous metal.
  - b. Anodized aluminum, stainless steel, chromium plating, copper, and brass, except as otherwise specified.
  - c. Signs, fixtures, and other similar items integrally finished.
- 3. Concealed surfaces:
  - a. Inside dumbwaiter, elevator and duct shafts, interstitial spaces, pipe basements, crawl spaces, pipe tunnels, above ceilings, attics, except as otherwise specified.
  - b. Inside walls or other spaces behind access doors or panels.
  - c. Surfaces concealed behind permanently installed casework and equipment.
- 4. Moving and operating parts:
  - a. Shafts, chains, gears, mechanical and electrical operators, linkages, and sprinkler heads, and sensing devices.
  - b. Tracks for overhead or coiling doors, shutters, and grilles.
- 5. Labels:
  - a. Code required label, such as Underwriters Laboratories Inc., Inchcape Testing Services, Inc., or Factory Mutual Research Corporation.
  - b. Identification plates, instruction plates, performance rating, and nomenclature.
- 6. Galvanized metal:
  - a. Exterior chain link fence and gates, corrugated metal areaways, and gratings.
  - b. Gas Storage Racks.
  - c. Except where specifically specified to be painted.
- 7. Metal safety treads and nosings.
- 8. Gaskets.
- 9. Concrete curbs, gutters, pavements, retaining walls, exterior exposed foundations walls and interior walls in pipe basements.
- 10. Face brick.
- 11. Structural steel encased in concrete, masonry, or other enclosure.
- 12. Structural steel to receive sprayed-on fire proofing.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

13. Ceilings, walls, columns in interstitial spaces.
14. Ceilings, walls, and columns in pipe basements.
15. Wood Shingles.

**3.12 IDENTITY PAINTING SCHEDULE**

- A. Identify designated service in accordance with ANSI A13.1, unless specified otherwise, on exposed piping, piping above removable ceilings, piping in accessible pipe spaces, interstitial spaces, and piping behind access panels.
1. Legend may be identified using 2.1 G options or by stencil applications.
  2. Apply legends adjacent to changes in direction, on branches, where pipes pass through walls or floors, adjacent to operating accessories such as valves, regulators, strainers and cleanouts a minimum of 12 000 mm (40 feet) apart on straight runs of piping. Identification next to plumbing fixtures is not required.
  3. Locate Legends clearly visible from operating position.
  4. Use arrow to indicate direction of flow.
  5. Identify pipe contents with sufficient additional details such as temperature, pressure, and contents to identify possible hazard. Insert working pressure shown on drawings where asterisk appears for High, Medium, and Low Pressure designations as follows:
    - a. High Pressure - 414 kPa (60 psig) and above.
    - b. Medium Pressure - 104 to 413 kPa (15 to 59 psig).
    - c. Low Pressure - 103 kPa (14 psig) and below.
    - d. Add Fuel oil grade numbers.
  6. Legend name in full or in abbreviated form as follows:

	COLOR OF	COLOR OF	COLOR OF	LEGEND
PIPING	EXPOSED PIPING	BACKGROUND	LETTERS	BBREVIATIONS
Blow-off		Yellow	Black	Blow-off
Boiler Feedwater		Yellow	Black	Blr Feed
A/C Condenser Water Supply		Green	White	A/C Cond Wtr Sup
A/C Condenser Water Return		Green	White	A/C Cond Wtr Ret
Chilled Water Supply		Green	White	Ch. Wtr Sup

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Chilled Water Return	Green	White	Ch. Wtr Ret
Shop Compressed Air	Yellow	Black	Shop Air
Air-Instrument Controls	Green	White	Air-Inst Cont
Drain Line	Green	White	Drain
Emergency Shower	Green	White	Emg Shower
High Pressure Steam	Yellow	Black	H.P. _____ *
High Pressure Condensate Return	Yellow	Black	H.P. Ret _____ *
Medium Pressure Steam	Yellow	Black	M. P. Stm _____ *
Medium Pressure Condensate Return	Yellow	Black	M.P. Ret _____ *
Low Pressure Steam	Yellow	Black	L.P. Stm _____ *
Low Pressure Condensate Return	Yellow	Black	L.P. Ret _____ *
High Temperature Water Supply	Yellow	Black	H. Temp Wtr Sup
High Temperature Water Return	Yellow	Black	H. Temp Wtr Ret
Hot Water Heating Supply	Yellow	Black	H. W. Htg Sup
Hot Water Heating Return	Yellow	Black	H. W. Htg Ret
Gravity Condensate Return	Yellow	Black	Gravity Cond Ret
Pumped Condensate Return	Yellow	Black	Pumped Cond Ret
Vacuum Condensate Return	Yellow	Black	Vac Cond Ret
Fuel Oil - Grade	Green	White	Fuel Oil-Grade ____ *
Boiler Water Sampling	Yellow	Black	Sample
Chemical Feed	Yellow	Black	Chem Feed
Continuous Blow-Down	Yellow	Black	Cont. B D
Pumped Condensate	Black		Pump Cond
Pump Recirculating	Yellow	Black	Pump-Recirc.
Vent Line	Yellow	Black	Vent
Alkali	Yellow	Black	Alk
Bleach	Yellow	Black	Bleach
Detergent	Yellow	Black	Det
Liquid Supply	Yellow	Black	Liq Sup
Reuse Water	Yellow	Black	Reuse Wtr
Cold Water (Domestic)	White	Green	C.W. Dom
Hot Water (Domestic)			
Supply	White	Yellow	H.W. Dom
Return	White	Yellow	H.W. Dom Ret
Tempered Water	White	Yellow	Temp. Wtr



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Ice Water				
Supply	White	Green	White	Ice Wtr
Return	White	Green	White	Ice Wtr Ret
Reagent Grade Water		Green	White	RG
Reverse Osmosis		Green	White	RO
Sanitary Waste		Green	White	San Waste
Sanitary Vent		Green	White	San Vent
Storm Drainage		Green	White	St Drain
Pump Drainage		Green	White	Pump Disch
Chemical Resistant Pipe				
Waste		Yellow	Black	Acid Waste
Vent		Yellow	Black	Acid Vent
Atmospheric Vent		Green	White	ATV
Silver Recovery		Green	White	Silver Rec
Oral Evacuation		Green	White	Oral Evac
Fuel Gas		Yellow	Black	Gas
Fire Protection Water				
Sprinkler		Red	White	Auto Spr
Standpipe		Red	White	Stand
Sprinkler		Red	White	Drain

7. Electrical Conduits containing feeders over 600 volts, paint legends using 50 mm (2 inch) high black numbers and letters, showing the voltage class rating. Provide legends where conduits pass through walls and floors and at maximum 6100 mm (20 foot) intervals in between. Use labels with yellow background with black border and words Danger High Voltage Class, 5000, 15000, OR 25000 AS REQUIRED.
8. See Sections for methods of identification, legends, and abbreviations of the following:
  - a. Regular compressed air lines: Section 22 15 00, GENERAL SERVICE COMPRESSED-AIR SYSTEMS.
  - b. Dental compressed air lines: Section 22 61 13.74, DENTAL COMPRESSED-AIR PIPING / Section 22 61 19.74, DENTAL COMPRESSED-AIR EQUIPMENT.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- c. Laboratory gas and vacuum lines: Section 22 62 00, VACUUM SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES / Section 22 63 00, GAS SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES.
  - d. Oral evacuation lines: Section 22 62 19.74, DENTAL VACUUM AND EVACUATION EQUIPMENT.
  - e. Medical Gases and vacuum lines: Section 22 62 00, VACUUM SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES / Section 22 63 00, GAS SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES.
  - f. Conduits containing high voltage feeders over 600 volts: Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS / Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS / Section 28 05 33, RACEWAYS AND BOXES FOR ELECTRONIC SAFETY AND SECURITY.
- B. Fire and Smoke Partitions:
- 1. Identify partitions above ceilings on both sides of partitions except within shafts in letters not less than 64 mm (2 1/2 inches) high.
  - 2. Stenciled message: "SMOKE BARRIER" or, "FIRE BARRIER" as applicable.
  - 3. Locate not more than 6100 mm (20 feet) on center on corridor sides of partitions, and with a least one message per room on room side of partition.
  - 4. Use semigloss paint of color that contrasts with color of substrate.
- C. Identify columns in pipe basements and interstitial space:
- 1. Apply stenciled number and letters to correspond with grid numbering and lettering shown.
  - 2. Paint numbers and letters 100 mm (4 inches) high, locate 450 mm (18 inches) below overhead structural slab.
  - 3. Apply on four sides of interior columns and on inside face only of exterior wall columns.
  - 4. Color:
    - a. Use black on concrete columns.
    - b. Use white or contrasting color on steel columns.

**3.14 PROTECTION CLEAN UP, AND TOUCH-UP**

- A. Protect work from paint droppings and spattering by use of masking, drop cloths, removal of items or by other approved methods.
- B. Upon completion, clean paint from hardware, glass and other surfaces and items not required to be painted of paint drops or smears.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- C. Before final inspection, touch-up or refinished in a manner to produce solid even color and finish texture, free from defects in work which was damaged or discolored.

- - - E N D - - -

**APPENDIX**

Coordinate the following abbreviations used in Section 09 91 00, PAINTING, with other Sections, especially Section 09 06 00, SCHEDULE FOR FINISHES and other COATING SECTIONS listed. Use the same abbreviation and terms consistently.

Paint or coating    Abbreviation

Acrylic Emulsion    AE (MPI 10 - flat/MPI 11 - semigloss/MPI 119 - gloss)

Alkyd Flat    Ak (MPI 49)

Alkyd Gloss Enamel    G (MPI 48)

Alkyd Semigloss Enamel    SG (MPI 47)

Aluminum Paint    AP (MPI 1)

Cementitious Paint    CEP (TT-P-1411)

Exterior Latex    EL??(MPI 10 / 11 / 119)??

Exterior Oil    EO (MPI 9 - gloss/MPI 8 - flat/MPI 94 - semigloss)

Epoxy Coating    EC (MPI 77 - walls, floors/MPI 108 - CMU, concrete)

Fire Retardant Paint    FR (MPI 67)

Fire Retardant Coating (Clear)    FC (MPI 66, intumescent type)

Floor Enamel    FE (MPI 27 - gloss/MPI 59 - eggshell)

Heat Resistant Paint    HR (MPI 22)

Latex Emulsion    LE (MPI 53, flat/MPI 52, eggshell/MPI 54, semigloss/MPI 114, gloss Level 6

Latex Flat    LF (MPI 138)

Latex Gloss LG (MPI 114)

Latex Semigloss    SG (MPI 141)

Latex Low Luster    LL (MPI 139)

Plastic Floor Coating    PL

Polyurethane Varnish    PV (MPI 31 - gloss/MPI 71 - flat)

Rubber Paint    RF (CID-A-A-3120 - Paint for Swimming Pools (RF)).

Water Paint, Cement    WPC (CID-A-A-1555 - Water Paint, Powder).

Wood Stain    WS (MPI 90)

Verify abbreviations used in the following coating sections:

**Manhattan VA Medical Center**  
**Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Section 09 96 59, HIGH-BUILD GLAZED COATINGS	GC
Section 09 94 19, MULTICOLOR INTERIOR FINISHING	MC

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 10 21 23  
CUBICLE CURTAIN TRACKS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies cubicle curtain track (C.C.T.).

**1.2 RELATED WORK**

Steel shapes for suspending track assembly: Section 05 50 00, METAL FABRICATIONS and Section 09 51 00, ACOUSTICAL CEILINGS.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
  - One 300 mm (12 inch) long piece of cubicle curtain track with carrier access and end stop.
  - One clip anchor for fastening track to grid system of acoustical ceilings. One curtain carrier.
- C. Shop Drawings: Showing layout of tracks and method of anchorage.
- D. Manufacturer's Literature and Data:
  - Cubicle curtain track.

**1.4 DELIVERY, STORAGE AND HANDLING**

- A. Deliver material in original package marked to identify the contents, brand name, and the name of the manufacturer or supplier.
- B. Store in dry and protected location. Store so as to not bend or warp the tracks.
- C. Do not open packages until contents are needed for installation, unless verification inspection is required.

**1.5 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - B221-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

B456-03 (R2009) .....Electrodeposited Coatings for Copper Plus Nickel  
Plus Chromium and Nickel Plus Chromium

C. The National Association of Architectural Metal Manufacturers (NAAMM):  
AMP 500 Series.....Metal Finishes Manual

**PART 2 - PRODUCTS**

**2.1 CUBICLE CURTAIN TRACKS**

- A. Surface mounted:
  - 1. Channel Tracks (Surface Mounted Type): Extruded aluminum, ASTM B221, alloy 6063, temper T5 or T6, channel shaped, with smooth inside raceway for curtain carriers.
  - 2. Tubular Track (Suspended Type): DELETED
- B. Curtain Carriers: Nylon or delrin carriers, with either nylon or delrin wheels on metal, delrin, or nylon axles. Equip each carrier with either stainless steel, chromium plated brass or steel hooks with swivel, or nickel chromium plated brass or stainless steel bead chain and hook assembly, or delrin carriers may have moulded on delrin hooks. Hook for bead chain may be the same material and finish as the bead chain or may be chromium plated steel. Provide 2.2 carriers for every 300 mm (onefoot) of each section of each track length, plus one additional carrier.
- C. End Stop Connectors, Ceiling Flanges and Other Accessories: Fabricate from the same material with the same finish as the tracks or from nylon.
- D. Hangers and Fittings: Fabricate from the same material with the same finish as the tracks. Hangers may be round or square for channel tracks and round for tubular tracks. Design fittings to be compatible with design of tracks and to safely transmit the track load to the hangers.
- E. At end of each section of track, make provision for insertion and removal of carriers. Design to prevent accidental removal of carrier. Any operating mechanism shall be removable with common tools.

**2.2 INTRAVENOUS SUPPORT ASSEMBLY DELETED**

**2.3 FASTENERS**

- A. Exposed Fasteners, Screws and Bolts: Stainless steel or chromium/nickel plated brass.
- B. Concealed Fasteners, Screws and Bolts: Hot-dip galvanized (except in high moisture areas use stainless steel).

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- C. Metal Clips: Anchor curtain tracks to exposed grid of lay-in acoustical tile ceilings, with concealed metal (butterfly) type or two piece snap locking type ceiling clip of high strength spring steel. When it is not possible to install the metal ceiling clip, the cubicle curtain track may be screwed to the ceiling grid.

**2.4 FINISHES**

- A. Aluminum: Chemically etched medium matte, with clear anodic coating, Class II Architectural, 0.4 mils thick.
- B. Chrome/Nickel Plating: Satin or polished finish as specified, ASTM B546, minimum thickness of chromium plate as follows:
  - 1. 0.2 mil on copper alloys.
  - 2. 0.4 mil on steel.
- C. Stainless Steel: No. 4 in accordance with NAAMM Metal Finishes Manual.

**2.5 FABRICATION**

- A. Weld and grind smooth joints of fabricated components.
- B. Form tracks and bends of lengths that will produce the minimum number of joints. Make track sections up to 4800 mm (16 feet) without joints. Form corner bend on a 300 mm (12 inch) radius.
- C. Provide steel anchor plates, supports, and anchors for securing components to building construction.
- D. Form flat surface without distortion.
- E. Shop assemble components and package complete with anchors and fittings.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

- A. Install tracks after finish painting and ceiling finishing operations are complete.
- B. Install track level and Securely anchor to the ceiling to form a rigid installation.
- C. Anchor surface mounted curtain tracks directly to exposed grid of lay-in acoustical tile ceilings with suitable fasteners, spaced approximately 600 mm (24 inches) on center.
- D. Anchor surface mounted curtain tracks to concrete, plaster and gypsum board ceilings with a minimum of 3 mm (1/8-inch) diameter fastenings or concealed clips spaced not more than 900 mm (three feet) on center.
- E. Install suspended track seven feet, three inches above the finished floor, with hangers spaced no more than four feet on center. At ceiling

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

line, provide flange fittings secured to hangers with set screws. Secure track to walls with flanged fittings and to hangers with special fittings.

F. Securely fasten end stop caps to prevent their being forced out by the striking weight of carriers.

G. DELETED

H. Remove damaged or defective components and replace with new components or repair to the original condition.

**3.2 ACCEPTANCE**

A. Track shall be installed neat, rigid, plumb, level and true, and securely anchored to the overhead construction.

B. Carrier units shall operate smoothly and easily over the full range of travel.

- - - E N D - - -



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 12 24 00  
WINDOW SHADES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

Cloth shades, vertical blinds and venetian blinds are specified in this section. Window shades shall be furnished complete, including brackets, fittings and hardware.

**1.2 RELATED WORK**

- A. Color of shade cloth, and color of exposed parts of venetian blinds, (including tapes and cords), and color of vertical blinds: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. DELETED

**1.3 QUALITY CONTROL**

Manufacturer's Qualification: Venetian blind and vertical blind manufacturer shall provide evidence that the manufacture of blinds are a major product, and that the blinds have performed satisfactorily on similar installations.

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
  - 1. Shade cloth, each type, 600 mm (24 inch) square, including cord and ring, showing color, finish and texture.
  - 2. Vertical blind slats, 300 mm (12 inches) long, including chain and supporting channels, showing color and finish.
  - 3. Venetian blind slats, 300 mm (12 inches) long, including cord and tape, showing color and finish.
- C. Manufacturer's literature and data; showing details of construction and hardware for:
  - Cloth and window shades
  - Vertical blinds
  - Venetian blinds

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.5 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced to in the text by the basic designation only.
- B. Federal Specifications (Fed. Spec.):
  - AA-V-00200B.....Venetian Blinds, Shade, Roller, Window, Roller, Slat, Cord, and Accessories
- C. American Society for Testing and Materials (ASTM):
  - A167-99(R2009).....Stainless and heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip
  - B221/B221M-08.....Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
  - D635-10.....Rate of Burning and/or Extent and Time of Burning of Self-Supporting Plastics in a Horizontal Position
  - D648-07.....Deflection Temperature of Plastics Under Flexural Load in the Edgewise Position
  - D1784-08.....Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly (Vinyl Chloride) (CPVC) Compounds

**PART 2 - PRODUCTS**

**2.1 MATERIALS**

- A. Shade Cloth: opaque.
- B. Staples (For Cloth Window Shades): Nonferrous metal or zinc-coated steel.
- C. Stainless Steel: ASTM A167
- D. Cords for Venetian Blinds: No. 4 braided nylon or No. 4-1/2 braided cotton having not less than 175 pounds breaking strength.
- E. Extruded Aluminum: ASTM B221/B221M.

**2.2 VENETIAN BLINDS**

Fed. Spec. AA-V-00200, Type II, 25 mm (one inch slats) fabricated of aluminum. Pre-production sample is not required.

**2.3 VERTICAL BLIND LOUVER BLADES**

Rigid polyvinyl chloride, light stable, ASTM D1784, Type I, Grade 2, not less than 0.6 mm (0.025 inch) thick, 90 mm (3-1/2 inches) wide, and with

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

beaded edges on each side of not less than 1.2 mm (0.050 inch). Louvers shall withstand 80°C (180 degrees F) head chamber for thirty minutes without distortion; shrinkage or stretching for no more than one half of one percent as tested by ASTM D648. Louvers shall be opaque and of plain finish, and permanently flame retardant as tested by ASTM D635.

**2.4 VENETIAN BLINDS AND SHADES ENCLOSED IN WINDOWS**

Shades or blinds inside of windows panes shall be used at Mental Health and Behavioral Nursing Units. There shall be no cords or ropes attached and curtains shall not be used. Hardware should be flush with the walls so that it can't be used to secure a nose. Hardware should also be tamper proof to prevent removal for use as a weapon or for self harm.

**2.5 FASTENINGS**

Zinc-coated or cadmium plated metal, aluminum or stainless steel fastenings of proper length and type. Except as otherwise specified, fastenings for use with various structural materials shall be as follows:

Type of Fastening	Structural Material
Wood screw	Wood
Tap screw	Metal
Case-hardened, self-tapping screw	Sheet Metal
Screw or bolt in expansion shields	Solid masonry
Toggle bolts	Hollow blocks, wallboard and plaster

**2.6 FABRICATION**

- A. Fabricate cloth shades, venetian blinds, and vertical blinds as may be applicable to fit measurements of finished openings obtained at site.
- B. Cloth Window Shades: Rolling type, constructed of shade cloth mounted on rollers. Shade cloth shall have plain sides, and with hem at bottom to accommodate wood slat. Separate shades are required for each individual sash within opening. Length of shades shall exceed height of window approximately 300 mm (12 inches) measured from head to sill, in addition to material required to make-up hem:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

1. Provide rollers with spindles, nylon bearings, tempered steel springs, and all other related accessories required for positive action. Provide rollers of diameter recommended by shade manufacturer. Staple shade cloth to wood rollers to prevent wrinkling or folding, and on line parallel to axis of rollers so that shade will hang plumb. Space staples not over 90 mm (3-1/2 inches) on centers. Use of tacks is prohibited.
  2. Wood slats shall be smooth, tapered, and inserted in the bottom hem of the shade cloth.
  3. Eyelets shall have clear openings large enough to accommodate cords. Edges of eyelets shall not cut into cloth when set.
  4. Cords shall be of sufficient length to permit shades to be drawn to bottom of opening with ends looped and held with cord rings. Attach cords to hems through metal eyelets in center of slats in bottom hems.
- C. Venetian Blinds: Venetian blinds shall have 25 mm (one inch) width horizontal slats positioned within ladder tapes. Multiple blinds in openings are to be of same type and divided at mullions.
1. Head-rails shall fully enclose operating mechanism on three sides and ends.
  2. Bottom rails shall be fully enclosed to prevent contact of tapes and sill at underside.
  3. DELETED
  4. Finish concealed metal work of head-rails including concealed mechanism, with one shop coat of paint. Do not paint parts that have non-rusting finish, or parts where motion of friction occurs.
- D. Vertical Blinds: Traversing type with rotating louvers positioned between window head and sill rails, and including hardware, brackets, anchors, fastenings and accessories.
1. Head and sill rails shall be one piece, extruded aluminum, full length with capped ends. Concealed surfaces shall be of manufacturer's standard finish. Exposed surfaces shall match finish on windows.
  2. Provide carrier trucks for head and sill rails for each louver blade, with two, aluminum or steel, ball bearing wheels, mounted on acetal resin axles. Louvers shall be held fixed until reset by control.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

Stainless steel, full hard, flexible spacer links shall space and stabilize each truck by passing smoothly between stabilizer guides on each truck. No glides or sliders shall be allowed. Louvers shall traverse at any angle without binding.

3. Louvers shall be kept taut between head and sill rails with a minimum of one to a maximum of 1 Kg (2-1/2 pounds) of spring tension.
4. Traversing shall be split draw and shall be accomplished by an anodized aluminum, spiral lead screw extending the full length of the channel, actuating a lead nut, and controlled by a nickel plated brass or stainless steel bead chain. Blinds shall pack when traversed to not more than 11 mm (7/16-inch) per louver plus space for end caps and end spacer tubes.
5. All louvers shall overlap not less than 9 mm (3/8-inch). Louvers shall operate manually in opposite direction from normal traverse, and end louver shall be firmly fixed by a friction spacer or anti-creep pin.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

A. Cloth Window Shades: Mount window shades on end of face brackets, set on metal gussets, or casing of windows as required. Provide extension face brackets where necessary at mullions. In existing buildings, provide brackets matching those on existing windows.

1. Locate rollers in level position as high as practicable at heads of windows to prevent infiltration of light over rollers.
2. Where extension brackets are necessary, on mullions or elsewhere, for alignment of shades, provide metal lugs, and rigidly anchor lugs and brackets.
3. Place brackets and rollers so that shades will not interfere with window and screen hardware.
4. DELETED
5. DELETED
6. Shade installation methods not specifically described, are subject to approval of Resident Engineer.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

B. Venetian Blinds: Support blinds in level position by brackets and intermediate supports that will permit easy removal and replacement of units without damage to blind, or adjacent surfaces. Provide at least two fasteners for each bracket or other support.

1. Install blinds between jambs on window openings with steel trim. Mount brackets on trim reveal, flush with face of trim and secure with steel screws.
2. Install blinds between jambs on window openings with wood trim. Mount brackets on trim or on wood plaster-mold set against plaster or other wall finish, and secure in place with screws.
3. Mount brackets and intermediate supports of lobby blinds on face of trim members, and secure with stainless steel standard tap or thread-forming machine screws, or by cadmium-plated molley or toggle bolts. Screws and bolts shall penetrate through and lock behind steel sub-frame.
4. Where blinds abut glass partitions of Vestibules, extend head rails to trim at head of partition frame with slats sufficiently long to clear transom bars.
5. Provide one brush (for each 1 to 50 blind) of an approved type, suitable for cleaning blinds.

C. Vertical Blinds:

1. Support blinds in level position that will permit easy removal and replacement of units without damage to blind or adjacent surfaces. Provide at least one fastener for each 500 mm (20 inches) of width, with end screws maximum of 75 mm (three inches) from end.
2. Protect vertical blinds against defacements, warpage of slats, or bending of rails. Warped or damaged slats, or bent rails shall be removed from the site immediately and replaced. Scratching or other defacements shall be repaired at the Contractor's expense and as approved by the Resident Engineer.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 12 32 00  
MANUFACTURED WOOD CASEWORK**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies plastic laminate casework as detailed on the drawings, including related components and accessories required to form integral units. Wood casework items shown on the drawings, but not specified below shall be included as part of the work under this section, and applicable portions of the specification shall apply to these items. Each like item of casework shall be of the same design and by one manufacturer.
- B. Where shown, provide plastic laminate casework items as follows:
  - 1. DELETED
  - 2. Base and wall hung upper cabinets.
  - 3. Plastic laminate covered countertops for casework.
  - 4. DELETED
- C. DELETED

**1.2 RELATED WORK**

- A. Custom Casework: Section 06 20 00, FINISH CARPENTRY.
- B. Color and Finish of Plastic Laminate: Section 09 06 00, SCHEDULE FOR FINISHES.
- C. Lavatories and Plumbing in Casework: Section 22 40 00, PLUMBING FIXTURES.

**1.3 MANUFACTURER'S QUALIFICATIONS**

The fabrication of casework shall be by a manufacturer who produces casework similar to the casework specified and shown.

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
  - Sinks, trim and fittings.
  - Locks for doors and drawers
  - Adhesive cements



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

C. Samples:

Counter top, plastic laminate, 150 mm (six inch) square  
Wood Face Veneer or Hardwood Plywood

D. Shop Drawings (1/2 full size):

1. All casework, showing details of construction, including materials, hardware and accessories.
2. Cabinets and counters showing faucets in connection with sink bowls, and electrical fixtures and receptacles which are mounted on cabinets and counters.
3. Fastenings and method of installation.

E. Mock-Up: Where required for special casework and where four or more similar units are involved, submit a mock-up of a typical unit for approval by resident engineer.

**1.5 APPLICABLE PUBLICATIONS**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.

B. American Society for Testing and Materials (ASTM):

A167-99 (R2009).....Stainless and Heat-Resisting chromium-Nickel

Steel Plate, Sheet and Strip

A1008-10.....Steel, Sheet, Cold-Rolled, Carbon, Structural,

High Strength Low Alloy

C1036-06.....Flat Glass

C. Composite Panel Association (CPA):

A208.1-09.....Particleboard

D. U.S. Department of Commerce Product Standards (Prod. Std):

PS1-95.....Construction and Industrial Plywood

E. Hardwood, Plywood and Veneer Association (HPVA):

HP-1-09.....Hardwood and Decorative Plywood

F. Architectural Woodwork Institute (AWI):

Architectural Woodwork Quality Standards, Guide Specifications Quality  
Certification Program - 1999

G. American Society of Mechanical Engineers (ASME):

A112.18.1-05.....Plumbing Fixture Fittings

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

H. National Electrical Manufacturers Association (NEMA):

LD3-05.....High Pressure Decorative Laminates

LD3.1-95.....Performance, Application Fabrication and  
Installations of High-Pressure Decorative  
Laminates

**PART 2 - PRODUCTS**

**2.1 PLYWOOD, HARDWOOD FACE VENEER DELETED**

**2.2 PLASTIC LAMINATE:**

- A. NEMA LD-3.
- B. Exposed decorative surfaces including countertops, both sides of cabinet doors, and for items having plastic laminate finish. General purpose Type HGL.
- C. Cabinet Interiors Including Shelving: Both of following options to comply with NEMA, LD3.1 as a minimum.
  - 1. Plastic laminate clad plywood or particle board.
  - 2. Resin impregnated decorative paper thermally fused to particle board.
- D. Backing sheet on bottom of plastic laminate covered wood tops. Backer Type BKL.
- E. Post Forming Fabrication, Decorative Surface: Post forming Type HGP.

**2.3 PLYWOOD, SOFTWOOD**

Prod. Std. PS1, five ply construction from 13 mm to 28 mm (1/2 inch to 1-1/8 inch) thickness, and seven ply for 31 mm (1 1/4 inch) thickness.

**2.4 PARTICLEBOARD**

CPA A208.1, Type 1, Grade 1-M-3.

**2.5 RUBBER OR VINYL BASE**

Straight (for carpet), cove (for resilient floor); 100 mm (4 inch) high, 3 mm (1/8 inch) thick, flexible to conform to irregularities in walls, partitions and floors.

**2.6 PLUMBING FIXTURES**

ASME A112.18.1, except die-cast zinc-alloy material is not acceptable.

**2.7 GLASS: ASTM C1036**

For Doors: Type I, Class 1, Quality q4.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**2.8 SOLID WOOD**

Wood required for edge banding moldings and legs as may be required shall be of same species as wood face veneer.

**2.9 SHEET STEEL**

ASTM A1008.

**2.10 STAINLESS STEEL**

ASTM A167, with No. 4 finish.

**2.11 HARDWARE**

- A. Where pin tumbler locks are specified, disc tumbler lock "Duo A", with brass working parts and case, as manufactured by the Illinois Lock Company will be an acceptable substitute. Locks for each type casework, shall be keyed differently and shall be master-keyed for each type service, such as Nurses, Psychiatric, and Administration. Provide two keys for each lock. Exposed hardware, except as otherwise specified, shall be satin finished chromium plated brass or nickel plated brass.

B. Marking of Locks and Keys:

1. The name of the manufacturer, or trademark by which manufacturer can readily be identified, legibly marked on each lock.
2. The key change number marked on the exposed face of lock, and also stamped on each key.
3. Key change numbers shall provide sufficient information for replacement of the key by the manufacturer.

C. Hinged Doors:

1. Doors 900 mm (36 inches) and more in height shall have three hinges and doors less than 900 mm (36 inches) in height shall have two hinges. Each door shall close against two rubber bumpers.
2. Hinges: Fabricate hinges with minimum 2 mm (0.072 inch) thick chromium plated steel leaves, and with minimum 3.5 mm (0.139 inch) diameter stainless steel pin. Hinges shall be five knuckle design with 63 mm (2-1/2 inch) high leaves and hospital type tips.
3. Fasteners: Provide full thread wood screws to fasten hinge leaves to door and cabinet frame. Finish screws to match finish of hinges.

D. Door Catches:

1. Friction or Magnetic type, fabricated with metal housing.
2. Provide one catch for cabinet doors 1200 mm (48 inches) high and under, and two for doors over 1200 mm (48 inches) high.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**E. Locks:**

1. Cylinder type pin tumbler.
2. Equip doors and drawers where shown with locks.

**F. Drawer and Door Pulls:**

Doors and drawers shall have flush pulls, fabricated of either chromium plated brass, chromium plated steel, stainless steel, or anodized aluminum.

**G. Drawer Slides:**

1. Full extension steel slides with nylon ball-bearing rollers.
2. Slides shall have positive stop.
3. Equip drawers with rubber bumpers.

**H. Sliding Doors:**

1. Each door shall be supported by two ball bearing bronze or nylon rollers, or sheaves riding on a stainless steel track at top or bottom, and shall be restrained by a nylon or stainless steel guide at the opposite end.
2. Plastic guides are not acceptable.
3. Each door shall have rubber silencers set near top and bottom of each jamb.

**I. Shelf Standards (Except For Fixed Shelves):**

Bright zinc-plated steel for recessed mounting with screws, 16 mm (5/8 inch) wide by 5 mm (3/16 inch) high providing 13 mm (1/2 inch) adjustment, complete with shelf supports.

**J. Gate Bolt:**

Surface mounted barrel type with strike.

**K. Hinged Gates:**

Gates shall have two double-acting hinges, size as required.

**2.12 FABRICATION**

A. Casework shall be of the flush overlay design and, except as otherwise specified, be of premium grade construction and of component thickness in conformance with AWI Quality Standards.

B. Fabricate casework of plastic laminated covered plywood or particleboard as follows:

1. Where shown, for gates, doors, drawers, shelves, and all semi-concealed surfaces shall be plastic laminated.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

2. DELETED
  3. DELETED
  4. Sliding doors shall have stops to prohibit bypass and be removable without use of tools.
- C. Electrical fixtures, receptacles, wiring and junction boxes required for fixtures and receptacles:
1. Factory installed in casework.
  2. For electrical lighting fixtures, see drawings.
  3. For electric receptacles and lighting fixtures installed below or adjacent to wall cabinets or above counter tops, see electrical sections or specifications.
  4. Install wiring in built-in raceways and terminate at junction box mounted on rear of cabinet and counter.
  5. For final hook-up at junction box see electrical sections of specifications.
- D. Provide 18 gage sheet steel sloping tops for casework where shown. Fasten sloping tops with oval-head screws inserted from interior. Exposed ends of sloping tops shall have flush closures fastened as recommended by manufacturer. Provide manufacturer's factory applied finished to match cabinet color as selected by the architect.
- E. Base:
1. Provide rubber or vinyl base with close, flush joints; set with adhesive.
  2. Remove adhesive from exposed surfaces.
  3. Install base at floor line after casework has been accurately leveled.
  4. Rub base to glossy finish.
- F. Countertops:
1. Countertops, splashbacks and reagent type shelves shall be plastic laminate factory glued to either a plywood (PS1), or particleboard (CPA A208.1) core.
  2. Countertops shall be 19 mm (3/4 inch ) thick.
  3. Splashbacks and reagent type shelves shall be finished 19 mm (3/4 inch) thick and be secured to countertops with concealed metal fastenings and with contact surfaces set in waterproof adhesive.
  4. Provide cut-outs for plumbing trim where shown.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

5. Cover exposed edges of countertops, splashbacks and reagent type shelves with plastic.
- G. Sink bowls:
1. 18 gage stainless steel, of size and design shown.
  2. All interior corners of bowls shall be formed to manufacturer's standard radii.
  3. Sinks shall have rims with flanged edges overlapping tops to provide tight joints.
  4. Secure sink bowls with concealed fastenings.
  5. For service lines from service fixtures, see other sections of specifications.
- H. Provide the following plumbing trim and fittings:
1. Faucets: ASME A112.18.1 Type I, compression type, countertop mounted, chromium plated brass, having two valves and with swing-spout or gooseneck spout as shown on the drawings, elevated to clear handles.
  2. Fittings shall have an elongated escutcheon for spout and handles, replaceable valve seats and four arm or lever style indexed chromium plated brass or stainless steel handles; handles either with or without hood.
- I. Faucets:
1. ASME A112.18.1 Type I, compression type, splashback mounted, chromium plated brass, having two valves and with swing-spout or gooseneck spout as indicated on the drawings.
  2. Fittings shall have exposed body union inlets and adjustable flanges.
  3. Valves shall have indexed chromium plated brass or stainless steel lever handles and replaceable valves seats; handles either with or without hood.
- J. Drain:
1. Cast or wrought brass or stainless steel with flat strainer.
  2. Surfaces of drains exposed from above shall have a chromium plated finish.
- K. Traps: Cast brass.
- L. Spray Hose:
1. Hose shall drop below counter top when not in use and be of sufficient length to reach the entire length of the countertop.
  2. Concealed trim may be rough brass.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**M. Support Members for Tops of Tables:**

1. Construct as detailed.
2. Provide miscellaneous steel members and anchor as shown.

**N. Legs For Counters: Note: Contractor shall provide wall mounted (and raised above the floor) plastic laminate counter support brackets as the primary counter support type in lieu of support legs where ever possible.**

1. Fabricate legs for counters of 1.6 mm (0.0635 inch) thick, 38 mm (1-1/2 inch) square tubular steel where shown (see note above regarding P.L. brackets).
2. Secure legs to counter tops and provide legs at bottom with shoes not less than 25 mm (one inch) in height.
3. Fabricate shoes of either stainless steel, aluminum or chromium plated brass.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

- A. Set casework in place; level, plumb and accurately scribe and secure to walls, and/or floors.
- B. The installation shall be complete including all trim and hardware. Leave the casework clean and free from defects.

**3.2 FASTENINGS**

- A. Fastenings for securing casework to adjoining construction shall be as detailed on the drawings or approved shop drawings.
- B. See Section 05 50 00, METAL FABRICATIONS for reinforcement of walls and partitions for casework anchorage.

- - - E N D - - -

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**SECTION 13 05 41  
SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

- A. Provide seismic restraint in accordance with the requirements of this section in order to maintain the integrity of nonstructural components of the building so that they remain safe and functional in case of seismic event.
- B. Definitions: Non-structural building components are components or systems that are not part of the building's structural system whether inside or outside, above or below grade. Non-structural components of buildings include:
  - 1. Architectural Elements: Facades that are not part of the structural system and its shear resistant elements; cornices and other architectural projections and parapets that do not function structurally; glazing; nonbearing partitions; suspended ceilings; stairs isolated from the basic structure; cabinets; bookshelves; medical equipment; and storage racks.
  - 2. Electrical Elements: Power and lighting systems; substations; switchgear and switchboards; auxiliary engine-generator sets; transfer switches; motor control centers; motor generators; selector and controller panels; fire protection and alarm systems; special life support systems; and telephone and communication systems.
  - 3. Mechanical Elements: Heating, ventilating, and air-conditioning systems; medical gas systems; plumbing systems; sprinkler systems; pneumatic systems; boiler equipment and components.
  - 4. Transportation Elements: Mechanical, electrical and structural elements for transport systems, i.e., elevators and dumbwaiters, including hoisting equipment and counterweights.

**1.2 RELATED WORK:**

- A. Section No.09 22 16 - Non Structural Framing
- B. Section No.09 51 00 - Acoustical Ceiling Systems
- C. Section No.12 24 00 - Window Shades
- D. Section No.12 32 00 - Manufactured Wood Casework
- E. Section No.21 13 13 - Wet Pipe Sprinkler Systems



**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- F. Section No.22 05 11 - Common Work Results For Plumbing
- G. Section No.22 11 00 - Facility Water Distribution
- H. Section No.22 13 00 - Facility Sanitary Sewerage
- I. Section No.23 05 11 - Common Work For HVAC and Steam Generation
- J. Section No.23 05 41 - Noise/Vibration Control For HVAC Piping/Equipment
- K. Section No.23 21 13 - Hydronic Piping
- L. Section No.23 31 00 - HVAC Ducts And Casings
- M. Section No.23 37 00 - Air Outlets And Inlets
- N. Section No.23 82 00 - Convection And Cooling Units
- O. Section No.23 82 16 - Air Coils
- P. Section No.26 05 11 - Requirements For Electrical Installations
- Q. Section No.26 05 21 - Low Voltage Electrical Power Conductors And Cables
- R. Section No.26 05 33 - Raceways And Boxes for Electrical Systems
- S. Section No.26 24 16 - Panel Boards
- T. Section No.26 29 21 - Disconnect Switches
- U. Section No.26 51 00 - Interior Lighting
- V. Section No.27 05 11 - Requirements For Communications Installations
- W. Section No.27 05 33 - Raceways And Boxes For Communications Systems
- X. Section No.28 05 13 - Conductors/Cables For Electronic Safety/Security
- Y. Section No.28 31 00 - Fire Alarm And Detection

**1.3 QUALITY CONTROL:**

**A. Shop-Drawing Preparation:**

1. Have seismic-force-restraint shop drawings and calculations prepared by a professional structural engineer experienced in the area of seismic force restraints. The professional structural engineer shall be registered in the state where the project is located.
2. Submit design tables and information used for the design-force levels, stamped and signed by a professional structural engineer registered in the State where project is located.

**B. Coordination:**

1. Do not install seismic restraints until seismic restraint submittals are approved by the Resident Engineer.
2. Coordinate and install trapezes or other multi-pipe hanger systems prior to pipe installation.

**C. Seismic Certification:**

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

In structures assigned to IBC Seismic Design Category C, D, E, or F, permanent equipments and components are to have Special Seismic Certification in accordance with requirements of section 13.2.2 of ASCE 7 except for equipment that are considered rugged as listed in section 2.2 OSHPD code application notice CAN No. 2-1708A.5, and shall comply with section 13.2.6 of ASCE 7.

**1.4 SUBMITTALS:**

- A. Submit a coordinated set of equipment anchorage drawings prior to installation including:
  - 1. Description, layout, and location of items to be anchored or braced with anchorage or brace points noted and dimensioned.
  - 2. Details of anchorage or bracing at large scale with all members, parts brackets shown, together with all connections, bolts, welds etc. clearly identified and specified.
  - 3. Numerical value of design seismic brace loads.
  - 4. For expansion bolts, include design load and capacity if different from those specified.
- B. Submit prior to installation, a coordinated set of bracing drawings for seismic protection of piping, with data identifying the various support-to-structure connections and seismic bracing structural connections, include:
  - 1. Single-line piping diagrams on a floor-by-floor basis. Show all suspended piping for a given floor on the same plain.
  - 2. Type of pipe (Copper, steel, cast iron, insulated, non-insulated, etc.).
  - 3. Pipe contents.
  - 4. Structural framing.
  - 5. Location of all gravity load pipe supports and spacing requirements.
  - 6. Numerical value of gravity load reactions.
  - 7. Location of all seismic bracing.
  - 8. Numerical value of applied seismic brace loads.
  - 9. Type of connection (Vertical support, vertical support with seismic brace etc.).

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

10. Seismic brace reaction type (tension or compression): Details illustrating all support and bracing components, methods of connections, and specific anchors to be used.
- C. Submit prior to installation, bracing drawings for seismic protection of suspended ductwork and suspended electrical and communication cables, include:
  1. Details illustrating all support and bracing components, methods of connection, and specific anchors to be used.
  2. Numerical value of applied gravity and seismic loads and seismic loads acting on support and bracing components.
  3. Maximum spacing of hangers and bracing.
  4. Seal of registered structural engineer responsible for design.
- D. Submit design calculations prepared and sealed by the registered structural engineer specified above in paragraph 1.3A.
- E. Submit for concrete anchors, the appropriate ICBC evaluation reports, OSHPD pre-approvals, or lab test reports verifying compliance with OSHPD Interpretation of Regulations 28-6.

**1.5 APPLICABLE PUBLICATIONS:**

- A. The Publications listed below (including amendments, addenda revisions, supplements and errata) form a part of this specification to the extent referenced. The publications are referenced in text by basic designation only. The publications listed below shall be the most current editions published. If the most current edition is different from the dates or references listed below, the contractor shall utilize and shall be responsible for compliance with the requirements of the most current edition of each publication listed below.
- B. American Concrete Institute (ACI):  
355.2-07.....Qualification for Post-Installed Mechanical  
Anchors in Concrete and Commentary
- C. American Institute of Steel Construction (AISC):  
Load and Resistance Factor Design, Volume 1, Second Edition
- D. American Society for Testing and Materials (ASTM):  
A36/A36M-08.....Standard Specification for Carbon Structural  
Steel

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- A53/A53M-10.....Standard Specification for Pipe, Steel, Black  
and Hot-Dipped, Zinc-Coated, Welded and Seamless
- A307-10.....Standard Specification for Carbon Steel Bolts  
and Studs; 60,000 PSI Tensile Strength.
- A325-10.....Standard Specification for Structural Bolts,  
Steel, Heat Treated, 120/105 ksi Minimum Tensile  
Strength
- A325M-09.....Standard Specification for High-Strength Bolts  
for Structural Steel Joints [Metric]
- A490-10.....Standard Specification for Heat-Treated Steel  
Structural Bolts, 150 ksi Minimum Tensile  
Strength
- A490M-10.....Standard Specification for High-Strength Steel  
Bolts, Classes 10.9 and 10.9.3, for Structural  
Steel Joints [Metric]
- A500/A500M-10.....Standard Specification for Cold-Formed Welded  
and Seamless Carbon Steel Structural Tubing in  
Rounds and Shapes
- A501-07.....Specification for Hot-Formed Welded and Seamless  
Carbon Steel Structural Tubing
- A615/A615M-09.....Standard Specification for Deformed and Plain  
Billet-Steel Bars for Concrete Reinforcement
- A992/A992M-06.....Standard Specification for Steel for Structural  
Shapes for Use in Building Framing
- A996/A996M-09.....Standard Specification for Rail-Steel and Axel-  
Steel Deformed Bars for Concrete  
Reinforcement
- E488-96 (R2003).....Standard Test Method for Strength of Anchors in  
Concrete and Masonry Element
- E. American Society of Civil Engineers (ASCE 7) Latest Edition.
- F. International Building Code (IBC) Latest Edition
- G. VA Seismic Design Requirements, H-18-8, February 2011
- H. National Uniform Seismic Installation Guidelines (NUSIG)
- I. Sheet Metal and Air Conditioning Contractors National Association  
(SMACNA): Seismic Restraint Manual - Guidelines for Mechanical Systems,  
1998 Edition and Addendum

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**1.6 REGULATORY REQUIREMENT:**

A. IBC 2012.

B. Exceptions: The seismic restraint of the following items may be omitted:

1. Equipment weighing less than 400 pounds, which is supported directly on the floor or roof.
2. Equipment weighing less than 20 pounds, which is suspended from the roof or floor or hung from a wall.
3. Gas and medical piping less than 2 ½ inches inside diameter.
4. Piping in boiler plants and equipment rooms less than 1 ¼ inches inside diameter.
5. All other piping less than 2 ½ inches inside diameter, except for automatic fire suppression systems.
6. All piping suspended by individual hangers, 12 inches or less in length from the top of pipe to the bottom of the support for the hanger.
7. All electrical conduits, less than 2 ½ inches inside diameter.
8. All rectangular air handling ducts less than six square feet in cross sectional area.
9. All round air handling ducts less than 28 inches in diameter.
10. All ducts suspended by hangers 12 inches or less in length from the top of the duct to the bottom of support for the hanger.

**PART 2 - PRODUCTS**

**2.1 STEEL:**

- A. Structural Steel: ASTM A36
- B. Structural Tubing: ASTM A500, Grade B.
- C. Structural Tubing: ASTM A501.
- D. Steel Pipe: ASTM A53/A53M, Grade B.
- E. Bolts & Nuts: ASTM A307

**2.2 CAST-IN-PLACE CONCRETE:**

- A. Concrete: 28 day strength, f'c = 25 MPa (3,000 psi)
- B. Reinforcing Steel: ASTM A615/615M or ASTM A996/A996M deformed.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

**PART 3 - EXECUTION**

**3.1 CONSTRUCTION, GENERAL:**

- A. Provide equipment supports and anchoring devices to withstand the seismic design forces, so that when seismic design forces are applied, the equipment cannot displace, overturn, or become inoperable.
- B. Provide anchorages in conformance with recommendations of the equipment manufacturer and as shown on approved shop drawings and calculations.
- C. Construct seismic restraints and anchorage to allow for thermal expansion.
- D. Testing Before Final Inspection:
  - 1. Test 10-percent of anchors in masonry and concrete per ASTM E488, and ACI 355.2 to determine that they meet the required load capacity. If any anchor fails to meet the required load, test the next 20 consecutive anchors, which are required to have zero failure, before resuming the 10-percent testing frequency.
  - 2. Before scheduling Final Inspection, submit a report on this testing indicating the number and location of testing, and what anchor-loads were obtained.

**3.2 EQUIPMENT RESTRAINT AND BRACING:**

- A. Refer to the construction documents for equipment and other related building elements identified by this specification section as equipment or other items to be restrained or braced.

**3.3 MECHANICAL DUCTWORK AND PIPING; BOILER PLANT STACKS AND BREACHING; ELECTRICAL BUSWAYS, CONDUITS, AND CABLE TRAYS; AND TELECOMMUNICATION WIRES AND CABLE TRAYS**

- A. Support and brace mechanical ductwork and piping; electrical busways, conduits and cable trays; and telecommunication wires and cable trays including boiler plant stacks and breeching to resist directional forces (lateral, longitudinal and vertical).
- B. Brace duct and breeching branches with a minimum of 1 brace per branch.
- D. Provide supports and anchoring so that, upon application of seismic forces, piping remains fully connected as operable systems which will not displace sufficiently to damage adjacent or connecting equipment, or building members.
- E. Seismic Restraint of Piping:
  - 1. Design criteria:

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- a. Piping resiliently supported: Restrain to support 120-percent of the weight of the systems and components and contents.
- b. Piping not resiliently supported: Restrain to support 60-percent of the weight of the system components and contents.
- 2. Provide seismic restraints according to one of the following options:
- F. Piping Connections: Provide flexible connections where pipes connect to equipment. Make the connections capable of accommodating relative differential movements between the pipe and equipment under conditions of earthquake shaking.

**3.4 PARTITIONS**

- A. In buildings with flexible structural frames, anchor partitions to only structural element, such as a floor slab, and separate such partition by a physical gap from all other structural elements.
- B. Properly anchor masonry walls to the structure for restraint, so as to carry lateral loads imposed due to earthquake along with their own weight and other lateral forces.

**3.5 CEILINGS AND LIGHTING FIXTURES**

- A. At regular intervals, laterally brace suspended ceilings against lateral and vertical movements, and provide with a physical separation at the walls.
- B. Independently support and laterally brace all lighting fixtures. Refer to applicable portion of lighting specification, Section 26 51 00, INTERIOR LIGHTING.

**3.6 FACADES AND GLAZING**

- A. Do not install concrete masonry unit filler walls in a manner that can restrain the lateral deflection of the building frame. Provide a gap with adequately sized resilient filler to separate the structural frame from the non-structural filler wall.
- B. Tie brick veneers to a separate wall that is independent of the steel frame as shown on construction drawings to ensure strength against applicable seismic forces at the project location.

**Manhattan VA Medical Center  
Renovate Women's Health Clinic - 7 West**

VA Project # 630-11-109  
Lothrop Associates Project # 1351-00

March, 2013  
Bid Document

- C. Install attachments to structure for all façade materials as shown on construction drawings to ensure strength against applicable seismic forces at the project location.

**3.7 STORAGE RACKS, CABINETS, AND BOOKCASES**

- A. Install storage racks to withstand earthquake forces and anchored to the floor or laterally braced from the top to the structural elements.
- B. Anchor medical supply cabinets to the floor or walls and equip them with properly engaged, lockable latches.
- C. Anchor filing cabinets that are more than 2 drawers high to the floor or walls, and equip all drawers with properly engaged, lockable latches.
- D. Anchor bookcases that are more than 30 inches high to the floor or walls, and equip any doors with properly engaged, lockable latches.

- - - E N D - - -