


① Basement - Phase II - Finish Plan
1/8" = 1'-0"

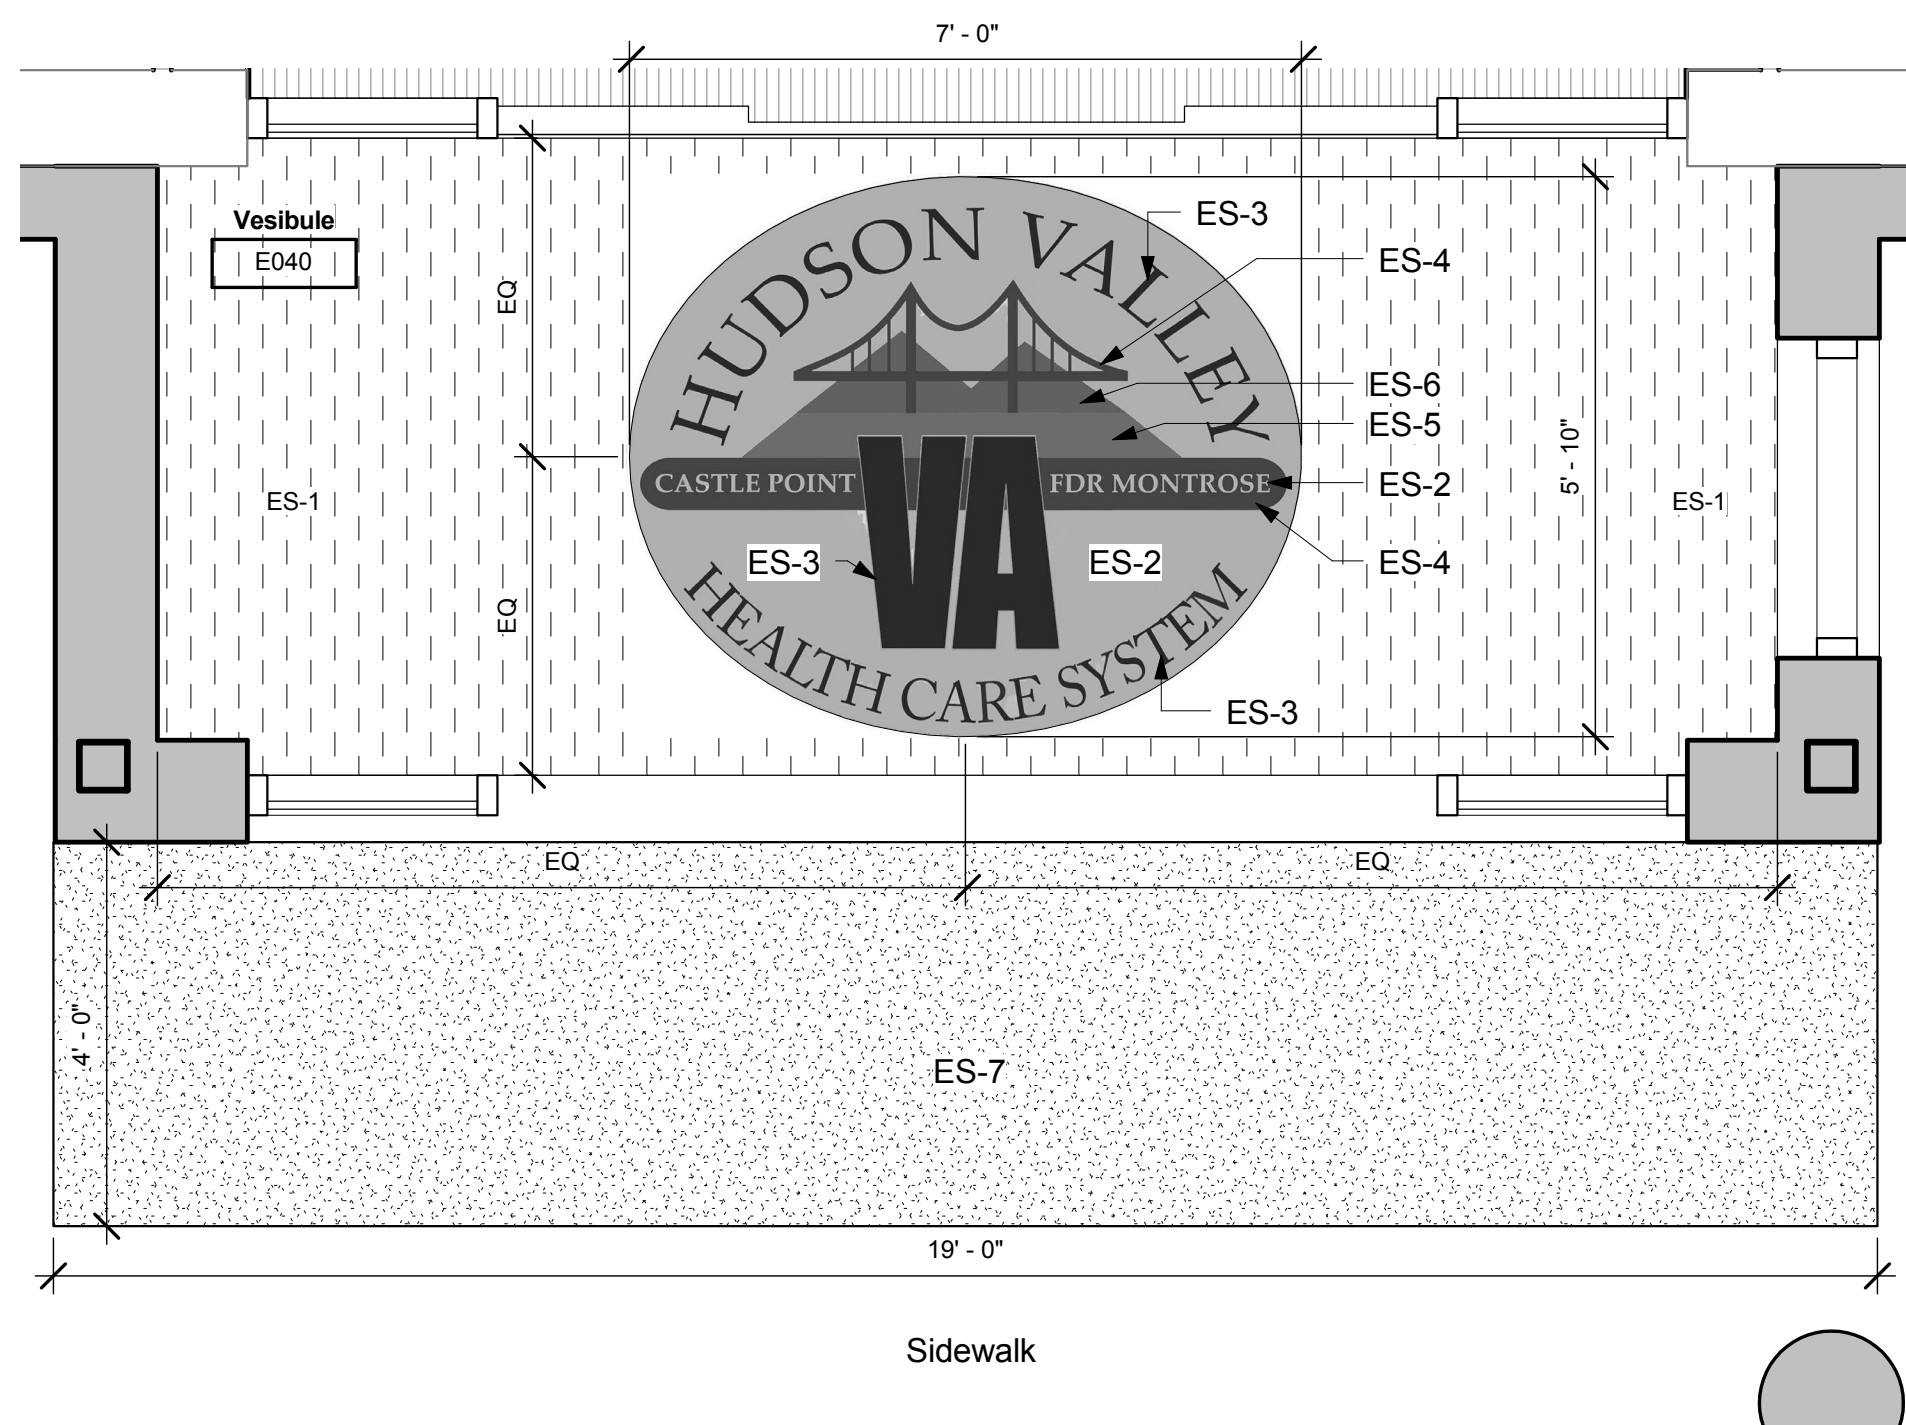

② Entrance System Design
1/2" = 1'-0"

Fire-Rated Partitions Legend	
	Fire Resistant Rated Walls, 1 Hour
	Fire Resistant Rated Walls, 2 Hour
	Fire Rated, Smoke Barrier Walls, 1 Hour
	Smoke Barrier Walls

Finish Plan General Notes:

1. Refer to the Finish Schedule for complete room finish material information.
2. Flooring material transitions shall occur mid-threshold at doorways.
3. Provide transition strip at all locations where two different finishes meet, refer to A1-01 for details. Follow manufacturers recommended installation instructions and procedures.
4. At locations where new floor finish meets an existing floor finish, the contractor shall flash patch or grind the floor as necessary to allow for floor finishes to be flush.
5. Provide new corner guards (CG-#) at all new outside corner wall locations. See finish plans for locations.
6. Floor finish to continue under all counters and mobile furniture & Equipment.

Revisions:	Date

Architect/Engineer:		Seal:
Architecture		
SERVICE DISABLED VETERAN OWNED SMALL BUSINESS		

Drawing Title		Project Title		Date
Basement - Phase II - Floor Finish Plan		Expand and Renovate Urgent Care Area - 15E at Castle Point		March 22, 2013
Scale		Building Number	Checked	Drawn
As Noted		15	Checker	Author
Issued For		Location		Drawing No.
Final Contract Documents		100 Route 9D Castle Point, NY 12511		AI-102