


4TH FLOOR - BUILDING 1

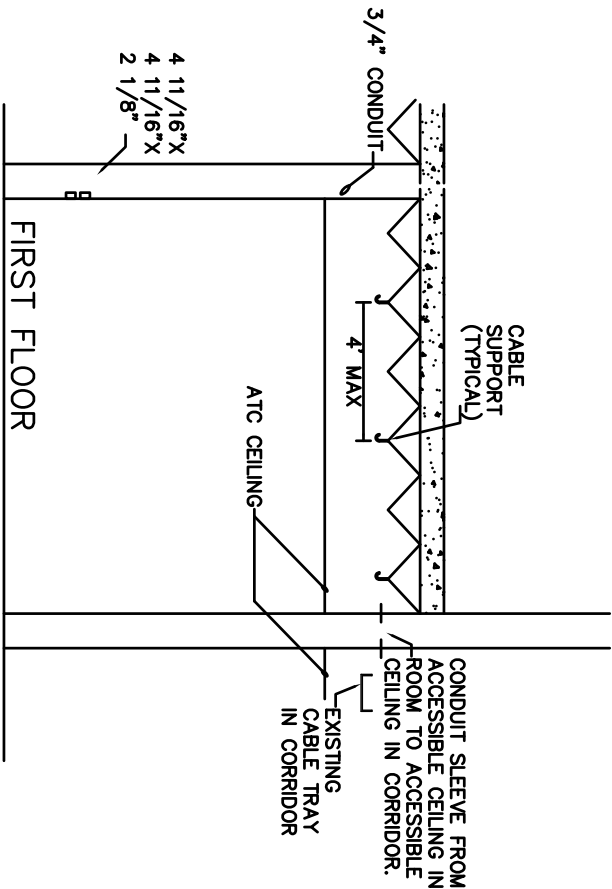

TELECOMMUNICATION
HORIZONTAL PATHWAY SCHEMATIC
NO SCALE

Location of Kiosk one this floor. Provide hospital grade quad receptacle feed from Panel N4W2 Sec 2 in room 4338. Run conductors in EMT conduit sized according to NEC and locate outlet 16" off the finished floor or match existing. Channel wall to eliminate exposed conduit and install a flush mounted 4X4 gang box.

Provide one data drop that will be fed from room 4374G. Data cable and devices will be CAT 6 certified. Cable will use existing raceways and 3/4" conduit down to outlet.

The contractor shall be responsible for patching, painting, repairing or replacement of all walls, ceilings, or other building elements which are disturbed as part of the demolition or installation of electrical work.

CONSULTANTS		ARCHITECT/ENGINEERS	
Project Title		Project Number	
4th Floor		Site Prep for Kiosk	
Approved Project Director		Safety Manager	
Date		Checked	
Drawn		Drawing Number	
E1.2		Dwg. d	
Office of Construction and Facilities Management			