


8TH FLOOR PLAN—BUILDING 1

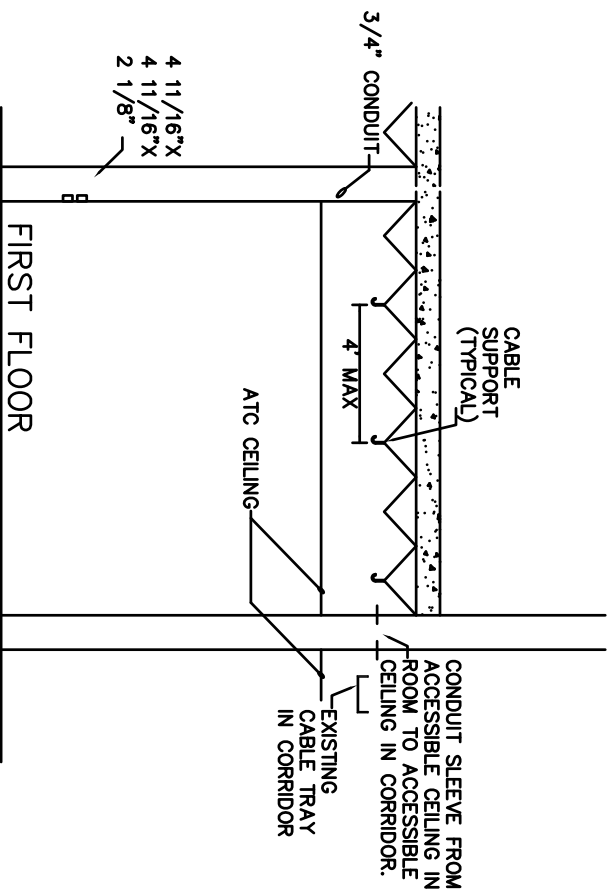

TELECOMMUNICATION
HORIZONTAL PATHWAY SCHEMATIC
NO SCALE

● Location of Kiosk two this floor. Provide hospital grade quad receptacle feed from Panel N8E1 in room 8201 and N8W1 in room 8608. Run conductors in EMT conduit sized according to NEC and locate outlet 16" off the finished floor or match existing. Channel wall to eliminate exposed conduit and install a flush mounted 4X4 gang box.

● Provide two data drops that will be fed from room 8414A. One to each location. Data cable and devices will be CAT 6 certified. Cable will use existing raceways and ¾" conduit down to outlet.

● Provide an additional quad data drop in room 8500.

● The contractor shall be responsible for patching, painting, repairing or replacement of all walls, ceilings, or other building elements which are disturbed as part of the demolition or installation of electrical work.
