

## YORK GENERAL NOTES

- A. REMOVE ALL WALLCOVERING/HIGH IMPACT PANELS/HANDRAILS/BUMPER GUARDS/CORNER GUARDS
- B. ABATE VCT AND MASTIC ACCORDING TO REGULATIONS USING INFECTION CONTROL AND INTERIM LIFE SAFETY MEASURES
- C. ALL MATERIAL TRANSITIONS SHALL BE AT CENTERLINE OF DOOR.
- D. PREP AND SKIM FLOORS PRIOR TO FLOORING INSTALLATION
- E. VERIFY WITH VA COR ALL CONCEPT FLOOR PATTERNS AND FINISHES LOCATIONS DURING THE DESIGN PHASE
- F. BLOCK/TILE WALLS WILL BE COVERED WITH MESH/PARGE METHOD TO CREATE SMOOTH SURFACE READY FOR PAINT
- G. FLASH PATCH ANY UNNEEDED ELECTRICAL BOXES. COORDINATE WITH COR FOR EXACT LOCATIONS
- H. REMOVE AND PATCH ALL LARGE UNNEEDED FIRE HOSE BOXES; INSTALL RECESSED FIRE EXTINGUISHER CABINET, AED BOXES AND PHONES
- I. RECESS ALL SURFACE MOUNTED WIRING, ELECTRICAL BOXES
- J. ENCASE ALL EXPOSED PIPING IN CORRIDORS AS COLUMNS AND INCLUDE ACCESS PANEL TO FIRE RISER

- K. INSTALL CONTROL JOINT AT EVERY CROSS CORRIDOR AND WHERE CRACKS ARE EVIDENT APPROX 10
- L. REPLACE/REFURBISH FLOOR EXPANSION JOINT COVERS APROX 7
- M. SKIM COAT ALL WALLS THAT ARE BEING PAINTED TYPICAL
- N. SAND AND REPAINT ALL DOOR FRAMES TYPICAL
- O. MATCH BUILDING STANDARD STAINLESS STEEL KICK PLATES ON DOORS IN CORRIDOR TYPICAL
- P. INSTALL NEW BUMPER GUARDS AT 8" O.C. AFF TYPICAL
- Q. INSTALL NEW CORNER GUARDS SURFACE MOUNTED AT: FLOOR TO CEILING TYPICAL TO ALL EXPOSED OUTSIDE CORNERS
- R. INSTALL NEW HANDRAIL 2'-8" A.F.F. TYPICAL
- S. CLEAN CEILING GRID AND REPLACE MISMATCHED CEILING TILE TO MATCH BLDG STANDARD TYPICAL
- T. REPLACE MISMATCHED LAMPS IN CORRIDOR LIGHTING FIXTURES TO MATCH FACILITY STANDARD LAMP COLOR
- U. FIELD VERIFY ALL FLOOR PLANS TO ENSURE ACCURACY
- V. REMOVE ALL CERAMIC TILE AROUND DRINKING FOUNTAINS

## KEY NOTES

- ① DEMO/FILL IN STAINLESS STEEL TAMBOR WINDOW
- ② INSTALL NEW STORE FRONT DOORS
- ③ INSTALL PORCELAIN TILE ON ELEVATOR WALL AND COLUMNS TO MATCH 1ST FLOOR
- ④ INSTALL WALL SCONCES AND ADD WALL WASH LIGHTING
- ⑤ REPLACE CEILING TILE AND GRID TO MATCH BUILDING STANDARD
- ⑥ REPLACE 2X4 CEILING LIGHTS TO MATCH BUILDING STANDARD
- ⑦ INSTALL CONTROL JOINT AT EVERY CROSS CORRIDOR AND WHERE CRACK IS EVIDENT APPROX 10
- ⑧ REPLACE/REFURBISH FLOOR EXPANSION JOINTS AS NEEDED APPROX 7
- ⑨ INSTALL SOLID VINYL FLOORING; FINISH & PATTERN TBD WITH 4" JOHNSONITE MILLWORK BASE
- ⑩ INSTALL ARMOUR PLATE ON EXISTING DOOR
- ⑪ GRIND EXISTING FLOOR, SHOT BLAST, REFINISH CONCRETE WITH SLIP RESISTANCE SURFACE I.E. TNEMEC
- ⑫ REMOVE CORRIDOR WALLS AS SHOWN/INSTALL CURVED SOFFIT/CAN LIGHTS/ CLERK WINDOW WITH TRANSACTION COUNTER/ WRAP COLUMNS WITH DWP/CG/SCONCES; RELOCATE AUTOMATIC DOOR OPENER
- ⑬ ENCASE SPRINKLER FIRE RISER PIPE AS COLUMN WITH ACCESS DOOR
- ⑭ DEMO WALL/DOOR; INSTALL STORE FRONT ASSEMBLY AND AUTOMATIC DOOR WITH HEADER/ WRAPPED COLUMNS WITH DWP/CG/SCONCES
- ⑮ DEMO WALL/DOOR; RELOCATE LIGHT SWITCH AND PHONE OUTLET/ADD SOFFIT
- ⑯ ADD "EXIT" SIGN AT DOOR
- ⑰ PROVIDE AND INSTALL CUSTOM DIGITAL WALLCOVERING MURAL
- ⑱ REPAIR DIMPLES IN WALL FROM OLD FASTNERS
- ⑲ ADD KICK PLATE TO EXISTING DOORS
- ⑳ ADD WOOD PANELIZED SYSTEM W/EXTRUDED ALUMINUM REVEALS
- ㉑ REPLACE DOOR TO MATCH BUILDING STANDARD
- ㉒ INSTALL NEW CEILING/DIFFUSER/2 ADDITIONAL CEILING LIGHTS TO MATCH BUILDING STANDARD
- ㉓ MESH/PARGE BLOCK; BUILD OUT TO ENCASE EXPOSED PIPE
- ㉔ WRAP COLUMNS WITH HIGH IMPACT WALL PANELS AND CORNER GUARDS
- ㉕ MESH/PARGE BLOCK WALL/FINISH FOR PAINT
- ㉖ REMOVE PIPE/INSTALL 84" FR STEEL DOOR W/STAINLESS STEEL EDGE PROTECTION
- ㉗ REFINISH EXISTING DOOR & REPLACE HARDWARE
- ㉘ REPLACE DOOR AND HARDWARE WITH STEEL FIRE RATED DOOR
- ㉙ REPLACE DRINKING FOUNTAIN WITH LOW PROFILE FOUNTAIN
- ㉚ INSTALL HALF WALL WITH ACRYLIC PANEL (3-FORM) PANEL ABOVE

## FINISH LEGEND

AP ACRYLIC PANEL  
CG CORNER GUARD  
DWP DECORATIVE WOOD PANELIZED SYSTEM  
ETR EXISTING TO REMAIN  
L LAMINATE  
LVT LUXURY VINYL TILE  
ME MATCH EXISTING  
P PAINT  
RB RUBBER BASE  
SC STONE CLADDING  
SV SHEET VINYL  
SS SOLID SURFACE  
T TILE  
VWP VINYL WALL PROTECTION  
VWC VINYL WALLCOVERING  
WT WALL TILE

### WALLS

P1 SHERWIN WILLIAMS: SW6106 KILIM BEIGE: SATIN  
P2 ALL DOORFRAMES:SHERWIN WILLIAMS: SW7038: TONY TAUPE: SEMI-GLOSS  
P3 SHERWIN WILLIAMS: TBD: SATIN  
P4 SHERWIN WILLIAMS: TBD: SATIN  
P5 SHERWIN WILLIAMS: TBD: SATIN  
P6 SHERWIN WILLIAMS: TBD: SATIN

DWP1 DECORATIVE WOOD PANELIZED SYSTEM  
AP-1 3 FORM PANELS VARIA ECORESIN; WISP GOLD

SC1 6"x2" REALSTONE SYSTEMS  
PROFILE; SHADOWSTONE COLOR; TERRACOTTA

VWC1 VERSA: CITY BLOCKS  
VWC2 VERSA: CITY BLOCKS  
VWC3 VERSA: CITY BLOCKS

T1 CROSSVILLE CERAMICS;  
EMPEROR'S GOLD (POLISHED  
AND UNPOLISHED) 10.5X21

T2 CROSSVILLE CERAMICS;  
EMPEROR SERIES;  
ELBA NIGHT 10.5X21  
GROUT: ACCUCOLOR XT  
LIGHT PEWTER  
SCHULTER - RONDEC;12MM  
ANODIZED ALUMINUM:AKGB  
BRUSHED COPPER/BRONZE

X X

\*DENOTES FLOORING  
TRANSITIONS

### BASE

RB1 JOHNSONITE: 4.25" MILLWORK CONTOURED REVEAL;MW-XX-F  
COLOR: BURNT UMBER

RB3 ROPPE RUBBER COVE BASE 4" COLOR: IVORY

### FLOORS

LVT1 CENTIVA -CONTOUR WOOD; CANADIAN MAPLE, TICK  
SURFACE, SQUARE EDGE CP 3306-C TK SE 4" X 36"

LVT2 CENTIVA -EVENT WOOD SERIES; ANTIQUE CIMARRON, THIRD  
GRAIN SURFACE, SQUARE EDGE WP GW29-E TG SE 4" X 36"

LVT3 CENTIVA EVENT STONE NS7231-E QU  
STRAIGHT EDGE; STAGGERED BRICK PATTERN

LVT4 TOLI INTERNATIONAL LINOTESTA,  
FASOLPLUS 17.7" X 17.7" LATTE

LVT5 TOLI INTERNATIONAL LINOTESTA,  
VIALE 17.7" X 17.7" TBD

CPT1 TANDUS, AFTERMATCH II, 03026;  
COLOR; FLEECE

### CEILING

AT1 2x2 ACOUSTICAL TILE- ARMSTRONG CORTEGA 770

### LAMINATE/SOLID SURFACE

L1 VERTICAL SURFACE; WILSONART COLOR; TBD  
SS1 CAMBRIA SOLID SURFACE-CAMBRIAN COLLECTION; LINWOOD  
SS2 CORIAN SOLID SURFACE; COLOR TBD

### WALL PROTECTION

HR -HANDRAIL ACROVYN HRB-10CN 6 1/4" SHAKER CHERRY  
CR -CRASH RAIL ACROVYN SCR-48N 6" SHAKER CHERRY  
CG -CORNER GUARD ACROVYN SM-10N 3" BULLNOSE SHAKER CHERRY

### DOORS\* TBD



## FINISH SCHEDULE

| NO.                     | CORRIDOR NAME            | WALL           | BASE | FLOORS     | CEILING | COMMENTS  |
|-------------------------|--------------------------|----------------|------|------------|---------|---|
| BLDG 1 GROUND FLOOR     |                          |                |      |            |         |   |
| G44                     | ELEVATOR LOBBY           | T1 / T2/P1,2,3 | RB1  | LVT1,2,3   | ETR     | ADD WALL TILE/SCONCES/WALLWASH LIGHTING   |
| G45                     | CORRIDOR                 | P1,2,3         | RB1  | LVT1,2,3   | ETR     |   |
| G46                     | CORRIDOR                 | P1,2,3         | RB1  | LVT-1,2,3, | AT1     |   |
| G47                     | CORRIDOR                 | P1,2,3         | RB1  | LVT1,2,3   | ETR     |   |
| G48                     | CORRIDOR                 | P1,2,3         | RB1  | LVT1,2,3,  | AT1     |   |
| G49                     | NUC MED CORRIDOR         | P1,2,3         | RB1  | LVT1,2,3   | AT1     | INSTALL STORE FRONT DOUBLE DOOR   |
| G14                     | DENTAL CORRIDOR          | P1,2,3         | RB1  | LVT1,2,3   | ETR     | INSTALL STORE FRONT DOOR  |
| BLDG 2 GROUND FLOOR     |                          |                |      |            |         |   |
| G27                     | CORRIDOR                 | P1,2,3         | RB1  | LVT1,2,3   | ETR     |   |
| G29                     | CORRIDOR                 | P1,2,3         | RB1  | LVT1,2,3   | ETR     | WRAP COLUMNS W/AP: SEE NOTES FOR 2G   |
| G30                     | CORRIDOR                 | P1,2,3         | RB1  | CONCRETE   | ETR     |   |
| G31                     | LIBRARY CORRIDOR         | P1,2,3         | RB1  | LVT1,2,3   | ETR     | WRAP COLUMNS WITH HIP/CORNER GUARDS   |
| G12K                    | 2G WAITING               | P1,2,VWC1 AP-1 | RB1  | LVT1,2,3   | AT1     | INSTALL HALF WALL W/3 FORM PANEL  |
| G12J                    | 2G CLERK                 | P1,2           | RB1  | LVT1,2,3   | AT1     | INSTALL CLERK WINDOW W/TRANS TOP SS1  |
| G15                     | ROI & PATIENT FUNDS      | P1,2,VWC2      | RB1  | LVT1,2,3   | AT1     | INSTALL CLERK WINDOWS W/TRANS TOP SS1   |
| G15A                    | ROI/PATIENT FUNDS OFFICE | P1,2 AP-1      | RB1  | CPT-1      | AT1     | AND 3 FORM DIVIDERS FLOOR/CEILING   |
| 2/3 CONNECTING CORRIDOR |                          |                |      |            |         |   |
| B149                    | STARBUCKS ENTRY          | P1,2,3         | RB1  | LVT1,2,3   | ETR     | ENCASE RISER W/AP COLUMNS W/ACCESS<br>INSTALL SOFFIT TO MEET CORRIDOR                                     |
| BLDG 3 GROUND FLOOR     |                          |                |      |            |         |   |
| G04                     | FIRM D WAITING           | P1,2,3 DWP1    | RB1  | LVT1,2,3   | ETR     | WRAP COLUMNS WITH HIP & ADD SCONCE  |
| G15                     | ELEVATOR LOBBY           | P1,2,3 DWP1    | RB1  | LVT1,2,3   | ETR     | ADD DWP ON ELEVATOR WALL  |
| G12                     | PHARMACY WAITING         | P1,2,3, DWP1   | RB1  | LVT1,2,3   | ETR     | WRAP COLUMNS WITH HIP & ADD SCONCE<br>ADD DWP ON WALL AS NOTED  |
| G25                     | MAIN ENTRY               | DWP1; SC1,P1,2 | RB1  | LVT1,2,3   | AT1     | ADD STORE FRONT WALL & SLIDING DOORS<br>RECEPT COUNTER/SOFFIT/CAN LIGHTS<br>ADD STONE CLAD & DWP AS NOTED |
| G29                     | CORRIDOR                 | P1,2,3         | RB1  | LVT1,2,3   | AT1     | ENCASE EXPOSED PIPE,PARGE BLOCK WALLS   |
| G27,28,30               | CORRIDOR                 | P1,2,3         | RB1  | LVT1,2,3   | ETR     |   |
| G31                     | ALVIN'S CORRIDOR         | P1,2,3         | RB1  | LVT1,2,3   | ETR     |   |
| 2/9 CONNECTING CORRIDOR |                          |                |      |            |         |   |
| BLDG 9 GROUND FLOOR     |                          |                |      |            |         |   |
| G07                     | PT-9 WAITING             | P1,2,VWC1      | RB1  | LVT1,2,3   | AT1     | DEMO CORRIDOR DOOR AND WALL TO COLUMN<br>HIP COLUMN & ADD SCONCE  |
| G23-25                  | CORRIDOR                 | P1,2,3         | RB1  | LVT1,2,3   | AT1     | ENCASE EXPOSED PIPE,PARGE BLOCK WALLS   |
| G01A                    | ELEVATOR LOBBY           | P1,2,3 DWP1    | RB1  | LVT1,2,3   | ETR     | FURR OUT COLUMN FOR WIRING; WRAP WITH<br>HIP, CG & ADD SCONCE   |
| 157/158                 | BLDG 3 FIRST FL CORRIDOR | P1,2,3         | RB3  | LVT4,5     | ETR     |   |

| Revisions | Date |
|-----------|------|
|           |      |
|           |      |
|           |      |
|           |      |
|           |      |
|           |      |
|           |      |



Tennessee Valley Healthcare System

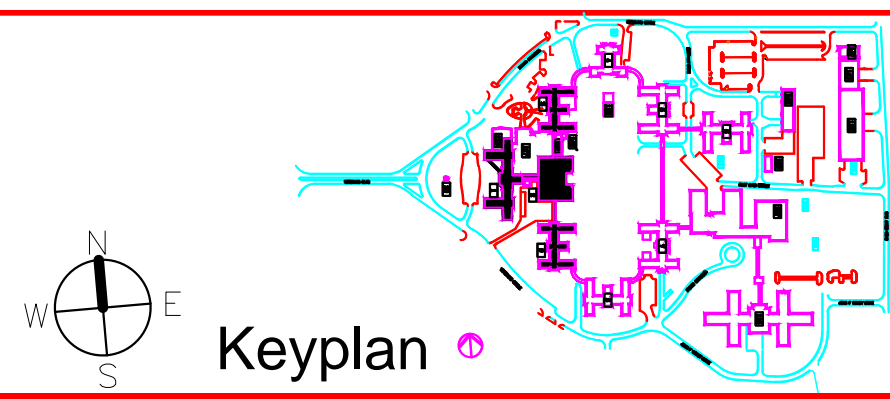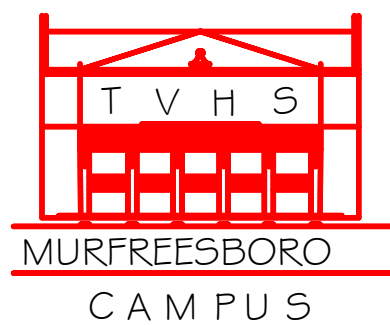

|                 |                               |
|-----------------|-------------------------------|
| Project Title:  | Halls and Walls Ph 5          |
| Drawing Title:  | General Notes/Finish Schedule |
| Approved By:    |                               |
| Approved By:    |                               |
| Drawing Number: | 626A4-11-102                  |
| Drawn By:       | Jackson                       |

|              |              |
|--------------|--------------|
| Date:        | 2/27/13      |
| Project No.: | 626A4-11-102 |
| Drawing No.: |              |
| Dwg.:        | 01           |

Department of  
Veterans Affairs