



1 KEY NOTE 1,2 CONCEPT DETAIL



2 KEY NOTE 6 CONCEPT DETAIL



3 KEY NOTE 7 CONCEPT DETAIL

KEY NOTES	
FINISH KEYNOTES	
1	REMOVE WALL/ DOOR SO WAITING IS COMPLETELY OPEN TO CORRIDOR. ADD 1' X 2' SOFFIT IN WAITING ENTRY
2	OPEN UP RECEPTION WINDOW. REPLACE LAMINATE TRANSACTION TOP. ADD WRITING SURFACE AND SMALL PENDANT. SEE SHEET 6 FOR KEYNOTE CONCEPT DETAIL
3	ADD BULK HEAD IN CORRIDOR
4	REMOVE WOOD WAINSCOTTING. PREP WALLS AND INSTALL HR2 & SC1 BELOW HANDRAIL
5	DEMOLISH WALL AND RELOCATE RECEPTION DESK
6	DEMOLISH RECEPTION DESK AND INSTALL NEW CASEWORK W/ SOFFIT. RECESSED NICHE/ LIGHTING ABOVE. SEE SHEET 6 FOR KEYNOTE CONCEPT DETAIL
7	INSTALL NEW CASEWORK - TIE IN/ADD ADDITIONAL SOFFITS/ADD PENDANT LIGHTING AND CANS. SEE SHEET 6 FOR KEYNOTE CONCEPT DETAIL
8	REPLACE CEILING TILE WITH GYP.
9	INSTALL FLOOR TO CEILING DWP1. SEE SHEET 6 FOR KEYNOTE CONCEPT DETAIL
10	REMOVE COLUMNS AND INSTALL SC1. SEE SHEET 6 FOR KEYNOTE CONCEPT DETAIL
11	REPLACE CANS WITH DECORATIVE PENDANTS AND UPDATE LIGHT COVE. SEE FINISH LEGEND FOR EXAMPLES AND SEE SHEET 6 FOR KEYNOTE CONCEPT DETAIL
12	INSTALL WALL SOONCES
13	PAINT SOFFITS
14	INSTALL WVP2 AT 36" A.F.F. ON ALL WALLS TYPICAL
15	STRIP WALLCOVERING. PAINT COLUMNS AND INSTALL CG1
16	INSTALL WALL PROTECTION ON ROUND COLS
17	INSTALL BUILT IN PLANTER AND CUSTOM DIGITAL WALLCOVERING IN ALCOVE ABOVE PLANTER. SEE SHEET 6 FOR KEYNOTE CONCEPT DETAIL
18	INSTALL 10' EXTERIOR SELF IRRIGATING PLANTERS. SEE FINISH LISTING FOR EXAMPLE
19	RELOCATE COFFEE BAR TO CANTINE AREA AND PROVIDE UTILITIES NEW FINISHES, SOFFIT, AND ACCELT LIGHTING
20	INSTALL WHEELCHAIR ALCOVE AND W/ WVP2. SEE SHEET 6 FOR KEYNOTE CONCEPT DETAIL
21	INSTALL DWP BELOW CHAIR RAIL AND TACKABLE DISPLAY BOARD ABOVE CHAIR RAILS ON ALL PERIMETER WALLS



4 KEY NOTE 7 CONCEPT DETAIL




5 KEY NOTE 9,10,11,12 CONCEPT DETAIL



6 KEY NOTE 17 CONCEPT DETAIL



7 KEY NOTE 20 CONCEPT DETAIL

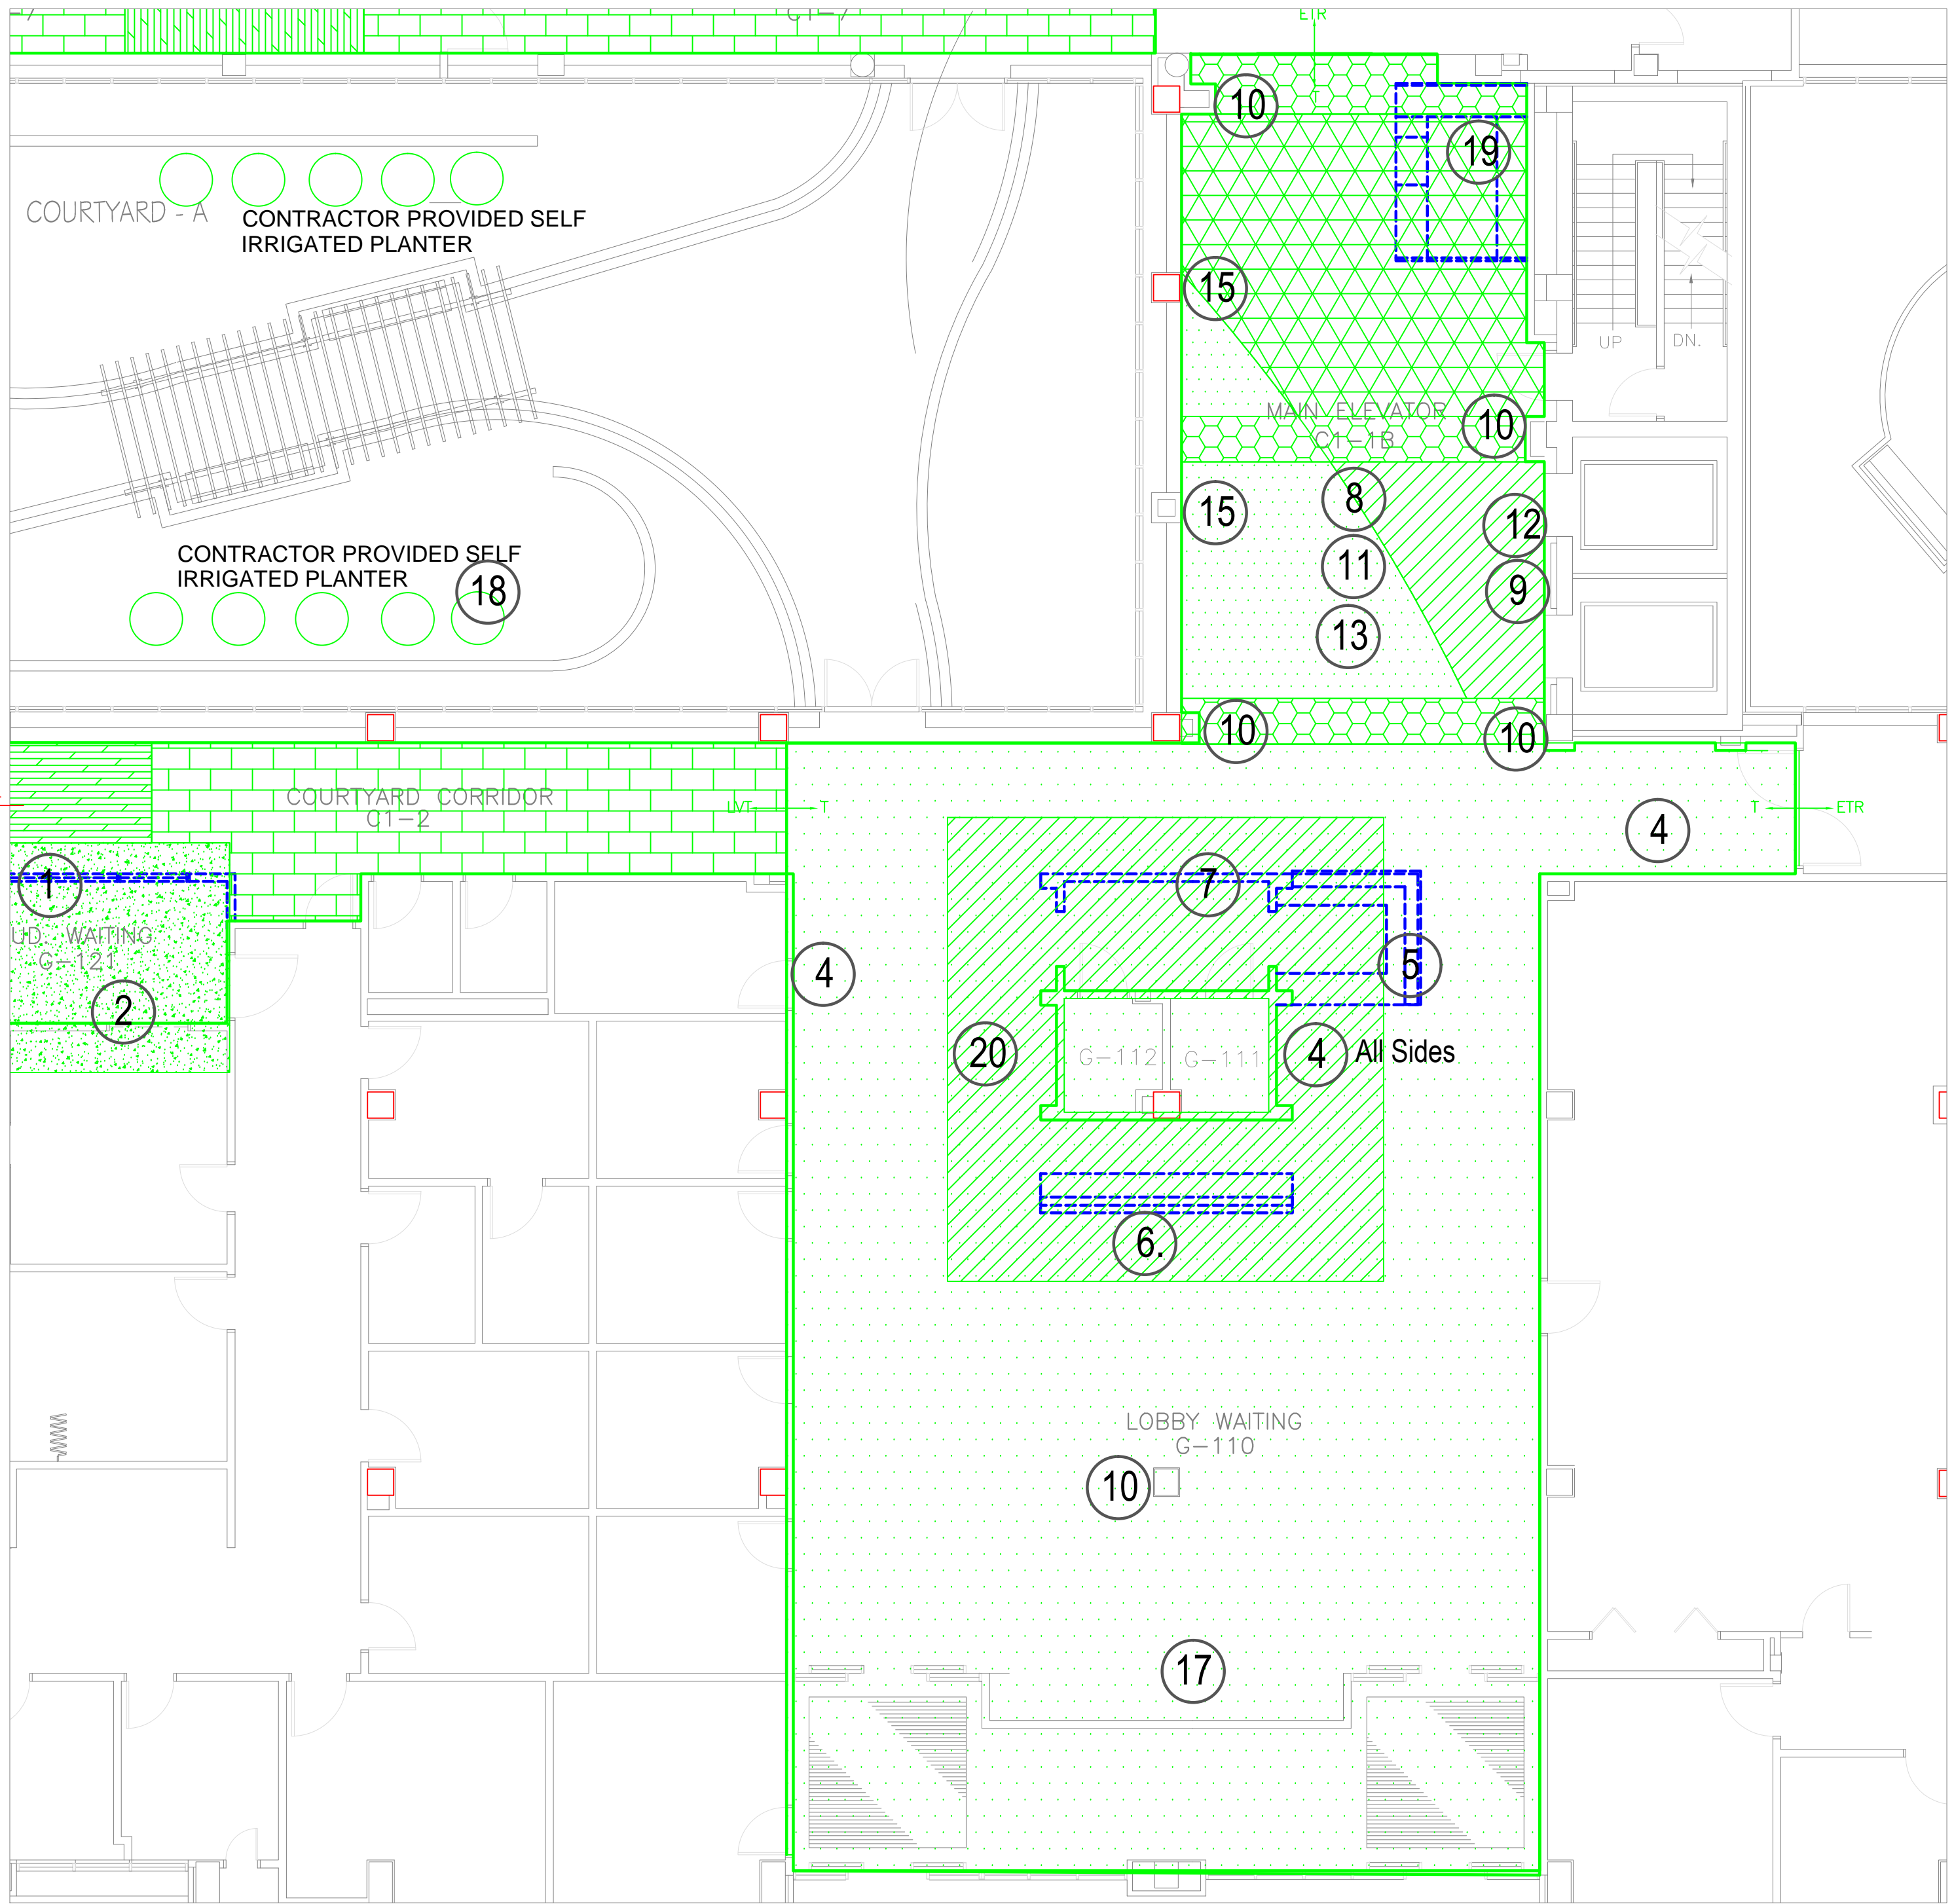


MAIN LOBBY FLOOR PLAN

SCALE: 1/8" = 1'-0"

Revisions	Date



Tennessee Valley Healthcare System



Project Title: Halls and Walls Ph 5	
Drawing Title: Key Note Concept Drawing	
Approved By: _____	Checked By: _____
Building Number: _____	Floor: _____
Checked By: SS	Drawn By: MW

Date: 3-20-13
Project No.: 626-13-101
Drawing No.: 5 of 5

Department of Veterans Affairs