


three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
three eighths inch = one foot
one quarter inch = one foot
one eighth inch = one foot
one eighth inch = one foot

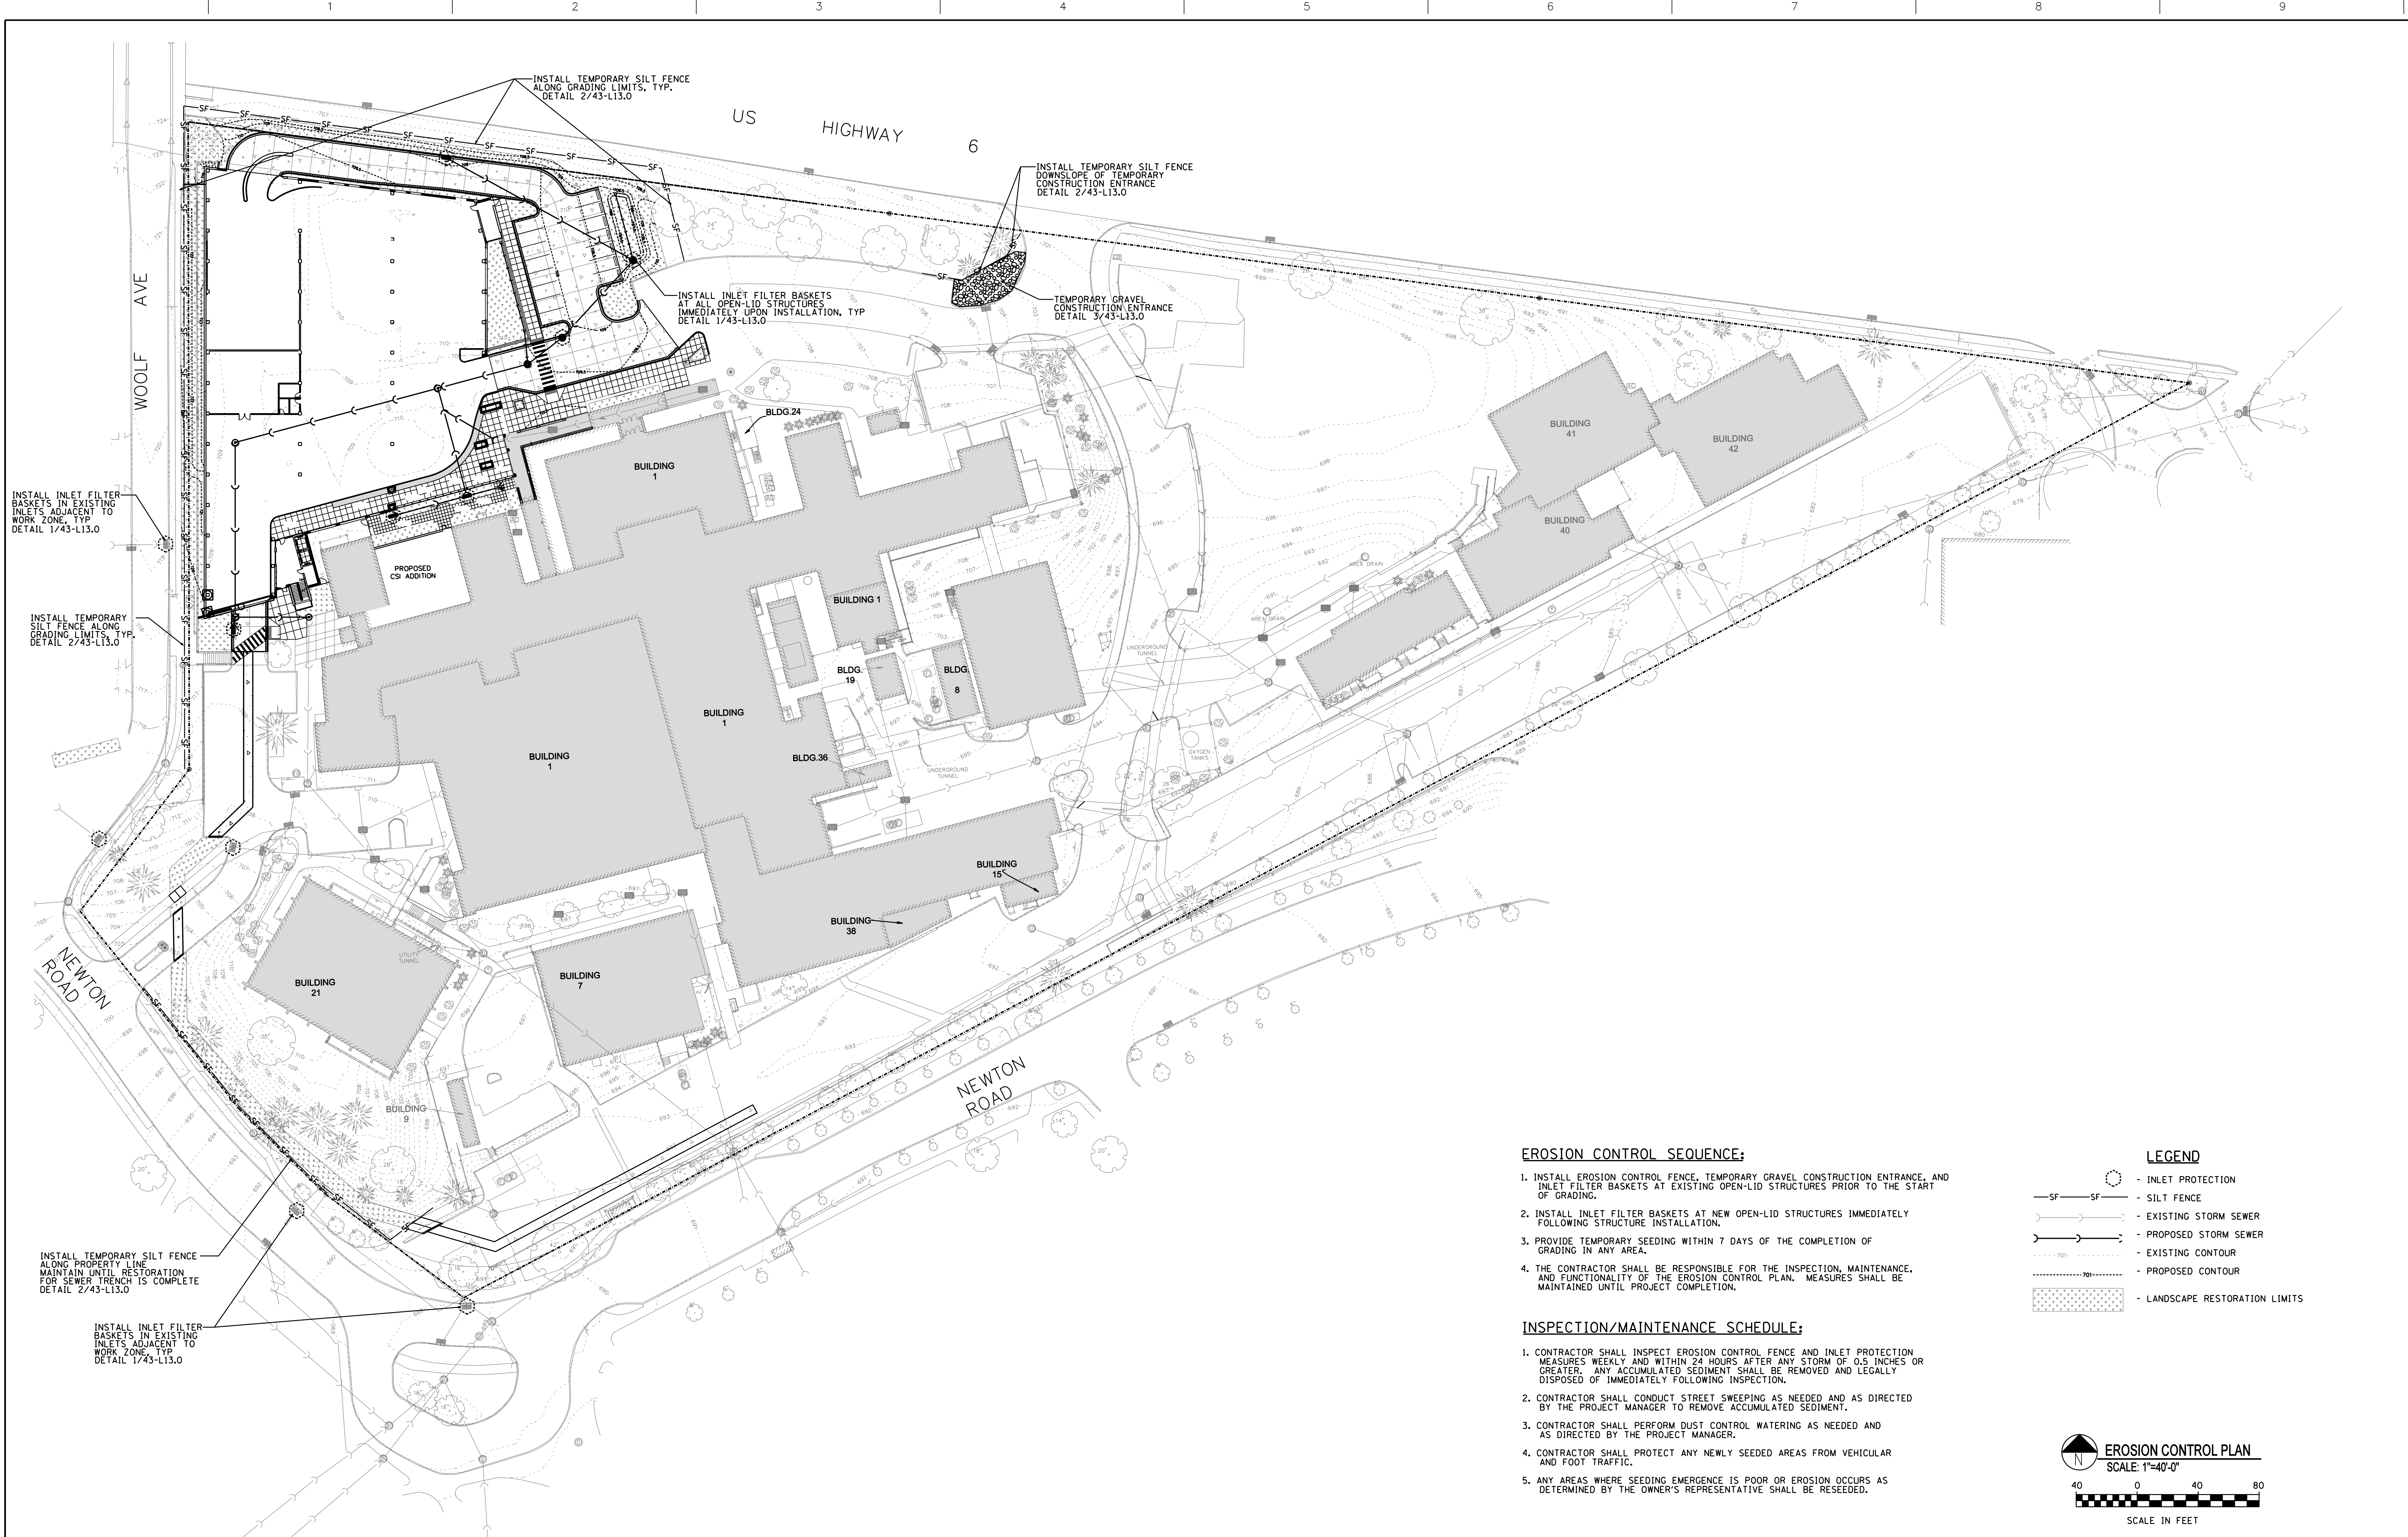

EROSION CONTROL SEQUENCE:


1. INSTALL EROSION CONTROL FENCE, TEMPORARY GRAVEL CONSTRUCTION ENTRANCE, AND INLET FILTER BASKETS AT EXISTING OPEN-LID STRUCTURES PRIOR TO THE START OF GRADING.
2. INSTALL INLET FILTER BASKETS AT NEW OPEN-LID STRUCTURES IMMEDIATELY FOLLOWING STRUCTURE INSTALLATION.
3. PROVIDE TEMPORARY SEEDING WITHIN 7 DAYS OF THE COMPLETION OF GRADING IN ANY AREA.
4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE INSPECTION, MAINTENANCE, AND FUNCTIONALITY OF THE EROSION CONTROL PLAN. MEASURES SHALL BE MAINTAINED UNTIL PROJECT COMPLETION.

INSPECTION/MAINTENANCE SCHEDULE:

1. CONTRACTOR SHALL INSPECT EROSION CONTROL FENCE AND INLET PROTECTION MEASURES WEEKLY AND WITHIN 24 HOURS AFTER ANY STORM OF 0.5 INCHES OR GREATER. ANY ACCUMULATED SEDIMENT SHALL BE REMOVED AND LEGALLY DISPOSED OF IMMEDIATELY FOLLOWING INSPECTION.
2. CONTRACTOR SHALL CONDUCT STREET SWEEPING AS NEEDED AND AS DIRECTED BY THE PROJECT MANAGER TO REMOVE ACCUMULATED SEDIMENT.
3. CONTRACTOR SHALL PERFORM DUST CONTROL WATERING AS NEEDED AND AS DIRECTED BY THE PROJECT MANAGER.
4. CONTRACTOR SHALL PROTECT ANY NEWLY SEEDED AREAS FROM VEHICULAR AND FOOT TRAFFIC.
5. ANY AREAS WHERE SEEDING EMERGENCE IS POOR OR EROSION OCCURS AS DETERMINED BY THE OWNER'S REPRESENTATIVE SHALL BE RESEDED.

LEGEND

- INLET PROTECTION
- SILT FENCE
- EXISTING STORM SEWER
- PROPOSED STORM SEWER
- EXISTING CONTOUR
- PROPOSED CONTOUR
- LANDSCAPE RESTORATION LIMITS

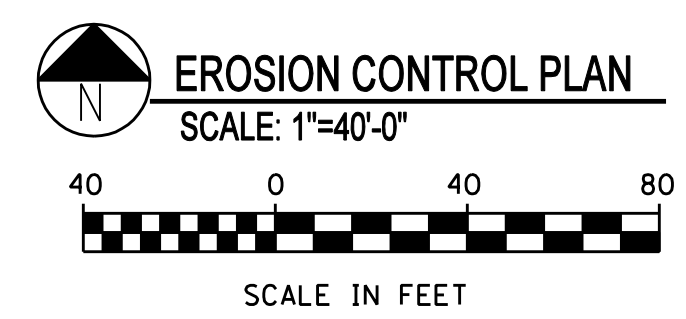

		CONSULTANTS/ENGINEERS:				ARCHITECT:		Drawing Title		Project Title		Project Number		Office of Construction and Facilities Management					
		KJWW ENGINEERING CONSULTANTS Mechanical/Electrical/Plumbing Engineer		TERRACON Geotechnical Engineer		GRAEF Civil Engineer/Landscape Architect		WALKER PARKING CONSULTANTS Structural Engineer		FAITHFUL+GOULD Cost Management		EROSION CONTROL PLAN				400 CAR PARKING GARAGE		636-402	
FINAL CONSTRUCTION DOCUMENTS		623 26TH AVENUE ROCK ISLAND, ILLINOIS 61201 309.786.0673 Telephone 309.786.5967 Fax		2640 12TH STREET SW CEDAR RAPIDS, IOWA 52404 319.366.8321 Telephone 319.366.0032 Fax		332 SOUTH MICHIGAN, SUITE 1400 CHICAGO, ILLINOIS 60604-4367 312.582.2020 Telephone 312.939.7014 Fax		506 DAVIS ROAD ELGIN, ILLINOIS 60123 847.697.2640 Telephone 847.697.7439 Fax		222 SOUTH RIVERSIDE PLAZA, SUITE 2240 CHICAGO, ILLINOIS 60606 312.612.6319 Telephone 312.655.9037 Fax		233 North Michigan Avenue Suite 3000 Chicago, Illinois 60601				Building Number 43		Project Number	
100% REVIEW SUBMISSION (NOT FOR CONSTRUCTION)		06/10/11										Approved: Project Director		Location		Drawing Number			
75% REVIEW SUBMISSION (NOT FOR CONSTRUCTION)		04/11/11										Iowa City VA Healthcare System		IOWA CITY, IA		43-L5			
75% REVIEW SUBMISSION (NOT FOR CONSTRUCTION) - COST ESTIMATE		02/03/11										Department of Veterans Affairs Medical Center		Date		Dwg. 10 of 152			
35% REVIEW SUBMISSION (NOT FOR CONSTRUCTION)		01/19/11												Checked		MAY			
Revisions:		11/22/10												Drawn		IN			
Date																			