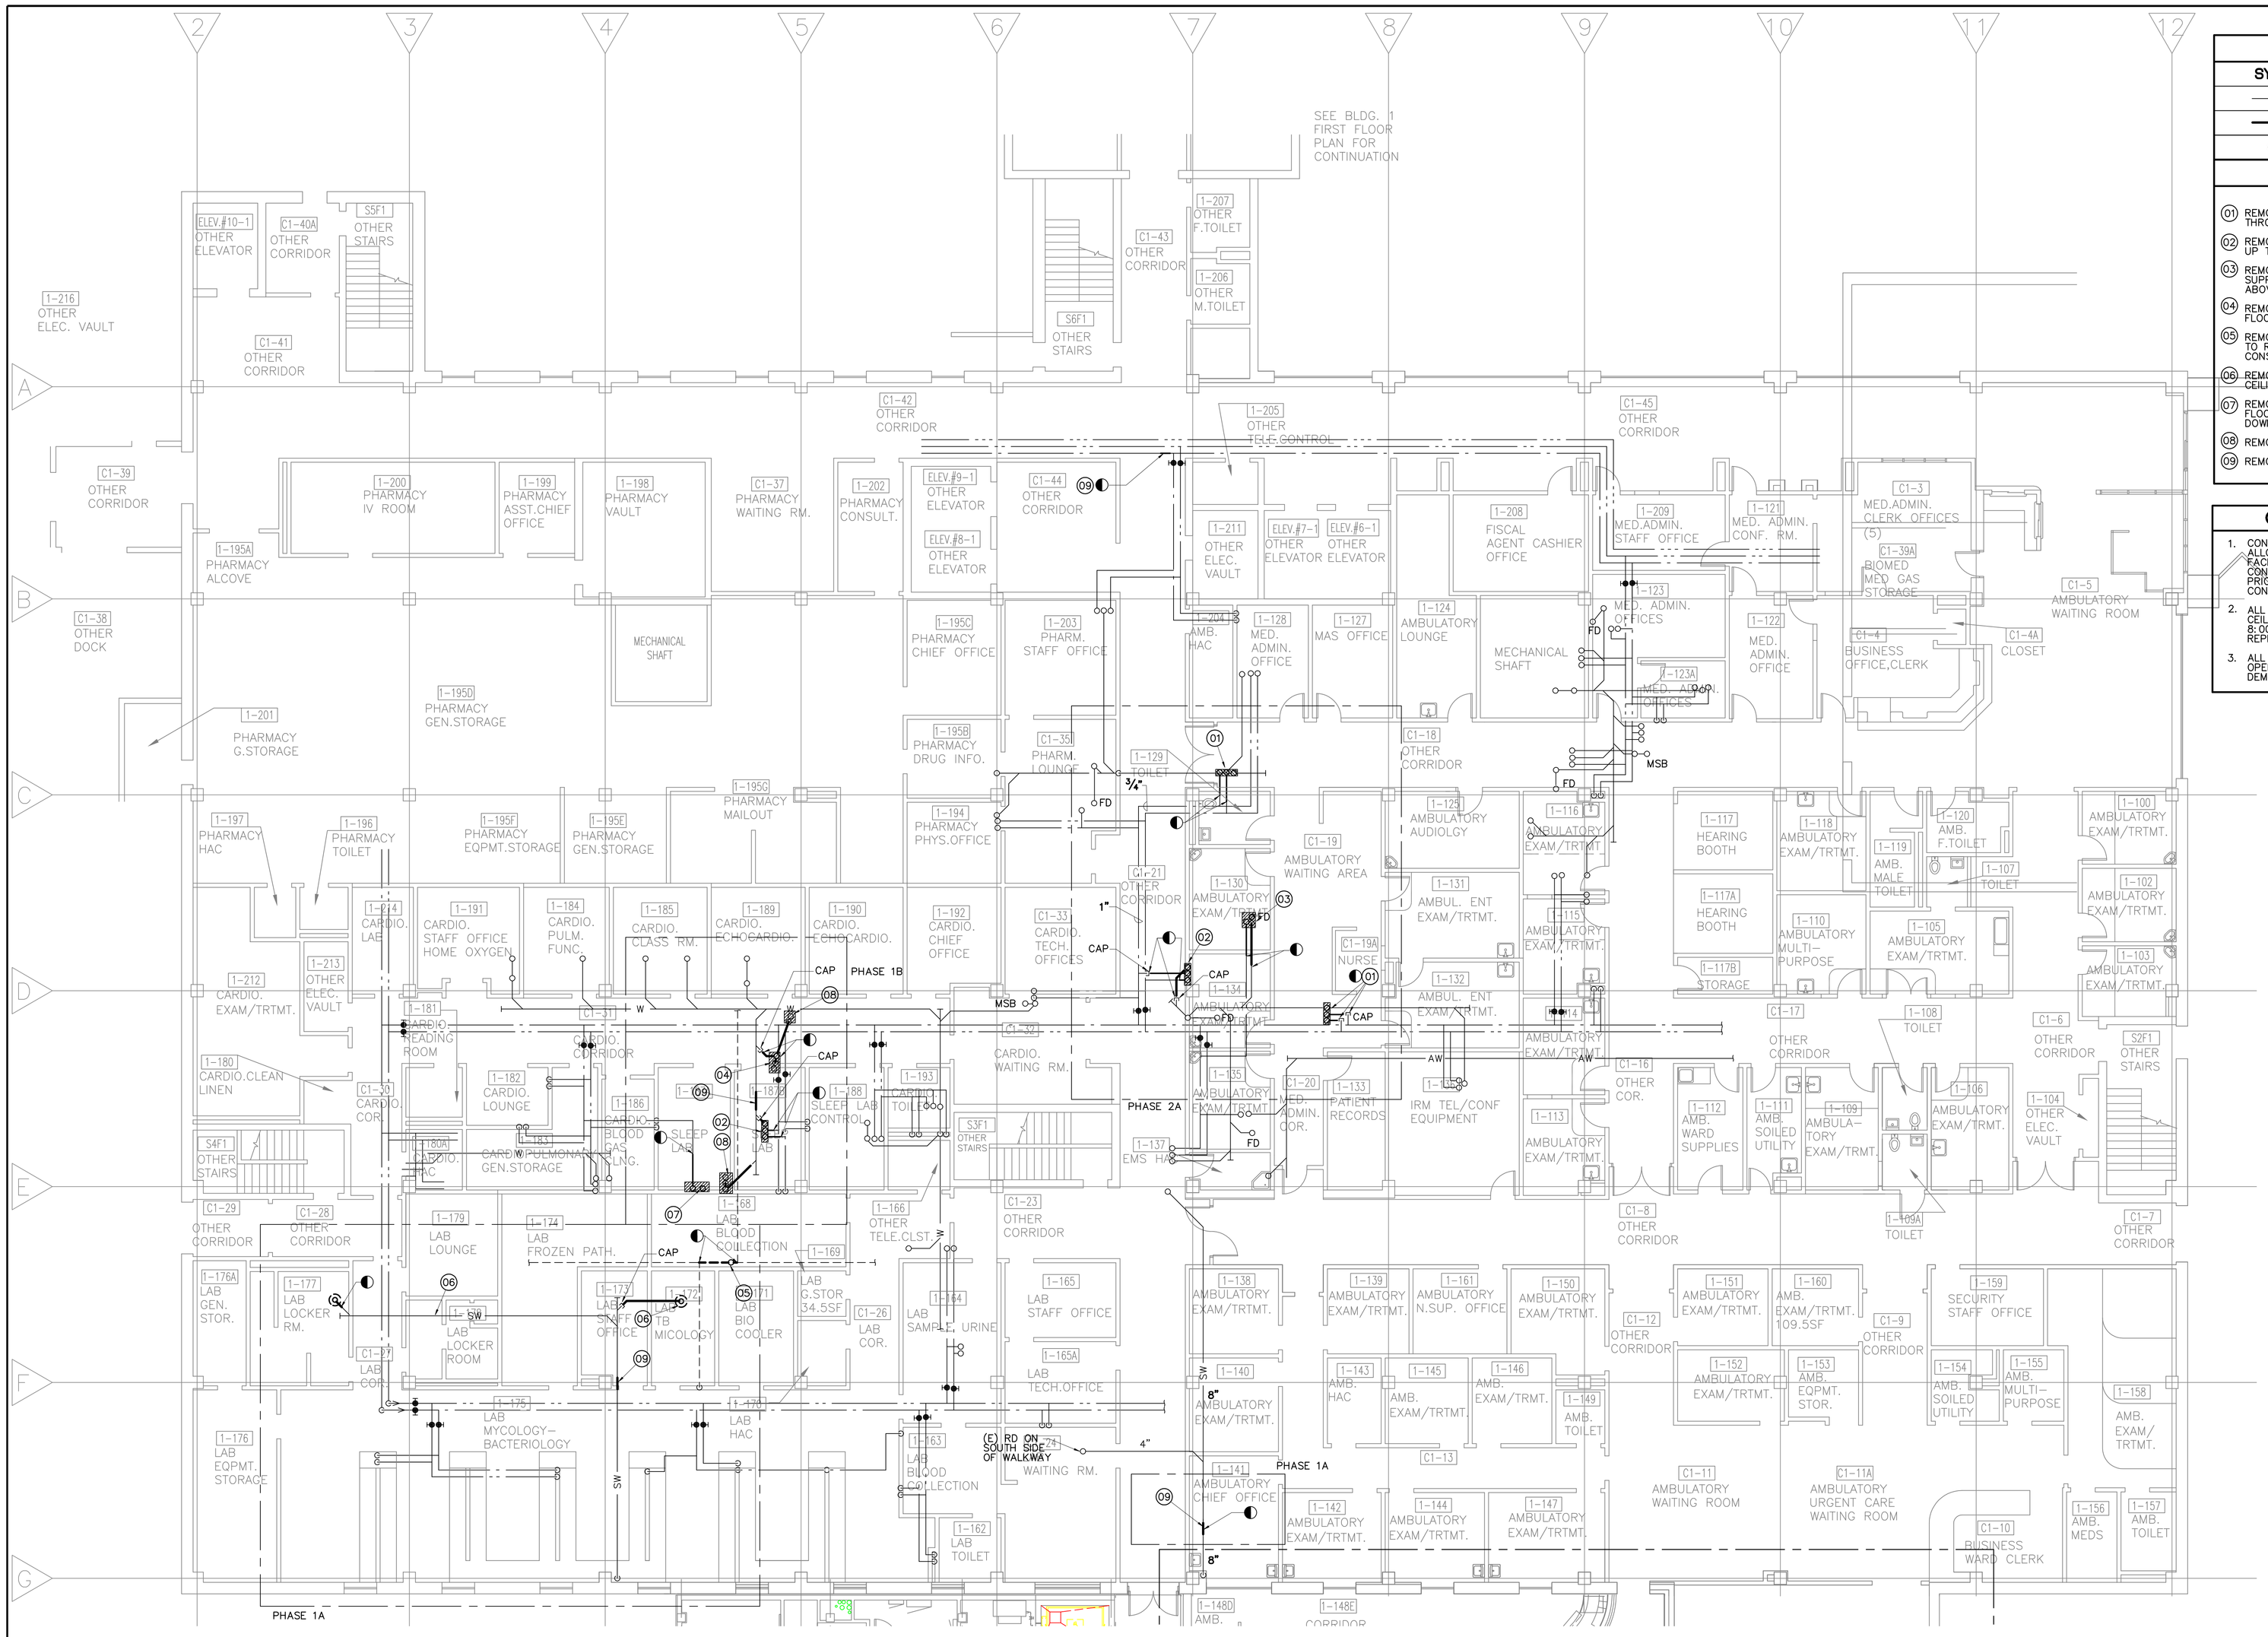

DEMOLITION LEGEND

SYMBOL	DESCRIPTION
———	EXISTING TO REMAIN
▬▬▬	EXISTING TO BE REMOVED
◐	DEMO TO THIS POINT

PLAN KEYED NOTES

01. REMOVE 3/4" HW, 3/4" CW, 2" WASTE RISERS UP THROUGH FLOOR SERVING SCRUB SINKS ABOVE.
02. REMOVE 1/2" HW, 1/2" CW AND 1-1/2" WASTE RISERS UP THROUGH FLOOR TO SINK ABOVE.
03. REMOVE 3" FLUSHING RIM FLOOR DRAIN AND CW SUPPLY RISER UP THROUGH FLOOR TO FLUSH VALVE ABOVE.
04. REMOVE 3" FLOOR DRAIN AND VENT RISER UP THROUGH FLOOR.
05. REMOVE 4" VENT TROUGH ROOF. VENT SERVING LAB TO REMAIN ACTIVE THROUGHOUT PHASE 1A/1B CONSTRUCTION.
06. REMOVE 4" ROOF DRAIN AND DRAIN PIPING ABOVE CEILING.
07. REMOVE CW AND 3/4" 140° HW RISERS UP THROUGH FLOOR SERVING EQUIPMENT ABOVE. 140° HW RISER DOWN TO REMAIN AND BE REUSED.
08. REMOVE 3" FLOOR DRAIN/SINK.
09. REMOVE FOR NEW CONNECTION.

CONSTRUCTION PHASING

1. CONSTRUCTION SHALL BE COMPLETED IN PHASES TO ALLOW FOR UNINTERRUPTED USE OF HOSPITAL FACILITIES. REFER TO ARCHITECTURAL PHASING PLAN. CONSTRUCTION PHASE 1A AND 1B SHALL BE COMPLETE PRIOR TO BEGINNING OF PHASE 2A AND 2B CONSTRUCTION.
2. ALL WORK (DEMOLITION AND NEW) ABOVE CEILING IN OCCUPIED AREAS SHALL OCCUR BETWEEN 8:00 PM AND 5:00 AM. ALL CEILING TILES MUST BE REPLACED AT END OF WORK SHIFT.
3. ALL SERVICES AND UTILITIES SHALL BE FULLY OPERATIONAL AT END OF WORK SHIFT. SCHEDULE DEMOLITION AND NEW CONSTRUCTION ACCORDINGLY.

FULLY SPRINKLERED

Revisions	Date

CONSULTANTS:

CIVIL/STRUCTURAL:

MARTIN/MARTIN
CONSULTING ENGINEERS
12499 West Colfax Avenue
P.O. Box 151500
Lakewood, Colorado 80215
303.431.5100
FAX 303.431.6866

MECHANICAL, PLUMBING, AND ELECTRICAL:

SSR Smith Seckman Reid, Inc.
8055 E. Tufts Avenue, Suite 1100
Denver, Colorado 80237
(303) 779-1222
FAX: (303) 694-9144
www.ssr-inc.com
SSR JOB #: 08270120

PLAN NORTH

SCALE: 1/8" = 1'-0"

ARCHITECT/ENGINEERS:

HEERY design

Heery International Inc.
820 16th Street Mall,
Suite 200,
Denver, CO 80202-3219
720.946.0276

Heery Project Number:
0830400

Drawing Title	FIRST FLOOR PLAN PLUMBING DEMOLITION
Approved Project Director	
Project Title	SURGERY RENOVATION AND EXPANSION
Location	CHEYENNE, WY
Date	04/24/09
Checked	RDM
Drawn	DLB
Project Number	VA-259-09-RA-209
Building Number	BLDG. NO. 1
Drawing Number	PD101
Dwg. SHT of 44	

Office of Construction and Facilities Management

Department of Veterans Affairs

VA FORM 08-6231