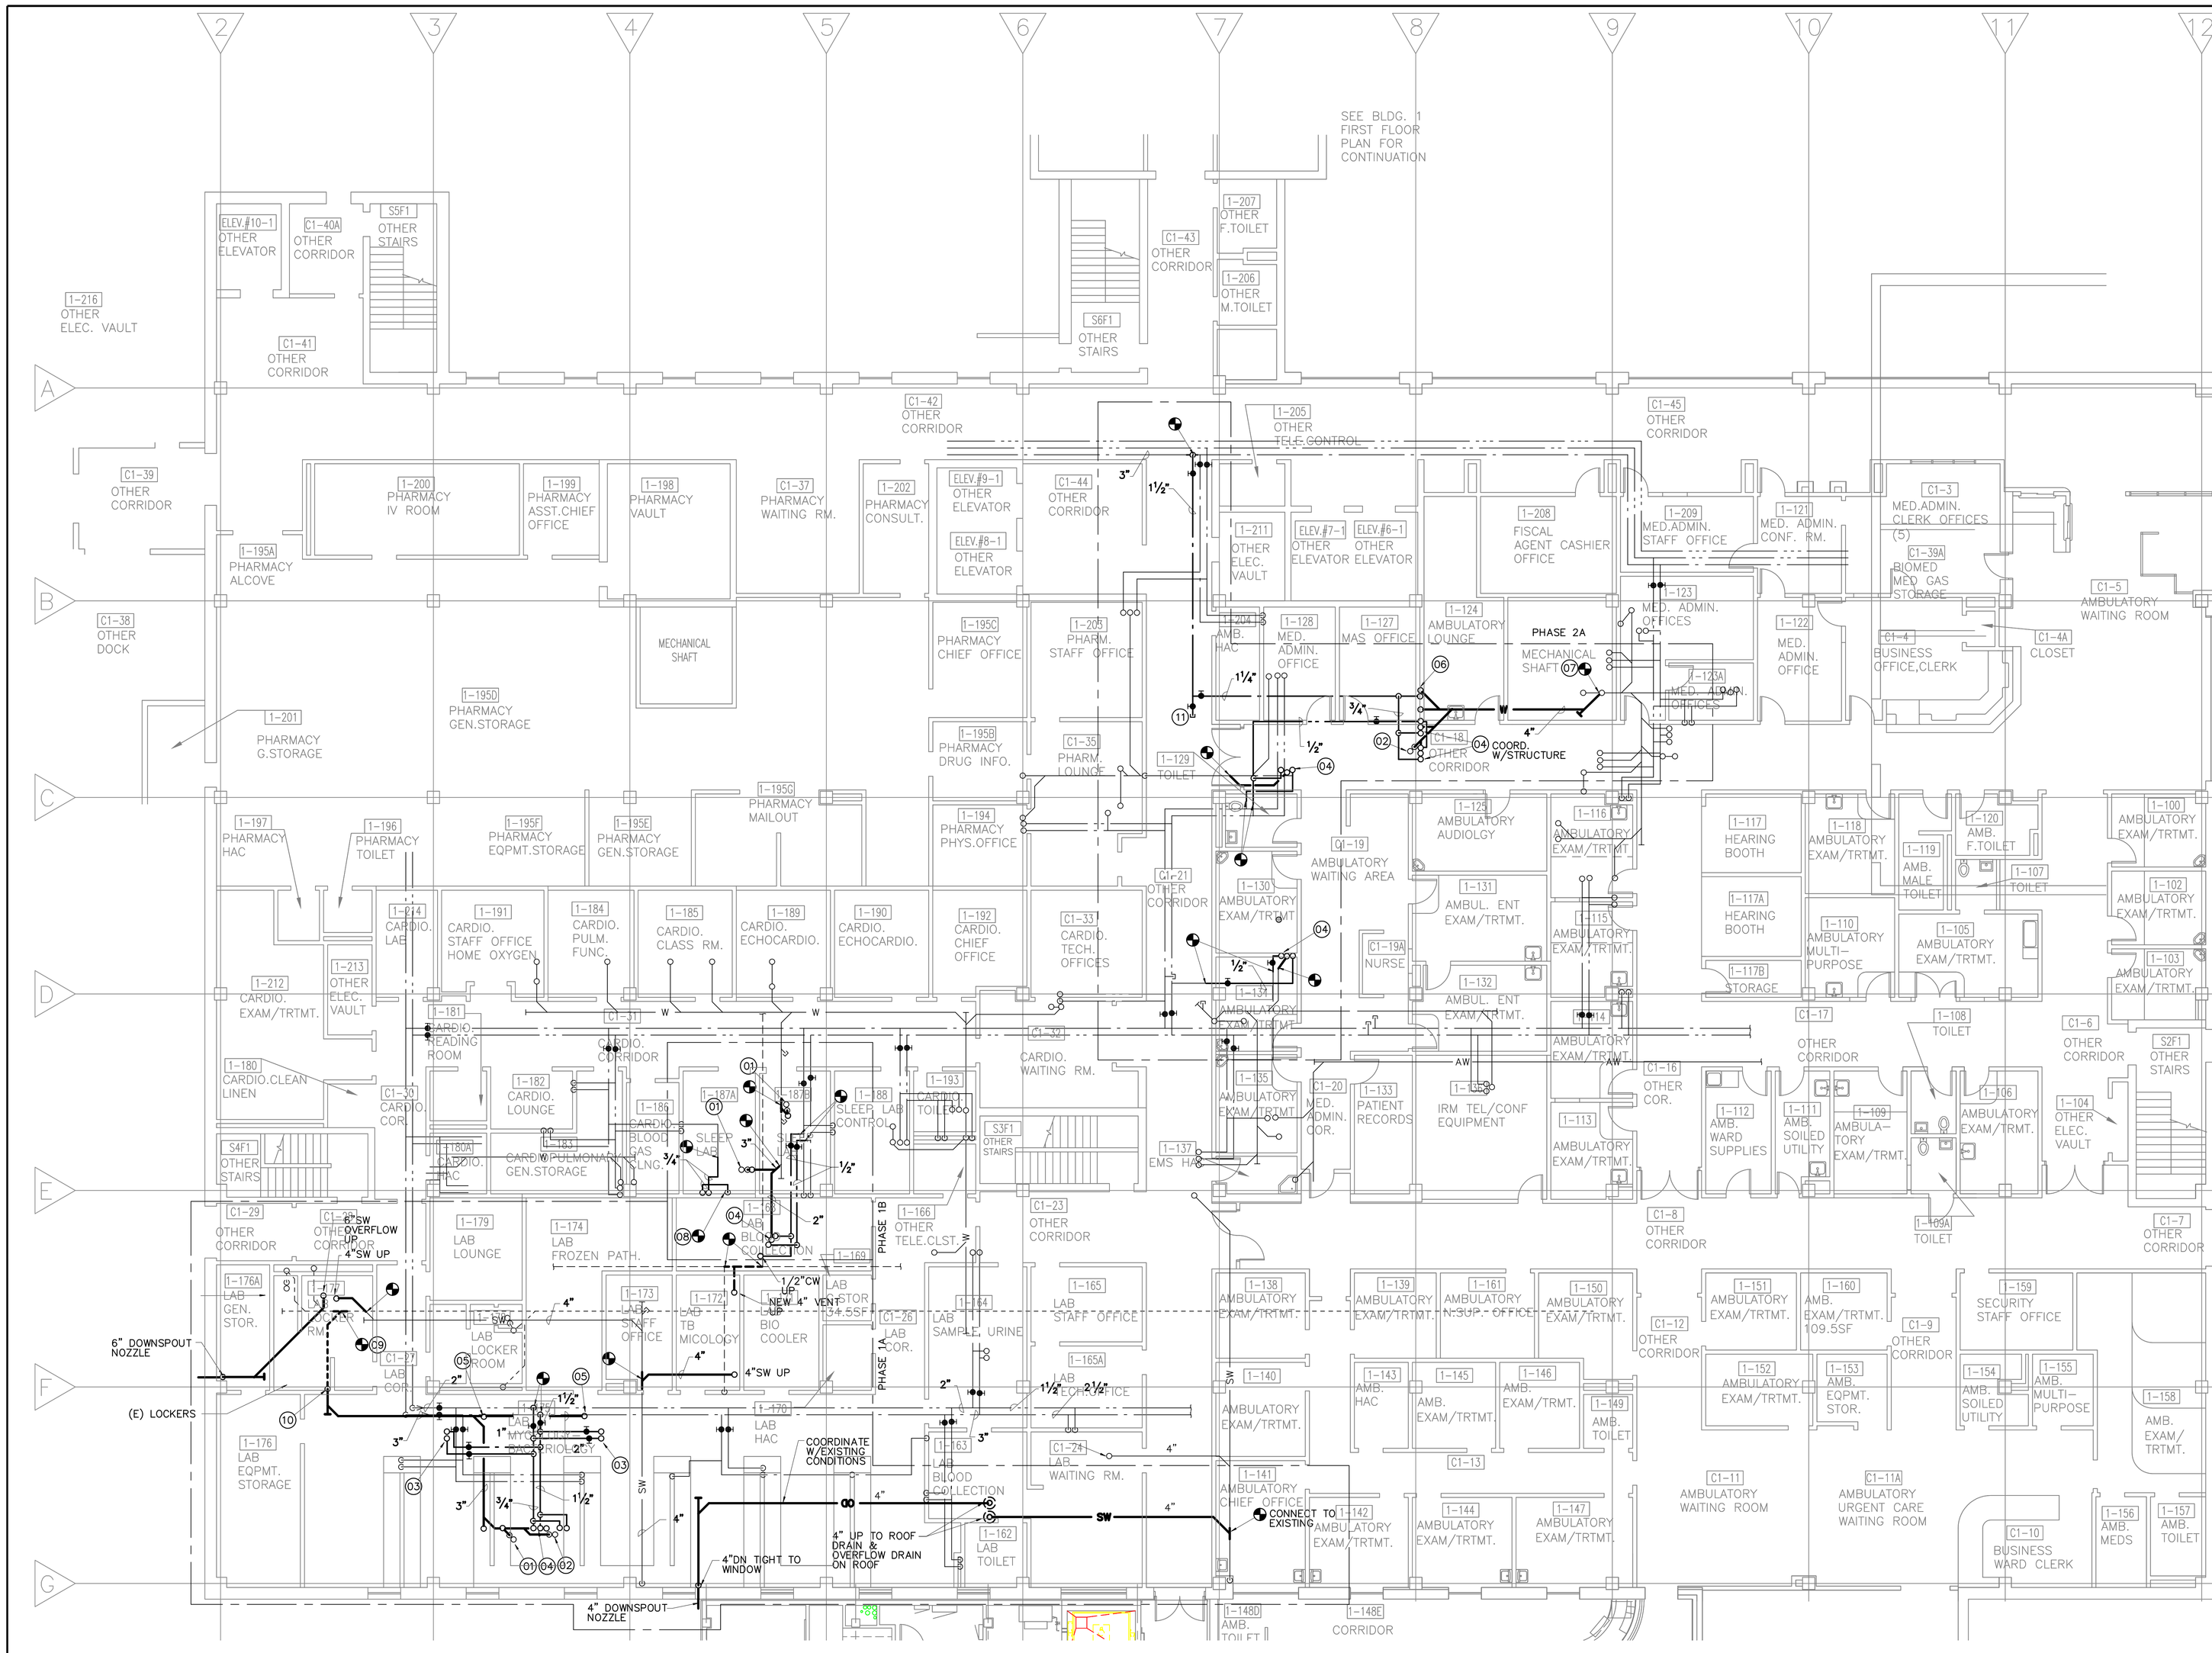

RENOVATION LEGEND

SYMBOL	DESCRIPTION
———	NEW CONSTRUCTION
———	EXISTING TO REMAIN
◐	CONNECT TO EXISTING AT THIS POINT

PLAN KEYED NOTES

01. 3" TRAPPED WASTE UP TO FLOOR SINK ABOVE. 2" VENT UP.
02. 2" TRAPPED WASTE UP TO FLOOR DRAIN ABOVE.
03. 3/4" HW, 3/4" CW UP.
04. 1/2" HW, 1/2" CW, 2" WASTE UP.
05. 2" WASTE UP.
06. 1" CW, 4" WASTE UP.
07. CONNECT NEW 4" WASTE LINE TO EXISTING 6" RISER IN SHAFT.
08. CONNECT NEW 3/4" 140° HW TO EXISTING RISER ABOVE CEILING. OFFSET TO NEW RISER LOCATION.
09. CONNECT NEW 4" WASTE TO (E) 4" IN CRAWL SPACE BELOW FLOOR. OFFSET NEW PIPING TO RISER IN LOCKER ROOM WALL.
10. NEW 4" WASTE RISER DOWN TO CRAWLSPACE. COORDINATE LOCKER REMOVAL AND REINSTALL AND WALL REPAIR WITH G.C.
11. CAP 1-1/2" CW FOR FUTURE.
12. 1-1/2" CW, 3/4" HW UP.

CONSTRUCTION PHASING

1. CONSTRUCTION SHALL BE COMPLETED IN PHASES TO ALLOW FOR UNINTERRUPTED USE OF HOSPITAL FACILITIES. REFER TO ARCHITECTURAL PHASING PLAN. CONSTRUCTION PHASE 1A AND 1B SHALL BE COMPLETE PRIOR TO BEGINNING OF PHASE 2A AND 2B CONSTRUCTION.
2. ALL WORK (DEMOLITION AND NEW) ABOVE LABORATORY CEILING SHALL OCCUR BETWEEN 8:00 PM AND 5:00 AM. ALL CEILING TILES MUST BE REPLACED AT END OF WORK SHIFT.
3. ALL SERVICES AND UTILITIES SHALL BE FULLY OPERATIONAL AT END OF WORK SHIFT. SCHEDULE DEMOLITION AND NEW CONSTRUCTION ACCORDINGLY.

FULLY SPRINKLERED

Revisions	Date

VA FORM 08-6231

CONSULTANTS:

CIVIL/STRUCTURAL:

MARTIN/MARTIN
CONSULTING ENGINEERS
12499 West Colfax Avenue
P.O. Box 151500
Lakewood, Colorado 80215
303.431.6100
Fax 303.431.6866

MECHANICAL, PLUMBING, AND ELECTRICAL:

SSR Smith Seckman Reid, Inc.
8055 E. Tufts Avenue, Suite 1100
Denver, Colorado 80237
(303) 779-1222
FAX: (303) 694-9144
www.ssr-inc.com
SSR JOB #: 08270120

PLAN NORTH

SCALE: 1/8" = 1'-0"

ARCHITECT/ENGINEERS:

HEERY design

Heery International Inc.
820 16th Street Mall,
Suite 200,
Denver, CO 80202-3219
720.946.0276

Heery Project Number:
0830400

Drawing Title
FIRST FLOOR PLAN
PLUMBING PLAN

Approved: Project Director

Project Title
SURGERY RENOVATION AND EXPANSION

Location
CHEYENNE, WY

Date 04/24/09 | Checked RDM | Drawn DLB

Project Number
VA-259-09-RA-209

Building Number
BLDG. NO. 1

Drawing Number
PL101
Dwg. 23 of 44

Office of Construction and Facilities Management

Department of Veterans Affairs